



Jones Gillam Renz Architects

Address

730 N 9th St.
Salina, KS 67401

1881 Main St., Suite 301
Kansas City, MO 64108

Contact

jgr@jgrarchitects.com
(785) 827-0386

Web

jgrarchitects.com

Project Manual

for

THEATRE SALINA EXPANSION Salina, KS

September 18, 2026

Project No. 22-3239

THEATRE SALINA
NEW ADDITION
SALINA, KANSAS

Project No. 22-3239

DATE OF DRAWINGS AND SPECIFICATIONS

September 18, 2026

OWNER

THEATRE SALINA
Michael Spicer, Executive Director
303 E. Iron Ave, Salina, KS 67401
785 827 3033

ARCHITECT

JONES GILLAM RENZ ARCHITECTS, INC
Charles A. Renz, Project Architect
730 N. 9th Street Salina, KS 67401
785 827 0386

STRUCTURAL ENGINEERS

BOB D. CAMPBELL & CO.
Chris Beverlin, P. E.
4338 Belleview Ave., Kansas City, MO 64111
816 531 4144

CIVIL ENGINEERS

KAW VALLEY ENGINEERING
Matthew Rowe, P.E.
1627 Sunflower Lane, Salina, KS 67401
785-823-3400

MECHANICAL/ELECTRICAL

LST CONSULTING ENGINEERS, INC.
John Lewis Smith, P.E
4809 Vue Du Lac Pl, Ste 201, Manhattan, KS 66503
785 587 8042

Table Of Contents

	<u>Page No.</u>
INVITATION TO BID	INV-1 – INV-2
CONTRACTOR QUALIFICATION STATEMENT	A305-1 – 11
INFORMATION FOR BIDDERS	INF-1 – INF-2
BID FORM	BF-1 – BF-2
GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION	A201-2017-1 - 39
SUPPLEMENTARY CONDITIONS OF THE CONTRACT	SC-1 – SC-3
GEOTECHNICAL REPORT	GR-1 – GR-41
LIST OF DRAWINGS	LOD-1
 Division 1 - General Requirements	
Section 01010 General Work Requirements	01010-1 – 01010-3
Section 01019 Special Provisions	01019-1 – 01019-3
Section 01030 Alternates	01030-1 – 01030-2
Section 01270 Unit Prices	01270-1
Section 013516 Alterations Project Procedures	013516-1 – 013516-5
Section 01500 Temporary Facilities and Controls	01500-1 – 01500-5
Section 01732 Selective Demolition	01732-1 – 01732-3
 Division 2 - Site Work	
Section 02110 Site Clearing	02110-1
Section 02205 Soil Materials	02205-1 – 02205-2
Section 02206 Lawns and Grasses	02206-1 – 02206-4
Section 02211 Rough Grading	02211-1 – 02211-2
Section 02222 Excavating	02222-1
Section 02223 Backfilling	02223-1 – 02223-2
Section 02225 Trenching	02225-1 – 02225-2
Section 02260 Excavation Support and Protection	02260-1 – 02260-2
Section 02281 Termite Control	02281-1 – 02281-4
Section 02520 Portland Cement Concrete Paving	02520-1 – 02520-3
Section 02764 Pavement Joint Sealants	02764-1 – 02764-3
 Division 3 – Concrete	
Section 03100 Concrete Formwork	03100-1 – 03100-3
Section 03200 Concrete Reinforcement	03200-1 – 03200-2
Section 033000 Cast-In-Place Concrete	03300-1 – 03300-8
 Division 4 - Masonry	
Section 04100 Mortar and Masonry Grout	04100-1 – 04100-2
Section 042200 Concrete Unit Masonry	042200-1 – 042200-6
Section 04300 Unit Masonry System	04300-1 – 04300-5
 Division 5 - Metals	
Section 051200 Structural Steel Frame	051200-1 – 051200-7
Section 052100 Steel Joist Framing	052100-1 – 052100-4
Section 053100 Steel Decking	053100-1 – 053100-5
Section 05311 Steel Floor Deck	05311-1 – 05311-2
Section 05312 Steel Roof Deck	05312-1 – 05312-2
Section 054000 Cold-Formed Metal Framing	054000-1 – 054000-9
Section 055000 Metal Fabrications	055000-1 – 055000-6
Section 05510 Metal Stairs	05510-1 – 05510-2
Section 05520 Handrails and Railings	05520-1 – 05520-2
 Division 6 - Wood and Plastics	
Section 06100 Rough Carpentry	06100-1 – 06100-5
Section 06112 Sheathing	06112-1
Section 06200 Finish Carpentry	06200-1 – 06200-2
Section 06410 Custom Casework	06410-1 – 06410-3
 Division 7 - Thermal and Moisture Protection	
Section 07110 Sheet Membrane Waterproofing	07110-1 – 07110-2
Section 07181 Water Repellent Coating	07181-1
Section 07212 Board Insulation	07212-1 – 07212-2
Section 07213 Batt Insulation	07213-1 – 07213-2
Section 072419 Exterior Insulation and Finish System with Moisture Drainage	07241-1 – 07241-9
Section 072726 Fluid-Applied, Vapor-Permeable Membrane Air Barriers	072726-1 – 072726-5
Section 074213.23 Aluminum Composite Material Wall Panels	074213.23-1 – 074213.23-8
Section 07425 Laminated Metal Fascia Panel System	07425-1 – 07425-3

Section 075423	Thermoplastic Polyolefin (TPO) Roofing	075423-1 – 075423-10
Section 07611	Pre-Manufactured Sheet Metal Wall and Soffit Panel	07611-1 – 07611-2
Section 07620	Sheet Metal Flashing and Trim	07620-1 – 07620-2
Section 07900	Joint Sealers	07900-1 – 07900-2

Division 8 - Doors and Windows

Section 08111	Standard Steel Doors and Frames	08111-1 – 08111-2
Section 08211	Flush Wood Doors	08211-1 – 08211-3
Section 08331	Overhead Coiling Doors	08331-1 – 08331-3
Section 08360	Sectional Overhead Doors	08360-1 – 08360-2
Section 08410	Aluminum Entrances and Storefronts	08410-1 – 08410-3
Section 08710	Door Hardware	08710-1 – 08710-2
Section 08800	Glazing	08800-1 – 08800-2

Division 9 - Finishes

Section 09260	Gypsum Board Systems	09260-1 – 09260-3
Section 09260 A	Gypsum Board Systems Checklist	09260 A-1
Section 09306	Floor and Wall Tile	09306-1 – 09306-2
Section 09511	Suspended Acoustical Ceilings	09511-1 – 09511-2
Section 09650	Resilient Flooring	09650-1 – 09650-3
Section 09688	Carpet - Glue Down	09688-1 – 09688-3
Section 09900	Painting	09900-1 – 09900-5

Division 10 - Specialties

Section 10160	Solid Color Reinforced Composite Toilet Compartments	10160-1 – 10160-2
Section 10431	Signage	10431-1 – 10431-3
Section 10522	Fire Extinguishers, Cabinets, and Accessories	10522-1
Section 10800	Toilet and Bath Accessories	10800-1 – 10800-2
Section 10850	Building Specialties	10850-1 – 10850-3

Division 11 - 20 Not Used**Division 21 – Fire Suppression**

Section 210500	Common Work Results For Fire Suppression	210500-1 – 210500-3
Section 210523	General-Duty Valves for Water-Based Fire-Suppression Piping	210523-1 – 210523-3
Section 210529	Hangers and Supports for Fire-Suppression Piping and Equipment	210529-1 – 210529-5
Section 210553	Identification for Fire-Suppression Piping and Equipment	210553-1 – 210553-3
Section 211000	Water-Based Fire-Suppression Systems	211000-1 – 211000-11

Division 22 - Plumbing

Section 220010	Plumbing Demolition	220010-1 – 220010-4
Section 220500	Common work Results for Plumbing	220500-1 – 220500-5
Section 220523	General-Duty Valves for Plumbing Piping	220523-1 – 220523-13
Section 220529	Hangers and Supports for Plumbing Piping and Equipment	220529-1 – 220529-8
Section 220553	Identification for Plumbing Piping and Equipment	220553-1 – 220553-4
Section 220719	Plumbing Piping Insulation	220719-1 – 220719-11
Section 221116	Domestic Water Piping	221116-1 – 221116-8
Section 221119	Domestic Water Piping Specialties	221119-1 – 221119-8
Section 221316	Sanitary Waste and Vent Piping	221316-1 – 221316-9
Section 221319	Sanitary Waste Piping Specialties	221319-1 – 221319-4
Section 221319.13	Sanitary Drains	221319.13-1 – 221319.13-2
Section 221414	Storm Drainage Piping	221414-1 – 221414-7
Section 221423	Storm Drainage Piping Specialties	221423-1 – 221423-17

Division 23 - Heating Ventilating and Air Conditioning

Section 230010	Mechanical Demolition	230010-1 – 230010-4
Section 230593	Testing, Adjusting, and Balancing for HVAC	230593-1 – 230593-6
Section 230713	Duct Insulation	230713-1 – 230713-8
Section 231123	Facility Natural-Gas Piping	231123-1 – 231123-8
Section 232300	Refrigerant Piping	232300-1 – 232300-3
Section 233113	Metal Duct	233113-1 – 233113-10
Section 233116	Nonmetal Ducts	233116-1 – 233116-4
Section 233300	Air Duct Accessories	233300-1 – 233300-6
Section 233713.13	Air Diffusers	233713.13-1 – 233713.13-2
Section 233713.23	Registers and Grilles	233713.23-1 – 233713.23-2
Section 237416.11	Packaged Rooftop Air-Conditioning Units	237416.11-1 – 237416.11-8

Division 26 - Electrical

Section 260001	Electrical Demolition	260001-1 – 260001-2
Section 260010	Supplemental Requirements for Electrical	260010-1 – 260010-10
Section 260519	Low-Voltage Electrical Power Conductors and Cables	260519-1 – 260519-6
Section 260526	Grounding and Bonding for Electrical Systems	260526-1 – 260526-11
Section 260529	Hangers and Supports for Electrical Systems	260529-1 – 260529-4
Section 260533.13	Conduit for Electrical Systems	260533.13-1 – 260533.13-10
Section 260533.16	Boxes and Covers for Electrical Systems	260533.16-1 – 260533.16-7
Section 260544	Sleeves and Sleeve Seals for Electrical Raceways and Cabling	260544-1 – 260544-3
Section 260553	Identification for Electrical Systems	260553-1 – 260553-8
Section 260923	Lighting Control Devices	260923-1 – 260923-5
Section 262416	Panelboards	262416-1 – 262416-7
Section 262726	Wiring Devices	262726-1 – 262726-5
Section 264313	Surge Protective Devices for Low-Voltage Electrical Power Circuits	264313-1 – 264313-3
Section 265000	Lighting	265000-1 – 265000-5

Theatre Salina
New Addition
Salina, Kansas

Jones Gillam Renz Architects, Inc
730 N. 9th St.
Salina, Kansas 67401
785-827-0386

Project No. 22-3239

INVITATION TO BID

Sealed Bids will be received by Michael Spicer, Theatre Salina, Salina, Kansas, for the furnishing of all labor and materials as hereinafter specified for the construction of a New Addition. **Bids shall be delivered to the office of JGR Architects, 730 North 9th Street, before Thursday, October 13, 2026 at 2:00 p.m.** Bids received after this time will not be accepted. Bids will be opened in private session with the owner the same day.

2. PROJECT SCOPE

Backstage Addition

- a. Demolish existing paving, site prep for new addition.
- b. New steel frame structure with CMU and metal stud exterior wall systems.
- c. Exterior wall finish to be FLUTED CMU and metal wall panel
- d. Interior wall finish to be exposed CMU/Concrete, Gypsum wallboard, painted, typically.
- e. New lighting.
- f. New HVAC ductwork, supply and return systems, and new HVAC equipment.
- g. Exposed structure to be painted

Education Wing (Dance Studios) New Addition

- a. New steel frame construction with metal stud wall construction, CMU, metal pane, and EIFS veneer.
- b. Concrete Foundations.
- c. Geopier site stabilization
- d. Interior walls to be metal stud and drywall construction. High STC partition types in areas.
- e. Ceilings include lay-in acoustical tiles and exposed structural steel slotted roof deck (acoustical).
- f. Carpet and porcelain tile flooring.
- g. TPO membrane roofing.
- h. Rooftop mounted HVAC equipment.
- i. Extension of existing fire sprinkler system to sprinkle the new addition.

Miscellaneous Renovation Interior

- a. Partial wall removal adjacent to stage for production storage.
- b. Leveling of portions of the existing recessed floor with steel framing and concrete.
- c. Removal of existing exterior doors and enlarged openings for new rolling shutters.
- d. Remove existing stair at backstage area to Green Room (basement)
- e. New exterior stair and concrete opening at basement below stage.
- f. Shoring as required for existing foundation support during stair addition construction.

3. PRE-BID CONFERENCE

Pre-Bid Conference will be held on **Thursday, October 1, 2026 at 2:00 p.m. at building site, 303 E. Iron St, Salina, KS.** Those wishing to review the building or portions of the building outside the designated time shall contact the architect, Charles Renz at JGR Architects, crenz@jgrarchitects.com 785 827-0386.

4. COMPLETION TIME

Completion date September 1 2027. Reference Special Conditions in Specification.

5. The GENERAL CONSTRUCTION CONTRACT will include General Construction, Mechanical, and Electrical Work combined into one Contract.

6. As a condition precedent to Contract Award, type of work completed and proposed Subcontractors will be carefully considered. Owner is not obligated to accept lowest or any other bid.

7. The Owner has identified a Select Bidders List for the General Construction. The Pre-Approved Bidders include:

Harbin Construction, Salina KS
Hutton Corporation, Salina KS
Ponton Construction, Salina KS

8. The Drawings, Specifications, and Contract Documents may be obtained by bona fide Prime Bidders (Mechanical and Electrical, and Subcontractors) from Jones Gillam Renz Architect, 730 North 9th Street,

Salina, Kansas 67401, 785-827-0386 upon deposit of \$300.00 for one (1) set of General Construction, Mechanical and Electrical Drawings and Specifications.

Electronic Drawings and specifications will be available for review on the website at www.jgrarchitects.com.
Mechanical, Plumbing and Electrical Subcontractors who are bidding from documents via website or plan room must contact the office of Jones Gillam Renz Architects, 785.827.0386 to register as an official Plan Holder.

Those who submit prime bids may obtain refund by returning sets in good condition no more than one (1) week after bids have been opened. No refund of deposit will be made to Contractors not submitting a bid, unless all documents are returned in good condition five (5) days prior to time of receiving bids.

CONTRACT DOCUMENTS will be on file and may be examined at the following locations:

Jones Gillam Renz Architects, 730 North 9th Street, Salina, KS 67401, ph. 785-827-0386, www.jgrarchitects.com

Associated General Contractors of Kansas, ph. 316-928-8635, www.agcks.org

Dodge Construction Network, ph. 877-784-9556, www.construction.com

Construct Connect, ph. 877-969-2909, www.constructconnect.com

Salina Blueprint, 209 S. Santa Fe Ave., Salina, KS 67401, ph. 785-827-6182, www.salinablue.com

10. BID SECURITY in the amount of 5% of the bid must accompany each bid in accordance with INFORMATION FOR BIDDERS.

BY ORDER OF:

Theatre Salina
Salina, Kansas
September 18, 2026



AIA[®] Document A305[™] – 2020

Contractor's Qualification Statement

THE PARTIES SHOULD EXECUTE A SEPARATE CONFIDENTIALITY AGREEMENT IF THEY INTEND FOR ANY OF THE INFORMATION IN THIS A305-2020 TO BE HELD CONFIDENTIAL.

SUBMITTED BY:

(Organization name and address.)

SUBMITTED TO:

(Organization name and address.)

This document has important legal consequences.

Consultation with an attorney is encouraged with respect to its completion or modification.

TYPE OF WORK TYPICALLY PERFORMED

(Indicate the type of work your organization typically performs, such as general contracting, construction manager as constructor services, HVAC contracting, electrical contracting, plumbing contracting, or other.)

THIS CONTRACTOR'S QUALIFICATION STATEMENT INCLUDES THE FOLLOWING:

(Check all that apply.)

- ☐ Exhibit A – General Information
- ☐ Exhibit B – Financial and Performance Information
- ☐ Exhibit C – Project-Specific Information
- ☐ Exhibit D – Past Project Experience
- ☐ Exhibit E – Past Project Experience (Continued)

CONTRACTOR CERTIFICATION

The undersigned certifies under oath that the information provided in this Contractor's Qualification Statement is true and sufficiently complete so as not to be misleading.

Organization's Authorized Representative Signature Date

Printed Name and Title

NOTARY

State of:

County of:

Signed and sworn to before me this day of

Notary Signature

My commission expires:



AIA[®] Document A305[™] – 2020 Exhibit A

General Information

This Exhibit is part of the Contractor's Qualification Statement, submitted by
and dated the day of in the year
(In words, indicate day, month and year.)

§ A.1 ORGANIZATION

§ A.1.1 Name and Location

§ A.1.1.1 Identify the full legal name of your organization.

This document has important
legal consequences.

Consultation with an attorney is
encouraged with respect to its
completion or modification.

§ A.1.1.2 List all other names under which your organization currently does business and,
for each name, identify jurisdictions in which it is registered to do business under that
trade name.

§ A.1.1.3 List all prior names under which your organization has operated and, for each name, indicate the date range
and jurisdiction in which it was used.

§ A.1.1.4 Identify the address of your organization's principal place of business and list all office locations out of which
your organization conducts business. If your organization has multiple offices, you may attach an exhibit or refer to a
website.

§ A.1.2 Legal Status

§ A.1.2.1 Identify the legal status under which your organization does business, such as sole proprietorship, partnership,
corporation, limited liability corporation, joint venture, or other.

- .1 If your organization is a corporation, identify the state in which it is incorporated, the date of
incorporation, and its four highest-ranking corporate officers and their titles, as applicable.
- .2 If your organization is a partnership, identify its partners and its date of organization.
- .3 If your organization is individually owned, identify its owner and date of organization.
- .4 If the form of your organization is other than those listed above, describe it and identify its individual
leaders:

§ A.1.2.2 Does your organization own, in whole or in part, any other construction-related businesses? If so, identify and describe those businesses and specify percentage of ownership.

§ A.1.3 Other Information

§ A.1.3.1 How many years has your organization been in business?

§ A.1.3.2 How many full-time employees work for your organization?

§ A.1.3.3 List your North American Industry Classification System (NAICS) codes and titles. Specify which is your primary NAICS code.

§ A.1.3.4 Indicate whether your organization is certified as a governmentally recognized special business class, such as a minority business enterprise, woman business enterprise, service disabled veteran owned small business, woman owned small business, small business in a HUBZone, or a small disadvantaged business in the 8(a) Business Development Program. For each, identify the certifying authority and indicate jurisdictions to which such certification applies.

§ A.2 EXPERIENCE

§ A.2.1 Complete Exhibit D to describe up to four projects, either completed or in progress, that are representative of your organization's experience and capabilities.

§ A.2.2 State your organization's total dollar value of work currently under contract.

§ A.2.3 Of the amount stated in Section A.2.2, state the dollar value of work that remains to be completed:

§ A.2.4 State your organization's average annual dollar value of construction work performed during the last five years.

§ A.3 CAPABILITIES

§ A.3.1 List the categories of work that your organization typically self-performs.

§ A.3.2 Identify qualities, accreditations, services, skills, or personnel that you believe differentiate your organization from others.

§ A.3.3 Does your organization provide design collaboration or pre-construction services? If so, describe those services.

§ A.3.4 Does your organization use building information modeling (BIM)? If so, describe how your organization uses BIM and identify BIM software that your organization regularly uses.

§ A.3.5 Does your organization use a project management information system? If so, identify that system.

§ A.4 REFERENCES

§ A.4.1 Identify three client references:

(Insert name, organization, and contact information)

§ A.4.2 Identify three architect references:

(Insert name, organization, and contact information)

§ A.4.3 Identify one bank reference:

(Insert name, organization, and contact information)

§ A.4.4 Identify three subcontractor or other trade references:

(Insert name, organization, and contact information)

Sample



AIA[®] Document A305[™] – 2020 Exhibit B

Financial and Performance Information

This Exhibit is part of the Contractor's Qualification Statement, submitted by
and dated the day of in the year
(In words, indicate day, month and year.)

§ B.1 FINANCIAL

§ B.1.1 Federal tax identification number:

This document has important
legal consequences.

Consultation with an attorney is
encouraged with respect to its
completion or modification.

§ B.1.2 Attach financial statements for the last three years prepared in accordance with
Generally Accepted Accounting Principles, including your organization's latest balance
sheet and income statement. Also, indicate the name and contact information of the firm
that prepared each financial statement.

§ B.1.3 Has your organization, its parent, or a subsidiary, affiliate, or other entity having common ownership or
management, been the subject of any bankruptcy proceeding within the last ten years?

§ B.1.4 Identify your organization's preferred credit rating agency and identification information.
(Identify rating agency, such as Dun and Bradstreet or Equifax, and insert your organization's identification number or
other method of searching your organization's credit rating with such agency.)

§ B.2 DISPUTES AND DISCIPLINARY ACTIONS

§ B.2.1 Are there any pending or outstanding judgments, arbitration proceedings, bond claims, or lawsuits against your
organization, its parent, or a subsidiary, affiliate, or other entity having common ownership or management, or any of
the individuals listed in Exhibit A, Section 1.2, in which the amount in dispute is more than \$75,000?
(If the answer is yes, provide an explanation.)

§ B.2.2 In the last five years, has your organization, its parent, or a subsidiary, affiliate, or other entity having common
ownership or management:
(If the answer to any of the questions below is yes, provide an explanation.)

- .1 failed to complete work awarded to it?
- .2 been terminated for any reason except for an owners' convenience?
- .3 had any judgments, settlements, or awards pertaining to a construction project in which your organization
was responsible for more than \$75,000?

- .4 filed any lawsuits or requested arbitration regarding a construction project?

§ B.2.3 In the last five years, has your organization, its parent, or a subsidiary, affiliate, or other entity having common ownership or management; or any of the individuals listed in Exhibit A Section 1.2:

(If the answer to any of the questions below is yes, provide an explanation.)

- .1 been convicted of, or indicted for, a business-related crime?
- .2 had any business or professional license subjected to disciplinary action?
- .3 been penalized or fined by a state or federal environmental agency?

Sample



AIA[®] Document A305[™] – 2020 Exhibit C

Project Specific Information

This Exhibit is part of the Contractor's Qualification Statement, submitted by
and dated the day of in the year
(In words, indicate day, month and year.)

PROJECT:
(Name and location or address.)

This document has important
legal consequences.
Consultation with an attorney is
encouraged with respect to its
completion or modification.

CONTRACTOR'S PROJECT OFFICE:
(Identify the office out of which the contractor proposes to perform the work for the
Project.)

TYPE OF WORK SOUGHT
(Indicate the type of work you are seeking for this Project, such as general contracting, construction manager as
constructor, design-build, HVAC subcontracting, electrical subcontracting, plumbing subcontracting, etc.)

CONFLICT OF INTEREST
Describe any conflict of interest your organization, its parent, or a subsidiary, affiliate, or other entity having common
ownership or management, or any of the individuals listed in Exhibit A Section 1.2, may have regarding this Project.

§ C.1 PERFORMANCE OF THE WORK
§ C.1.1 When was the Contractor's Project Office established?

§ C.1.2 How many full-time field and office staff are respectively employed at the Contractor's Project Office?

§ C.1.3 List the business license and contractor license or registration numbers for the Contractor's Project Office that
pertain to the Project.

§ C.1.4 Identify key personnel from your organization who will be meaningfully involved with work on this Project and
indicate (1) their position on the Project team, (2) their office location, (3) their expertise and experience, and (4)
projects similar to the Project on which they have worked.

§ C.1.5 Identify portions of work that you intend to self-perform on this Project.

§ C.1.6 To the extent known, list the subcontractors you intend to use for major portions of work on the Project.

§ C.2 EXPERIENCE RELATED TO THE PROJECT

§ C.2.1 Complete Exhibit D to describe up to four projects performed by the Contractor's Project Office, either completed or in progress, that are relevant to this Project, such as projects in a similar geographic area or of similar project type. If you have already completed Exhibit D, but want to provide further examples of projects that are relevant to this Project, you may complete Exhibit E.

§ C.2.2 State the total dollar value of work currently under contract at the Contractor's Project Office:

§ C.2.3 Of the amount stated in Section C.2.2, state the dollar value of work that remains to be completed:

§ C.2.4 State the average annual dollar value of construction work performed by the Contractor's Project Office during the last five years.

§ C.2.5 List the total number of projects the Contractor's Project Office has completed in the last five years and state the dollar value of the largest contract the Contractor's Project Office has completed during that time.

§ C.3 SAFETY PROGRAM AND RECORD

§ C.3.1 Does the Contractor's Project Office have a written safety program?

§ C.3.2 List all safety-related citations and penalties the Contractor's Project Office has received in the last three years.

§ C.3.3 Attach the Contractor's Project Office's OSHA 300a Summary of Work-Related Injuries and Illnesses form for the last three years.

§ C.3.4 Attach a copy of your insurance agent's verification letter for your organization's current workers' compensation experience modification rate and rates for the last three years.

§ C.4 INSURANCE

§ C.4.1 Attach current certificates of insurance for your commercial general liability policy, umbrella insurance policy, and professional liability insurance policy, if any. Identify deductibles or self-insured retentions for your commercial general liability policy.

§ C.4.2 If requested, will your organization be able to provide property insurance for the Project written on a builder's risk "all-risks" completed value or equivalent policy form and sufficient to cover the total value of the entire Project on a replacement cost basis?

§ C.4.3 Does your commercial general liability policy contain any exclusions or restrictions of coverage that are prohibited in AIA Document A101-2017, Exhibit A, Insurance A.3.2.2.2? If so, identify.

§ C.5 SURETY

§ C.5.1 If requested, will your organization be able to provide a performance and payment bond for this Project?

§ C.5.2 Surety company name:

§ C.5.3 Surety agent name and contact information:

§ C.5.4 Total bonding capacity:

§ C.5.5 Available bonding capacity as of the date of this qualification statement:

Sample



AIA[®] Document A305[™] – 2020 Exhibit D

Contractor's Past Project Experience

	1	2	3	4
PROJECT NAME				
PROJECT LOCATION				
PROJECT TYPE				
OWNER				
ARCHITECT				
CONTRACTOR'S PROJECT EXECUTIVE				
KEY PERSONNEL (include titles)				
PROJECT DETAILS	Contract Amount Completion Date % Self-Performed Work	Contract Amount Completion Date % Self-Performed Work	Contract Amount Completion Date % Self-Performed Work	Contract Amount Completion Date % Self-Performed Work
PROJECT DELIVERY METHOD	☐ Design-bid-build ☐ Design-build ☐ CM constructor ☐ CM advisor ☐ Other:	☐ Design-bid-build ☐ Design-build ☐ CM constructor ☐ CM advisor ☐ Other:	☐ Design-bid-build ☐ Design-build ☐ CM constructor ☐ CM advisor ☐ Other:	☐ Design-bid-build ☐ Design-build ☐ CM constructor ☐ CM advisor ☐ Other:
SUSTAINABILITY CERTIFICATIONS				



AIA[®] Document A305[™] – 2020 Exhibit E

Contractor's Past Project Experience, Continued

	1	2	3	4
PROJECT NAME				
PROJECT LOCATION				
PROJECT TYPE				
OWNER				
ARCHITECT				
CONTRACTOR'S PROJECT EXECUTIVE				
KEY PERSONNEL (include titles)				
PROJECT DETAILS	Contract Amount Completion Date % Self-Performed Work	Contract Amount Completion Date % Self-Performed Work	Contract Amount Completion Date % Self-Performed Work	Contract Amount Completion Date % Self-Performed Work
PROJECT DELIVERY METHOD	☐ Design-bid-build ☐ Design-build ☐ CM constructor ☐ CM advisor ☐ Other:	☐ Design-bid-build ☐ Design-build ☐ CM constructor ☐ CM advisor ☐ Other:	☐ Design-bid-build ☐ Design-build ☐ CM constructor ☐ CM advisor ☐ Other:	☐ Design-bid-build ☐ Design-build ☐ CM constructor ☐ CM advisor ☐ Other:
SUSTAINABILITY CERTIFICATIONS				

INFORMATION FOR BIDDERS

1. EXAMINATION

Before submitting their bid, each Bidder shall carefully examine all documents pertaining to the work, visit the site of the work, and inform themselves as to all existing conditions under which the work will be performed. Submission of a bid will be considered presumptive evidence that the Bidder is fully aware of the conditions of the work, requirements of the Contract Documents, pertinent State and Local codes, conditions of labor and material markets, and has made allowances in their bid for all work and all contingencies. Contractors will not be given extra payments for conditions which can be determined by examining the site and documents.

2. QUESTIONS AND INTERPRETATION OF DOCUMENTS

Should a Bidder be in doubt as to the meaning of any part of the Drawings, Specifications or other proposed Contract Documents and/or find discrepancies in or omissions from the Drawings, Specifications and Contract Documents, he shall contact the Architect immediately per Article 3, Subparagraph 3.2.1 of the AIA General Conditions. Any interpretation of the proposed documents will be made only by Addendum duly issued and copy of such Addendum will be emailed to each person receiving a set of such documents. The Architect and Owner will not be responsible for any other explanation or interpretation of the proposed documents.

3. GENERAL CONSTRUCTION BID

- a. The General Construction bid shall incorporate all of the departments of Work (General Construction, Electrical, and Mechanical Work) into one (1) bid.
It is preferred that General Contractors work with Prime subcontractors with whom they have previous working relationships, including at least three previous projects of similar scope. Contractor/Subcontractor experience and relationship may be considered by the owner in the evaluation of bids and acceptance of bids.
- b. The General Contractor shall assume all responsibility for supervision and coordination of the Work.
- c. The General Contractor shall furnish Performance and Payment Bonds in the full amount of the Work (Total of General Construction, Electrical, and Mechanical Work).
- d. The General Contractor shall carry and pay the premium covering the General Construction Work, for Contractors and Subcontractors Insurance as specified in Supplementary Conditions of the Contract.

4. BID PROCEDURE

- a. Bids will be received at the time and place stated in the INVITATION TO BID. Bids received after the time stated will be returned unopened.
- b. No oral or telephonic bids will be considered, but modifications by telephone or email of bids already submitted will be considered if received prior to time set for bid opening.
- c. Any addenda issued during the time of preparation of bids are to be acknowledged on the Bid Form and in closing a Contract, they will become a part thereof.
- d. Each Bidder is required to bid all alternates included in the Bid Form, except that should they desire not to bid an Alternate, they may insert the words "No Bid" in the space provided for such Alternates. In such case, if it is determined to use such Alternate, the fact that the cost of the material, type, or method bid may be lower than that chosen shall not constitute the basis of a claim by the Bidder that the Contract be awarded to him. If an Alternate Price called for involves no change in price, Bidder shall so indicate by writing the words, "No Change" in the space provided. Refer to Section 01019 - SPECIAL PROVISIONS. Each Bidder is required to fill in all unit cost items shown on the Bid Form. Failure to comply may be cause for rejection.
- e. Bids shall be submitted on the forms provided. All blank spaces on the forms shall be fully completed in words as well as figures. Bid Forms must be signed in longhand, with name typed below signature. Where Bidder is a corporation, Bid Forms must be signed with legal name of corporation, followed by the name of the State of Incorporation, the legal signature of an officer authorized to bind the corporation to a contract, Attest and Seal Impression. A copy of the Bid Form is bound herein for the convenience of the Bidders and is not to be detached or filled out. Separate Bid Forms, will be furnished to all Bidders.
- f. Submittals of Bids shall be as follows:

- 1) Bids, together with Bid Security, shall be sealed in an opaque envelope, labeled “THEATRE SALINA – NEW ADDITION, SEALED BID, DO NOT OPEN” addressed to: Theatre Salina ATTN: Michael Spicer, 303 E. Iron St., Salina, KS 67401. Bids shall be delivered to the **office of JGR Architects, 730 North Ninth St. before 2:00 pm on Thursday October 8, 2026.** Bids will be opened in private session with the owner the same day.

5. CONTRACT GUARANTEE

Successful Bidder must deliver to the Owner the following Bonds in an amount no less than 100% of the accepted bid, as security for the faithful performance of the Contract.

- a. Performance and Payment Bond as per General Conditions.
- b. Statutory Bond, as required in Section 01019 - SPECIAL PROVISIONS.

6. WITHDRAWAL OF BIDS

A bid may be withdrawn on written or faxed request and by request of Contractor personally, received or made prior to time fixed for bid opening. No bid may be withdrawn after opening of bids.

7. INTERPRETATION OF QUOTED PRICES

In case of a difference in written words and figures in a bid, the amount stated in written words shall govern.

8. TIME OF CONSTRUCTION AND LIQUIDATED DAMAGES

Refer to Section 01019 - SPECIAL PROVISIONS.

9. DISQUALIFICATION

The Owner reserves the right to disqualify bids, before or after opening upon evidence of collusion with intent to defraud or illegal practices upon part of the Bidder. Bids will be opened as stated in the Invitation to Bid.

10. SALES TAX EXEMPTION

Refer to Section 01019 - SPECIAL PROVISIONS.

Theatre Salina – New Addition

Salina, Kansas

BID FORM

Bid of _____
(Firm Name)

Date _____

BID FORM FOR:

Theatre Salina – New Addition

TO: **Theatre Salina**
303 E. Iron St.
Salina, KS 67401

In compliance with your INVITATION TO BID, the undersigned proposes to furnish all labor and materials and perform all work for the General Construction, including Mechanical and Electrical Work, incidental for the construction and equipping of Theatre Salina – New Addition, Salina, Kansas, in strict accordance with the Specifications and the Drawings dated September 18, 2026 mentioned therein for the consideration of the following:

BASE BID _____ **Dollars**

\$ _____

The Base Bid includes all allowances as outlined in Section 01019 – Special Provisions.

Number of consecutive Calendar Days to complete this project in accordance with Drawings and Specifications, to be coordinated with General Contractor and subject to Liquidated Damages,

Section 01019 - SPECIAL PROVISIONS -- _____ **DAYS**

The Undersigned acknowledges receipt of the following addenda:

Addendum #1 _____ Addendum #2 _____ Addendum #3 _____ Addendum #4 _____ Addendum #5 _____

ALTERNATE PRICES: For the Alternates as described in the Specifications and/or Drawings, the undersigned agrees to ADD or DEDUCT the following amounts to or from the BASE BID as hereinafter itemized:

<u>ALTERNATE NO.</u>	<u>ADD</u>	<u>DEDUCT</u>
<u>Alternate No. 1</u> Install EIFS at dance studio façade in lieu of ACM panels.	\$ _____	\$ _____
<u>Alternate No. 2</u> Eliminate painting steel structure/ductwork/conduit/piping etc. at Backstage.	\$ _____	\$ _____
<u>Alternate No. 3</u> Provide and install 20 year EIFS warranty.	\$ _____	\$ _____
<u>Alternate No. 4</u> Installation of Dance Studio Floor system.	\$ _____	\$ _____
<u>Alternate No. 5</u> (if Added by addendum)	\$ _____	\$ _____

Unit Prices

Unit Price No. 1 Removal, haul-off, and replacement of unsuitable soil \$ _____ **per C.Y.**

Major Subcontractors:

Bidder shall identify, as part of this Bid, the major Subcontractors he proposes to use in performance of the Work under this Contract. This list is for preliminary review purposes. Final list of Major Subcontractors shall be submitted two the oner within 24 hours following the bid opening, if requested by the owner.

MECHANICAL CONSTRUCTION

Name, Address

PLUMBING CONSTRUCTION

Name, Address

ELECTRICAL CONSTRUCTION

Name, Address

FLOORING INSTALLATION

Name, Address

I (or WE) FURTHER AGREE AS FOLLOWS:

1. To furnish labor and materials for additional work (except Mechanical and Electrical) ordered by the Owner and for which no pre-agreed upon amount has been determined for the cost of the labor and materials involved plus 10% for overhead and profit.
2. To furnish supervision and coordination for 10% of the cost of additional Mechanical and Electrical work ordered by the Owner.
3. To accept the provisions of Section 01019 - SPECIAL PROVISIONS regarding the date of completion of the Project and Liquidated Damages.
4. If written notice of the acceptance of the Bid is mailed, telegraphed or delivered to the Undersigned within 30 days after the date of the opening of the Bids, or anytime thereafter before this Bid is withdrawn, the Undersigned will, within ten (10) days after the date of such mailing, telegraphing or delivery of such notice, execute and deliver a contract in accordance with AIA Document A101, Standard Form of Agreement Between Owner and Contractor, and give Performance Bond in accordance with the Specifications and bid as accepted.
5. That upon failure or refusal to execute and deliver the contract and bonds required within ten (10) days after receipt of notice of acceptance of the Bid, that security deposited with Bid shall be forfeited to the Owner as liquidated damages for such failure or refusal.

DECLARATION:

1. The Undersigned hereby declares that he has carefully examined the Invitation and Information for Bidders, the Drawings and Specifications, has visited the actual location of the Work and has consulted his sources of supply, and has satisfied himself as to all quantities and conditions, and understands that in signing this Bid, he waives all rights to plead any misunderstanding regarding the same.
2. The Undersigned understands that his competence and responsibility and that of his proposed subcontractors, time of completion, as well as any other factors of interest to the Owner will be considered in making the award. The Owner reserves the right to reject any or all bids, to accept or reject alternate bids and unit prices and to waive technicalities concerning the bids received, as it may be in his interest to do so.

(Legal Name of Bidder)

(SEAL, if bid is by a corporation)

(Address of Bidder)

BY _____ in longhand

(Title) Typewritten

AIA[®] Document A201[™] – 2017

General Conditions of the Contract for Construction

for the following PROJECT:

(Name and location or address)

Theatre Salina
New Addition
Salina, KS
JGR Project #22-3239

THE OWNER:

(Name, legal status and address)

Theatre Salina
303 E. Iron St.
Salina, KS 67401

THE ARCHITECT:

(Name, legal status and address)

Jones Gillam Renz Architects, Inc.
730 N. Ninth St.
Salina, KS 67401

TABLE OF ARTICLES

1	GENERAL PROVISIONS
2	OWNER
3	CONTRACTOR
4	ARCHITECT
5	SUBCONTRACTORS
6	CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
7	CHANGES IN THE WORK
8	TIME
9	PAYMENTS AND COMPLETION
10	PROTECTION OF PERSONS AND PROPERTY
11	INSURANCE AND BONDS
12	UNCOVERING AND CORRECTION OF WORK
13	MISCELLANEOUS PROVISIONS
14	TERMINATION OR SUSPENSION OF THE CONTRACT
15	CLAIMS AND DISPUTES

ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

For guidance in modifying this document to include supplementary conditions, see AIA Document A503[™], Guide for Supplementary Conditions.

INDEX

(Topics and numbers in bold are Section headings.)

Acceptance of Nonconforming Work

9.6.6, 9.9.3, **12.3**

Acceptance of Work

9.6.6, 9.8.2, 9.9.3, 9.10.1, 9.10.3, **12.3**

Access to Work

3.16, 6.2.1, **12.1**

Accident Prevention

10

Acts and Omissions

3.2, 3.3.2, 3.12.8, 3.18, 4.2.3, 8.3.1, 9.5.1, 10.2.5,
10.2.8, 13.3.2, 14.1, 15.1.2, 15.2

Addenda

1.1.1

Additional Costs, Claims for

3.7.4, 3.7.5, 10.3.2, 15.1.5

Additional Inspections and Testing

9.4.2, 9.8.3, 12.2.1, **13.4**

Additional Time, Claims for

3.2.4, 3.7.4, 3.7.5, 3.10.2, 8.3.2, **15.1.6**

Administration of the Contract

3.1.3, **4.2**, 9.4, 9.5

Advertisement or Invitation to Bid

1.1.1

Aesthetic Effect

4.2.13

Allowances

3.8

Applications for Payment

4.2.5, 7.3.9, 9.2, **9.3**, 9.4, 9.5.1, 9.5.4, 9.6.3, 9.7, 9.10

Approvals

2.1.1, 2.3.1, 2.5, 3.1.3, 3.10.2, 3.12.8, 3.12.9,
3.12.10.1, 4.2.7, 9.3.2, 13.4.1

Arbitration

8.3.1, 15.3.2, **15.4**

ARCHITECT

4

Architect, Definition of

4.1.1

Architect, Extent of Authority

2.5, 3.12.7, 4.1.2, 4.2, 5.2, 6.3, 7.1.2, 7.3.4, 7.4, 9.2,
9.3.1, 9.4, 9.5, 9.6.3, 9.8, 9.10.1, 9.10.3, 12.1, 12.2.1,
13.4.1, 13.4.2, 14.2.2, 14.2.4, 15.1.4, 15.2.1

Architect, Limitations of Authority and Responsibility

2.1.1, 3.12.4, 3.12.8, 3.12.10, 4.1.2, 4.2.1, 4.2.2, 4.2.3,
4.2.6, 4.2.7, 4.2.10, 4.2.12, 4.2.13, 5.2.1, 7.4, 9.4.2,
9.5.4, 9.6.4, 15.1.4, 15.2

Architect's Additional Services and Expenses

2.5, 12.2.1, 13.4.2, 13.4.3, 14.2.4

Architect's Administration of the Contract

3.1.3, 3.7.4, 15.2, 9.4.1, 9.5

Architect's Approvals

2.5, 3.1.3, 3.5, 3.10.2, 4.2.7

Architect's Authority to Reject Work

3.5, 4.2.6, 12.1.2, 12.2.1

Architect's Copyright

1.1.7, 1.5

Architect's Decisions

3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 4.2.14, 6.3,
7.3.4, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4.1, 9.5, 9.8.4, 9.9.1,
13.4.2, 15.2

Architect's Inspections

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 13.4

Architect's Instructions

3.2.4, 3.3.1, 4.2.6, 4.2.7, 13.4.2

Architect's Interpretations

4.2.11, 4.2.12

Architect's Project Representative

4.2.10

Architect's Relationship with Contractor

1.1.2, 1.5, 2.3.3, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2,
3.5, 3.7.4, 3.7.5, 3.9.2, 3.9.3, 3.10, 3.11, 3.12, 3.16,
3.18, 4.1.2, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5,
9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3, 12, 13.3.2, 13.4, 15.2

Architect's Relationship with Subcontractors

1.1.2, 4.2.3, 4.2.4, 4.2.6, 9.6.3, 9.6.4, 11.3

Architect's Representations

9.4.2, 9.5.1, 9.10.1

Architect's Site Visits

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.4

Asbestos

10.3.1

Attorneys' Fees

3.18.1, 9.6.8, 9.10.2, 10.3.3

Award of Separate Contracts

6.1.1, 6.1.2

Award of Subcontracts and Other Contracts for Portions of the Work

5.2

Basic Definitions

1.1

Bidding Requirements

1.1.1

Binding Dispute Resolution

8.3.1, 9.7, 11.5, 13.1, 15.1.2, 15.1.3, 15.2.1, 15.2.5,
15.2.6.1, 15.3.1, 15.3.2, 15.3.3, 15.4.1

Bonds, Lien

7.3.4.4, 9.6.8, 9.10.2, 9.10.3

Bonds, Performance, and Payment

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**, 11.1.3, **11.5**

Building Information Models Use and Reliance

1.8

Building Permit

3.7.1

Capitalization

1.3

Certificate of Substantial Completion

9.8.3, 9.8.4, 9.8.5

Certificates for Payment

4.2.1, 4.2.5, 4.2.9, 9.3.3, **9.4**, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 14.1.1.3, 14.2.4, 15.1.4

Certificates of Inspection, Testing or Approval
13.4.4

Certificates of Insurance
9.10.2

Change Orders

1.1.1, 3.4.2, 3.7.4, 3.8.2.3, 3.11, 3.12.8, 4.2.8, 5.2.3, 7.1.2, 7.1.3, **7.2**, 7.3.2, 7.3.7, 7.3.9, 7.3.10, 8.3.1, 9.3.1.1, 9.10.3, 10.3.2, 11.2, 11.5, 12.1.2

Change Orders, Definition of

7.2.1

CHANGES IN THE WORK

2.2.2, 3.11, 4.2.8, 7, 7.2.1, 7.3.1, 7.4, 8.3.1, 9.3.1.1, 11.5

Claims, Definition of

15.1.1

Claims, Notice of
1.6.2, 15.1.3

CLAIMS AND DISPUTES

3.2.4, 6.1.1, 6.3, 7.3.9, 9.3.3, 9.10.4, 10.3.3, **15**, 15.4
Claims and Timely Assertion of Claims
15.4.1

Claims for Additional Cost

3.2.4, 3.3.1, 3.7.4, 7.3.9, 9.5.2, 10.2.5, 10.3.2, **15.1.5**

Claims for Additional Time

3.2.4, 3.3.1, 3.7.4, 6.1.1, 8.3.2, 9.5.2, 10.3.2, **15.1.6**

Concealed or Unknown Conditions, Claims for
3.7.4

Claims for Damages

3.2.4, 3.18, 8.3.3, 9.5.1, 9.6.7, 10.2.5, 10.3.3, 11.3, 11.3.2, 14.2.4, 15.1.7

Claims Subject to Arbitration
15.4.1

Cleaning Up

3.15, 6.3

Commencement of the Work, Conditions Relating to
2.2.1, 3.2.2, 3.4.1, 3.7.1, 3.10.1, 3.12.6, 5.2.1, 5.2.3, 6.2.2, 8.1.2, 8.2.2, 8.3.1, 11.1, 11.2, **15.1.5**

Commencement of the Work, Definition of
8.1.2

Communications

3.9.1, **4.2.4**

Completion, Conditions Relating to

3.4.1, 3.11, 3.15, 4.2.2, 4.2.9, 8.2, 9.4.2, 9.8, 9.9.1, 9.10, 12.2, 14.1.2, 15.1.2

COMPLETION, PAYMENTS AND 9

Completion, Substantial

3.10.1, 4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3, 12.2, 15.1.2

Compliance with Laws

2.3.2, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 10.2.2, 13.1, 13.3, 13.4.1, 13.4.2, 13.5, 14.1.1, 14.2.1.3, 15.2.8, 15.4.2, 15.4.3

Concealed or Unknown Conditions

3.7.4, 4.2.8, 8.3.1, 10.3

Conditions of the Contract

1.1.1, 6.1.1, 6.1.4

Consent, Written

3.4.2, 3.14.2, 4.1.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3, 13.2, 15.4.4.2

Consolidation or Joinder

15.4.4

CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

1.1.4, **6**

Construction Change Directive, Definition of
7.3.1

Construction Change Directives

1.1.1, 3.4.2, 3.11, 3.12.8, 4.2.8, 7.1.1, 7.1.2, 7.1.3, **7.3**, 9.3.1.1

Construction Schedules, Contractor's

3.10, 3.11, 3.12.1, 3.12.2, 6.1.3, 15.1.6.2

Contingent Assignment of Subcontracts

5.4, 14.2.2.2

Continuing Contract Performance

15.1.4

Contract, Definition of

1.1.2

CONTRACT, TERMINATION OR SUSPENSION OF THE

5.4.1.1, 5.4.2, 11.5, **14**

Contract Administration

3.1.3, 4, 9.4, 9.5

Contract Award and Execution, Conditions Relating to

3.7.1, 3.10, 5.2, 6.1

Contract Documents, Copies Furnished and Use of
1.5.2, 2.3.6, 5.3

Contract Documents, Definition of

1.1.1

Contract Sum

2.2.2, 2.2.4, 3.7.4, 3.7.5, 3.8, 3.10.2, 5.2.3, 7.3, 7.4, **9.1**, 9.2, 9.4.2, 9.5.1.4, 9.6.7, 9.7, 10.3.2, 11.5, 12.1.2, 12.3, 14.2.4, 14.3.2, 15.1.4.2, **15.1.5**, **15.2.5**

Contract Sum, Definition of

9.1

Contract Time

1.1.4, 2.2.1, 2.2.2, 3.7.4, 3.7.5, 3.10.2, 5.2.3, 6.1.5, 7.2.1.3, 7.3.1, 7.3.5, 7.3.6, 7, 7, 7.3.10, 7.4, 8.1.1, 8.2.1, 8.2.3, 8.3.1, 9.5.1, 9.7, 10.3.2, 12.1.1, 12.1.2, 14.3.2, 15.1.4.2, 15.1.6.1, 15.2.5

Contract Time, Definition of

8.1.1

CONTRACTOR

3

Contractor, Definition of

3.1, **6.1.2**

Contractor's Construction and Submittal Schedules

3.10, 3.12.1, 3.12.2, 4.2.3, 6.1.3, 15.1.6.2

Contractor's Employees
2.2.4, 3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3, 11.3, 14.1, 14.2.1.1

Contractor's Liability Insurance
11.1
Contractor's Relationship with Separate Contractors and Owner's Forces
3.12.5, 3.14.2, 4.2.4, 6, 11.3, 12.2.4
Contractor's Relationship with Subcontractors
1.2.2, 2.2.4, 3.3.2, 3.18.1, 3.18.2, 4.2.4, 5, 9.6.2, 9.6.7, 9.10.2, 11.2, 11.3, 11.4
Contractor's Relationship with the Architect
1.1.2, 1.5, 2.3.3, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5.1, 3.7.4, 3.10, 3.11, 3.12, 3.16, 3.18, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5, 9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3, 12, 13.4, 15.1.3, 15.2.1
Contractor's Representations
3.2.1, 3.2.2, 3.5, 3.12.6, 6.2.2, 8.2.1, 9.3.3, 9.8.2
Contractor's Responsibility for Those Performing the Work
3.3.2, 3.18, 5.3, 6.1.3, 6.2, 9.5.1, 10.2.8
Contractor's Review of Contract Documents
3.2
Contractor's Right to Stop the Work
2.2.2, 9.7
Contractor's Right to Terminate the Contract
14.1
Contractor's Submittals
3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 9.2, 9.3, 9.8.2, 9.8.3, 9.9.1, 9.10.2, 9.10.3
Contractor's Superintendent
3.9, 10.2.6
Contractor's Supervision and Construction Procedures
1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.4, 7.3.6, 8.2, 10, 12, 14, 15.1.4
Coordination and Correlation
1.2, 3.2.1, 3.3.1, 3.10, 3.12.6, 6.1.3, 6.2.1
Copies Furnished of Drawings and Specifications
1.5, 2.3.6, 3.11
Copyrights
1.5, **3.17**
Correction of Work
2.5, 3.7.3, 9.4.2, 9.8.2, 9.8.3, 9.9.1, 12.1.2, **12.2**, 12.3, 15.1.3.1, 15.1.3.2, 15.2.1
Correlation and Intent of the Contract Documents
1.2
Cost, Definition of
7.3.4
Costs
2.5, 3.2.4, 3.7.3, 3.8.2, 3.15.2, 5.4.2, 6.1.1, 6.2.3, 7.3.3.3, 7.3.4, 7.3.8, 7.3.9, 9.10.2, 10.3.2, 10.3.6, 11.2, 12.1.2, 12.2.1, 12.2.4, 13.4, 14
Cutting and Patching
3.14, 6.2.5

Damage to Construction of Owner or Separate Contractors
3.14.2, 6.2.4, 10.2.1.2, 10.2.5, 10.4, 12.2.4
Damage to the Work
3.14.2, 9.9.1, 10.2.1.2, 10.2.5, 10.4, 12.2.4
Damages, Claims for
3.2.4, 3.18, 6.1.1, 8.3.3, 9.5.1, 9.6.7, 10.3.3, 11.3.2, 11.3, 14.2.4, 15.1.7
Damages for Delay
6.2.3, 8.3.3, 9.5.1.6, 9.7, 10.3.2, 14.3.2
Date of Commencement of the Work, Definition of
8.1.2
Date of Substantial Completion, Definition of
8.1.3
Day, Definition of
8.1.4
Decisions of the Architect
3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 6.3, 7.3.4, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4, 9.5.1, 9.8.4, 9.9.1, 13.4.2, 14.2.2, 14.2.4, 15.1, 15.2
Decisions to Withhold Certification
9.4.1, **9.5**, 9.7, 14.1.1.3
Defective or Nonconforming Work, Acceptance, Rejection and Correction of
2.5, 3.5, 4.2.6, 6.2.3, 9.5.1, 9.5.3, 9.6.6, 9.8.2, 9.9.3, 9.10.4, 12.2.1
Definitions
1.1, 2.1.1, 3.1.1, 3.5, 3.12.1, 3.12.2, 3.12.3, 4.1.1, 5.1, 6.1.2, 7.2.1, 7.3.1, 8.1, 9.1, 9.8.1, 15.1.1
Delays and Extensions of Time
3.2, **3.7.4**, 5.2.3, 7.2.1, 7.3.1, **7.4**, **8.3**, 9.5.1, **9.7**, 10.3.2, **10.4**, 14.3.2, **15.1.6**, 15.2.5
Digital Data Use and Transmission
1.7
Disputes
6.3, 7.3.9, 15.1, 15.2
Documents and Samples at the Site
3.11
Drawings, Definition of
1.1.5
Drawings and Specifications, Use and Ownership of
3.11
Effective Date of Insurance
8.2.2
Emergencies
10.4, 14.1.1.2, **15.1.5**
Employees, Contractor's
3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3.3, 11.3, 14.1, 14.2.1.1
Equipment, Labor, or Materials
1.1.3, 1.1.6, 3.4, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2
Execution and Progress of the Work
1.1.3, 1.2.1, 1.2.2, 2.3.4, 2.3.6, 3.1, 3.3.1, 3.4.1, 3.7.1, 3.10.1, 3.12, 3.14, 4.2, 6.2.2, 7.1.3, 7.3.6, 8.2, 9.5.1, 9.9.1, 10.2, 10.3, 12.1, 12.2, 14.2, 14.3.1, 15.1.4

Extensions of Time
3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3, 7.4, 9.5.1, 9.7, 10.3.2, 10.4, 14.3, 15.1.6, **15.2.5**

Failure of Payment
9.5.1.3, **9.7**, 9.10.2, 13.5, 14.1.1.3, 14.2.1.2

Faulty Work
(See Defective or Nonconforming Work)

Final Completion and Final Payment
4.2.1, 4.2.9, 9.8.2, **9.10**, 12.3, 14.2.4, 14.4.3

Financial Arrangements, Owner's
2.2.1, 13.2.2, 14.1.1.4

GENERAL PROVISIONS

1

Governing Law

13.1
Guarantees (See Warranty)

Hazardous Materials and Substances
10.2.4, **10.3**

Identification of Subcontractors and Suppliers
5.2.1

Indemnification
3.17, **3.18**, 9.6.8, 9.10.2, 10.3.3, 11.3

Information and Services Required of the Owner
2.1.2, **2.2**, 2.3, 3.2.2, 3.12.10.1, 6.1.3, 6.1.4, 6.2.5, 9.6.1, 9.9.2, 9.10.3, 10.3.3, 11.2, 13.4.1, 13.4.2, 14.1.1.4, 14.1.4, 15.1.4

Initial Decision
15.2

Initial Decision Maker, Definition of
1.1.8
Initial Decision Maker, Decisions
14.2.4, 15.1.4.2, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5
Initial Decision Maker, Extent of Authority
14.2.4, 15.1.4.2, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5

Injury or Damage to Person or Property
10.2.8, 10.4

Inspections
3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 12.2.1, 13.4

Instructions to Bidders
1.1.1

Instructions to the Contractor
3.2.4, 3.3.1, 3.8.1, 5.2.1, 7, 8.2.2, 12, 13.4.2

Instruments of Service, Definition of
1.1.7

Insurance
6.1.1, 7.3.4, 8.2.2, 9.3.2, 9.8.4, 9.9.1, 9.10.2, 10.2.5, **11**

Insurance, Notice of Cancellation or Expiration
11.1.4, 11.2.3

Insurance, Contractor's Liability
11.1
Insurance, Effective Date of
8.2.2, 14.4.2

Insurance, Owner's Liability
11.2

Insurance, Property
10.2.5, 11.2, 11.4, 11.5

Insurance, Stored Materials
9.3.2

INSURANCE AND BONDS
11

Insurance Companies, Consent to Partial Occupancy
9.9.1

Insured loss, Adjustment and Settlement of
11.5

Intent of the Contract Documents
1.2.1, 4.2.7, 4.2.12, 4.2.13

Interest
13.5

Interpretation
1.1.8, 1.2.3, **1.4**, 4.1.1, 5.1, 6.1.2, 15.1.1

Interpretations, Written
4.2.11, 4.2.12

Judgment on Final Award
15.4.2

Labor and Materials, Equipment
1.1.3, 1.1.6, **3.4**, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2

Labor Disputes
8.3.1

Laws and Regulations
1.5, 2.3.2, 3.2.3, 3.2.4, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 9.9.1, 10.2.2, 13.1, 13.3.1, 13.4.2, 13.5, 14, 15.2.8, 15.4

Liens
2.1.2, 9.3.1, 9.3.3, 9.6.8, 9.10.2, 9.10.4, 15.2.8

Limitations, Statutes of
12.2.5, 15.1.2, 15.4.1.1

Limitations of Liability
3.2.2, 3.5, 3.12.10, 3.12.10.1, 3.17, 3.18.1, 4.2.6, 4.2.7, 6.2.2, 9.4.2, 9.6.4, 9.6.7, 9.6.8, 10.2.5, 10.3.3, 11.3, 12.2.5, 13.3.1

Limitations of Time
2.1.2, 2.2, 2.5, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2.7, 5.2, 5.3, 5.4.1, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3, 9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 12.2, 13.4, 14, 15, 15.1.2, 15.1.3, 15.1.5

Materials, Hazardous
10.2.4, **10.3**

Materials, Labor, Equipment and
1.1.3, 1.1.6, 3.4.1, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1.2, 10.2.4, 14.2.1.1, 14.2.1.2

Means, Methods, Techniques, Sequences and Procedures of Construction
3.3.1, 3.12.10, 4.2.2, 4.2.7, 9.4.2

Mechanic's Lien
2.1.2, 9.3.1, 9.3.3, 9.6.8, 9.10.2, 9.10.4, 15.2.8

Mediation
8.3.1, 15.1.3.2, 15.2.1, 15.2.5, 15.2.6, **15.3**, 15.4.1, 15.4.1.1

Minor Changes in the Work
1.1.1, 3.4.2, 3.12.8, 4.2.8, 7.1, **7.4**

MISCELLANEOUS PROVISIONS

13

Modifications, Definition of

1.1.1

Modifications to the Contract

1.1.1, 1.1.2, 2.5, 3.11, 4.1.2, 4.2.1, 5.2.3, 7, 8.3.1, 9.7, 10.3.2

Mutual Responsibility

6.2

Nonconforming Work, Acceptance of

9.6.6, 9.9.3, **12.3**

Nonconforming Work, Rejection and Correction of

2.4, 2.5, 3.5, 4.2.6, 6.2.4, 9.5.1, 9.8.2, 9.9.3, 9.10.4, 12.2

Notice

1.6, 1.6.1, 1.6.2, 2.1.2, 2.2.2., 2.2.3, 2.2.4, 2.5, 3.2.4, 3.3.1, 3.7.4, 3.7.5, 3.9.2, 3.12.9, 3.12.10, 5.2.1, 7.4, 8.2.2, 9.6.8, 9.7, 9.10.1, 10.2.8, 10.3.2, 11.5, 12.2.2.1, 13.4.1, 13.4.2, 14.1, 14.2.2, 14.4.2, 15.1.3, 15.1.5, 15.1.6, 15.4.1

Notice of Cancellation or Expiration of Insurance

11.1.4, 11.2.3

Notice of Claims

1.6.2, 2.1.2, 3.7.4, 9.6.8, 10.2.8, **15.1.3**, 15.1.5, 15.1.6, 15.2.8, 15.3.2, 15.4.1

Notice of Testing and Inspections

13.4.1, 13.4.2

Observations, Contractor's

3.2, 3.7.4

Occupancy

2.3.1, 9.6.6, 9.8

Orders, Written

1.1.1, 2.4, 3.9.2, 7, 8.2.2, 11.5, 12.1, 12.2.2.1, 13.4.2, 14.3.1

OWNER

2

Owner, Definition of

2.1.1

Owner, Evidence of Financial Arrangements

2.2, 13.2.2, 14.1.1.4

Owner, Information and Services Required of the

2.1.2, **2.2**, 2.3, 3.2.2, 3.12.10, 6.1.3, 6.1.4, 6.2.5, 9.3.2, 9.6.1, 9.6.4, 9.9.2, 9.10.3, 10.3.3, 11.2, 13.4.1, 13.4.2, 14.1.1.4, 14.1.4, 15.1.4

Owner's Authority

1.5, 2.1.1, 2.3.32.4, 2.5, 3.4.2, 3.8.1, 3.12.10, 3.14.2, 4.1.2, 4.2.4, 4.2.9, 5.2.1, 5.2.4, 5.4.1, 6.1, 6.3, 7.2.1, 7.3.1, 8.2.2, 8.3.1, 9.3.2, 9.5.1, 9.6.4, 9.9.1, 9.10.2, 10.3.2, 11.4, 11.5, 12.2.2, 12.3, 13.2.2, 14.3, 14.4, 15.2.7

Owner's Insurance

11.2

Owner's Relationship with Subcontractors

1.1.2, 5.2, 5.3, 5.4, 9.6.4, 9.10.2, 14.2.2

Owner's Right to Carry Out the Work

2.5, 14.2.2

Owner's Right to Clean Up

6.3

Owner's Right to Perform Construction and to Award Separate Contracts

6.1

Owner's Right to Stop the Work

2.4

Owner's Right to Suspend the Work

14.3

Owner's Right to Terminate the Contract

14.2, 14.4

Ownership and Use of Drawings, Specifications and Other Instruments of Service

1.1.1, 1.1.6, 1.1.7, **1.5**, 2.3.6, 3.2.2, 3.11, 3.17, 4.2.12, 5.3

Partial Occupancy or Use

9.6.6, **9.9**

Patching, Cutting and

3.14, 6.2.5

Patents

3.17

Payment, Applications for

4.2.5, 7.3.9, 9.2, **9.3**, 9.4, 9.5, 9.6.3, 9.7, 9.8.5, 9.10.1, 14.2.3, 14.2.4, 14.4.3

Payment, Certificates for

4.2.5, 4.2.9, 9.3.3, **9.4**, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 14.1.1.3, 14.2.4

Payment, Failure of

9.5.1.3, **9.7**, 9.10.2, 13.5, 14.1.1.3, 14.2.1.2

Payment, Final

4.2.1, 4.2.9, **9.10**, 12.3, 14.2.4, 14.4.3

Payment Bond, Performance Bond and

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**

Payments, Progress

9.3, **9.6**, 9.8.5, 9.10.3, 14.2.3, 15.1.4

PAYMENTS AND COMPLETION

9

Payments to Subcontractors

5.4.2, 9.5.1.3, 9.6.2, 9.6.3, 9.6.4, 9.6.7, 14.2.1.2

PCB

10.3.1

Performance Bond and Payment Bond

7.3.4.4, 9.6.7, 9.10.3, **11.1.2**

Permits, Fees, Notices and Compliance with Laws

2.3.1, **3.7**, 3.13, 7.3.4.4, 10.2.2

PERSONS AND PROPERTY, PROTECTION OF

10

Polychlorinated Biphenyl

10.3.1

Product Data, Definition of

3.12.2

Product Data and Samples, Shop Drawings

3.11, **3.12**, 4.2.7

Progress and Completion

4.2.2, **8.2**, 9.8, 9.9.1, 14.1.4, 15.1.4

Progress Payments

9.3, **9.6**, 9.8.5, 9.10.3, 14.2.3, 15.1.4

Project, Definition of
1.1.4
 Project Representatives
 4.2.10
Property Insurance
 10.2.5, **11.2**
Proposal Requirements
 1.1.1
PROTECTION OF PERSONS AND PROPERTY
10
 Regulations and Laws
 1.5, 2.3.2, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 9.9.1,
 10.2.2, 13.1, 13.3, 13.4.1, 13.4.2, 13.5, 14, 15.2.8, 15.4
 Rejection of Work
 4.2.6, 12.2.1
 Releases and Waivers of Liens
 9.3.1, 9.10.2
 Representations
 3.2.1, 3.5, 3.12.6, 8.2.1, 9.3.3, 9.4.2, 9.5.1, 9.10.1
 Representatives
 2.1.1, 3.1.1, 3.9, 4.1.1, 4.2.10, 13.2.1
 Responsibility for Those Performing the Work
 3.3.2, 3.18, 4.2.2, 4.2.3, 5.3, 6.1.3, 6.2, 6.3, 9.5.1, 10
 Retainage
 9.3.1, 9.6.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3
Review of Contract Documents and Field
Conditions by Contractor
3.2, 3.12.7, 6.1.3
 Review of Contractor's Submittals by Owner and
 Architect
 3.10.1, 3.10.2, 3.11, 3.12, 4.2, 5.2, 6.1.3, 9.2, 9.8.2
 Review of Shop Drawings, Product Data and Samples
 by Contractor
 3.12
Rights and Remedies
 1.1.2, 2.4, 2.5, 3.5, 3.7.4, 3.15.2, 4.2.6, 5.3, 5.4, 6.1,
 6.3, 7.3.1, 8.3, 9.5.1, 9.7, 10.2.5, 10.3, 12.2.1, 12.2.2,
 12.2.4, **13.3**, 14, 15.4
Royalties, Patents and Copyrights
3.17
 Rules and Notices for Arbitration
 15.4.1
Safety of Persons and Property
10.2, 10.4
Safety Precautions and Programs
 3.3.1, 4.2.2, 4.2.7, 5.3, **10.1**, 10.2, 10.4
Samples, Definition of
3.12.3
Samples, Shop Drawings, Product Data and
 3.11, **3.12**, 4.2.7
Samples at the Site, Documents and
3.11
Schedule of Values
9.2, 9.3.1
 Schedules, Construction
 3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.6.2

Separate Contracts and Contractors
 1.1.4, 3.12.5, 3.14.2, 4.2.4, 4.2.7, 6, 8.3.1, 12.1.2
Separate Contractors, Definition of
6.1.1
Shop Drawings, Definition of
3.12.1
Shop Drawings, Product Data and Samples
 3.11, **3.12**, 4.2.7
Site, Use of
3.13, 6.1.1, 6.2.1
 Site Inspections
 3.2.2, 3.3.3, 3.7.1, 3.7.4, 4.2, 9.9.2, 9.4.2, 9.10.1, 13.4
 Site Visits, Architect's
 3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.4
 Special Inspections and Testing
 4.2.6, 12.2.1, 13.4
Specifications, Definition of
1.1.6
Specifications
 1.1.1, **1.1.6**, 1.2.2, 1.5, 3.12.10, 3.17, 4.2.14
 Statute of Limitations
 15.1.2, 15.4.1.1
 Stopping the Work
 2.2.2, 2.4, 9.7, 10.3, 14.1
 Stored Materials
 6.2.1, 9.3.2, 10.2.1.2, 10.2.4
Subcontractor, Definition of
5.1.1
SUBCONTRACTORS
5
 Subcontractors, Work by
 1.2.2, 3.3.2, 3.12.1, 3.18, 4.2.3, 5.2.3, 5.3, 5.4, 9.3.1.2,
 9.6.7
Subcontractual Relations
5.3, 5.4, 9.3.1.2, 9.6, 9.10, 10.2.1, 14.1, 14.2.1
 Submittals
 3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 7.3.4, 9.2, 9.3, 9.8,
 9.9.1, 9.10.2, 9.10.3
 Submittal Schedule
 3.10.2, 3.12.5, 4.2.7
Subrogation, Waivers of
 6.1.1, **11.3**
Substances, Hazardous
10.3
Substantial Completion
 4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, **9.8**, 9.9.1, 9.10.3, 12.2,
 15.1.2
Substantial Completion, Definition of
9.8.1
 Substitution of Subcontractors
 5.2.3, 5.2.4
 Substitution of Architect
 2.3.3
 Substitutions of Materials
 3.4.2, 3.5, 7.3.8
Sub-subcontractor, Definition of
5.1.2

Subsurface Conditions

3.7.4

Successors and Assigns

13.2

Superintendent

3.9, 10.2.6

Supervision and Construction Procedures

1.2.2, **3.3**, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.4, 8.2, 8.3.1, 9.4.2, 10, 12, 14, 15.1.4

Suppliers

1.5, 3.12.1, 4.2.4, 4.2.6, 5.2.1, 9.3, 9.4.2, 9.5.4, 9.6, 9.10.5, 14.2.1

Surety

5.4.1.2, 9.6.8, 9.8.5, 9.10.2, 9.10.3, 11.1.2, 14.2.2, 15.2.7

Surety, Consent of

9.8.5, 9.10.2, 9.10.3

Surveys

1.1.7, 2.3.4

Suspension by the Owner for Convenience

14.3

Suspension of the Work

3.7.5, 5.4.2, 14.3

Suspension or Termination of the Contract

5.4.1.1, 14

Taxes

3.6, 3.8.2.1, 7.3.4.4

Termination by the Contractor

14.1, 15.1.7

Termination by the Owner for Cause

5.4.1.1, **14.2**, 15.1.7

Termination by the Owner for Convenience

14.4

Termination of the Architect

2.3.3

Termination of the Contractor Employment

14.2.2

TERMINATION OR SUSPENSION OF THE CONTRACT

14

Tests and Inspections

3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 10.3.2, 12.2.1, **13.4**

TIME

8

Time, Delays and Extensions of

3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4, **8.3**, 9.5.1, 9.7, 10.3.2, 10.4, 14.3.2, 15.1.6, 15.2.5

Time Limits

2.1.2, 2.2, 2.5, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2, 5.2, 5.3, 5.4, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3, 9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 12.2, 13.4, 14, 15.1.2, 15.1.3, 15.4

Time Limits on Claims

3.7.4, 10.2.8, 15.1.2, 15.1.3

Title to Work

9.3.2, 9.3.3

UNCOVERING AND CORRECTION OF WORK

Uncovering of Work

12.1

Unforeseen Conditions, Concealed or Unknown

3.7.4, 8.3.1, 10.3

Unit Prices

7.3.3.2, 9.1.2

Use of Documents

1.1.1, 1.5, 2.3.6, 3.12.6, 5.3

Use of Site

3.13, 6.1.1, 6.2.1

Values, Schedule of

9.2, 9.3.1

Waiver of Claims by the Architect

13.3.2

Waiver of Claims by the Contractor

9.10.5, 13.3.2, **15.1.7**

Waiver of Claims by the Owner

9.9.3, 9.10.3, 9.10.4, 12.2.2.1, 13.3.2, 14.2.4, **15.1.7**

Waiver of Consequential Damages

14.2.4, 15.1.7

Waiver of Liens

9.3, 9.10.2, 9.10.4

Waivers of Subrogation

6.1.1, **11.3**

Warranty

3.5, 4.2.9, 9.3.3, 9.8.4, 9.9.1, 9.10.2, 9.10.4, 12.2.2, 15.1.2

Weather Delays

8.3, 15.1.6.2

Work, Definition of

1.1.3

Written Consent

1.5.2, 3.4.2, 3.7.4, 3.12.8, 3.14.2, 4.1.2, 9.3.2, 9.10.3, 13.2, 13.3.2, 15.4.4.2

Written Interpretations

4.2.11, 4.2.12

Written Orders

1.1.1, 2.4, 3.9, 7, 8.2.2, 12.1, 12.2, 13.4.2, 14.3.1

ARTICLE 1 GENERAL PROVISIONS

§ 1.1 Basic Definitions

§ 1.1.1 The Contract Documents

The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement, and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive, or (4) a written order for a minor change in the Work issued by the Architect. Unless specifically enumerated in the Agreement, the Contract Documents do not include the advertisement or invitation to bid, Instructions to Bidders, sample forms, other information furnished by the Owner in anticipation of receiving bids or proposals, the Contractor's bid or proposal, or portions of Addenda relating to bidding or proposal requirements.

§ 1.1.2 The Contract

The Contract Documents form the Contract for Construction. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. The Contract may be amended or modified only by a Modification. The Contract Documents shall not be construed to create a contractual relationship of any kind (1) between the Contractor and the Architect or the Architect's consultants, (2) between the Owner and a Subcontractor or a Sub-subcontractor, (3) between the Owner and the Architect or the Architect's consultants, or (4) between any persons or entities other than the Owner and the Contractor. The Architect shall, however, be entitled to performance and enforcement of obligations under the Contract intended to facilitate performance of the Architect's duties.

§ 1.1.3 The Work

The term "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all other labor, materials, equipment, and services provided or to be provided by the Contractor to fulfill the Contractor's obligations. The Work may constitute the whole or a part of the Project.

§ 1.1.4 The Project

The Project is the total construction of which the Work performed under the Contract Documents may be the whole or a part and which may include construction by the Owner and by Separate Contractors.

§ 1.1.5 The Drawings

The Drawings are the graphic and pictorial portions of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules, and diagrams.

§ 1.1.6 The Specifications

The Specifications are that portion of the Contract Documents consisting of the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.

§ 1.1.7 Instruments of Service

Instruments of Service are representations, in any medium of expression now known or later developed, of the tangible and intangible creative work performed by the Architect and the Architect's consultants under their respective professional services agreements. Instruments of Service may include, without limitation, studies, surveys, models, sketches, drawings, specifications, and other similar materials.

§ 1.1.8 Initial Decision Maker

The Initial Decision Maker is the person identified in the Agreement to render initial decisions on Claims in accordance with Section 15.2. The Initial Decision Maker shall not show partiality to the Owner or Contractor and shall not be liable for results of interpretations or decisions rendered in good faith.

§ 1.2 Correlation and Intent of the Contract Documents

§ 1.2.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all; performance by the Contractor shall be required only to the extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the indicated results.

§ 1.2.1.1 The invalidity of any provision of the Contract Documents shall not invalidate the Contract or its remaining provisions. If it is determined that any provision of the Contract Documents violates any law, or is otherwise invalid or unenforceable, then that provision shall be revised to the extent necessary to make that provision legal and enforceable. In such case the Contract Documents shall be construed, to the fullest extent permitted by law, to give effect to the parties' intentions and purposes in executing the Contract.

§ 1.2.2 Organization of the Specifications into divisions, sections and articles, and arrangement of Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of Work to be performed by any trade.

§ 1.2.3 Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

§ 1.3 Capitalization

Terms capitalized in these General Conditions include those that are (1) specifically defined, (2) the titles of numbered articles, or (3) the titles of other documents published by the American Institute of Architects.

§ 1.4 Interpretation

In the interest of brevity the Contract Documents frequently omit modifying words such as "all" and "any" and articles such as "the" and "an," but the fact that a modifier or an article is absent from one statement and appears in another is not intended to affect the interpretation of either statement.

§ 1.5 Ownership and Use of Drawings, Specifications, and Other Instruments of Service

§ 1.5.1 The Architect and the Architect's consultants shall be deemed the authors and owners of their respective Instruments of Service, including the Drawings and Specifications, and retain all common law, statutory, and other reserved rights in their Instruments of Service, including copyrights. The Contractor, Subcontractors, Sub-subcontractors, and suppliers shall not own or claim a copyright in the Instruments of Service. Submittal or distribution to meet official regulatory requirements or for other purposes in connection with the Project is not to be construed as publication in derogation of the Architect's or Architect's consultants' reserved rights.

§ 1.5.2 The Contractor, Subcontractors, Sub-subcontractors, and suppliers are authorized to use and reproduce the Instruments of Service provided to them, subject to any protocols established pursuant to Sections 1.7 and 1.8, solely and exclusively for execution of the Work. All copies made under this authorization shall bear the copyright notice, if any, shown on the Instruments of Service. The Contractor, Subcontractors, Sub-subcontractors, and suppliers may not use the Instruments of Service on other projects or for additions to the Project outside the scope of the Work without the specific written consent of the Owner, Architect, and the Architect's consultants.

§ 1.6 Notice

§ 1.6.1 Except as otherwise provided in Section 1.6.2, where the Contract Documents require one party to notify or give notice to the other party, such notice shall be provided in writing to the designated representative of the party to whom the notice is addressed and shall be deemed to have been duly served if delivered in person, by mail, by courier, or by electronic transmission if a method for electronic transmission is set forth in the Agreement.

§ 1.6.2 Notice of Claims as provided in Section 15.1.3 shall be provided in writing and shall be deemed to have been duly served only if delivered to the designated representative of the party to whom the notice is addressed by certified or registered mail, or by courier providing proof of delivery.

§ 1.7 Digital Data Use and Transmission

The parties shall agree upon protocols governing the transmission and use of Instruments of Service or any other information or documentation in digital form. The parties will use AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, to establish the protocols for the development, use, transmission, and exchange of digital data.

§ 1.8 Building Information Models Use and Reliance

Any use of, or reliance on, all or a portion of a building information model without agreement to protocols governing the use of, and reliance on, the information contained in the model and without having those protocols set forth in AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, and the requisite AIA Document

G202™–2013, Project Building Information Modeling Protocol Form, shall be at the using or relying party's sole risk and without liability to the other party and its contractors or consultants, the authors of, or contributors to, the building information model, and each of their agents and employees.

ARTICLE 2 OWNER

§ 2.1 General

§ 2.1.1 The Owner is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Owner shall designate in writing a representative who shall have express authority to bind the Owner with respect to all matters requiring the Owner's approval or authorization. Except as otherwise provided in Section 4.2.1, the Architect does not have such authority. The term "Owner" means the Owner or the Owner's authorized representative.

§ 2.1.2 The Owner shall furnish to the Contractor, within fifteen days after receipt of a written request, information necessary and relevant for the Contractor to evaluate, give notice of, or enforce mechanic's lien rights. Such information shall include a correct statement of the record legal title to the property on which the Project is located, usually referred to as the site, and the Owner's interest therein.

§ 2.2 Evidence of the Owner's Financial Arrangements

§ 2.2.1 Prior to commencement of the Work and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract. The Contractor shall have no obligation to commence the Work until the Owner provides such evidence. If commencement of the Work is delayed under this Section 2.2.1, the Contract Time shall be extended appropriately.

§ 2.2.2 Following commencement of the Work and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract only if (1) the Owner fails to make payments to the Contractor as the Contract Documents require; (2) the Contractor identifies in writing a reasonable concern regarding the Owner's ability to make payment when due; or (3) a change in the Work materially changes the Contract Sum. If the Owner fails to provide such evidence, as required, within fourteen days of the Contractor's request, the Contractor may immediately stop the Work and, in that event, shall notify the Owner that the Work has stopped. However, if the request is made because a change in the Work materially changes the Contract Sum under (3) above, the Contractor may immediately stop only that portion of the Work affected by the change until reasonable evidence is provided. If the Work is stopped under this Section 2.2.2, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided in the Contract Documents.

§ 2.2.3 After the Owner furnishes evidence of financial arrangements under this Section 2.2, the Owner shall not materially vary such financial arrangements without prior notice to the Contractor.

§ 2.2.4 Where the Owner has designated information furnished under this Section 2.2 as "confidential," the Contractor shall keep the information confidential and shall not disclose it to any other person. However, the Contractor may disclose "confidential" information, after seven (7) days' notice to the Owner, where disclosure is required by law, including a subpoena or other form of compulsory legal process issued by a court or governmental entity, or by court or arbitrator(s) order. The Contractor may also disclose "confidential" information to its employees, consultants, sureties, Subcontractors and their employees, Sub-subcontractors, and others who need to know the content of such information solely and exclusively for the Project and who agree to maintain the confidentiality of such information.

§ 2.3 Information and Services Required of the Owner

§ 2.3.1 Except for permits and fees that are the responsibility of the Contractor under the Contract Documents, including those required under Section 3.7.1, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for construction, use or occupancy of permanent structures or for permanent changes in existing facilities.

§ 2.3.2 The Owner shall retain an architect lawfully licensed to practice architecture, or an entity lawfully practicing architecture, in the jurisdiction where the Project is located. That person or entity is identified as the Architect in the Agreement and is referred to throughout the Contract Documents as if singular in number.

§ 2.3.3 If the employment of the Architect terminates, the Owner shall employ a successor to whom the Contractor has no reasonable objection and whose status under the Contract Documents shall be that of the Architect.

§ 2.3.4 The Owner shall furnish surveys describing physical characteristics, legal limitations and utility locations for the site of the Project, and a legal description of the site. The Contractor shall be entitled to rely on the accuracy of information furnished by the Owner but shall exercise proper precautions relating to the safe performance of the Work.

§ 2.3.5 The Owner shall furnish information or services required of the Owner by the Contract Documents with reasonable promptness. The Owner shall also furnish any other information or services under the Owner's control and relevant to the Contractor's performance of the Work with reasonable promptness after receiving the Contractor's written request for such information or services.

§ 2.3.6 Unless otherwise provided in the Contract Documents, the Owner shall furnish to the Contractor one copy of the Contract Documents for purposes of making reproductions pursuant to Section 1.5.2.

§ 2.4 Owner's Right to Stop the Work

If the Contractor fails to correct Work that is not in accordance with the requirements of the Contract Documents as required by Section 12.2 or repeatedly fails to carry out Work in accordance with the Contract Documents, the Owner may issue a written order to the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, the right of the Owner to stop the Work shall not give rise to a duty on the part of the Owner to exercise this right for the benefit of the Contractor or any other person or entity, except to the extent required by Section 6.1.3.

§ 2.5 Owner's Right to Carry Out the Work

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a ten-day period after receipt of notice from the Owner to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such default or neglect. Such action by the Owner and amounts charged to the Contractor are both subject to prior approval of the Architect and the Architect may, pursuant to Section 9.5.1, withhold or nullify a Certificate for Payment in whole or in part, to the extent reasonably necessary to reimburse the Owner for the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Architect's additional services made necessary by such default, neglect, or failure. If current and future payments are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner. If the Contractor disagrees with the actions of the Owner or the Architect, or the amounts claimed as costs to the Owner, the Contractor may file a Claim pursuant to Article 15.

ARTICLE 3 CONTRACTOR

§ 3.1 General

§ 3.1.1 The Contractor is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Contractor shall be lawfully licensed, if required in the jurisdiction where the Project is located. The Contractor shall designate in writing a representative who shall have express authority to bind the Contractor with respect to all matters under this Contract. The term "Contractor" means the Contractor or the Contractor's authorized representative.

§ 3.1.2 The Contractor shall perform the Work in accordance with the Contract Documents.

§ 3.1.3 The Contractor shall not be relieved of its obligations to perform the Work in accordance with the Contract Documents either by activities or duties of the Architect in the Architect's administration of the Contract, or by tests, inspections or approvals required or performed by persons or entities other than the Contractor.

§ 3.2 Review of Contract Documents and Field Conditions by Contractor

§ 3.2.1 Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become generally familiar with local conditions under which the Work is to be performed, and correlated personal observations with requirements of the Contract Documents.

§ 3.2.2 Because the Contract Documents are complementary, the Contractor shall, before starting each portion of the Work, carefully study and compare the various Contract Documents relative to that portion of the Work, as well as the information furnished by the Owner pursuant to Section 2.3.4, shall take field measurements of any existing conditions related to that portion of the Work, and shall observe any conditions at the site affecting it. These obligations are for the purpose of facilitating coordination and construction by the Contractor and are not for the purpose of discovering errors, omissions, or inconsistencies in the Contract Documents; however, the Contractor shall promptly report to the Architect any errors, inconsistencies or omissions discovered by or made known to the Contractor as a request for information in such form as the Architect may require. It is recognized that the Contractor's review is made in the Contractor's capacity as a contractor and not as a licensed design professional, unless otherwise specifically provided in the Contract Documents.

§ 3.2.3 The Contractor is not required to ascertain that the Contract Documents are in accordance with applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, but the Contractor shall promptly report to the Architect any nonconformity discovered by or made known to the Contractor as a request for information in such form as the Architect may require.

§ 3.2.4 If the Contractor believes that additional cost or time is involved because of clarifications or instructions the Architect issues in response to the Contractor's notices or requests for information pursuant to Sections 3.2.2 or 3.2.3, the Contractor shall submit Claims as provided in Article 15. If the Contractor fails to perform the obligations of Sections 3.2.2 or 3.2.3, the Contractor shall pay such costs and damages to the Owner, subject to Section 15.1.7, as would have been avoided if the Contractor had performed such obligations. If the Contractor performs those obligations, the Contractor shall not be liable to the Owner or Architect for damages resulting from errors, inconsistencies or omissions in the Contract Documents, for differences between field measurements or conditions and the Contract Documents, or for nonconformities of the Contract Documents to applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities.

§ 3.3 Supervision and Construction Procedures

§ 3.3.1 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for, and have control over, construction means, methods, techniques, sequences, and procedures, and for coordinating all portions of the Work under the Contract. If the Contract Documents give specific instructions concerning construction means, methods, techniques, sequences, or procedures, the Contractor shall evaluate the jobsite safety thereof and shall be solely responsible for the jobsite safety of such means, methods, techniques, sequences, or procedures. If the Contractor determines that such means, methods, techniques, sequences or procedures may not be safe, the Contractor shall give timely notice to the Owner and Architect, and shall propose alternative means, methods, techniques, sequences, or procedures. The Architect shall evaluate the proposed alternative solely for conformance with the design intent for the completed construction. Unless the Architect objects to the Contractor's proposed alternative, the Contractor shall perform the Work using its alternative means, methods, techniques, sequences, or procedures.

§ 3.3.2 The Contractor shall be responsible to the Owner for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons or entities performing portions of the Work for, or on behalf of, the Contractor or any of its Subcontractors.

§ 3.3.3 The Contractor shall be responsible for inspection of portions of Work already performed to determine that such portions are in proper condition to receive subsequent Work.

§ 3.4 Labor and Materials

§ 3.4.1 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work.

§ 3.4.2 Except in the case of minor changes in the Work approved by the Architect in accordance with Section 3.12.8 or ordered by the Architect in accordance with Section 7.4, the Contractor may make substitutions only with the consent of the Owner, after evaluation by the Architect and in accordance with a Change Order or Construction Change Directive.

§ 3.4.3 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Work. The Contractor shall not permit employment of unfit persons or persons not properly skilled in tasks assigned to them.

§ 3.5 Warranty

§ 3.5.1 The Contractor warrants to the Owner and Architect that materials and equipment furnished under the Contract will be of good quality and new unless the Contract Documents require or permit otherwise. The Contractor further warrants that the Work will conform to the requirements of the Contract Documents and will be free from defects, except for those inherent in the quality of the Work the Contract Documents require or permit. Work, materials, or equipment not conforming to these requirements may be considered defective. The Contractor's warranty excludes remedy for damage or defect caused by abuse, alterations to the Work not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear and normal usage. If required by the Architect, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment.

§ 3.5.2 All material, equipment, or other special warranties required by the Contract Documents shall be issued in the name of the Owner, or shall be transferable to the Owner, and shall commence in accordance with Section 9.8.4.

§ 3.6 Taxes

The Contractor shall pay sales, consumer, use and similar taxes for the Work provided by the Contractor that are legally enacted when bids are received or negotiations concluded, whether or not yet effective or merely scheduled to go into effect.

§ 3.7 Permits, Fees, Notices and Compliance with Laws

§ 3.7.1 Unless otherwise provided in the Contract Documents, the Contractor shall secure and pay for the building permit as well as for other permits, fees, licenses, and inspections by government agencies necessary for proper execution and completion of the Work that are customarily secured after execution of the Contract and legally required at the time bids are received or negotiations concluded.

§ 3.7.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities applicable to performance of the Work.

§ 3.7.3 If the Contractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume appropriate responsibility for such Work and shall bear the costs attributable to correction.

§ 3.7.4 Concealed or Unknown Conditions

If the Contractor encounters conditions at the site that are (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (2) unknown physical conditions of an unusual nature that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall promptly provide notice to the Owner and the Architect before conditions are disturbed and in no event later than 14 days after first observance of the conditions. The Architect will promptly investigate such conditions and, if the Architect determines that they differ materially and cause an increase or decrease in the Contractor's cost of, or time required for, performance of any part of the Work, will recommend that an equitable adjustment be made in the Contract Sum or Contract Time, or both. If the Architect determines that the conditions at the site are not materially different from those indicated in the Contract Documents and that no change in the terms of the Contract is justified, the Architect shall promptly notify the Owner and Contractor, stating the reasons. If either party disputes the Architect's determination or recommendation, that party may submit a Claim as provided in Article 15.

§ 3.7.5 If, in the course of the Work, the Contractor encounters human remains or recognizes the existence of burial markers, archaeological sites or wetlands not indicated in the Contract Documents, the Contractor shall immediately suspend any operations that would affect them and shall notify the Owner and Architect. Upon receipt of such notice, the Owner shall promptly take any action necessary to obtain governmental authorization required to resume the operations. The Contractor shall continue to suspend such operations until otherwise instructed by the Owner but shall continue with all other operations that do not affect those remains or features. Requests for adjustments in the Contract Sum and Contract Time arising from the existence of such remains or features may be made as provided in Article 15.

§ 3.8 Allowances

§ 3.8.1 The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. Items covered by allowances shall be supplied for such amounts and by such persons or entities as the Owner may direct, but the Contractor shall not be required to employ persons or entities to whom the Contractor has reasonable objection.

§ 3.8.2 Unless otherwise provided in the Contract Documents,

- .1 allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;
- .2 Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit, and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and
- .3 whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Change Order. The amount of the Change Order shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2.

§ 3.8.3 Materials and equipment under an allowance shall be selected by the Owner with reasonable promptness.

§ 3.9 Superintendent

§ 3.9.1 The Contractor shall employ a competent superintendent and necessary assistants who shall be in attendance at the Project site during performance of the Work. The superintendent shall represent the Contractor, and communications given to the superintendent shall be as binding as if given to the Contractor.

§ 3.9.2 The Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect of the name and qualifications of a proposed superintendent. Within 14 days of receipt of the information, the Architect may notify the Contractor, stating whether the Owner or the Architect (1) has reasonable objection to the proposed superintendent or (2) requires additional time for review. Failure of the Architect to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 3.9.3 The Contractor shall not employ a proposed superintendent to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not change the superintendent without the Owner's consent, which shall not unreasonably be withheld or delayed.

§ 3.10 Contractor's Construction and Submittal Schedules

§ 3.10.1 The Contractor, promptly after being awarded the Contract, shall submit for the Owner's and Architect's information a Contractor's construction schedule for the Work. The schedule shall contain detail appropriate for the Project, including (1) the date of commencement of the Work, interim schedule milestone dates, and the date of Substantial Completion; (2) an apportionment of the Work by construction activity; and (3) the time required for completion of each portion of the Work. The schedule shall provide for the orderly progression of the Work to completion and shall not exceed time limits current under the Contract Documents. The schedule shall be revised at appropriate intervals as required by the conditions of the Work and Project.

§ 3.10.2 The Contractor, promptly after being awarded the Contract and thereafter as necessary to maintain a current submittal schedule, shall submit a submittal schedule for the Architect's approval. The Architect's approval shall not be unreasonably delayed or withheld. The submittal schedule shall (1) be coordinated with the Contractor's construction schedule, and (2) allow the Architect reasonable time to review submittals. If the Contractor fails to submit a submittal schedule, or fails to provide submittals in accordance with the approved submittal schedule, the Contractor shall not be entitled to any increase in Contract Sum or extension of Contract Time based on the time required for review of submittals.

§ 3.10.3 The Contractor shall perform the Work in general accordance with the most recent schedules submitted to the Owner and Architect.

§ 3.11 Documents and Samples at the Site

The Contractor shall make available, at the Project site, the Contract Documents, including Change Orders, Construction Change Directives, and other Modifications, in good order and marked currently to indicate field changes and selections made during construction, and the approved Shop Drawings, Product Data, Samples, and similar required submittals. These shall be in electronic form or paper copy, available to the Architect and Owner, and

delivered to the Architect for submittal to the Owner upon completion of the Work as a record of the Work as constructed.

§ 3.12 Shop Drawings, Product Data and Samples

§ 3.12.1 Shop Drawings are drawings, diagrams, schedules, and other data specially prepared for the Work by the Contractor or a Subcontractor, Sub-subcontractor, manufacturer, supplier, or distributor to illustrate some portion of the Work.

§ 3.12.2 Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams, and other information furnished by the Contractor to illustrate materials or equipment for some portion of the Work.

§ 3.12.3 Samples are physical examples that illustrate materials, equipment, or workmanship, and establish standards by which the Work will be judged.

§ 3.12.4 Shop Drawings, Product Data, Samples, and similar submittals are not Contract Documents. Their purpose is to demonstrate how the Contractor proposes to conform to the information given and the design concept expressed in the Contract Documents for those portions of the Work for which the Contract Documents require submittals. Review by the Architect is subject to the limitations of Section 4.2.7. Informational submittals upon which the Architect is not expected to take responsive action may be so identified in the Contract Documents. Submittals that are not required by the Contract Documents may be returned by the Architect without action.

§ 3.12.5 The Contractor shall review for compliance with the Contract Documents, approve, and submit to the Architect, Shop Drawings, Product Data, Samples, and similar submittals required by the Contract Documents, in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of the Owner or of Separate Contractors.

§ 3.12.6 By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Contractor represents to the Owner and Architect that the Contractor has (1) reviewed and approved them, (2) determined and verified materials, field measurements and field construction criteria related thereto, or will do so, and (3) checked and coordinated the information contained within such submittals with the requirements of the Work and of the Contract Documents.

§ 3.12.7 The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples, or similar submittals, until the respective submittal has been approved by the Architect.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from the requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples, or similar submittals, unless the Contractor has specifically notified the Architect of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples, or similar submittals, by the Architect's approval thereof.

§ 3.12.9 The Contractor shall direct specific attention, in writing or on resubmitted Shop Drawings, Product Data, Samples, or similar submittals, to revisions other than those requested by the Architect on previous submittals. In the absence of such notice, the Architect's approval of a resubmission shall not apply to such revisions.

§ 3.12.10 The Contractor shall not be required to provide professional services that constitute the practice of architecture or engineering unless such services are specifically required by the Contract Documents for a portion of the Work or unless the Contractor needs to provide such services in order to carry out the Contractor's responsibilities for construction means, methods, techniques, sequences, and procedures. The Contractor shall not be required to provide professional services in violation of applicable law.

§ 3.12.10.1 If professional design services or certifications by a design professional related to systems, materials, or equipment are specifically required of the Contractor by the Contract Documents, the Owner and the Architect will specify all performance and design criteria that such services must satisfy. The Contractor shall be entitled to rely

upon the adequacy and accuracy of the performance and design criteria provided in the Contract Documents. The Contractor shall cause such services or certifications to be provided by an appropriately licensed design professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings, and other submittals prepared by such professional. Shop Drawings, and other submittals related to the Work, designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to the Architect. The Owner and the Architect shall be entitled to rely upon the adequacy and accuracy of the services, certifications, and approvals performed or provided by such design professionals, provided the Owner and Architect have specified to the Contractor the performance and design criteria that such services must satisfy. Pursuant to this Section 3.12.10, the Architect will review and approve or take other appropriate action on submittals only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents.

§ 3.12.10.2 If the Contract Documents require the Contractor's design professional to certify that the Work has been performed in accordance with the design criteria, the Contractor shall furnish such certifications to the Architect at the time and in the form specified by the Architect.

§ 3.13 Use of Site

The Contractor shall confine operations at the site to areas permitted by applicable laws, statutes, ordinances, codes, rules and regulations, lawful orders of public authorities, and the Contract Documents and shall not unreasonably encumber the site with materials or equipment.

§ 3.14 Cutting and Patching

§ 3.14.1 The Contractor shall be responsible for cutting, fitting, or patching required to complete the Work or to make its parts fit together properly. All areas requiring cutting, fitting, or patching shall be restored to the condition existing prior to the cutting, fitting, or patching, unless otherwise required by the Contract Documents.

§ 3.14.2 The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or Separate Contractors by cutting, patching, or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter construction by the Owner or a Separate Contractor except with written consent of the Owner and of the Separate Contractor. Consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold, from the Owner or a Separate Contractor, its consent to cutting or otherwise altering the Work.

§ 3.15 Cleaning Up

§ 3.15.1 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials and rubbish caused by operations under the Contract. At completion of the Work, the Contractor shall remove waste materials, rubbish, the Contractor's tools, construction equipment, machinery, and surplus materials from and about the Project.

§ 3.15.2 If the Contractor fails to clean up as provided in the Contract Documents, the Owner may do so and the Owner shall be entitled to reimbursement from the Contractor.

§ 3.16 Access to Work

The Contractor shall provide the Owner and Architect with access to the Work in preparation and progress wherever located.

§ 3.17 Royalties, Patents and Copyrights

The Contractor shall pay all royalties and license fees. The Contractor shall defend suits or claims for infringement of copyrights and patent rights and shall hold the Owner and Architect harmless from loss on account thereof, but shall not be responsible for defense or loss when a particular design, process, or product of a particular manufacturer or manufacturers is required by the Contract Documents, or where the copyright violations are contained in Drawings, Specifications, or other documents prepared by the Owner or Architect. However, if an infringement of a copyright or patent is discovered by, or made known to, the Contractor, the Contractor shall be responsible for the loss unless the information is promptly furnished to the Architect.

§ 3.18 Indemnification

§ 3.18.1 To the fullest extent permitted by law, the Contractor shall indemnify and hold harmless the Owner, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss, or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity that would otherwise exist as to a party or person described in this Section 3.18.

§ 3.18.2 In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation, or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts, or other employee benefit acts.

ARTICLE 4 ARCHITECT

§ 4.1 General

§ 4.1.1 The Architect is the person or entity retained by the Owner pursuant to Section 2.3.2 and identified as such in the Agreement.

§ 4.1.2 Duties, responsibilities, and limitations of authority of the Architect as set forth in the Contract Documents shall not be restricted, modified, or extended without written consent of the Owner, Contractor, and Architect. Consent shall not be unreasonably withheld.

§ 4.2 Administration of the Contract

§ 4.2.1 The Architect will provide administration of the Contract as described in the Contract Documents and will be an Owner's representative during construction until the date the Architect issues the final Certificate for Payment. The Architect will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents.

§ 4.2.2 The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Owner, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. The Architect will not have control over, charge of, or responsibility for the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents.

§ 4.2.3 On the basis of the site visits, the Architect will keep the Owner reasonably informed about the progress and quality of the portion of the Work completed, and promptly report to the Owner (1) known deviations from the Contract Documents, (2) known deviations from the most recent construction schedule submitted by the Contractor, and (3) defects and deficiencies observed in the Work. The Architect will not be responsible for the Contractor's failure to perform the Work in accordance with the requirements of the Contract Documents. The Architect will not have control over or charge of, and will not be responsible for acts or omissions of, the Contractor, Subcontractors, or their agents or employees, or any other persons or entities performing portions of the Work.

§ 4.2.4 Communications

The Owner and Contractor shall include the Architect in all communications that relate to or affect the Architect's services or professional responsibilities. The Owner shall promptly notify the Architect of the substance of any direct communications between the Owner and the Contractor otherwise relating to the Project. Communications by and with the Architect's consultants shall be through the Architect. Communications by and with Subcontractors and suppliers shall be through the Contractor. Communications by and with Separate Contractors shall be through the Owner. The Contract Documents may specify other communication protocols.

§ 4.2.5 Based on the Architect's evaluations of the Contractor's Applications for Payment, the Architect will review and certify the amounts due the Contractor and will issue Certificates for Payment in such amounts.

§ 4.2.6 The Architect has authority to reject Work that does not conform to the Contract Documents. Whenever the Architect considers it necessary or advisable, the Architect will have authority to require inspection or testing of the Work in accordance with Sections 13.4.2 and 13.4.3, whether or not the Work is fabricated, installed or completed. However, neither this authority of the Architect nor a decision made in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect to the Contractor, Subcontractors, suppliers, their agents or employees, or other persons or entities performing portions of the Work.

§ 4.2.7 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data, and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review. Review of such submittals is not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. The Architect's review of the Contractor's submittals shall not relieve the Contractor of the obligations under Sections 3.3, 3.5, and 3.12. The Architect's review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences, or procedures. The Architect's approval of a specific item shall not indicate approval of an assembly of which the item is a component.

§ 4.2.8 The Architect will prepare Change Orders and Construction Change Directives, and may order minor changes in the Work as provided in Section 7.4. The Architect will investigate and make determinations and recommendations regarding concealed and unknown conditions as provided in Section 3.7.4.

§ 4.2.9 The Architect will conduct inspections to determine the date or dates of Substantial Completion and the date of final completion; issue Certificates of Substantial Completion pursuant to Section 9.8; receive and forward to the Owner, for the Owner's review and records, written warranties and related documents required by the Contract and assembled by the Contractor pursuant to Section 9.10; and issue a final Certificate for Payment pursuant to Section 9.10.

§ 4.2.10 If the Owner and Architect agree, the Architect will provide one or more Project representatives to assist in carrying out the Architect's responsibilities at the site. The Owner shall notify the Contractor of any change in the duties, responsibilities and limitations of authority of the Project representatives.

§ 4.2.11 The Architect will interpret and decide matters concerning performance under, and requirements of, the Contract Documents on written request of either the Owner or Contractor. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness.

§ 4.2.12 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from, the Contract Documents and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either, and will not be liable for results of interpretations or decisions rendered in good faith.

§ 4.2.13 The Architect's decisions on matters relating to aesthetic effect will be final if consistent with the intent expressed in the Contract Documents.

§ 4.2.14 The Architect will review and respond to requests for information about the Contract Documents. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness. If appropriate, the Architect will prepare and issue supplemental Drawings and Specifications in response to the requests for information.

ARTICLE 5 SUBCONTRACTORS

§ 5.1 Definitions

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term "Subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term "Subcontractor" does not include a Separate Contractor or the subcontractors of a Separate Contractor.

§ 5.1.2 A Sub-subcontractor is a person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the Work at the site. The term "Sub-subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Sub-subcontractor or an authorized representative of the Sub-subcontractor.

§ 5.2 Award of Subcontracts and Other Contracts for Portions of the Work

§ 5.2.1 Unless otherwise stated in the Contract Documents, the Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect of the persons or entities proposed for each principal portion of the Work, including those who are to furnish materials or equipment fabricated to a special design. Within 14 days of receipt of the information, the Architect may notify the Contractor whether the Owner or the Architect (1) has reasonable objection to any such proposed person or entity or (2) requires additional time for review. Failure of the Architect to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 5.2.2 The Contractor shall not contract with a proposed person or entity to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made reasonable objection.

§ 5.2.3 If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection. If the proposed but rejected Subcontractor was reasonably capable of performing the Work, the Contract Sum and Contract Time shall be increased or decreased by the difference, if any, occasioned by such change, and an appropriate Change Order shall be issued before commencement of the substitute Subcontractor's Work. However, no increase in the Contract Sum or Contract Time shall be allowed for such change unless the Contractor has acted promptly and responsively in submitting names as required.

§ 5.2.4 The Contractor shall not substitute a Subcontractor, person, or entity for one previously selected if the Owner or Architect makes reasonable objection to such substitution.

§ 5.3 Subcontractual Relations

By appropriate written agreement, the Contractor shall require each Subcontractor, to the extent of the Work to be performed by the Subcontractor, to be bound to the Contractor by terms of the Contract Documents, and to assume toward the Contractor all the obligations and responsibilities, including the responsibility for safety of the Subcontractor's Work that the Contractor, by these Contract Documents, assumes toward the Owner and Architect. Each subcontract agreement shall preserve and protect the rights of the Owner and Architect under the Contract Documents with respect to the Work to be performed by the Subcontractor so that subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor, unless specifically provided otherwise in the subcontract agreement, the benefit of all rights, remedies, and redress against the Contractor that the Contractor, by the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the subcontract agreement, copies of the Contract Documents to which the Subcontractor will be bound, and, upon written request of the Subcontractor, identify to the Subcontractor terms and conditions of the proposed subcontract agreement that may be at variance with the Contract Documents. Subcontractors will similarly make copies of applicable portions of such documents available to their respective proposed Sub-subcontractors.

§ 5.4 Contingent Assignment of Subcontracts

§ 5.4.1 Each subcontract agreement for a portion of the Work is assigned by the Contractor to the Owner, provided that

- .1 assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor; and
- .2 assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

When the Owner accepts the assignment of a subcontract agreement, the Owner assumes the Contractor's rights and obligations under the subcontract.

§ 5.4.2 Upon such assignment, if the Work has been suspended for more than 30 days, the Subcontractor's compensation shall be equitably adjusted for increases in cost resulting from the suspension.

§ 5.4.3 Upon assignment to the Owner under this Section 5.4, the Owner may further assign the subcontract to a successor contractor or other entity. If the Owner assigns the subcontract to a successor contractor or other entity, the Owner shall nevertheless remain legally responsible for all of the successor contractor's obligations under the subcontract.

ARTICLE 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

§ 6.1 Owner's Right to Perform Construction and to Award Separate Contracts

§ 6.1.1 The term "Separate Contractor(s)" shall mean other contractors retained by the Owner under separate agreements. The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and with Separate Contractors retained under Conditions of the Contract substantially similar to those of this Contract, including those provisions of the Conditions of the Contract related to insurance and waiver of subrogation.

§ 6.1.2 When separate contracts are awarded for different portions of the Project or other construction or operations on the site, the term "Contractor" in the Contract Documents in each case shall mean the Contractor who executes each separate Owner-Contractor Agreement.

§ 6.1.3 The Owner shall provide for coordination of the activities of the Owner's own forces and of each Separate Contractor with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with any Separate Contractors and the Owner in reviewing their construction schedules. The Contractor shall make any revisions to its construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, Separate Contractors, and the Owner until subsequently revised.

§ 6.1.4 Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces or with Separate Contractors, the Owner or its Separate Contractors shall have the same obligations and rights that the Contractor has under the Conditions of the Contract, including, without excluding others, those stated in Article 3, this Article 6, and Articles 10, 11, and 12.

§ 6.2 Mutual Responsibility

§ 6.2.1 The Contractor shall afford the Owner and Separate Contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities, and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

§ 6.2.2 If part of the Contractor's Work depends for proper execution or results upon construction or operations by the Owner or a Separate Contractor, the Contractor shall, prior to proceeding with that portion of the Work, promptly notify the Architect of apparent discrepancies or defects in the construction or operations by the Owner or Separate Contractor that would render it unsuitable for proper execution and results of the Contractor's Work. Failure of the Contractor to notify the Architect of apparent discrepancies or defects prior to proceeding with the Work shall constitute an acknowledgment that the Owner's or Separate Contractor's completed or partially completed construction is fit and proper to receive the Contractor's Work. The Contractor shall not be responsible for discrepancies or defects in the construction or operations by the Owner or Separate Contractor that are not apparent.

§ 6.2.3 The Contractor shall reimburse the Owner for costs the Owner incurs that are payable to a Separate Contractor because of the Contractor's delays, improperly timed activities or defective construction. The Owner shall be responsible to the Contractor for costs the Contractor incurs because of a Separate Contractor's delays, improperly timed activities, damage to the Work or defective construction.

§ 6.2.4 The Contractor shall promptly remedy damage that the Contractor wrongfully causes to completed or partially completed construction or to property of the Owner or Separate Contractor as provided in Section 10.2.5.

§ 6.2.5 The Owner and each Separate Contractor shall have the same responsibilities for cutting and patching as are described for the Contractor in Section 3.14.

§ 6.3 Owner's Right to Clean Up

If a dispute arises among the Contractor, Separate Contractors, and the Owner as to the responsibility under their respective contracts for maintaining the premises and surrounding area free from waste materials and rubbish, the Owner may clean up and the Architect will allocate the cost among those responsible.

ARTICLE 7 CHANGES IN THE WORK

§ 7.1 General

§ 7.1.1 Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Change Order, Construction Change Directive or order for a minor change in the Work, subject to the limitations stated in this Article 7 and elsewhere in the Contract Documents.

§ 7.1.2 A Change Order shall be based upon agreement among the Owner, Contractor, and Architect. A Construction Change Directive requires agreement by the Owner and Architect and may or may not be agreed to by the Contractor. An order for a minor change in the Work may be issued by the Architect alone.

§ 7.1.3 Changes in the Work shall be performed under applicable provisions of the Contract Documents. The Contractor shall proceed promptly with changes in the Work, unless otherwise provided in the Change Order, Construction Change Directive, or order for a minor change in the Work.

§ 7.2 Change Orders

§ 7.2.1 A Change Order is a written instrument prepared by the Architect and signed by the Owner, Contractor, and Architect stating their agreement upon all of the following:

- .1 The change in the Work;
- .2 The amount of the adjustment, if any, in the Contract Sum; and
- .3 The extent of the adjustment, if any, in the Contract Time.

§ 7.3 Construction Change Directives

§ 7.3.1 A Construction Change Directive is a written order prepared by the Architect and signed by the Owner and Architect, directing a change in the Work prior to agreement on adjustment, if any, in the Contract Sum or Contract Time, or both. The Owner may by Construction Change Directive, without invalidating the Contract, order changes in the Work within the general scope of the Contract consisting of additions, deletions, or other revisions, the Contract Sum and Contract Time being adjusted accordingly.

§ 7.3.2 A Construction Change Directive shall be used in the absence of total agreement on the terms of a Change Order.

§ 7.3.3 If the Construction Change Directive provides for an adjustment to the Contract Sum, the adjustment shall be based on one of the following methods:

- .1 Mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
- .2 Unit prices stated in the Contract Documents or subsequently agreed upon;
- .3 Cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or
- .4 As provided in Section 7.3.4.

§ 7.3.4 If the Contractor does not respond promptly or disagrees with the method for adjustment in the Contract Sum, the Architect shall determine the adjustment on the basis of reasonable expenditures and savings of those performing the Work attributable to the change, including, in case of an increase in the Contract Sum, an amount for overhead and profit as set forth in the Agreement, or if no such amount is set forth in the Agreement, a reasonable amount. In such case, and also under Section 7.3.3.3, the Contractor shall keep and present, in such form as the Architect may prescribe, an itemized accounting together with appropriate supporting data. Unless otherwise provided in the Contract Documents, costs for the purposes of this Section 7.3.4 shall be limited to the following:

- .1 Costs of labor, including applicable payroll taxes, fringe benefits required by agreement or custom, workers' compensation insurance, and other employee costs approved by the Architect;
- .2 Costs of materials, supplies, and equipment, including cost of transportation, whether incorporated or consumed;
- .3 Rental costs of machinery and equipment, exclusive of hand tools, whether rented from the Contractor or others;
- .4 Costs of premiums for all bonds and insurance, permit fees, and sales, use, or similar taxes, directly related to the change; and
- .5 Costs of supervision and field office personnel directly attributable to the change.

§ 7.3.5 If the Contractor disagrees with the adjustment in the Contract Time, the Contractor may make a Claim in accordance with applicable provisions of Article 15.

§ 7.3.6 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Architect of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.7 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

§ 7.3.8 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change that results in a net decrease in the Contract Sum shall be actual net cost as confirmed by the Architect. When both additions and credits covering related Work or substitutions are involved in a change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.3.9 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may request payment for Work completed under the Construction Change Directive in Applications for Payment. The Architect will make an interim determination for purposes of monthly certification for payment for those costs and certify for payment the amount that the Architect determines, in the Architect's professional judgment, to be reasonably justified. The Architect's interim determination of cost shall adjust the Contract Sum on the same basis as a Change Order, subject to the right of either party to disagree and assert a Claim in accordance with Article 15.

§ 7.3.10 When the Owner and Contractor agree with a determination made by the Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the Architect will prepare a Change Order. Change Orders may be issued for all or any part of a Construction Change Directive.

§ 7.4 Minor Changes in the Work

The Architect may order minor changes in the Work that are consistent with the intent of the Contract Documents and do not involve an adjustment in the Contract Sum or an extension of the Contract Time. The Architect's order for minor changes shall be in writing. If the Contractor believes that the proposed minor change in the Work will affect the Contract Sum or Contract Time, the Contractor shall notify the Architect and shall not proceed to implement the change in the Work. If the Contractor performs the Work set forth in the Architect's order for a minor change without prior notice to the Architect that such change will affect the Contract Sum or Contract Time, the Contractor waives any adjustment to the Contract Sum or extension of the Contract Time.

ARTICLE 8 TIME

§ 8.1 Definitions

§ 8.1.1 Unless otherwise provided, Contract Time is the period of time, including authorized adjustments, allotted in the Contract Documents for Substantial Completion of the Work.

§ 8.1.2 The date of commencement of the Work is the date established in the Agreement.

§ 8.1.3 The date of Substantial Completion is the date certified by the Architect in accordance with Section 9.8.

§ 8.1.4 The term "day" as used in the Contract Documents shall mean calendar day unless otherwise specifically defined.

§ 8.2 Progress and Completion

§ 8.2.1 Time limits stated in the Contract Documents are of the essence of the Contract. By executing the Agreement, the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

§ 8.2.2 The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, commence the Work prior to the effective date of insurance required to be furnished by the Contractor and Owner.

§ 8.2.3 The Contractor shall proceed expeditiously with adequate forces and shall achieve Substantial Completion within the Contract Time.

§ 8.3 Delays and Extensions of Time

§ 8.3.1 If the Contractor is delayed at any time in the commencement or progress of the Work by (1) an act or neglect of the Owner or Architect, of an employee of either, or of a Separate Contractor; (2) by changes ordered in the Work; (3) by labor disputes, fire, unusual delay in deliveries, unavoidable casualties, adverse weather conditions documented in accordance with Section 15.1.6.2, or other causes beyond the Contractor's control; (4) by delay authorized by the Owner pending mediation and binding dispute resolution; or (5) by other causes that the Contractor asserts, and the Architect determines, justify delay, then the Contract Time shall be extended for such reasonable time as the Architect may determine.

§ 8.3.2 Claims relating to time shall be made in accordance with applicable provisions of Article 15.

§ 8.3.3 This Section 8.3 does not preclude recovery of damages for delay by either party under other provisions of the Contract Documents.

ARTICLE 9 PAYMENTS AND COMPLETION

§ 9.1 Contract Sum

§ 9.1.1 The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

§ 9.1.2 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed so that application of such unit prices to the actual quantities causes substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

§ 9.2 Schedule of Values

Where the Contract is based on a stipulated sum or Guaranteed Maximum Price, the Contractor shall submit a schedule of values to the Architect before the first Application for Payment, allocating the entire Contract Sum to the various portions of the Work. The schedule of values shall be prepared in the form, and supported by the data to substantiate its accuracy, required by the Architect. This schedule, unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's Applications for Payment. Any changes to the schedule of values shall be submitted to the Architect and supported by such data to substantiate its accuracy as the Architect may require, and unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's subsequent Applications for Payment.

§ 9.3 Applications for Payment

§ 9.3.1 At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2, for completed portions of the Work. The application shall be notarized, if required, and supported by all data substantiating the Contractor's right to payment that the Owner or Architect require, such as copies of requisitions, and releases and waivers of liens from Subcontractors and suppliers, and shall reflect retainage if provided for in the Contract Documents.

§ 9.3.1.1 As provided in Section 7.3.9, such applications may include requests for payment on account of changes in the Work that have been properly authorized by Construction Change Directives, or by interim determinations of the Architect, but not yet included in Change Orders.

§ 9.3.1.2 Applications for Payment shall not include requests for payment for portions of the Work for which the Contractor does not intend to pay a Subcontractor or supplier, unless such Work has been performed by others whom the Contractor intends to pay.

§ 9.3.2 Unless otherwise provided in the Contract Documents, payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment suitably stored off the site at a location agreed upon in writing. Payment for materials and equipment stored on or off the site shall be conditioned upon compliance by the Contractor with procedures satisfactory to the Owner to establish the Owner's title to such materials and equipment or otherwise protect the Owner's interest, and shall include the costs of applicable insurance, storage, and transportation to the site, for such materials and equipment stored off the site.

§ 9.3.3 The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information, and belief, be free and clear of liens, claims, security interests, or encumbrances, in favor of the Contractor, Subcontractors, suppliers, or other persons or entities that provided labor, materials, and equipment relating to the Work.

§ 9.4 Certificates for Payment

§ 9.4.1 The Architect will, within seven days after receipt of the Contractor's Application for Payment, either (1) issue to the Owner a Certificate for Payment in the full amount of the Application for Payment, with a copy to the Contractor; or (2) issue to the Owner a Certificate for Payment for such amount as the Architect determines is properly due, and notify the Contractor and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Application for Payment, and notify the Contractor and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1.

§ 9.4.2 The issuance of a Certificate for Payment will constitute a representation by the Architect to the Owner, based on the Architect's evaluation of the Work and the data in the Application for Payment, that, to the best of the Architect's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is entitled to payment in the amount certified. The foregoing representations are subject to an evaluation of the Work for conformance with the Contract Documents upon Substantial Completion, to results of subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion, and to specific qualifications expressed by the Architect. However, the issuance of a Certificate for Payment will not be a representation that the Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work; (2) reviewed construction means, methods, techniques, sequences, or procedures; (3) reviewed copies of requisitions received from Subcontractors and suppliers and other data requested by the Owner to substantiate the Contractor's right to payment; or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

§ 9.5 Decisions to Withhold Certification

§ 9.5.1 The Architect may withhold a Certificate for Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Architect's opinion the representations to the Owner required by Section 9.4.2 cannot be made. If the Architect is unable to certify payment in the amount of the Application, the Architect will notify the Contractor and Owner as provided in Section 9.4.1. If the Contractor and Architect cannot agree on a revised amount, the Architect will promptly issue a Certificate for Payment for the amount for which the Architect is able to make such representations to the Owner. The Architect may also withhold a Certificate for Payment or, because of subsequently discovered evidence, may nullify the whole or a part of a Certificate for Payment previously issued, to such extent as may be necessary in the Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from acts and omissions described in Section 3.3.2, because of

- .1 defective Work not remedied;
- .2 third party claims filed or reasonable evidence indicating probable filing of such claims, unless security acceptable to the Owner is provided by the Contractor;
- .3 failure of the Contractor to make payments properly to Subcontractors or suppliers for labor, materials or equipment;

- .4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
- .5 damage to the Owner or a Separate Contractor;
- .6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
- .7 repeated failure to carry out the Work in accordance with the Contract Documents.

§ 9.5.2 When either party disputes the Architect's decision regarding a Certificate for Payment under Section 9.5.1, in whole or in part, that party may submit a Claim in accordance with Article 15.

§ 9.5.3 When the reasons for withholding certification are removed, certification will be made for amounts previously withheld.

§ 9.5.4 If the Architect withholds certification for payment under Section 9.5.1.3, the Owner may, at its sole option, issue joint checks to the Contractor and to any Subcontractor or supplier to whom the Contractor failed to make payment for Work properly performed or material or equipment suitably delivered. If the Owner makes payments by joint check, the Owner shall notify the Architect and the Contractor shall reflect such payment on its next Application for Payment.

§ 9.6 Progress Payments

§ 9.6.1 After the Architect has issued a Certificate for Payment, the Owner shall make payment in the manner and within the time provided in the Contract Documents, and shall so notify the Architect.

§ 9.6.2 The Contractor shall pay each Subcontractor, no later than seven days after receipt of payment from the Owner, the amount to which the Subcontractor is entitled, reflecting percentages actually retained from payments to the Contractor on account of the Subcontractor's portion of the Work. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to Sub-subcontractors in a similar manner.

§ 9.6.3 The Architect will, on request, furnish to a Subcontractor, if practicable, information regarding percentages of completion or amounts applied for by the Contractor and action taken thereon by the Architect and Owner on account of portions of the Work done by such Subcontractor.

§ 9.6.4 The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and suppliers amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors and suppliers to ascertain whether they have been properly paid. Neither the Owner nor Architect shall have an obligation to pay, or to see to the payment of money to, a Subcontractor or supplier, except as may otherwise be required by law.

§ 9.6.5 The Contractor's payments to suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

§ 9.6.6 A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the Contract Documents.

§ 9.6.7 Unless the Contractor provides the Owner with a payment bond in the full penal sum of the Contract Sum, payments received by the Contractor for Work properly performed by Subcontractors or provided by suppliers shall be held by the Contractor for those Subcontractors or suppliers who performed Work or furnished materials, or both, under contract with the Contractor for which payment was made by the Owner. Nothing contained herein shall require money to be placed in a separate account and not commingled with money of the Contractor, create any fiduciary liability or tort liability on the part of the Contractor for breach of trust, or entitle any person or entity to an award of punitive damages against the Contractor for breach of the requirements of this provision.

§ 9.6.8 Provided the Owner has fulfilled its payment obligations under the Contract Documents, the Contractor shall defend and indemnify the Owner from all loss, liability, damage or expense, including reasonable attorney's fees and litigation expenses, arising out of any lien claim or other claim for payment by any Subcontractor or supplier of any tier. Upon receipt of notice of a lien claim or other claim for payment, the Owner shall notify the Contractor. If approved by the applicable court, when required, the Contractor may substitute a surety bond for the property against which the lien or other claim for payment has been asserted.

§ 9.7 Failure of Payment

If the Architect does not issue a Certificate for Payment, through no fault of the Contractor, within seven days after receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within seven days after the date established in the Contract Documents, the amount certified by the Architect or awarded by binding dispute resolution, then the Contractor may, upon seven additional days' notice to the Owner and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.

§ 9.8 Substantial Completion

§ 9.8.1 Substantial Completion is the stage in the progress of the Work when the Work or designated portion thereof is sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work for its intended use.

§ 9.8.2 When the Contractor considers that the Work, or a portion thereof which the Owner agrees to accept separately, is substantially complete, the Contractor shall prepare and submit to the Architect a comprehensive list of items to be completed or corrected prior to final payment. Failure to include an item on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.

§ 9.8.3 Upon receipt of the Contractor's list, the Architect will make an inspection to determine whether the Work or designated portion thereof is substantially complete. If the Architect's inspection discloses any item, whether or not included on the Contractor's list, which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of the Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect to determine Substantial Completion.

§ 9.8.4 When the Work or designated portion thereof is substantially complete, the Architect will prepare a Certificate of Substantial Completion that shall establish the date of Substantial Completion; establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance; and fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 9.8.5 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in the Certificate. Upon such acceptance, and consent of surety if any, the Owner shall make payment of retainage applying to the Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

§ 9.9 Partial Occupancy or Use

§ 9.9.1 The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the insurer and authorized by public authorities having jurisdiction over the Project. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage, if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work and commencement of warranties required by the Contract Documents. When the Contractor considers a portion substantially complete, the Contractor shall prepare and submit a list to the Architect as provided under Section 9.8.2. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect.

§ 9.9.2 Immediately prior to such partial occupancy or use, the Owner, Contractor, and Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

§ 9.9.3 Unless otherwise agreed upon, partial occupancy or use of a portion or portions of the Work shall not constitute acceptance of Work not complying with the requirements of the Contract Documents.

§ 9.10 Final Completion and Final Payment

§ 9.10.1 Upon receipt of the Contractor's notice that the Work is ready for final inspection and acceptance and upon receipt of a final Application for Payment, the Architect will promptly make such inspection. When the Architect finds the Work acceptable under the Contract Documents and the Contract fully performed, the Architect will promptly issue a final Certificate for Payment stating that to the best of the Architect's knowledge, information and belief, and on the basis of the Architect's on-site visits and inspections, the Work has been completed in accordance with the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Architect's final Certificate for Payment will constitute a further representation that conditions listed in Section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled.

§ 9.10.2 Neither final payment nor any remaining retained percentage shall become due until the Contractor submits to the Architect (1) an affidavit that payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might be responsible or encumbered (less amounts withheld by Owner) have been paid or otherwise satisfied, (2) a certificate evidencing that insurance required by the Contract Documents to remain in force after final payment is currently in effect, (3) a written statement that the Contractor knows of no reason that the insurance will not be renewable to cover the period required by the Contract Documents, (4) consent of surety, if any, to final payment, (5) documentation of any special warranties, such as manufacturers' warranties or specific Subcontractor warranties, and (6) if required by the Owner, other data establishing payment or satisfaction of obligations, such as receipts and releases and waivers of liens, claims, security interests, or encumbrances arising out of the Contract, to the extent and in such form as may be designated by the Owner. If a Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against such lien, claim, security interest, or encumbrance. If a lien, claim, security interest, or encumbrance remains unsatisfied after payments are made, the Contractor shall refund to the Owner all money that the Owner may be compelled to pay in discharging the lien, claim, security interest, or encumbrance, including all costs and reasonable attorneys' fees.

§ 9.10.3 If, after Substantial Completion of the Work, final completion thereof is materially delayed through no fault of the Contractor or by issuance of Change Orders affecting final completion, and the Architect so confirms, the Owner shall, upon application by the Contractor and certification by the Architect, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed, corrected, and accepted. If the remaining balance for Work not fully completed or corrected is less than retainage stipulated in the Contract Documents, and if bonds have been furnished, the written consent of the surety to payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by the Contractor to the Architect prior to certification of such payment. Such payment shall be made under terms and conditions governing final payment, except that it shall not constitute a waiver of Claims.

§ 9.10.4 The making of final payment shall constitute a waiver of Claims by the Owner except those arising from

- .1 liens, Claims, security interests, or encumbrances arising out of the Contract and unsettled;
- .2 failure of the Work to comply with the requirements of the Contract Documents;
- .3 terms of special warranties required by the Contract Documents; or
- .4 audits performed by the Owner, if permitted by the Contract Documents, after final payment.

§ 9.10.5 Acceptance of final payment by the Contractor, a Subcontractor, or a supplier, shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

ARTICLE 10 PROTECTION OF PERSONS AND PROPERTY

§ 10.1 Safety Precautions and Programs

The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract.

§ 10.2 Safety of Persons and Property

§ 10.2.1 The Contractor shall take reasonable precautions for safety of, and shall provide reasonable protection to prevent damage, injury, or loss to

- .1 employees on the Work and other persons who may be affected thereby;
- .2 the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody, or control of the Contractor, a Subcontractor, or a Sub-subcontractor; and
- .3 other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction.

§ 10.2.2 The Contractor shall comply with, and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities, bearing on safety of persons or property or their protection from damage, injury, or loss.

§ 10.2.3 The Contractor shall implement, erect, and maintain, as required by existing conditions and performance of the Contract, reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards; promulgating safety regulations; and notifying the owners and users of adjacent sites and utilities of the safeguards.

§ 10.2.4 When use or storage of explosives or other hazardous materials or equipment, or unusual methods are necessary for execution of the Work, the Contractor shall exercise utmost care and carry on such activities under supervision of properly qualified personnel.

§ 10.2.5 The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in Sections 10.2.1.2 and 10.2.1.3 caused in whole or in part by the Contractor, a Subcontractor, a Sub-subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable and for which the Contractor is responsible under Sections 10.2.1.2 and 10.2.1.3. The Contractor may make a Claim for the cost to remedy the damage or loss to the extent such damage or loss is attributable to acts or omissions of the Owner or Architect or anyone directly or indirectly employed by either of them, or by anyone for whose acts either of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's obligations under Section 3.18.

§ 10.2.6 The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner and Architect.

§ 10.2.7 The Contractor shall not permit any part of the construction or site to be loaded so as to cause damage or create an unsafe condition.

§ 10.2.8 Injury or Damage to Person or Property

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, notice of the injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

§ 10.3 Hazardous Materials and Substances

§ 10.3.1 The Contractor is responsible for compliance with any requirements included in the Contract Documents regarding hazardous materials or substances. If the Contractor encounters a hazardous material or substance not addressed in the Contract Documents and if reasonable precautions will be inadequate to prevent foreseeable bodily injury or death to persons resulting from a material or substance, including but not limited to asbestos or polychlorinated biphenyl (PCB), encountered on the site by the Contractor, the Contractor shall, upon recognizing the condition, immediately stop Work in the affected area and notify the Owner and Architect of the condition.

§ 10.3.2 Upon receipt of the Contractor's notice, the Owner shall obtain the services of a licensed laboratory to verify the presence or absence of the material or substance reported by the Contractor and, in the event such material or substance is found to be present, to cause it to be rendered harmless. Unless otherwise required by the Contract Documents, the Owner shall furnish in writing to the Contractor and Architect the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of the material or substance or who are to perform the task of removal or safe containment of the material or substance. The Contractor and the Architect will

promptly reply to the Owner in writing stating whether or not either has reasonable objection to the persons or entities proposed by the Owner. If either the Contractor or Architect has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor and the Architect have no reasonable objection. When the material or substance has been rendered harmless, Work in the affected area shall resume upon written agreement of the Owner and Contractor. By Change Order, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable additional costs of shutdown, delay, and start-up.

§ 10.3.3 To the fullest extent permitted by law, the Owner shall indemnify and hold harmless the Contractor, Subcontractors, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work in the affected area if in fact the material or substance presents the risk of bodily injury or death as described in Section 10.3.1 and has not been rendered harmless, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), except to the extent that such damage, loss, or expense is due to the fault or negligence of the party seeking indemnity.

§ 10.3.4 The Owner shall not be responsible under this Section 10.3 for hazardous materials or substances the Contractor brings to the site unless such materials or substances are required by the Contract Documents. The Owner shall be responsible for hazardous materials or substances required by the Contract Documents, except to the extent of the Contractor's fault or negligence in the use and handling of such materials or substances.

§ 10.3.5 The Contractor shall reimburse the Owner for the cost and expense the Owner incurs (1) for remediation of hazardous materials or substances the Contractor brings to the site and negligently handles, or (2) where the Contractor fails to perform its obligations under Section 10.3.1, except to the extent that the cost and expense are due to the Owner's fault or negligence.

§ 10.3.6 If, without negligence on the part of the Contractor, the Contractor is held liable by a government agency for the cost of remediation of a hazardous material or substance solely by reason of performing Work as required by the Contract Documents, the Owner shall reimburse the Contractor for all cost and expense thereby incurred.

§ 10.4 Emergencies

In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury, or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 15 and Article 7.

ARTICLE 11 INSURANCE AND BONDS

§ 11.1 Contractor's Insurance and Bonds

§ 11.1.1 The Contractor shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Contractor shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Owner, Architect, and Architect's consultants shall be named as additional insureds under the Contractor's commercial general liability policy or as otherwise described in the Contract Documents.

§ 11.1.2 The Contractor shall provide surety bonds of the types, for such penal sums, and subject to such terms and conditions as required by the Contract Documents. The Contractor shall purchase and maintain the required bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

§ 11.1.3 Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

§ 11.1.4 Notice of Cancellation or Expiration of Contractor's Required Insurance. Within three (3) business days of the date the Contractor becomes aware of an impending or actual cancellation or expiration of any insurance required by the Contract Documents, the Contractor shall provide notice to the Owner of such impending or actual cancellation or

expiration. Upon receipt of notice from the Contractor, the Owner shall, unless the lapse in coverage arises from an act or omission of the Owner, have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by the Contractor. The furnishing of notice by the Contractor shall not relieve the Contractor of any contractual obligation to provide any required coverage.

§ 11.2 Owner's Insurance

§ 11.2.1 The Owner shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Owner shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located.

§ 11.2.2 Failure to Purchase Required Property Insurance. If the Owner fails to purchase and maintain the required property insurance, with all of the coverages and in the amounts described in the Agreement or elsewhere in the Contract Documents, the Owner shall inform the Contractor in writing prior to commencement of the Work. Upon receipt of notice from the Owner, the Contractor may delay commencement of the Work and may obtain insurance that will protect the interests of the Contractor, Subcontractors, and Sub-Subcontractors in the Work. When the failure to provide coverage has been cured or resolved, the Contract Sum and Contract Time shall be equitably adjusted. In the event the Owner fails to procure coverage, the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent the loss to the Owner would have been covered by the insurance to have been procured by the Owner. The cost of the insurance shall be charged to the Owner by a Change Order. If the Owner does not provide written notice, and the Contractor is damaged by the failure or neglect of the Owner to purchase or maintain the required insurance, the Owner shall reimburse the Contractor for all reasonable costs and damages attributable thereto.

§ 11.2.3 Notice of Cancellation or Expiration of Owner's Required Property Insurance. Within three (3) business days of the date the Owner becomes aware of an impending or actual cancellation or expiration of any property insurance required by the Contract Documents, the Owner shall provide notice to the Contractor of such impending or actual cancellation or expiration. Unless the lapse in coverage arises from an act or omission of the Contractor: (1) the Contractor, upon receipt of notice from the Owner, shall have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by either the Owner or the Contractor; (2) the Contract Time and Contract Sum shall be equitably adjusted; and (3) the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent any loss to the Owner would have been covered by the insurance had it not expired or been cancelled. If the Contractor purchases replacement coverage, the cost of the insurance shall be charged to the Owner by an appropriate Change Order. The furnishing of notice by the Owner shall not relieve the Owner of any contractual obligation to provide required insurance.

§ 11.3 Waivers of Subrogation

§ 11.3.1 The Owner and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents, and employees, each of the other; (2) the Architect and Architect's consultants; and (3) Separate Contractors, if any, and any of their subcontractors, sub-subcontractors, agents, and employees, for damages caused by fire, or other causes of loss, to the extent those losses are covered by property insurance required by the Agreement or other property insurance applicable to the Project, except such rights as they have to proceeds of such insurance. The Owner or Contractor, as appropriate, shall require similar written waivers in favor of the individuals and entities identified above from the Architect, Architect's consultants, Separate Contractors, subcontractors, and sub-subcontractors. The policies of insurance purchased and maintained by each person or entity agreeing to waive claims pursuant to this section 11.3.1 shall not prohibit this waiver of subrogation. This waiver of subrogation shall be effective as to a person or entity (1) even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, (2) even though that person or entity did not pay the insurance premium directly or indirectly, or (3) whether or not the person or entity had an insurable interest in the damaged property.

§ 11.3.2 If during the Project construction period the Owner insures properties, real or personal or both, at or adjacent to the site by property insurance under policies separate from those insuring the Project, or if after final payment property insurance is to be provided on the completed Project through a policy or policies other than those insuring the Project during the construction period, to the extent permissible by such policies, the Owner waives all rights in accordance with the terms of Section 11.3.1 for damages caused by fire or other causes of loss covered by this separate property insurance.

§ 11.4 Loss of Use, Business Interruption, and Delay in Completion Insurance

The Owner, at the Owner's option, may purchase and maintain insurance that will protect the Owner against loss of use of the Owner's property, or the inability to conduct normal operations, due to fire or other causes of loss. The Owner waives all rights of action against the Contractor and Architect for loss of use of the Owner's property, due to fire or other hazards however caused.

§11.5 Adjustment and Settlement of Insured Loss

§ 11.5.1 A loss insured under the property insurance required by the Agreement shall be adjusted by the Owner as fiduciary and made payable to the Owner as fiduciary for the insureds, as their interests may appear, subject to requirements of any applicable mortgagee clause and of Section 11.5.2. The Owner shall pay the Architect and Contractor their just shares of insurance proceeds received by the Owner, and by appropriate agreements the Architect and Contractor shall make payments to their consultants and Subcontractors in similar manner.

§ 11.5.2 Prior to settlement of an insured loss, the Owner shall notify the Contractor of the terms of the proposed settlement as well as the proposed allocation of the insurance proceeds. The Contractor shall have 14 days from receipt of notice to object to the proposed settlement or allocation of the proceeds. If the Contractor does not object, the Owner shall settle the loss and the Contractor shall be bound by the settlement and allocation. Upon receipt, the Owner shall deposit the insurance proceeds in a separate account and make the appropriate distributions. Thereafter, if no other agreement is made or the Owner does not terminate the Contract for convenience, the Owner and Contractor shall execute a Change Order for reconstruction of the damaged or destroyed Work in the amount allocated for that purpose. If the Contractor timely objects to either the terms of the proposed settlement or the allocation of the proceeds, the Owner may proceed to settle the insured loss, and any dispute between the Owner and Contractor arising out of the settlement or allocation of the proceeds shall be resolved pursuant to Article 15. Pending resolution of any dispute, the Owner may issue a Construction Change Directive for the reconstruction of the damaged or destroyed Work.

ARTICLE 12 UNCOVERING AND CORRECTION OF WORK

§ 12.1 Uncovering of Work

§ 12.1.1 If a portion of the Work is covered contrary to the Architect's request or to requirements specifically expressed in the Contract Documents, it must, if requested in writing by the Architect, be uncovered for the Architect's examination and be replaced at the Contractor's expense without change in the Contract Time.

§ 12.1.2 If a portion of the Work has been covered that the Architect has not specifically requested to examine prior to its being covered, the Architect may request to see such Work and it shall be uncovered by the Contractor. If such Work is in accordance with the Contract Documents, the Contractor shall be entitled to an equitable adjustment to the Contract Sum and Contract Time as may be appropriate. If such Work is not in accordance with the Contract Documents, the costs of uncovering the Work, and the cost of correction, shall be at the Contractor's expense.

§ 12.2 Correction of Work

§ 12.2.1 Before Substantial Completion

The Contractor shall promptly correct Work rejected by the Architect or failing to conform to the requirements of the Contract Documents, discovered before Substantial Completion and whether or not fabricated, installed or completed. Costs of correcting such rejected Work, including additional testing and inspections, the cost of uncovering and replacement, and compensation for the Architect's services and expenses made necessary thereby, shall be at the Contractor's expense.

§ 12.2.2 After Substantial Completion

§ 12.2.2.1 In addition to the Contractor's obligations under Section 3.5, if, within one year after the date of Substantial Completion of the Work or designated portion thereof or after the date for commencement of warranties established under Section 9.9.1, or by terms of any applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of notice from the Owner to do so, unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. During the one-year period for correction of Work, if the Owner fails to notify the Contractor and give the Contractor an opportunity to make the correction, the Owner waives the rights to require correction by the Contractor and to make a claim for breach of warranty. If the Contractor fails to correct nonconforming Work within a reasonable time during

that period after receipt of notice from the Owner or Architect, the Owner may correct it in accordance with Section 2.5.

§ 12.2.2.2 The one-year period for correction of Work shall be extended with respect to portions of Work first performed after Substantial Completion by the period of time between Substantial Completion and the actual completion of that portion of the Work.

§ 12.2.2.3 The one-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

§ 12.2.3 The Contractor shall remove from the site portions of the Work that are not in accordance with the requirements of the Contract Documents and are neither corrected by the Contractor nor accepted by the Owner.

§ 12.2.4 The Contractor shall bear the cost of correcting destroyed or damaged construction of the Owner or Separate Contractors, whether completed or partially completed, caused by the Contractor's correction or removal of Work that is not in accordance with the requirements of the Contract Documents.

§ 12.2.5 Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor has under the Contract Documents. Establishment of the one-year period for correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

§ 12.3 Acceptance of Nonconforming Work

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. Such adjustment shall be effected whether or not final payment has been made.

ARTICLE 13 MISCELLANEOUS PROVISIONS

§ 13.1 Governing Law

The Contract shall be governed by the law of the place where the Project is located, excluding that jurisdiction's choice of law rules. If the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4.

§ 13.2 Successors and Assigns

§ 13.2.1 The Owner and Contractor respectively bind themselves, their partners, successors, assigns, and legal representatives to covenants, agreements, and obligations contained in the Contract Documents. Except as provided in Section 13.2.2, neither party to the Contract shall assign the Contract as a whole without written consent of the other. If either party attempts to make an assignment without such consent, that party shall nevertheless remain legally responsible for all obligations under the Contract.

§ 13.2.2 The Owner may, without consent of the Contractor, assign the Contract to a lender providing construction financing for the Project, if the lender assumes the Owner's rights and obligations under the Contract Documents. The Contractor shall execute all consents reasonably required to facilitate the assignment.

§ 13.3 Rights and Remedies

§ 13.3.1 Duties and obligations imposed by the Contract Documents and rights and remedies available thereunder shall be in addition to and not a limitation of duties, obligations, rights, and remedies otherwise imposed or available by law.

§ 13.3.2 No action or failure to act by the Owner, Architect, or Contractor shall constitute a waiver of a right or duty afforded them under the Contract, nor shall such action or failure to act constitute approval of or acquiescence in a breach thereunder, except as may be specifically agreed upon in writing.

§ 13.4 Tests and Inspections

§ 13.4.1 Tests, inspections, and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules, and regulations or lawful orders of public authorities. Unless otherwise provided, the Contractor shall make arrangements for such tests, inspections, and approvals with an independent testing laboratory or entity acceptable to the Owner, or with the appropriate public authority, and shall bear all related costs of tests, inspections, and approvals. The Contractor shall give the Architect timely notice of when and where tests and inspections are to be made so that the Architect may be present for such procedures. The Owner shall bear costs of tests, inspections, or approvals that do not become requirements until after bids are received or negotiations concluded. The Owner shall directly arrange and pay for tests, inspections, or approvals where building codes or applicable laws or regulations so require.

§ 13.4.2 If the Architect, Owner, or public authorities having jurisdiction determine that portions of the Work require additional testing, inspection, or approval not included under Section 13.4.1, the Architect will, upon written authorization from the Owner, instruct the Contractor to make arrangements for such additional testing, inspection, or approval, by an entity acceptable to the Owner, and the Contractor shall give timely notice to the Architect of when and where tests and inspections are to be made so that the Architect may be present for such procedures. Such costs, except as provided in Section 13.4.3, shall be at the Owner's expense.

§ 13.4.3 If procedures for testing, inspection, or approval under Sections 13.4.1 and 13.4.2 reveal failure of the portions of the Work to comply with requirements established by the Contract Documents, all costs made necessary by such failure, including those of repeated procedures and compensation for the Architect's services and expenses, shall be at the Contractor's expense.

§ 13.4.4 Required certificates of testing, inspection, or approval shall, unless otherwise required by the Contract Documents, be secured by the Contractor and promptly delivered to the Architect.

§ 13.4.5 If the Architect is to observe tests, inspections, or approvals required by the Contract Documents, the Architect will do so promptly and, where practicable, at the normal place of testing.

§ 13.4.6 Tests or inspections conducted pursuant to the Contract Documents shall be made promptly to avoid unreasonable delay in the Work.

§ 13.5 Interest

Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at the rate the parties agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

ARTICLE 14 TERMINATION OR SUSPENSION OF THE CONTRACT

§ 14.1 Termination by the Contractor

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, for any of the following reasons:

- .1 Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;
- .2 An act of government, such as a declaration of national emergency, that requires all Work to be stopped;
- .3 Because the Architect has not issued a Certificate for Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4.1, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or
- .4 The Owner has failed to furnish to the Contractor reasonable evidence as required by Section 2.2.

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, repeated suspensions, delays, or interruptions of the entire Work by the Owner as described in Section 14.3, constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

§ 14.1.3 If one of the reasons described in Section 14.1.1 or 14.1.2 exists, the Contractor may, upon seven days' notice to the Owner and Architect, terminate the Contract and recover from the Owner payment for Work executed, as well as reasonable overhead and profit on Work not executed, and costs incurred by reason of such termination.

§ 14.1.4 If the Work is stopped for a period of 60 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, or their agents or employees or any other persons or entities performing portions of the Work because the Owner has repeatedly failed to fulfill the Owner's obligations under the Contract Documents with respect to matters important to the progress of the Work, the Contractor may, upon seven additional days' notice to the Owner and the Architect, terminate the Contract and recover from the Owner as provided in Section 14.1.3.

§ 14.2 Termination by the Owner for Cause

§ 14.2.1 The Owner may terminate the Contract if the Contractor

- .1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2 fails to make payment to Subcontractors or suppliers in accordance with the respective agreements between the Contractor and the Subcontractors or suppliers;
- .3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4 otherwise is guilty of substantial breach of a provision of the Contract Documents.

§ 14.2.2 When any of the reasons described in Section 14.2.1 exist, and upon certification by the Architect that sufficient cause exists to justify such action, the Owner may, without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

- .1 Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;
- .2 Accept assignment of subcontracts pursuant to Section 5.4; and
- .3 Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

§ 14.2.3 When the Owner terminates the Contract for one of the reasons stated in Section 14.2.1, the Contractor shall not be entitled to receive further payment until the Work is finished.

§ 14.2.4 If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, including compensation for the Architect's services and expenses made necessary thereby, and other damages incurred by the Owner and not expressly waived, such excess shall be paid to the Contractor. If such costs and damages exceed the unpaid balance, the Contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or Owner, as the case may be, shall be certified by the Initial Decision Maker, upon application, and this obligation for payment shall survive termination of the Contract.

§ 14.3 Suspension by the Owner for Convenience

§ 14.3.1 The Owner may, without cause, order the Contractor in writing to suspend, delay or interrupt the Work, in whole or in part for such period of time as the Owner may determine.

§ 14.3.2 The Contract Sum and Contract Time shall be adjusted for increases in the cost and time caused by suspension, delay, or interruption under Section 14.3.1. Adjustment of the Contract Sum shall include profit. No adjustment shall be made to the extent

- .1 that performance is, was, or would have been, so suspended, delayed, or interrupted, by another cause for which the Contractor is responsible; or
- .2 that an equitable adjustment is made or denied under another provision of the Contract.

§ 14.4 Termination by the Owner for Convenience

§ 14.4.1 The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause.

§ 14.4.2 Upon receipt of notice from the Owner of such termination for the Owner's convenience, the Contractor shall

- .1 cease operations as directed by the Owner in the notice;

- .2 take actions necessary, or that the Owner may direct, for the protection and preservation of the Work; and
- .3 except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

§ 14.4.3 In case of such termination for the Owner's convenience, the Owner shall pay the Contractor for Work properly executed; costs incurred by reason of the termination, including costs attributable to termination of Subcontracts; and the termination fee, if any, set forth in the Agreement.

ARTICLE 15 CLAIMS AND DISPUTES

§ 15.1 Claims

§ 15.1.1 Definition

A Claim is a demand or assertion by one of the parties seeking, as a matter of right, payment of money, a change in the Contract Time, or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner and Contractor arising out of or relating to the Contract. The responsibility to substantiate Claims shall rest with the party making the Claim. This Section 15.1.1 does not require the Owner to file a Claim in order to impose liquidated damages in accordance with the Contract Documents.

§ 15.1.2 Time Limits on Claims

The Owner and Contractor shall commence all Claims and causes of action against the other and arising out of or related to the Contract, whether in contract, tort, breach of warranty or otherwise, in accordance with the requirements of the binding dispute resolution method selected in the Agreement and within the period specified by applicable law, but in any case not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all Claims and causes of action not commenced in accordance with this Section 15.1.2.

§ 15.1.3 Notice of Claims

§ 15.1.3.1 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered prior to expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party and to the Initial Decision Maker with a copy sent to the Architect, if the Architect is not serving as the Initial Decision Maker. Claims by either party under this Section 15.1.3.1 shall be initiated within 21 days after occurrence of the event giving rise to such Claim or within 21 days after the claimant first recognizes the condition giving rise to the Claim, whichever is later.

§ 15.1.3.2 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party. In such event, no decision by the Initial Decision Maker is required.

§ 15.1.4 Continuing Contract Performance

§ 15.1.4.1 Pending final resolution of a Claim, except as otherwise agreed in writing or as provided in Section 9.7 and Article 14, the Contractor shall proceed diligently with performance of the Contract and the Owner shall continue to make payments in accordance with the Contract Documents.

§ 15.1.4.2 The Contract Sum and Contract Time shall be adjusted in accordance with the Initial Decision Maker's decision, subject to the right of either party to proceed in accordance with this Article 15. The Architect will issue Certificates for Payment in accordance with the decision of the Initial Decision Maker.

§ 15.1.5 Claims for Additional Cost

If the Contractor wishes to make a Claim for an increase in the Contract Sum, notice as provided in Section 15.1.3 shall be given before proceeding to execute the portion of the Work that is the subject of the Claim. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

§ 15.1.6 Claims for Additional Time

§ 15.1.6.1 If the Contractor wishes to make a Claim for an increase in the Contract Time, notice as provided in Section 15.1.3 shall be given. The Contractor's Claim shall include an estimate of cost and of probable effect of delay on progress of the Work. In the case of a continuing delay, only one Claim is necessary.

§ 15.1.6.2 If adverse weather conditions are the basis for a Claim for additional time, such Claim shall be documented by data substantiating that weather conditions were abnormal for the period of time, could not have been reasonably anticipated, and had an adverse effect on the scheduled construction.

§ 15.1.7 Waiver of Claims for Consequential Damages

The Contractor and Owner waive Claims against each other for consequential damages arising out of or relating to this Contract. This mutual waiver includes

- .1 damages incurred by the Owner for rental expenses, for losses of use, income, profit, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons; and
- .2 damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit, except anticipated profit arising directly from the Work.

This mutual waiver is applicable, without limitation, to all consequential damages due to either party's termination in accordance with Article 14. Nothing contained in this Section 15.1.7 shall be deemed to preclude assessment of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents.

§ 15.2 Initial Decision

§ 15.2.1 Claims, excluding those where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2 or arising under Sections 10.3, 10.4, and 11.5, shall be referred to the Initial Decision Maker for initial decision. The Architect will serve as the Initial Decision Maker, unless otherwise indicated in the Agreement. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim. If an initial decision has not been rendered within 30 days after the Claim has been referred to the Initial Decision Maker, the party asserting the Claim may demand mediation and binding dispute resolution without a decision having been rendered. Unless the Initial Decision Maker and all affected parties agree, the Initial Decision Maker will not decide disputes between the Contractor and persons or entities other than the Owner.

§ 15.2.2 The Initial Decision Maker will review Claims and within ten days of the receipt of a Claim take one or more of the following actions: (1) request additional supporting data from the claimant or a response with supporting data from the other party, (2) reject the Claim in whole or in part, (3) approve the Claim, (4) suggest a compromise, or (5) advise the parties that the Initial Decision Maker is unable to resolve the Claim if the Initial Decision Maker lacks sufficient information to evaluate the merits of the Claim or if the Initial Decision Maker concludes that, in the Initial Decision Maker's sole discretion, it would be inappropriate for the Initial Decision Maker to resolve the Claim.

§ 15.2.3 In evaluating Claims, the Initial Decision Maker may, but shall not be obligated to, consult with or seek information from either party or from persons with special knowledge or expertise who may assist the Initial Decision Maker in rendering a decision. The Initial Decision Maker may request the Owner to authorize retention of such persons at the Owner's expense.

§ 15.2.4 If the Initial Decision Maker requests a party to provide a response to a Claim or to furnish additional supporting data, such party shall respond, within ten days after receipt of the request, and shall either (1) provide a response on the requested supporting data, (2) advise the Initial Decision Maker when the response or supporting data will be furnished, or (3) advise the Initial Decision Maker that no supporting data will be furnished. Upon receipt of the response or supporting data, if any, the Initial Decision Maker will either reject or approve the Claim in whole or in part.

§ 15.2.5 The Initial Decision Maker will render an initial decision approving or rejecting the Claim, or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to mediation and, if the parties fail to resolve their dispute through mediation, to binding dispute resolution.

§ 15.2.6 Either party may file for mediation of an initial decision at any time, subject to the terms of Section 15.2.6.1.

§ 15.2.6.1 Either party may, within 30 days from the date of receipt of an initial decision, demand in writing that the other party file for mediation. If such a demand is made and the party receiving the demand fails to file for mediation within 30 days after receipt thereof, then both parties waive their rights to mediate or pursue binding dispute resolution proceedings with respect to the initial decision.

§ 15.2.7 In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to a possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

§ 15.2.8 If a Claim relates to or is the subject of a mechanic's lien, the party asserting such Claim may proceed in accordance with applicable law to comply with the lien notice or filing deadlines.

§ 15.3 Mediation

§ 15.3.1 Claims, disputes, or other matters in controversy arising out of or related to the Contract, except those waived as provided for in Sections 9.10.4, 9.10.5, and 15.1.7, shall be subject to mediation as a condition precedent to binding dispute resolution.

§ 15.3.2 The parties shall endeavor to resolve their Claims by mediation which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedures in effect on the date of the Agreement. A request for mediation shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the mediation. The request may be made concurrently with the filing of binding dispute resolution proceedings but, in such event, mediation shall proceed in advance of binding dispute resolution proceedings, which shall be stayed pending mediation for a period of 60 days from the date of filing, unless stayed for a longer period by agreement of the parties or court order. If an arbitration is stayed pursuant to this Section 15.3.2, the parties may nonetheless proceed to the selection of the arbitrator(s) and agree upon a schedule for later proceedings.

§ 15.3.3 Either party may, within 30 days from the date that mediation has been concluded without resolution of the dispute or 60 days after mediation has been demanded without resolution of the dispute, demand in writing that the other party file for binding dispute resolution. If such a demand is made and the party receiving the demand fails to file for binding dispute resolution within 60 days after receipt thereof, then both parties waive their rights to binding dispute resolution proceedings with respect to the initial decision.

§ 15.3.4 The parties shall share the mediator's fee and any filing fees equally. The mediation shall be held in the place where the Project is located, unless another location is mutually agreed upon. Agreements reached in mediation shall be enforceable as settlement agreements in any court having jurisdiction thereof.

§ 15.4 Arbitration

§ 15.4.1 If the parties have selected arbitration as the method for binding dispute resolution in the Agreement, any Claim subject to, but not resolved by, mediation shall be subject to arbitration which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Arbitration Rules in effect on the date of the Agreement. The Arbitration shall be conducted in the place where the Project is located, unless another location is mutually agreed upon. A demand for arbitration shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the arbitration. The party filing a notice of demand for arbitration must assert in the demand all Claims then known to that party on which arbitration is permitted to be demanded.

§ 15.4.1.1 A demand for arbitration shall be made no earlier than concurrently with the filing of a request for mediation, but in no event shall it be made after the date when the institution of legal or equitable proceedings based on the Claim would be barred by the applicable statute of limitations. For statute of limitations purposes, receipt of a written demand for arbitration by the person or entity administering the arbitration shall constitute the institution of legal or equitable proceedings based on the Claim.

§ 15.4.2 The award rendered by the arbitrator or arbitrators shall be final, and judgment may be entered upon it in accordance with applicable law in any court having jurisdiction thereof.

§ 15.4.3 The foregoing agreement to arbitrate and other agreements to arbitrate with an additional person or entity duly consented to by parties to the Agreement, shall be specifically enforceable under applicable law in any court having jurisdiction thereof.

§ 15.4.4 Consolidation or Joinder

§ 15.4.4.1 Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may consolidate an arbitration conducted under this Agreement with any other arbitration to which it is a party provided that (1) the arbitration agreement governing the other arbitration permits consolidation, (2) the arbitrations to be consolidated substantially involve common questions of law or fact, and (3) the arbitrations employ materially similar procedural rules and methods for selecting arbitrator(s).

§ 15.4.4.2 Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may include by joinder persons or entities substantially involved in a common question of law or fact whose presence is required if complete relief is to be accorded in arbitration, provided that the party sought to be joined consents in writing to such joinder. Consent to arbitration involving an additional person or entity shall not constitute consent to arbitration of any claim, dispute or other matter in question not described in the written consent.

§ 15.4.4.3 The Owner and Contractor grant to any person or entity made a party to an arbitration conducted under this Section 15.4, whether by joinder or consolidation, the same rights of joinder and consolidation as those of the Owner and Contractor under this Agreement.

SUPPLEMENTARY CONDITIONS OF THE CONTRACT

1. DEFINITIONS - Supplement Paragraph 1.1 as follows:
 - a. When words such as approved, proper, satisfactory, equal, and as directed are used, they imply such reference to the Architect's specific approval and directions.
 - b. Provide means to furnish and install.
 - c. The provisions of the Agreement take precedence over all other Contract Documents.
2. WARRANTY - Supplement Paragraph 3.5.1 as follows:
 - a. Contractor warrants to Owner and Architect that on receipt of notice from either of them, within the period of one (1) year following date of Substantial Completion, that defects in materials and/or workmanship have appeared in the Work, Contractor will promptly correct such defects to the state of condition originally required by the Contract Documents at Contractor's expense.
3. SHOP DRAWINGS - Supplement Paragraph 3.12 as follows:
 - a. The Contractor shall submit **one (1) electronic copy** of all Shop or Setting Drawings and Schedules required for the work of the various trades, after same have been checked and compared with the Contract Document Requirements, and after checking with field conditions at the job and so certified on the Drawings by the Contractor. Above Drawings will not be checked by Architect unless same bear certification.
 - b. Architect's approval is subject to notations on Drawings, Compliance with Drawings and Specifications, and conditions and measurements at project. Measurements and quantity not checked or approved.
4. SAMPLES - Supplement Subparagraph 3.12.3 as follows:
 - a. All samples as called for in the various Sections of this Specification and any other samples, as directed, shall be furnished by the Contractor for approval.
 - b. All samples of materials that require approval as to color, texture, finish and type shall be furnished at the same time, so that an intelligent selection of colors and textures may be made by the Architect.
5. COLOR SELECTIONS
 - a. The Contractor shall provide for and coordinate into the project construction schedule, a 6-week time frame for the Architect/Designer to make final color selections from Contractor's submittals, obtain approval from the Owner and to submit a color schedule, indicating what colors go where, to the Contractor. Time frame begins when Architect has received 100% of submittals listed below.
 - b. Submittals, i.e., actual samples, manufacturers' literature, full color line options, etc., shall include as a minimum, but not limited to:
 - Carpet Types
 - Vinyl Base
 - Ceramic Wall/Floor Tile
 - Ceiling Types
 - Corner Guards
 - Plastic Laminate (Manufacturer)
 - Wood Stain for Doors and Woodwork
 - Aluminum Storefront System/Caulk
6. CLEAN UP - Supplement Paragraph 3.15 as follows:
 - a. Each Contractor shall, at all times, remove any and all of his rubbish from the buildings and grounds and keep the building site clean.
 - b. In addition to the general broom cleaning, the General Contractor shall do the following special cleaning for all trades at the completion of the work:
 - 1) Glass. Remove putty, stains and paint from all glass and wash and polish same. Care shall be taken not to scratch the glass.
 - 2) Painted, Decorated, and Stained Work. Remove all marks, stains, fingerprints and other soil or dirt from all painted, decorated, and stained work.
 - 3) Temporary Protection. Remove all temporary protections; clean and polish all floors at completion.
 - 4) Woodwork. Clean and polish all woodwork upon completion.
 - 5) Hardware. Clean and polish all hardware for all trades. This shall include removal of all stains, dust, dirt, paint, etc., upon completion.
 - 6) Tile Work. Remove all spots, soil, and paint from all tile work, wash same upon completion.
 - 7) Fixtures and Equipment. Clean all fixtures and equipment, removing all stains, paint, dirt and dust.
 - c. All combustible rubbish, and all debris and other rubbish shall be removed entirely from the premises.

7. MUTUAL RESPONSIBILITY OF CONTRACTORS - Supplement Paragraph 6.2 as follows:
- General Contractor shall assume general coordination and direction of the project. General Contractor shall cooperate with Mechanical and Electrical Contractors and other subcontractors and/or suppliers on the Work and install their work in sequence to facilitate and not delay the completion of the project. The Architect is not the coordinator or expeditor of the work of the contractors and/or subcontractors referred to hereinbefore.
8. CHANGES IN THE WORK
Refer to Paragraph 7.2 and insert the following:
- Whenever a Change Order involves net cost decrease, the CREDIT to the Owner shall be such net cost decrease. Whenever a Change Order involves a summary net increase, the Contract shall be increased by the amount of such net cost increase plus 10% of such net cost for overhead and profit. The General Contractor will furnish supervision and coordination for 10% of the cost of additional Mechanical and Electrical work ordered by the Owner.
 - The Contractor shall furnish the Owner an itemized accounting with supporting data used in computing the value of any change that might be ordered.
 - Change Orders must state a number of added days or days to be deleted from completion time. If no change in days is required by the change order, write NONE. Failure to comply with above voids any later request for extra time.
9. APPLICATION FOR PROGRESS PAYMENTS AND CERTIFICATION FOR PAYMENT
- Amend Subparagraph 9.3.1 and insert the following: On or before the 25th day of each month, the Contractor shall submit to the Architect an itemized Application for Payment supported by such data substantiating the Contractor's right to payment as the Owner or Architect may require.
 - Amend Subparagraph 9.4.1 and insert: If the Contractor has made application for payment as above, the Architect will, with reasonable promptness and within seven (7) days after receipt of the application, issue an application for payment to the Owner, with a copy to the Contractor in the amount of 90% of the value of the Contract the Architect determines has been completed to the date of application, thus a 10% retainage, less any amount paid to the Contractor, or state in writing his reason for withholding an application as provided in Subparagraph 9.5.1.
 - Date of payment of the Application for Payment by the Owner is hereby defined as the earliest possible date that the Owner can prepare vouchers after receipt of Application for Payment from the Architect and approval of same by any governing body of the Owner and issuance of vouchers to cover Application for Payment.
10. CONTRACTOR'S LIABILITY INSURANCE
- Workers' Compensation and Employers Liability Insurance - Refer to Subparagraph 11.1.1.
 - Bodily Injury and Property Damage - Refer to Subparagraph 11.1.2. Limits shall be as follows:
 - Limits of liability coverage shall be \$2,000,000.00 Combined Single Limit for Bodily Injury and Property Damage.
 - Owner's Protective Liability Insurance - Refer to Paragraph 11.2 - Owner's Option.
11. PERFORMANCE AND PAYMENT BONDS - Supplement Subparagraph 11.4.1 as follows:
- Bond shall be equivalent to AIA Form A311, two part Performance Bond and Labor and Materials Bond with amount shown on each part equal to 100% of the total amount payable by the terms of the Contract. Surety shall be company licensed to do business at the place of building and shall be acceptable to the Owner.
12. PROPERTY INSURANCE MARINE ALL RISK SPECIAL BUILDERS RISK AND TRANSIT FORM
Refer to Paragraph 11.4 Property Insurance and insert the following:
- Until the Work is completed and accepted by the Owner, **the General Contractor shall effect and maintain total Property Insurance (Marine All Risk Special Builders Risk and Transit Form)** upon the Work at the site to 100% of the insurable value thereof (plus 8% of this insured value for Architect's Fee in connection with any loss covered by this insurance) including items of labor and materials connected therewith in or adjacent to the structure insured, materials in place or to be used as a part of the permanent construction, including surplus materials, shanties, protective fences, bridges or temporary structures, miscellaneous materials and supplies incidental to the Work, and such scaffoldings, stagings, towers, forms and equipment as are not owned or rented by the Contractor, the cost of which is included in the cost of the work. EXCLUSIONS: This insurance does not cover any tools owned by mechanics; any tools, equipment, scaffoldings, stagings, towers and forms owned or rented by the Contractor; the capital value of which is not included in the cost of the work, nor loss of equipment, materials, tools, etc., by theft. **Contractor shall not commence construction prior to receipt of policy copy from Owner.**

- b. This insurance shall include the interest of the Owner, the Contractor, Subcontractor, and Sub-Subcontractor in the Work.

END OF SECTION



GEOTECHNICAL EXPLORATION REPORT
Theatre Salina Addition
303 East Iron Avenue
Salina, Kansas


UES Project No. A26125.00474.000
August 7, 2026

Prepared by:

UES Professional Solutions 25, LLC
4503 East 47th Street South
Wichita, Kansas 67210
(316) 554-0725

Prepared for:

JGR Architects
730 North Ninth Street
Salina, Kansas 67401

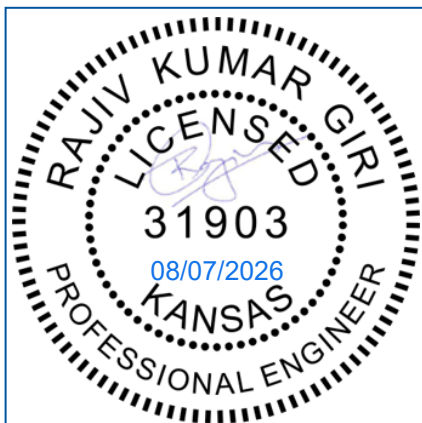

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Kansas.

A handwritten signature in blue ink, appearing to read "Rajiv K. Giri".

08/07/2026

Rajiv K. Giri, Ph.D., P.E.

Date

My license renewal date is April 30, 2028.

Sections covered by this seal: Sections 1 through 6 and all pages included as appendices within this bound document.

Important Information about This Geotechnical-Engineering Report

Subsurface problems are a principal cause of construction delays, cost overruns, claims, and disputes.

While you cannot eliminate all such risks, you can manage them. The following information is provided to help.

Geotechnical Services Are Performed for Specific Purposes, Persons, and Projects

Geotechnical engineers structure their services to meet the specific needs of their clients. A geotechnical-engineering study conducted for a civil engineer may not fulfill the needs of a constructor — a construction contractor — or even another civil engineer. Because each geotechnical-engineering study is unique, each geotechnical-engineering report is unique, prepared *solely* for the client. No one except you should rely on this geotechnical-engineering report without first conferring with the geotechnical engineer who prepared it. *And no one — not even you — should apply this report for any purpose or project except the one originally contemplated.*

Read the Full Report

Serious problems have occurred because those relying on a geotechnical-engineering report did not read it all. Do not rely on an executive summary. Do not read selected elements only.

Geotechnical Engineers Base Each Report on a Unique Set of Project-Specific Factors

Geotechnical engineers consider many unique, project-specific factors when establishing the scope of a study. Typical factors include: the client's goals, objectives, and risk-management preferences; the general nature of the structure involved, its size, and configuration; the location of the structure on the site; and other planned or existing site improvements, such as access roads, parking lots, and underground utilities. Unless the geotechnical engineer who conducted the study specifically indicates otherwise, do not rely on a geotechnical-engineering report that was:

- not prepared for you;
- not prepared for your project;
- not prepared for the specific site explored; or
- completed before important project changes were made.

Typical changes that can erode the reliability of an existing geotechnical-engineering report include those that affect:

- the function of the proposed structure, as when it's changed from a parking garage to an office building, or from a light-industrial plant to a refrigerated warehouse;
- the elevation, configuration, location, orientation, or weight of the proposed structure;
- the composition of the design team; or
- project ownership.

As a general rule, *always* inform your geotechnical engineer of project changes—even minor ones—and request an

assessment of their impact. *Geotechnical engineers cannot accept responsibility or liability for problems that occur because their reports do not consider developments of which they were not informed.*

Subsurface Conditions Can Change

A geotechnical-engineering report is based on conditions that existed at the time the geotechnical engineer performed the study. *Do not rely on a geotechnical-engineering report whose adequacy may have been affected by:* the passage of time; man-made events, such as construction on or adjacent to the site; or natural events, such as floods, droughts, earthquakes, or groundwater fluctuations. *Contact the geotechnical engineer before applying this report to determine if it is still reliable.* A minor amount of additional testing or analysis could prevent major problems.

Most Geotechnical Findings Are Professional Opinions

Site exploration identifies subsurface conditions only at those points where subsurface tests are conducted or samples are taken. Geotechnical engineers review field and laboratory data and then apply their professional judgment to render an opinion about subsurface conditions throughout the site. Actual subsurface conditions may differ — sometimes significantly — from those indicated in your report. Retaining the geotechnical engineer who developed your report to provide geotechnical-construction observation is the most effective method of managing the risks associated with unanticipated conditions.

A Report's Recommendations Are Not Final

Do not overrely on the confirmation-dependent recommendations included in your report. *Confirmation-dependent recommendations are not final*, because geotechnical engineers develop them principally from judgment and opinion. Geotechnical engineers can finalize their recommendations *only* by observing actual subsurface conditions revealed during construction. *The geotechnical engineer who developed your report cannot assume responsibility or liability for the report's confirmation-dependent recommendations if that engineer does not perform the geotechnical-construction observation required to confirm the recommendations' applicability.*

A Geotechnical-Engineering Report Is Subject to Misinterpretation

Other design-team members' misinterpretation of geotechnical-engineering reports has resulted in costly

problems. Confront that risk by having your geotechnical engineer confer with appropriate members of the design team after submitting the report. Also retain your geotechnical engineer to review pertinent elements of the design team's plans and specifications. Constructors can also misinterpret a geotechnical-engineering report. Confront that risk by having your geotechnical engineer participate in prebid and preconstruction conferences, and by providing geotechnical construction observation.

Do Not Redraw the Engineer's Logs

Geotechnical engineers prepare final boring and testing logs based upon their interpretation of field logs and laboratory data. To prevent errors or omissions, the logs included in a geotechnical-engineering report should *never* be redrawn for inclusion in architectural or other design drawings. Only photographic or electronic reproduction is acceptable, *but recognize that separating logs from the report can elevate risk.*

Give Constructors a Complete Report and Guidance

Some owners and design professionals mistakenly believe they can make constructors liable for unanticipated subsurface conditions by limiting what they provide for bid preparation. To help prevent costly problems, give constructors the complete geotechnical-engineering report, *but* preface it with a clearly written letter of transmittal. In that letter, advise constructors that the report was not prepared for purposes of bid development and that the report's accuracy is limited; encourage them to confer with the geotechnical engineer who prepared the report (a modest fee may be required) and/or to conduct additional study to obtain the specific types of information they need or prefer. A prebid conference can also be valuable. *Be sure constructors have sufficient time to perform additional study.* Only then might you be in a position to give constructors the best information available to you, while requiring them to at least share some of the financial responsibilities stemming from unanticipated conditions.

Read Responsibility Provisions Closely

Some clients, design professionals, and constructors fail to recognize that geotechnical engineering is far less exact than other engineering disciplines. This lack of understanding has created unrealistic expectations that have led to disappointments, claims, and disputes. To help reduce the risk of such outcomes, geotechnical engineers commonly include a variety of explanatory provisions in their reports. Sometimes labeled "limitations," many of these provisions indicate where geotechnical engineers' responsibilities begin and end, to help

others recognize their own responsibilities and risks. *Read these provisions closely.* Ask questions. Your geotechnical engineer should respond fully and frankly.

Environmental Concerns Are Not Covered

The equipment, techniques, and personnel used to perform an *environmental* study differ significantly from those used to perform a *geotechnical* study. For that reason, a geotechnical-engineering report does not usually relate any environmental findings, conclusions, or recommendations; e.g., about the likelihood of encountering underground storage tanks or regulated contaminants. *Unanticipated environmental problems have led to numerous project failures.* If you have not yet obtained your own environmental information, ask your geotechnical consultant for risk-management guidance. *Do not rely on an environmental report prepared for someone else.*

Obtain Professional Assistance To Deal with Mold

Diverse strategies can be applied during building design, construction, operation, and maintenance to prevent significant amounts of mold from growing on indoor surfaces. To be effective, all such strategies should be devised for the *express purpose* of mold prevention, integrated into a comprehensive plan, and executed with diligent oversight by a professional mold-prevention consultant. Because just a small amount of water or moisture can lead to the development of severe mold infestations, many mold-prevention strategies focus on keeping building surfaces dry. While groundwater, water infiltration, and similar issues may have been addressed as part of the geotechnical-engineering study whose findings are conveyed in this report, the geotechnical engineer in charge of this project is not a mold prevention consultant; *none of the services performed in connection with the geotechnical engineer's study were designed or conducted for the purpose of mold prevention. Proper implementation of the recommendations conveyed in this report will not of itself be sufficient to prevent mold from growing in or on the structure involved.*

Rely, on Your GBC-Member Geotechnical Engineer for Additional Assistance

Membership in the Geotechnical Business Council of the Geoprofessional Business Association exposes geotechnical engineers to a wide array of risk-confrontation techniques that can be of genuine benefit for everyone involved with a construction project. Confer with you GBC-Member geotechnical engineer for more information.



8811 Colesville Road/Suite G106, Silver Spring, MD 20910

Telephone: 301/565-2733 Facsimile: 301/589-2017

e-mail: info@geoprofessional.org www.geoprofessional.org

Copyright 2015 by Geoprofessional Business Association (GBA). Duplication, reproduction, or copying of this document, or its contents, in whole or in part, by any means whatsoever, is strictly prohibited, except with GBA's specific written permission. Excerpting, quoting, or otherwise extracting wording from this document is permitted only with the express written permission of GBA, and only for purposes of scholarly research or book review. Only members of GBA may use this document as a complement to or as an element of a geotechnical-engineering report. Any other firm, individual, or other entity that so uses this document without being a GBA member could be committing negligent or intentional (fraudulent) misrepresentation.

TABLE OF CONTENTS

	<u>Page No.</u>
1. INTRODUCTION	1
1.1 General.....	1
1.2 Project Description	1
2. FIELD EXPLORATION	3
3. SITE CONDITIONS.....	5
3.1 Regional Geology	5
3.2 Surface Conditions	5
3.3 Subsurface Conditions.....	5
3.4 Groundwater Conditions.....	6
3.5 Seismic Site Classification	7
4. LABORATORY TESTING	8
5. CONCLUSIONS AND RECOMMENDATIONS	10
5.1 General Geotechnical Considerations.....	10
5.2 Earthwork	11
5.2.1 Site Preparation.....	11
5.2.2 General Structural Fill	13
5.2.3 Low Volume Change Material (LVC).....	13
5.2.4 Compaction of Engineered Structural Fills	14
5.2.5 Utility Trench Backfill	14
5.2.6 Foundation Backfill.....	15
5.2.7 Correction of Unsuitable Foundation Soils.....	16
5.2.8 Excavation Slopes.....	16
5.3 Foundations - Scene Shop and Dance Education Wing Additions	17
5.3.1 Scene Shop Building.....	17
5.3.2 Dance Education Wing Building.....	19
5.3.3 Rammed Aggregate Piers.....	20
5.4 Slabs-on-Grade	21
5.5 Lateral Earth Pressures.....	22
5.6 Surface Drainage and Landscaping	23
5.7 Construction Considerations.....	24
5.8 Construction Observation and Quality Assurance	25
6. CLOSING REMARKS AND LIMITATIONS.....	26

APPENDICES



- Appendix A - General Vicinity Map
Boring Location Plan
- Appendix B - Boring Logs
Legend & Nomenclature
Unified Soil Classification System (USCS)
- Appendix C - Field & Laboratory Test Results

1. INTRODUCTION

1.1 General

This report summarizes the findings of our geotechnical exploration for the proposed Theatre Salina Addition located at 303 E. Iron Avenue in Salina, Kansas. The scope of work was outlined in our proposal dated June 15, 2026. Mr. Charles Renz of JGR Architects authorized this exploration on June 30, 2026.

The purpose of this geotechnical investigation is to explore the subsurface conditions at the proposed site with exploratory borings, evaluate the engineering properties of the subsurface materials with appropriate field and laboratory tests, and perform engineering analyses for developing design and construction recommendations for the proposed project.

1.2 Project Description

We understand the proposed development will consist of the construction of a new scene shop and new dance education wing additions to the existing Theatre Salina building. We understand the new additions include a scene shop to be added north of the existing stage, and a dance education wing to be located west of the existing Salina Theatre. We understand a new stairway will connect the existing green room located below the stage to the new scene shop and continue up to the new dance education wing. The new scene shop will have a finished floor elevation (FFE) of approximately 1221.2 feet and be located at Stage Level. Whereas the new dance education wing will have a FFE of approximately 1225.2 feet and will match the existing main theatre level.

The proposed single-story addition structures will be of steel frame or concrete masonry construction with concrete slab-on-grade floors. We estimate the new additions will have maximum column and continuous wall loads on the order of 75 kips and 4 kips per linear foot, respectively.

We understand this site will be adjacent to future development by the City of Salina and modification to the river area. In addition, a new retaining wall will be constructed on the west side of the new west addition to accommodate the city's proposed designs for this area. We understand the



anticipated change in elevation from the addition's FFE to the adjacent grade west of the retaining wall to be approximately 6 to 10 feet. Please note that the recommendations in this report do not address any retaining wall design, including slope stability analysis. Please contact UES if these services will be required.

We anticipate site grading required to bring the new building additions to the desired elevations will be minimal, with cuts of up to 2 feet and 3 feet in the proposed new scene shop and new dance education wing, respectively. Please contact us if site grading will be more significant so we may evaluate and adjust our recommendations if necessary.

Due to the proximity of the Smoky Hill River, the site elevation should be evaluated to determine if it resides in the 100-year flood plain. Structure elevations and earthwork may be impacted by site and flood plain elevations.

A general vicinity map and boring location map are included in Appendix A for reference.

2. FIELD EXPLORATION

We drilled 8 borings for this geotechnical exploration on July 9, 2026, with a CME 75 truck-mounted drilling rig using 4-inch diameter continuous flight augers. We drilled 6 borings, B-3 through B-8, within the new dance studio building footprint to a depth of approximately 15 feet below the site grade at the time of our exploration. We drilled 2 borings, B-1 and B-2, within the new scene shop building footprint to a depth of approximately 20 feet below the site grade at the time of our exploration.

We selected boring locations based on a preliminary site plan/boring location plan provided by Mr. Charles Renz via email dated June 11, 2026. UES personnel established field locations using a hand-held GPS unit with an accuracy of +/- 10 feet. Boring locations in relation to existing and proposed features are indicated on the Boring Location Plan included in Appendix A. The boring locations should be considered accurate only to the degree implied by the methods used in their determination.

We interpolated ground surface elevations at the boring locations using elevations obtained from ground surface profiling provided by Google Earth. The ground surface elevations at the borings are shown on the boring logs included in Appendix B. The boring elevations should be considered accurate only to the degree implied by the methods used in their determination.

Our drill crew obtained soil samples at the intervals shown on the boring logs in Appendix B. Recovered samples were sealed in plastic containers, labeled, and protected for transportation to the laboratory for further examination, testing, and classification.

We obtained split-barrel samples (designated "Split Spoon" or "S" samples) while performing Standard Penetration Tests (SPT) with a 1-3/8 inch I.D. thick-walled sampler, driven using an automatic hammer in general accordance with ASTM D1586, *"Penetration Test and Split-Barrel Sampling of Soils."* The "N" value, reported in blows per foot (bpf), equals the number of blows

required to drive the sampler through the last 12 inches of the 18-inch sample interval using a 140-pound hammer falling 30 inches.

We obtained undisturbed samples (designated "Shelby Tube" or "U" samples) with 3-inch O.D. thin-walled tube samplers, hydraulically pushed in general accordance with ASTM D1587, *"Thin-Walled Tube Sampling of Soils for Geotechnical Purposes."*

Our drilling personnel prepared field boring logs during drilling operations. These field logs report drilling and sampling methods, sampling intervals, groundwater measurements and the subsurface conditions we encountered. At the conclusion of drilling, our drill crew made groundwater measurements and backfilled the borings in accordance with Kansas state regulations.

3. SITE CONDITIONS

3.1 Regional Geology

This project lies within the Smoky Hills geomorphic region of north central Kansas. Where the bedrock is exposed at the surface, the topography in this region is strongly sloped or steep, while the areas mantled by more recent deposits exhibit a relatively level or gently rolling surface. The surface soils in the northern portion of the region generally comprise wind-blown deposits of silt and clay particles (loess) as well as alluvial and terrace deposits associated with current and former river channels. The bedrock in the Smoky Hills is of Cretaceous Age and includes the Dakota Sandstone in the east, the Niobrara Chalk in the west, and the Greenhorn Limestone (occasionally referred to as the "Fencepost Limestone") in the central portion of the region.

3.2 Surface Conditions

The project site is comprised of the existing Theatre Salina building and a grass covered lot with several mature trees and pavements. The project area exhibits approximately 5 feet of elevation difference, with decreasing elevation from the southwest to the northeast corner, across the proposed addition footprint. The site is bound by Founder's Park Path to the north, south, and west, and the existing Theatre Salina to the east. Smoky Hill River flows right next to the project site.

3.3 Subsurface Conditions

Although we observed some variability, the subsurface materials we encountered within the depths of exploration generally comprised 6 inches of topsoil overlying fill materials primarily comprised of lean clays to the depth of approximately 2.5 feet, followed by native lean clay soils with varying amounts of sand and clayey/poorly graded sand soils with varying amounts of clay to the termination depth of borings. General descriptions of the strata we encountered are presented below, while more detailed subsurface information is presented on the boring logs located in Appendix B. Please note that the indicated depths are relative to the site grade at the time of our exploration.

Stratum 1 – Fill Materials

We encountered fill materials comprised of lean clay with varying amounts of sand, trace concrete, and trace roots in each of our soil borings, underlying the topsoil at the surface, and extending to the depth of approximately 2.5 feet below the site grade at the time of our exploration. This fill material was generally described as varying shades of brown, grayish brown and light reddish brown and slightly moist. We measured Standard Penetration Test (SPT) N-values between 11 and 18 blows per foot (bpf), indicating that the surficial fill materials are in stiff to very stiff condition.

Stratum 2 – Native Soils

We encountered native lean clay soil with varying amounts of sand in each of our borings, underlying the fill materials at 2.5 feet below the existing grades, and extending to depths ranging between 13.5 feet to the terminal depths of the borings at 15 feet and 20 feet below the site grade at the time of our exploration. This native clay soils was generally described as varying shades of brown, grayish brown and light reddish brown and slightly moist to moist. We measured Standard Penetration Test (SPT) N-values between 3 and 18 blows per foot (bpf) and an unconfined compressive strength of 11.79 kips per square foot (ksf), indicating that the clay soils are in a soft to hard condition.

We also encountered clayey/poorly graded sand soils with varying amounts of clay in soil borings B-3, B-4, B-6, and B-8, underlying the native clay soils, and extending to the termination depths of the borings at approximately 15 feet below the site grade at the time of our exploration. This material was generally described as light reddish brown to reddish brown and brown and slightly moist. We measured SPT N-values between 7 and 16 bpf, indicating that the sand soils are in a loose to medium dense condition.

3.4 Groundwater Conditions

Our drill crew made water level observations during drilling and after completion of the borings to evaluate groundwater conditions. We did not encounter groundwater in any of our soil borings.

The groundwater conditions we observed during our exploration program should not be construed to represent an absolute or permanent condition. Uncertainty is involved with short-term water level observations in boreholes.

The free groundwater surface or groundwater table within unconfined aquifers is generally a subdued reflection of surface topography. Water generally flows downward from upland positions (recharge zones) to low lying areas or surface water bodies (discharge zones). As such, the groundwater level and the amount and level of any perched water on the site may be expected to fluctuate with variations in precipitation, site grading, drainage and adjacent land use. Further, the groundwater elevation is expected to vary locally with changes in the nearby Smoky Hill River level. Long-term monitoring utilizing piezometers or observation wells is required to evaluate the potential range of groundwater conditions.

3.5 Seismic Site Classification

We have reviewed the boring logs and laboratory test data for this project. We have also reviewed other geologic data from the general area available to us for further information on the soils extending to a depth of 100 feet below the existing grade.

Based on the above resources, we estimate that the weighted average N-value for soil and rock across this depth is greater than 15 but less than 50 blows per foot (bpf). As defined in ASCE 7-16 as well as the 2018 version of the International Building Code, this building site is assigned a Site Class of D.

4. LABORATORY TESTING

Our engineering staff reviewed the field boring logs to outline the depth, thickness and extent of the soil strata. The samples taken from the borings were examined in our laboratory and visually classified in general accordance with ASTM D2488, *"Description and Identification of Soils (Visual-Manual Procedure)"*. We established a testing program to evaluate the engineering properties of the recovered samples. A UES technician performed laboratory testing in general accordance with the following current ASTM test methods:

- Moisture Content (ASTM D2216, *"Laboratory Determination of Water (Moisture) Content of Soil and Rock"*)
- Unit Weight (ASTM D7263, *"Laboratory Determination of Density (Unit Weight) of Soil Specimens"*)
- Atterberg Limits (ASTM D4318, *"Liquid Limit, Plastic Limit, and Plasticity Index of Soils"*)
- Minus No. 200 Sieve Wash (ASTM D1140, *"Amount of Material in Soils Finer Than the No. 200 (75- μ m) Sieve"*)
- Unconfined Compressive Strength (ASTM D2166, *"Unconfined Compressive Strength of Cohesive Soil"*)

Laboratory test results are presented on the boring logs in Appendix B and tabulated in Appendix C.

Moisture content and unit weight tests were used to evaluate the existing moisture-density condition of the soils. The Atterberg limits and Minus No. 200 sieve tests were used to help classify the soils under the Unified Soils Classification System. The Atterberg limits were also used to evaluate the plasticity characteristics of the soils. Unconfined compression tests were used to define the stress-strain characteristics and related shear strength of the soils.

The following data summarize our laboratory test results. We used these data to develop the allowable bearing values, anticipated settlements, and other geotechnical design criteria for the project.

- Natural Moisture Content6.8 to 31.2%
- Wet Density.....114.1 to 119.2 lb/ft³
- Dry Density.....87.0 to 101.8 lb/ft³
- Unconfined Compressive Strength..... 11.79 kips/ft²
- Liquid Limit.....35 to 40
- Plastic Limit..... 15 to 20
- Plasticity Index.....20 to 25
- Percent Passing the No. 200 Sieve..... 50.6 to 84.9%
- Standard Penetration Test (SPT 'N' blows per foot)..... 3 to 18

Based on the results of this testing program, we reviewed and supplemented the field logs to arrive at the final logs as presented in Appendix B. The final logs represent our interpretation of the field logs and reflect the additional information obtained from the laboratory testing. Stratification boundaries indicated on the boring logs were based on observations made during drilling, an extrapolation of information obtained by evaluating samples from the borings, and comparisons of similar engineering characteristics. Locations of these boundaries are approximate and the transitions between soil types may be gradual rather than clearly defined.

5. CONCLUSIONS AND RECOMMENDATIONS

5.1 General Geotechnical Considerations

The soils we encountered in the test borings within the proposed new Scene Shop and new Dance Education Wing building footprints are not suitable for supporting the new building additions on shallow foundations without a soil improvement program, such as intermediate foundations. We did not encounter groundwater within the depth of expected excavation.

We anticipate cuts of up to 2 feet within the Scene shop building footprint to match the proposed finished floor elevation of approximately 1121.2 feet. Additionally, we anticipate cuts of up to 3 feet within the Dance Education Wing building footprint to match the proposed finished floor elevation of approximately 1125.2 feet.

Due to the depths and extents of unsuitable soft clay or loose sand soils, consideration should be given to ground improvement such as rammed aggregate piers. Please see section 5.3 for more information regarding building foundations.

The near-surface native clay soils we encountered at the site generally exhibit low plasticity and limited shrink/swell potential. These soils may be used for direct support of foundations, or floor slabs, if properly moisture conditioned and compacted as outlined later in this report.

The surficial clay fill materials we encountered in our borings to the depth of approximately 2.5 feet below the existing grade may contain debris or organic matter and may be susceptible to excessive total and differential settlements when subjected to nominal structural loadings or vibration. These surficial fill materials are not recommended for direct support of footings, or floor slabs. The surficial fill materials we encountered must be completely removed within the new Scene Shop and new Dance Education Wing building footprints in accordance with Section 5.2.7 and the foundation systems must bear on unyielding native clay soils with at least medium stiff consistency.

5.2 Earthwork

5.2.1 Site Preparation

Adjacent foundations and structures that will remain must be protected (where applicable) while performing excavations and soil improvement programs. Roof drains and stormwater drainage from these structures as well as the surrounding area should be directed away from the proposed construction area.

We recommend that any existing utilities within the proposed building area be relocated to avoid passing beneath the new structures. Abandoned utility pipes that cannot be removed must be plugged with grout to reduce the potential for future collapse or moisture migration into the subgrade soils. Excavations resulting from utility removal must be replaced with engineered structural fill as outlined in Section 5.2.5.

In preparing the site for construction, existing pavements, surface vegetation, topsoil containing a significant percentage of organic matter, and any surficial fill materials encountered during our exploration and as shown in the boring logs must be completely removed from the areas beneath structures and any other areas that are to be paved, cut or receive fill. The removal depth for this site is expected to be up to approximately 24 to 36 inches. However, the removal depth should be monitored during stripping and adjusted as required. This material should either be removed from the site or stockpiled for later use in landscaping of unpaved or non-structural areas.

Trees within the areas to be prepared for development must be removed. The root-balls and surrounding soils containing observable organic material must also be removed. We expect the root-balls will extend to substantially greater depths than the topsoil stripping depth. The root-ball excavations must be filled with an engineered structural fill that is placed, moisture conditioned and compacted in accordance with Section 5.2.4.

Due to the large number of mature trees present in the building pad area, we emphasize the importance of the proper removal and replacement of any on-site materials containing organic

matter and debris. All organic material (such as roots and root-balls) with a diameter greater than 1/2-inch should be completely removed beneath the structures to help prevent detrimental effects on subgrade stability.

If a substantial amount of organic material with a diameter greater than 1/2-inch cannot be removed in a reasonable manner from beneath the proposed pavements, the LVC layer may be increased to mitigate the harmful effect of the organic material. Please see Section 5.4 for further details on LVC thickness beneath floor slabs.

Prior to fill placement, the top 9 inches of the ground surface in fill areas should be scarified, moisture conditioned and recompactd in accordance with Section 5.2.4 to eliminate a plane of weakness along the contact surface.

The subgrade should be proof rolled with a loaded tandem axle dump truck or equivalent (loaded water truck, loaded concrete mixer or motor grader with a minimum weight of 20 tons). A proof-roll is considered acceptable if no ruts greater than one inch deep appear behind the loaded vehicle, and no pumping or weaving is observed as the wheels pass over the area. Any soft or unsuitable areas should be compacted or removed and replaced with stable fill material similar in composition to the surrounding soils. If necessary, clean materials such as crushed concrete or crushed stone may be used to stabilize areas where wet soil or water is present. Geogrid or structural geotextile may be used in conjunction with crushed concrete or stone to provide additional stabilization.

Whether in cut or fill, the final subgrade surface must be maintained in a stable condition at the moisture content and level of compaction identified in Section 5.2.4. Verification and maintenance of the completed subgrade may require scarification, moisture conditioning, re-compaction, and proof rolling.

5.2.2 General Structural Fill

General structural fill may be used for mass site grading, landscaping applications or as utility trench backfill outside of building areas. General structural fill may also be used to within 12 inches of the base of any granular cushion beneath floor slabs. In the former applications, low volume change materials are required immediately below the slabs (low volume change material is discussed in the following section).

General structural fill may comprise cohesive or granular material but should be free from organic matter or debris. Granular materials used as general structural fill should be well graded, have a maximum particle size of 1.5 inches, and meet KDOT freeze/thaw durability and sulfate soundness requirements. Off-site material used as general structural fill should have a liquid limit (LL) of less than 50 and a plastic index (PI) of less than 30.

5.2.3 Low Volume Change Material (LVC)

Low volume change (LVC) material as specified for use below slabs-on-grade must consist of granular material or cohesive soil with a liquid limit (LL) less than 40 and a plasticity index (PI) between 10 and 20.

Granular material used as LVC must have sufficient cohesion to form a compactable, uniform, and stable subgrade. This typically translates to a material with greater than 15 percent fines (percent passing the No. 200 sieve) and a maximum particle size of 1.5 inches. Silty gravel (such as KDOT AB-3), crushed concrete with a maximum particle size of 1.5 inches, or limestone screenings are also acceptable LVC materials. Granular materials with less than 15 percent fines may be used within confined areas such as within foundation stem walls. LVC materials should be free of organic matter or debris.

If granular materials are used as LVC and are placed over less permeable or expansive soils, they should be constructed with edge drains or other drainage methods to prevent the ponding or collection of water in the granular layer.

The on-site near-surface clay fill materials are not considered LVC material as defined in this section.

However, the on-site native clay soils with varying amounts of sand we encountered at a depth of 2.5 feet or below, may be considered LVC material as defined in this section, if properly moisture conditioned and recompacted in place as outline in Section 5.2.4 of this report.

5.2.4 Compaction of Engineered Structural Fills

Unless otherwise noted, fill materials should be placed in loose lifts not to exceed 9 inches and be compacted to a minimum of 95 percent of the maximum dry unit weight obtained from ASTM D698 (Standard Proctor). Moisture content at the time of compaction should be controlled to between optimum and 4 percent above optimum moisture content.

Granular fill materials which produce a definable moisture-density curve when tested according to ASTM D698 should be compacted to a minimum of 95 percent of the maximum dry unit weight obtained from ASTM D698. Granular fill materials which do not produce a definable moisture-density curve should be compacted to a minimum of 75 percent relative density (ASTM D4253, *"Maximum Index Density and Unit Weight of Soils Using a Vibratory Table"* and ASTM D4254, *"Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density"*). Granular materials should be placed at a moisture content that will achieve the desired densities. Please note that relative density and standard Proctor tests measure different parameters and are not interchangeable.

In general, proper compaction of cohesive soils can be achieved with sheepsfoot or pneumatic-type compactors, while compaction of granular soils can be achieved with smooth-drum or smooth-plate vibratory compactors. Water flooding is not an acceptable compaction method for any soil type.

5.2.5 Utility Trench Backfill

As a minimum, utility trench backfill material should meet the requirements of general structural fill as defined in Section 5.2.2. Where utility trenches pass beneath the structures or flatwork, the upper foot of utility backfill should meet the requirements of LVC material as defined in Section 5.2.3.

Backfill soils in utility trenches must be placed in lifts of 6 inches or less in loose thickness and be compacted in accordance with Section 5.2.4.

Granular material could be used as utility trench backfill but may retain or pond water on the underlying expansive clay and present a higher potential for volume changes due to shrink and swell. We recommend that where utility trenches pass beneath the structures, that the use of granular backfill be limited to avoid creating a preferential pathway to the underlying expansive soils. We recommend that clay materials meeting the specifications of LVC material as specified in Section 5.2.3 or flowable fill as described in the following paragraph be used to backfill or plug utility penetrations beneath the structures.

Controlled low strength material (CLSM) or flowable fill may also be used for utility backfills. We recommend designing flowable fill with a compressive strength between 50 and 300 pounds per square inch (psi). CLSM with a maximum compressive strength less than 300 psi can be readily excavated with a backhoe. The intent for the CLSM is to provide a backfill that can be placed in a single lift, without personnel entering the excavation and without the need for compaction equipment.

Where used beneath flatwork or the structures, CLSM should be terminated a minimum of one foot below the structures or floor slab subgrade elevation. To provide uniform support beneath flatwork and the structures, the fill placed over the CLSM should be of similar composition as the surrounding bearing materials and be constructed as moisture-conditioned and compacted engineered structural fill in accordance with Section 5.2.4.

5.2.6 Foundation Backfill

As a minimum, backfill soils for formed foundations should meet the requirements of general structural fill as defined in Section 5.2.2. However, we recommend fill around foundations meet the requirements of LVC material as defined in Section 5.2.3. The use of LVC material to backfill foundations is intended to help reduce lateral swell pressures on the foundation wall and reduce

desiccation cracking adjacent to the structures, which can provide a pathway for water to infiltrate the foundation subgrade. If other cohesive materials are used to backfill foundations, the risk of differential movements caused by water infiltration into the foundation subgrade may be increased.

We also recommend the upper 18 inches of exterior foundation backfill have sufficient cohesion to direct surface water away from the structures. Granular materials such as sand and gravel are not suitable for use as exterior foundation backfill in the surficial 18 inches.

Backfill soils around formed foundations must be placed in lifts of 6 inches or less in loose thickness and be moisture conditioned and compacted in accordance with Section 5.2.4. Care should be exercised during compaction to avoid applying excessive stress to the foundation surfaces. Where both sides of a foundation wall are backfilled, the fill should be placed simultaneously in uniform lifts on both sides of the wall to reduce unbalanced lateral loads.

5.2.7 Correction of Unsuitable Foundation Soils

If soft, loose, fill materials or otherwise unsuitable soils are encountered at the base of any foundations, an over-excavation and replacement/re-compaction procedure will be required. The unsuitable soils beneath the foundations should be removed to the required depth, with the excavation extending laterally 9 inches in all directions for each vertical foot of over-excavation. Structural fill for the over-excavated areas should be of similar composition as the surrounding materials or meet the requirements of LVC material as defined in Section 5.2.3. Backfill material should be compacted in accordance with Section 5.2.4. CLSM, as defined in Section 5.2.5 may also be used to backfill over-excavated areas.

5.2.8 Excavation Slopes

Vertical cuts and excavations may stand for short periods of time, but should not be considered stable in any case. All excavations should be sloped back, shored, or shielded for the protection of workers. As a minimum, trenching and excavation activities should conform to federal and local regulations.

The clay soils we encountered in the test borings generally classify as a type "C" soil according to OSHA's Construction Standards for Excavations. In general, the maximum allowable slope for shallow excavations of less than 20 feet in a type "C" soil is 1.5H:1.0V, although other provisions and restrictions may apply. If different soil types are encountered, the maximum allowable slope may be different.

The Contractor is responsible for designing any excavation slopes or temporary shoring. The Contractor must also be aware that slope height, slope inclination, and excavation depths (including utility trench excavations) should in no case exceed those specified in federal, state, or local safety regulations, such as OSHA Health and Safety Standards for Excavations, 29 CFR Part 1926, or successor regulations.

Excavations performed near existing structures must not compromise the integrity or support of the existing foundation elements. Shoring, bracing, underpinning or other methods of maintaining foundation integrity may be required.

The information presented in this section is solely for our client's reference. **UES assumes no responsibility for site safety or the implementation of proper excavation techniques.**

5.3 Foundations - Scene Shop and Dance Education Wing Additions

We anticipate cuts of up to 2 feet within the Scene shop building footprint to match the proposed finished floor elevation of approximately 1121.2 feet. Additionally, we anticipate cuts of up to 3 feet within the Dance Education Wing building footprint to match the proposed finished floor elevation of approximately 1125.2 feet.

5.3.1 Scene Shop Building

Based on the results of our analysis, the soils we encountered in the test borings, B-1 and B-2, within the proposed Scene Shop addition to be added north of the existing Stage are not suitable for supporting the new single-story addition on shallow foundations without a soil improvement

program. The selection of an allowable soil bearing pressure for shallow foundation elements must fulfill two requirements. First, the foundation load must be sufficiently less than the ultimate soil bearing capacity to ensure stability. Second, the total and differential settlements must not exceed amounts which will produce adverse behavior of the superstructure.

In order to meet the previous criteria, we have explored both the bearing capacity and the load settlement characteristics of the subsurface materials using maximum column and continuous wall loads of 75 kips and 4 kplf, respectively. The allowable soil bearing pressure is based on a factor of safety of three against the ultimate bearing capacity of the soil, with additional consideration given to limiting settlement to acceptable levels.

The native clay soils within the upper 5 to 10 feet of the site exhibit good bearing strength and are capable of providing a net allowable bearing capacity of 1,500 pounds per square foot (psf). The allowable bearing pressure is expressed in terms of the net pressure transferred to the soil. The net allowable bearing pressure is defined as the total structural dead load including the weight of the foundation elements, less the weight of the soil excavated for the foundation elements. This value may be increased by one-third for transient loading conditions such as wind or seismic forces.

However, we note that the clay soils encountered below the upper 10 feet of the existing grades are soft and exhibit significantly low bearing strengths and a moderate to high risk of compressibility. Based on the information provided, we estimate that total vertical settlement beneath the proposed building addition will be on the order of 1½ to 1¾ inches. The stress increase on the soft soils induced by the allowable soil bearing pressure and the estimated settlement beneath the new Scene Shop addition exceed both the recommended factor of safety and tolerable vertical/differential movement of the individual structures.

Due to the anticipated building loadings and the depths and extents of unsuitable soft clay soils, consideration should be given to ground improvement such as rammed aggregate piers. Rammed aggregate piers are discussed in Section 5.3.3.

5.3.2 Dance Education Wing Building

Based on the results of our analysis, the soils we encountered in the test borings, B-3 through B-8, within the proposed Dance Education Wing addition to be located west of the existing Theatre, are not suitable for supporting the new single-story addition on shallow foundations without a soil improvement program. The selection of an allowable soil bearing pressure for shallow foundation elements must fulfill two requirements. First, the foundation load must be sufficiently less than the ultimate soil bearing capacity to ensure stability. Second, the total and differential settlements must not exceed amounts which will produce adverse behavior of the superstructure.

In order to meet the previous criteria, we have explored both the bearing capacity and the load settlement characteristics of the subsurface materials using maximum column and continuous wall loads of 75 kips and 4 kplf, respectively. The allowable soil bearing pressure is based on a factor of safety of three against the ultimate bearing capacity of the soil, with additional consideration given to limiting settlement to acceptable levels.

The native clay soils within the upper 5 to 10 feet of the site exhibit good bearing strength and are capable of providing a net allowable bearing capacity of 1,500 pounds per square foot (psf). The allowable bearing pressure is expressed in terms of the net pressure transferred to the soil. The net allowable bearing pressure is defined as the total structural dead load including the weight of the foundation elements, less the weight of the soil excavated for the foundation elements. This value may be increased by one-third for transient loading conditions such as wind or seismic forces.

However, the clay and sand soils encountered below the upper 10 feet of the existing grades are soft clay or loose sand soils and exhibit significantly low bearing strengths and a moderate to high risk of compressibility. Based on the information provided, we estimate that total vertical settlement beneath the proposed building addition will be on the order of 1¼ to 1¾ inches. The stress increase on the soft or loose soils induced by the allowable soil bearing pressure and the estimated settlement beneath the new Dance Education Wing addition exceed both the recommended factor of safety and tolerable vertical/differential movement of the individual structures.

Due to the anticipated building loadings and the depths and extents of unsuitable soft or loose soils, consideration should be given to ground improvement such as rammed aggregate piers. Rammed aggregate piers are discussed in the following section.

5.3.3 Rammed Aggregate Piers

Intermediate foundation elements comprising rammed aggregate piers (RAP) are an option for supporting the proposed apartment buildings. RAP's improve existing bearing conditions and reduce settlement to acceptable limits. Soil shear strength and friction angles in foundation soils are improved by reinforcing the soil with highly compacted aggregate columns. In addition to developing high-capacity side friction at the interface of the aggregate and the existing soils, the rammed aggregate piers improve shear strength and internal friction angle in soils between the piers.

Rammed aggregate piers are constructed by drilling excavations or inserting a hollow mandrel into the existing soils, prestressing the existing soils at the base of the excavation, and then placing well-graded aggregate in highly compacted controlled lifts. The prestressing of the soils at the base of the excavation and the compaction of each lift of aggregate is accomplished by a high-energy tamping apparatus. Rammed aggregate piers are generally 2 to 2½ feet in diameter and will vary in length depending on structural loads and the depth of soil improvement needed to control settlement to acceptable limits.

Upon completion of RAP installation, conventional strip and spread shallow foundations can be constructed on the improved soils.

Based on our preliminary assessment of the on-site soils, we estimate allowable bearing capacities between 5,000 and 6,000 psf can be realized using RAP ground improvement. However, RAP's are a proprietary foundation system which requires analysis, recommendations, and construction to be performed by licensed contractors.

5.4 Slabs-on-Grade

The surficial clay fill materials we encountered in our borings contain debris or organic matter and may be susceptible to total and differential settlements. We recommend excavating and removing the entire upper 2.5 feet of the surficial fill materials encountered in the proposed slab-on-grade area to match the anticipated FFEs of new Scene shop and Dance studio additions. In addition, the native clay soils we encountered at this site are generally categorized as low plasticity soils and exhibit a low swell potential. Most slabs-on-grade will experience some amount of vertical movement, which the Owner must be willing to accept. Recommendations to help reduce the risk of movement of a slab supported on clay soils are presented below.

To provide uniform support for slabs-on-grade and reduce the potential for subgrade volume change, we recommend all floor slabs bear on a minimum of 12 inches of LVC material as defined in Section 5.2.3. The placement and compaction of the LVC material should conform to the recommendations in Section 5.2.4 of this report. Depending on final site grades, this LVC layer could comprise on-site soils that have been moisture-conditioned and recompacted in place.

By constructing a 12-inch layer of low plasticity, low volume change material immediately beneath the slab and closely controlling the moisture and density of the scarified soil and new fill materials, it is our opinion that the potential for detrimental slab-on-grade movement will be sufficiently reduced. A greater thickness of low volume change material beneath the floor slab may further reduce potential slab movement. If even slight slab movements are not acceptable, please contact UES for further floor slab recommendations.

We recommend a 2- to 4-inch thick granular base be placed beneath the floor slab in addition to the low plasticity, low volume change material. This layer should be free-draining, well-graded and compacted by vibration prior to placing the floor slab.

We also recommend the moisture content of upper 9 inches of the subgrade be checked prior to placement of a granular base, reinforcing steel or concrete floor slab. If the moisture content of the

subgrade is below optimum, we recommend the subgrade be scarified, moisture conditioned and recompacted according to Section 5.2.4.

In many construction projects, the moisture content of the slab subgrade is tested during grading of the site. The subgrade then remains exposed until slab-on-grade placement occurs several weeks later. In this situation, even LVC material is subject to some swell movement if not properly moisture conditioned prior to slab placement. Periodic applications of water will help maintain the proper moisture content of subgrade soils. The risk of differential movements can be reduced by creating and properly preparing an LVC zone beneath the slab as well as ensuring proper drainage is maintained around the structure at all times.

In finished areas, the floor covering manufacturer should be consulted regarding the use of a vapor retarder beneath floor slabs. If a vapor retarder is recommended by the floor covering manufacturer, it should conform to the manufacturer's specifications to maintain the product warranty. In other areas, vapor retarder should be placed in accordance with recommendations outlined in ACI 302.1R-15, "Guide to Concrete Floor and Slab Construction."

5.5 Lateral Earth Pressures

Earth-retaining structures should be designed to withstand lateral earth pressures caused by adjacent soil and applied surcharge loads. The magnitude of the lateral earth pressure will depend on the height of the walls, stiffness of the walls, magnitude of the surcharge loads behind the walls, and the backfill and existing soil conditions behind the walls.

Table 5.5-1: Lateral Earth Pressure Coefficients

Soil Type (USCS Symbol)	Wet Unit Weight (pcf)	Drained Friction Angle (Φ')	At Rest (K_o)	Active (K_a)	Passive (K_p)
Lean Clay w/ Varying Sand (CL)	115	22	0.63	0.45	2.20
Clayey/Poorly Graded Sand (SC, SP)	115	28	0.53	0.36	2.77
Granular Backfill* (SP, SW)	115	32	0.47	0.31	3.25
Granular Backfill* (GP, GW)	125	35	0.43	0.27	3.69

**Values for material compacted in accordance with Section 5.2.4*

The values provided above are empirical and are based on basic testing as well as our experience with similar materials. These values also assume a vertical wall with a horizontal retained surface behind the wall. Lateral earth pressure parameters for granular backfill may be used only if the granular backfill extends upward from the heel of the wall at a slope shallower than 1.0H:1.0V. Please contact us if different backfill materials or wall geometries are a consideration for this project.

Static surcharge loads imposed on below-grade walls may be computed by multiplying the static surcharge load (q) by the appropriate lateral earth pressure coefficient (K_a or K_o). Appropriate factors of safety should be applied to the computed lateral earth pressures and sliding friction resistance. We recommend an underdrain system with a gravity drain or sump pump be provided to prevent hydrostatic forces from developing behind the retaining wall.

5.6 Surface Drainage and Landscaping

The success of the foundation system including soil improvement program and slab-on-grade floor system is contingent upon keeping the moisture content of subgrade soils as constant as possible and not allowing surface drainage to have a path to the subsurface soils. Positive surface drainage

away from structures must be maintained throughout the life of the structures. Landscaped areas should be designed and constructed such that irrigation and other surface water will be collected and carried away from foundation elements. Pavements should be sloped or crowned to direct surface water to storm sewer systems or detention/retention ponds.

During construction, temporary grades should be established to prevent runoff from entering excavations or footing trenches. Backfill should be placed as soon as concrete structural strength requirements are met and should be graded to drain away from the building.

The final grade of the foundation backfill and any overlying pavements should have a positive slope away from foundation walls on all sides. We typically recommend a minimum slope of one inch per foot for the first 5 to 10 feet for uncovered surfaces. However, the slope may be decreased if the ground surface adjacent to foundations is covered with concrete slabs or asphalt pavements. For other areas of the site, we recommend a minimum slope of two percent. Pavements and exterior slabs that abut structures should be carefully sealed against moisture intrusion at the joint. All downspouts and faucets should discharge onto splash blocks that extend at least five feet from the building line or be tied into the storm drain system. Splash blocks should slope away from the foundation walls.

The placement of vegetation and plantings next to the foundation should be minimized. Where landscaping is required, we recommend considering plants and vegetation that require minimal irrigation. Irrigation within ten feet of the foundation should be carefully controlled and minimized.

5.7 Construction Considerations

If construction of the project is to be performed during periods of freezing temperatures, steps should be taken to prevent the soils under floor slabs or footings from freezing. In no case should the fill materials, floor slabs, foundations, or other exterior flat work be placed on frozen or partially frozen materials. Frozen materials should be removed and replaced with a suitable material as described in earlier sections of this report.

Care should be exercised during excavation of new footings to avoid undermining the existing footings. Shoring, bracing, underpinning or other methods of maintaining foundation integrity may be required.

Construction performed during periods of high precipitation may result in saturated unstable soils, and caving or sloughing of excavations. Control of soil moisture will be necessary for successful soil compaction, and to maintain soil bearing capacity.

5.8 Construction Observation and Quality Assurance

We recommend that UES review those portions of the plans and specifications that pertain to foundations and earthwork to evaluate consistency with our findings and recommendations. UES will provide up to 2 hours of engineering support services at no charge to review project documents for adherence to our recommendations.

Site grading, including proof-rolling, replacement or re-compaction of material, and placement of fill and backfill, should be observed by a quality assurance technician from UES under the direction of a registered professional engineer. The technician should perform density tests and make any other observations necessary to assure that the requirements of the specifications are being achieved.

It is the opinion of UES that construction observation by the geotechnical engineer of record or his designated representative is necessary to complete the design process. Field observation services are viewed as essential and a continuation of the design process. Unless these services are provided by UES, the geotechnical engineer will not be responsible for improper use of our recommendations or failure by others to recognize conditions which may be detrimental to the successful completion of the project.

UES will be available to make field observations and provide consultation services as may be necessary. A written proposal outlining the cost of construction testing services such as soil, concrete, and steel quality assurance can be provided upon request.

6. CLOSING REMARKS AND LIMITATIONS

This report is presented in broad terms to provide an assessment of the subsurface conditions and their potential effect on the adequate design and economical construction of the proposed structures. The analyses, conclusions, and recommendations contained in this report are based on the site conditions existing at the time of the exploration, the project layout described herein, and the assumption that the information obtained from our eight borings is representative of subsurface conditions throughout the site.

Any changes in the design or location of the proposed structures should be assumed to invalidate the conclusions and recommendations given in this report until we have had the opportunity to review the changes and, if necessary, modify our conclusions and recommendations accordingly. If subsurface conditions different from those encountered in the explorations are observed during construction or appear to be present beneath excavations, UES should be advised at once so that the conditions can be reviewed and recommendations reconsidered where necessary.

If there is a substantial lapse in time between the submission of this report and the start of construction, or if site conditions or the project layout have significantly changed (due to further development of grading plans, natural causes, or construction operations at or adjacent to the site), we recommend that this report be reviewed to determine the applicability of our previous conclusions and recommendations.

Our geotechnical exploration and subsequent recommendations address only the design and construction considerations contained in this report. We make no warranty for the contents of this report, neither expressed nor implied, except that our professional services were performed in accordance with engineering principles and practices generally accepted at this time and location.

The scope of services for this exploration report did not include design, analysis, or construction of the proposed retaining wall on the west side of the new west addition. The scope of services also didn't include performing any slope stability calculations for the new retaining wall. We note that the



scope of services for this report did not include providing any recommendations for the new stairway connecting the existing green room located below the stage to the new scene shop and continuing up to the new dance education wing. In addition, the scope of services for this exploration did not include a wetlands evaluation, an environmental assessment, or an investigation for the presence of hazardous or toxic materials in the soil, surface water, groundwater, or air within or adjacent to this site. If contamination is suspected or is a concern, we recommend the scope of this study be expanded to include an environmental assessment.

This report was prepared by the firm of UES Professional Solutions 25, LLC under the supervision of a professional engineer registered in the State of Kansas. Report preparation was in accordance with generally accepted geotechnical engineering practices for the exclusive use of our client for evaluating the design of the project as it relates to the geotechnical aspects discussed herein. Recommendations are based on the applicable standards of the profession at the time of this report within this geographic area. UES Professional Solutions 25, LLC will not be responsible for misrepresentation of this report resulting from partial reproduction or paraphrasing of its contents.

We appreciate the opportunity to be of service on this project. Please contact us if we can provide further information regarding the contents of this report or the scope and cost of additional services.

Respectfully submitted,
UES Professional Solutions 25, LLC

A handwritten signature in blue ink, appearing to read "Anna Wilson", is positioned above the printed name.

Anna E. Wilson, I.G.
Staff Geologist

A handwritten signature in blue ink, appearing to read "Rajiv K. Giri", is positioned above the printed name.

Rajiv K. Giri, Ph.D., P.E.
Senior Geotechnical Engineer

AEW/RKG



APPENDIX A

**General Vicinity Map
Boring Location Plan**



Date: July 30, 2026
Drawn By: AEW
Project Manager: KAM
Scale: NTS

General Vicinity Map
Theatre Salina Addition
Salina, Kansas
UES Project No.: A26125.00474.000



Date: July 30, 2026
Drawn By: AEW
Project Manager: KAM
Scale: NTS

Boring Location Plan
Theatre Salina Addition
Salina, Kansas
UES Project No.: A26125.00474.000



APPENDIX B

**Boring Logs
Legend & Nomenclature
Unified Soil Classification System (USCS)**



PROJECT Theatre Salina Addition

COORDINATES 38.84109, -97.60612

PROJECT ADDRESS 303 E. Iron Avenue, Salina, Kansas

SURFACE ELEVATION 1223'

CLIENT NAME JGR Architects

ELEVATION DATUM WGS84

DRILLED BY M. Wold

GEOLOGY Smoky Hills

LOGGED BY D. Kilpatrick

GW AT TIME OF DRILLING N.E. GW AFTER DRILLING N.E.

DATE COMPLETED 07/09/2026

DEPTH 20'

Depth (ft)	Sample Graphic	Samples		Graphic Log	Soil Description and Remarks	USCS	Laboratory Results					Elevation (ft)
		Sample Number	N-Value				MC (%)	Wet Density (pcf)	Compress Strength (ksf)	% Fines	LL-PL-PI	
5		S-1	11		TOPSOIL 0.5'	CL	13.9	114.1	11.79		38-15-23	1220
		S-2	12		LEAN CLAY - dark brown, slightly moist, stiff, trace roots, concrete, trace gravel, FILL 2.5'		20.1					
		U-3	N/A		- very moist, hard, else as above		31.2					1215
10		S-4	10		SANDY LEAN CLAY - brown, very moist, stiff 8.5'		27.8					
15		S-5	7		- slightly moist, medium stiff, else as above		11.5			50.6		1210
20		S-6	12		- light reddish brown, stiff, else as above 20'							1205

End of boring at 20'

LOG NAME: B-1

PROJECT NUMBER: A26125.00474.000

**PROJECT** Theatre Salina Addition**COORDINATES** 38.84102, -97.60621**PROJECT ADDRESS** 303 E. Iron Avenue, Salina, Kansas**SURFACE ELEVATION** 1223'**CLIENT NAME** JGR Architects**ELEVATION DATUM** WGS84**DRILLED BY** M. Wold**GEOLOGY** Smoky Hills**LOGGED BY** D. Kilpatrick**GW AT TIME OF DRILLING** N.E. **GW AFTER DRILLING** N.E.**DATE COMPLETED** 07/09/2026**DEPTH** 20'

Depth (ft)	Sample Graphic	Samples		Graphic Log	Soil Description and Remarks	USCS	Laboratory Results					Elevation (ft)
		Sample Number	N-Value				MC (%)	Wet Density (pcf)	Compress Strength (ksf)	% Fines	LL-PL-PI	
5		S-1	13		TOPSOIL 0.5	CL	14.4				35-15-20	1220
		S-2	18		LEAN CLAY - brown, slightly moist, stiff, trace roots, concrete, FILL 2.5							
		S-3	5		LEAN CLAY - brown, moist, very stiff							1215
10		S-4	5		- medium stiff, else as above							
		S-5	5		- grayish brown, trace iron nodules, else as above							1210
15		S-6	3		- sandy lean clay - brown, slightly moist, medium stiff 13.5							1205
		S-6	3		- soft, else as above 20							

End of boring at 20'

LOG NAME: B-2**PROJECT NUMBER:** A26125.00474.000

**PROJECT** Theatre Salina Addition**COORDINATES** 38.84092, -97.60618**PROJECT ADDRESS** 303 E. Iron Avenue, Salina, Kansas**SURFACE ELEVATION** 1227'**CLIENT NAME** JGR Architects**ELEVATION DATUM** WGS84**DRILLED BY** M. Wold**GEOLOGY** Smoky Hills**LOGGED BY** D. Kilpatrick**GW AT TIME OF DRILLING** N.E. **GW AFTER DRILLING** N.E.**DATE COMPLETED** 07/09/2026**DEPTH** 15'

Depth (ft)	Sample Graphic	Samples		Graphic Log	Soil Description and Remarks	USCS	Laboratory Results					Elevation (ft)
		Sample Number	N-Value				MC (%)	Wet Density (pcf)	Compress Strength (ksf)	% Fines	LL-PL-PI	
5		S-1	18		TOPSOIL 0.5	CL	10.5	119.2			40-15-25	1225
		U-2	N/A		LEAN CLAY - brown, slightly moist, very stiff, trace roots, concrete, FILL 2.5							
10		S-3	17		LEAN CLAY - brown, moist, very stiff							1220
		S-4	10		- very moist, trace iron nodules, else as above							
15		S-5	7		- moist, stiff, else as above	SC	18.0					1215
					CLAYEY SAND - reddish brown, slightly moist, loose, fine grained 13.5							
					15							

End of boring at 15'

LOG NAME: B-3**PROJECT NUMBER:** A26125.00474.000



PROJECT Theatre Salina Addition **COORDINATES** 38.84086, -97.60628
PROJECT ADDRESS 303 E. Iron Avenue, Salina, Kansas **SURFACE ELEVATION** 1227'
CLIENT NAME JGR Architects **ELEVATION DATUM** WGS84
DRILLED BY M. Wold **GEOLOGY** Smoky Hills
LOGGED BY D. Kilpatrick **GW AT TIME OF DRILLING** N.E. **GW AFTER DRILLING** N.E.
DATE COMPLETED 07/09/2026 **DEPTH** 15'

Depth (ft)	Sample Graphic	Samples		Graphic Log	Soil Description and Remarks	USCS	Laboratory Results					Elevation (ft)
		Sample Number	N-Value				MC (%)	Wet Density (pcf)	Compress Strength (ksf)	% Fines	LL-PL-PI	
5		S-1	18		TOPSOIL 0.5 LEAN CLAY - brown, slightly moist, very stiff, trace concrete and roots, FILL 2.5	CL	11.3				40-20-20	1225
		S-2	14		LEAN CLAY with SAND - brown, slightly moist, stiff, trace rust stains		14.8			84.9		
		S-3	9		- as above		14.6					1220
10		S-4	12		8.5 SANDY LEAN CLAY - brown, moist, stiff		15.6					1215
15		S-5	16		13.5 POORLY GRADED SAND with CLAY - brown, slightly moist, medium dense, fine grained 15	SP-SC						

End of boring at 15'

LOG NAME: B-4

PROJECT NUMBER: A26125.00474.000

**PROJECT** Theatre Salina Addition**COORDINATES** 38.84073, -97.60628**PROJECT ADDRESS** 303 E. Iron Avenue, Salina, Kansas**SURFACE ELEVATION** 1228'**CLIENT NAME** JGR Architects**ELEVATION DATUM** WGS84**DRILLED BY** M. Wold**GEOLOGY** Smoky Hills**LOGGED BY** D. Kilpatrick**GW AT TIME OF DRILLING** N.E. **GW AFTER DRILLING** N.E.**DATE COMPLETED** 07/09/2026**DEPTH** 15'

Depth (ft)	Sample Graphic	Samples		Graphic Log	Soil Description and Remarks	USCS	Laboratory Results					Elevation (ft)	
		Sample Number	N-Value				MC (%)	Wet Density (pcf)	Compress Strength (ksf)	% Fines	LL-PL-PI		
5		S-1	15		TOPSOIL 0.5	CL	6.8				39-19-20	1225	
		S-2	17		LEAN CLAY - light brown, slightly moist, stiff, trace concrete and roots, FILL 2.5								
		S-3	16		LEAN CLAY - light brown, slightly moist, very stiff								
10		S-4	13		LEAN CLAY with SAND - brown, slightly moist, very stiff 5		11.6						1220
		S-5	13		- moist, stiff, else as above								
15		S-5	17		13.5	20.1						1215	
		S-5	17		SANDY LEAN CLAY - brown, slightly moist, very stiff, trace rust stains 15								

End of boring at 15'

LOG NAME: B-5**PROJECT NUMBER:** A26125.00474.000

**PROJECT** Theatre Salina Addition**COORDINATES** 38.84078, -97.60610**PROJECT ADDRESS** 303 E. Iron Avenue, Salina, Kansas**SURFACE ELEVATION** 1228'**CLIENT NAME** JGR Architects**ELEVATION DATUM** WGS84**DRILLED BY** M. Wold**GEOLOGY** Smoky Hills**LOGGED BY** D. Kilpatrick**GW AT TIME OF DRILLING** N.E. **GW AFTER DRILLING** N.E.**DATE COMPLETED** 07/09/2026**DEPTH** 15'

Depth (ft)	Sample Graphic	Samples		Graphic Log	Soil Description and Remarks	USCS	Laboratory Results					Elevation (ft)
		Sample Number	N-Value				MC (%)	Wet Density (pcf)	Compress Strength (ksf)	% Fines	LL-PL-PI	
5		S-1	12		TOPSOIL 0.5	CL	14.0					1225
		S-2	14		LEAN CLAY - dark brown, slightly moist, stiff, trace concrete and roots, FILL 2.5							
		S-3	6		LEAN CLAY - dark brown, moist, stiff 5							
10		S-4	4		LEAN CLAY with SAND - dark brown, moist, medium stiff 8.5	SC	12.9					1220
		S-5	8		CLAYEY SAND - brown, slightly moist, loose, fine grained 13.5							
15		S-5	8		POORLY GRADED SAND - light reddish brown, slightly moist, loose, fine grained 15	SP						1215

End of boring at 15'

LOG NAME: B-6**PROJECT NUMBER:** A26125.00474.000



PROJECT Theatre Salina Addition **COORDINATES** 38.84074, -97.60598
PROJECT ADDRESS 303 E. Iron Avenue, Salina, Kansas **SURFACE ELEVATION** 1227'
CLIENT NAME JGR Architects **ELEVATION DATUM** WGS84
DRILLED BY M. Wold **GEOLOGY** Smoky Hills
LOGGED BY D. Kilpatrick **GW AT TIME OF DRILLING** N.E. **GW AFTER DRILLING** N.E.
DATE COMPLETED 07/09/2026 **DEPTH** 15'

Depth (ft)	Sample Graphic	Samples		Graphic Log	Soil Description and Remarks	USCS	Laboratory Results					Elevation (ft)
		Sample Number	N-Value				MC (%)	Wet Density (pcf)	Compress Strength (ksf)	% Fines	LL-PL-PI	
5		S-1	12		TOPSOIL 0.5	CL	15.1					1225
		S-2	14		LEAN CLAY - brown, moist, stiff, trace concrete, trace roots, FILL 2.5							
10		S-3	12		LEAN CLAY - brown, moist, stiff							
		S-4	5		LEAN CLAY with SAND - brown, moist, stiff 5							1220
15		S-5	4		- medium stiff, else as above							1215
					SANDY LEAN CLAY - brown, moist, medium stiff 13.5		16.9			60.4		
End of boring at 15'												

LOG NAME: B-7**PROJECT NUMBER:** A26125.00474.000

**PROJECT** Theatre Salina Addition**COORDINATES** 38.84069, -97.60611**PROJECT ADDRESS** 303 E. Iron Avenue, Salina, Kansas**SURFACE ELEVATION** 1226'**CLIENT NAME** JGR Architects**ELEVATION DATUM** WGS84**DRILLED BY** M. Wold**GEOLOGY** Smoky Hills**LOGGED BY** D. Kilpatrick**GW AT TIME OF DRILLING** N.E. **GW AFTER DRILLING** N.E.**DATE COMPLETED** 07/09/2026**DEPTH** 15'

Depth (ft)	Sample Graphic	Samples		Graphic Log	Soil Description and Remarks	USCS	Laboratory Results					Elevation (ft)
		Sample Number	N-Value				MC (%)	Wet Density (pcf)	Compress Strength (ksf)	% Fines	LL-PL-PI	
5		S-1	18		TOPSOIL 0.5	CL	11.8					1225
		S-2	16		LEAN CLAY - brown, slightly moist, very stiff, trace concrete and roots, FILL 2.5							
		S-3	17		LEAN CLAY - brown, slightly moist, very stiff 5							
10		S-4	11		LEAN CLAY with SAND - brown, slightly moist, very stiff 8.5		13.8					1220
		S-5	10		SANDY LEAN CLAY - brown, slightly moist, stiff 13.5							
15		S-5	10		CLAYEY SAND - reddish brown, slightly moist, loose, fine grained, trace rust stains 15	SC	13.4					1215

End of boring at 15'

LOG NAME: B-8**PROJECT NUMBER:** A26125.00474.000



Boring Log Legend and Nomenclature

Items shown on boring logs refer to the following:

1. **Depth** - Depth below ground surface or drilling platform
2. **Sample** -Types designated by letter:
 - A* - Disturbed sample, obtained from auger cuttings or wash water.
 - S* - Split barrel sample, obtained by driving a 2-inch split-barrel sampler unless otherwise noted.
 - C* - California liner sample, obtained using a thick-walled liner sampler containing 2-inch-diameter liner tubes.
 - U* - Undisturbed sample, obtained using a thin-walled tube, 3-inch-diameter, or as noted, and open sampling head.

Recovery - Recovery is expressed as a percentage of the length recovered to the total length pushed, driven or cored.

Resistance - Resistance is designated as follows:

 - P* - Sample pushed in one continuous movement by hydraulic rig action.
 - 12* - The Standard Penetration Resistance is the number of blows for the last 12 inches of penetration of split spoon sampler, driven by a 140-pound hammer falling 30 inches.
 - 50/4"* - Number of blows to drive sampler distance shown.
3. **Soil Description** - Description of material according to the Unified Soil Classification: word description giving soil constituents, consistency or density, and other appropriate classification characteristics. Geologic name or type of deposit and other pertinent information, where appropriate, is shown under Geologic Description or other Remarks. A solid line indicates the approximate location of stratigraphic change.
4. **Lab Data** – Laboratory test data.
5. **Legend**

A.D. — After drilling	N.A. — Not Applicable
A.T.D. — At time of drilling	N.D. — Not detectable due to
C.F.A. — Continuous flight auger	drilling method
D.W.L. — Drill water loss	N.E. — None encountered
D.W.R. — Drill water return	N.R. — Not recorded
E.D. — End of drilling	R.Q.D. — Rock quality designation
H.B. — Hole backfilled	R.W.B. — Rotary wash boring
6. **Limitations** - The lines between materials shown on the boring logs represent approximate boundaries between material types and the changes may be gradual. Water level readings shown on the logs were made at the time and under the conditions indicated. Fluctuations in the water levels may occur with time. The boring logs in this report are subject to the limitations, explanations and conclusions of this report.


UNIFIED SOIL CLASSIFICATION SYSTEM

GROUP NAME	GROUP SYMBOL	SOIL DESCRIPTION	COMMENTS
Peat	Pt	Highly Organic Soils	50% or More Is Smaller than No. 200 Sieve
Fat Clay	CH	Clay - Liquid Limit => 50*	
Elastic Silt	MH	Silt - Liquid Limit => 50*	
Lean Clay	CL	Clay - Liquid Limit < 50*	
Silt	ML	Silt - Liquid Limit < 50*	
Silty Clay	CL-ML	Silty Clay*	
Clayey Sand	SC	Sands with 12 to 50 Percent Smaller than No. 200 Sieve	More than 50% Is Larger than No. 200 Sieve and % Sand > % Gravel
Silty Sand	SM		
Poorly-Graded Sand with Clay	SP-SC	Sands with 5 to 12 Percent Smaller than No. 200 Sieve	
Poorly-Graded Sand with Silt	SP-SM		
Well-Graded Sand with Clay**	SW-SC		
Well-Graded Sand with Silt**	SW-SM		
Poorly-Graded Sand	SP	Sands with Less than 5	
Well-Graded Sand**	SW	Percent Smaller than No. 200	
Clayey Gravel	GC	Gravels with 12 to 50 Percent Smaller than No. 200 Sieve	More than 50% Is Larger than No. 200 Sieve and % Gravel > % Sand
Silty Gravel	GM		
Poorly-Graded Gravel with Clay	GP-GC	Gravels with 5 to 12 Percent Smaller than No. 200 Sieve	
Poorly-Graded Gravel with Silt	GP-GM		
Well-Graded Gravel with Clay**	GW-GC		
Well-Graded Gravel with Silt**	GW-GP		
Poorly-Graded Gravel	GP	Gravels with Less than 5	
Well-Graded Gravel**	GW	Percent Smaller than No. 200	

*See Plasticity Chart for definition of silts and clays. If organic, use OL or OH.

**See definition of well-graded

PLASTICITY CHART

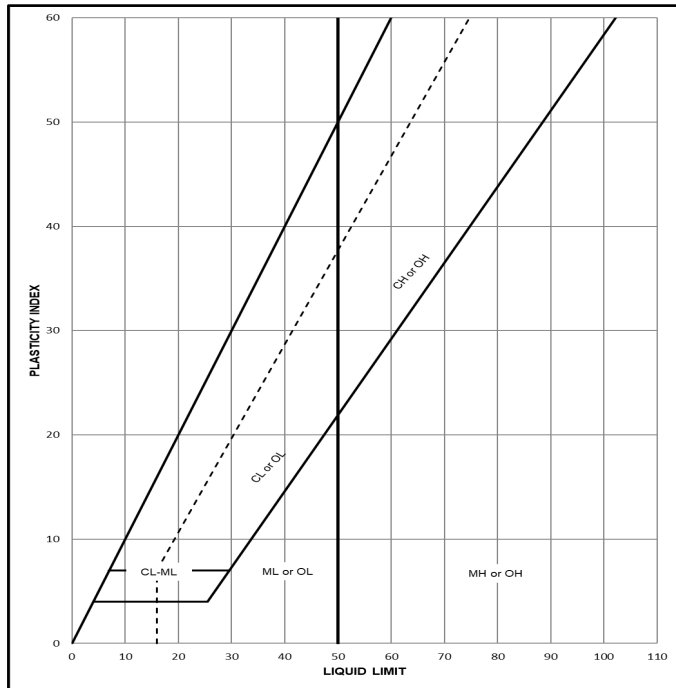

LEGEND OF TERMS

MOISTURE CONDITIONS

Dry, Slightly Moist, Moist, Very Moist, Wet (Saturated)

SOIL CONSISTENCY

Fine-Grained Soils

Description	SPT (N)	UCS (q_u , tsf)
Very Soft	0-2	0-0.25
Soft	2-4	0.25-0.50
Medium Stiff	4-8	0.50-1.0
Stiff	8-16	1.0-2.0
Very Stiff	16-30	2.0-4.0
Hard	>30	>4.0

Coarse-Grained Soils

Description	SPT (N)
Very Loose	0-4
Loose	4-10
Medium Dense	10-30
Dense	30-50
Very Dense	>50

CLASSIFICATION OF SANDS & GRAVELS

Boulders	Cobbles	Coarse Gravel	Fine Gravel	Coarse Sand	Medium Sand	Fine Sand	Fines (Silt or Clay)
10"	3"	3/4"	#4	#10	#40	#200	

Well-Graded Sands (SW): $C_u \geq 6$ and $1 \leq C_c \leq 3$

Well-Graded Gravels (GW): $C_u \geq 4$ and $1 \leq C_c \leq 3$





APPENDIX C

Field & Laboratory Test Results

SUMMARY OF FIELD AND LABORATORY TESTS

BORING NO.	SAMPLE NO.	SAMPLE DEPTH (ft.)	DIA. (in.)	MOISTURE CONTENT (%)	UNIT WEIGHT		VOID RATIO (e)	SAT. (%)	UNCONF. COMPR. STR. (ksf)	ATTERBERG LIMITS			PASS NO. 200 (%)	SPT "N" (blows /ft)	USCS SOIL CLASS.
					WET (pcf)	DRY (pcf)				LL	PL	PI			
B-1	S-1	0.5-2.0		13.9										11	CL
	S-2	2.5-4.0		20.1										12	CL
	U-3	5.0-7.0	2.83	31.2	114.1	87.0	0.901	92	11.79					N/A	CL
	S-4	8.5-10.0		27.8						38	15	23		10	Sandy CL
	S-5	13.5-15.0		11.5									50.6	7	Sandy CL
	S-6	18.5-20.0												12	Sandy CL
B-2	S-1	0.5-2.0		14.4										13	CL
	S-2	2.5-4.0		20.8						35	15	20		18	CL
	S-3	5.0-6.5		17.1										5	CL
	S-4	8.5-10.0		23.8										5	CL
	S-5	13.5-15.0												5	Sandy CL
	S-6	18.5-20.0												3	Sandy CL
B-3	S-1	0.5-2.0		10.5										18	CL
	U-2	2.5-4.5	2.77	17.1	119.2	101.8	0.624	73						N/A	CL
	S-3	5.0-6.5		26.2										17	CL
	S-4	8.5-10.0		18.0						40	15	25		10	CL
	S-5	13.5-15.0												7	SC
B-4	S-1	0.5-2.0		11.3						40	20	20		18	CL
	S-2	2.5-4.0		14.8									84.9	14	CL w/ Sand
	S-3	5.0-6.5		14.6										9	CL w/ Sand
	S-4	8.5-10.0		15.6										12	Sandy CL
	S-5	13.5-15.0												16	SP-SC
B-5	S-1	0.5-2.0		6.8						39	19	20		15	CL
	S-2	2.5-4.0		8.8										17	CL
	S-3	5.0-6.5		11.6										16	CL w/ Sand
	S-4	8.5-10.0		20.1										13	CL w/ Sand
	S-5	13.5-15.0												17	Sandy CL
B-6	S-1	0.5-2.0		14.0										12	CL
	S-2	2.5-4.0		18.3										14	CL
	S-3	5.0-6.5		15.6										6	CL w/ Sand
	S-4	8.5-10.0		12.9										4	SC
	S-5	13.5-15.0												8	SP-SC
B-7	S-1	0.5-2.0		15.1										12	CL
	S-2	2.5-4.0		17.3										14	CL
	S-3	5.0-6.5		16.6										12	CL w/ Sand
	S-4	8.5-10.0		16.9										5	CL w/ Sand
	S-5	13.5-15.0		16.9									60.4	4	Sandy CL



UES Professional
Solutions 25, LLC
4503 E. 47th Street South
Wichita, KS 67210
(316) 554-0725
www.teamUES.com

PROJECT
Theatre Salina Additions

LOCATION
Salina, Kansas

PROJECT NUMBER
A26125.00474.000

DATE
August 4, 2026

[illegible]

LIST OF DRAWINGS

General

	Cover	CFP2	Code Footprint
	Survey	ADA	ADA Diagrams
CFP1	Code Footprint		

Civil

C01	Demolition Plan	C04	Detail Sheet
C02	Site and Utility Plan	C05	Detail Sheet
C03	Grading & Erosion Control Plan		

Demolition

D1.1	Demolition Site Plan	D2.1	Demolition Floor Plans
D1.2	Photographs	D2.2	Photographs

Architectural

A1.1	Site Plan	A4.10	Wall Sections
A1.2	Enlarged Site Plan	A4.11	Wall Sections
A2.1	Main Level Floor Plan	A4.12	Wall Sections
A2.2	Stage Level Floor Plan	A4.13	Details
A2.3	Basement Level & Second Level Floor Plans	A4.14	Details
A3.1	Exterior Elevations	A5.1	Roof Plan
A3.2	Exterior Elevations	A5.2	Details
A3.3	Building Sections	A6.1	Stair Plans & Section
A3.4	Building Sections	A6.2	Stair Sections
A3.5	Building Sections	A6.3	Stair Sections
A4.A	Wall Section Key Plan	A7.1	Partial Main & Stage Level Reflected Ceiling Plan
A4.B	Existing Wall Sections	A8.1	Enlarged Restroom Plan & Interior Elevations
A4.C	Existing Wall Sections	A9.1	Partial Main & Stage Level Floor Finish Plan
A4.1	Wall Sections	A9.2	Interior Elevations
A4.2	Wall Sections	A9.3	Interior Elevations
A4.3	Wall Sections	A9.4	Interior Elevations
A4.4	Wall Sections	A9.5	Interior Elevations
A4.5	Wall Sections	A9.6	Casework Elevations & Sections
A4.6	Wall Sections	A10.1	Finish, Door & Window Schedules
A4.7	Wall Sections	A10.2	Details
A4.8	Wall Sections		
A4.9	Wall Sections		

Structural

S0.1	Structural General Notes	S3.4	Sections
S0.2	Standard Details	S3.5	Sections
S0.3	Standard Details	S3.6	Sections
S2.1	Basement Foundation Plan	S3.7	Sections
S2.2	Stage Level foundation & Framing Plan	S3.8	Sections
S2.3	Main Level Foundation & Second Level Framing Plan	S3.9	Sections
S2.4	Roof Framing Plan	S4.1	Bracing Sections
S3.0	Typical Details	S4.2	Bracing Sections
S3.1	Sections	S4.3	Bracing Sections
S3.2	Sections	S4.4	Bracing Sections
S3.3	Sections		

Mechanical

ME1.1	Mechanical Electrical Demolition	PP1.2	Drain and Vent Main Floor Plan
ME 1.2	Mechanical Electrical Roof Plan	PP1.3	Domestic Water and Gas – Main Level Floor Plan
M0.1	Mechanical Legend	PP6.1	Schedules and Details
PP1.1	Drain and Vent Underfloor Plan	PP9.1	Water, Waste, and Vent Riser Diagrams
M1.1	Level 1 HVAC Plan		
M6.1	Mechanical Schedules		
PP0.1	Plumbing Legend		

Electrical

E0.1	Electrical Legend and Notes	EL1.2	Lighting Plan Main Level Floor Plan
E6.1	Fixture and Panelboard Schedules	EP1.1	Power Plans Basement and Stage Level
EL1.1	Lighting Plans – Basement and Stage Level	EP1.2	Power Plans Main Level

SECTION 01010

GENERAL WORK REQUIREMENTS

1. **GENERAL**
Should conflict occur between these General Work Requirements and the General Conditions, the requirements of this Section take precedence.
2. **INTENT OF DOCUMENTS**
The Contract Drawings are complementary and what is called for by anyone shall be as binding as if called by all. The intention of the documents is to include all labor and materials, equipment and transportation necessary for the proper execution of the work.
3. **MANUFACTURER'S DIRECTIONS**
All manufactured articles, materials and equipment shall be applied, installed, connected, erected, used, cleaned and conditioned as directed by the manufacturers, unless herein specified to the contrary.
4. **BUILDING PERMIT**
As stated in Subparagraph 4.7.1, AIA DOCUMENT A201, General Conditions, the General Contractor shall secure and pay for the building permit.
5. **CONSTRUCTION COORDINATION**
Before starting construction, a meeting shall be held with Contractor(s), Architect, and Consulting Engineers in attendance to plan and coordinate the schedule of construction and to review intent of Contract Documents. Contractor(s) shall follow instructions received at meeting in prosecuting the Work.
6. **MATERIALS - EQUIPMENT - SUBSTITUTION**
 - A. In general, these Specifications identify the required materials and equipment by naming one or more manufacturers, brand, model, catalog number, and/or other identification; the first-named manufacturer's product used as a basis for design; the other named brands considered equivalent. Equivalent brand manufacturers named must furnish products consistent with the Specifications for the first-named product, as determined by the Architect. Base Bid shall include only those brands named and must be used on the project, except as hereinafter provided.
 - B. Hazardous Materials are prohibited from this project and any equipment specified. All materials, systems, and/or equipment must not contain hazardous materials in excess of the US EPA criteria.
 - C. Materials or equipment specified exclusively, Base Bid shall be based on same and used on project, except as hereinafter provided.
 - D. Prior to receipt of bids, should Contractor wish to incorporate in Base Bid, brands or products other than those named in the Specifications, he shall submit written request for substitution to Architect not later than seven (7) days prior to date bids are due. Architect will consider request and items approved will be listed in an addendum issued to all bidders.
 - E. After execution of Contract, substitution of product brands for those named in the Specifications will be considered, only if request is received within thirty (30) days after Contract Date and request includes showing credit due Owner.
 - F. Materials specified equivalent and those proposed for substitution must be equal or better than first-named material in construction, efficiency, utility, aesthetic design, and physical size shall not be larger than space provided for it. Request for substitution by full description and technical data in two (2) copies, including manufacturer's name, model, catalog number, photographs or cuts, physical dimensions, operating characteristics, and any other information for comparison.
 - G. Owner reserves the right:
 - 1) To require any or all bidders, before execution of Contract, to state what materials they will use.
 - 2) To require "if bound with the Bid Form," the Contractor to fill out a BID SUPPLEMENT listing the BASE BID and "ADD" or "DEDUCT" for other materials he proposes to use.
7. **APPROVAL OF SUBCONTRACTORS - MATERIALS**
 - A. The Contractor, if requested, must submit for approval before signing Agreement, list of Subcontractors and material suppliers enumerating items of work to be performed, name of materials, equipment, etc., to be furnished and/or installed. Refer to Paragraph - MATERIALS - EQUIPMENT - SUBSTITUTION.
 - B. If the list is not requested prior to signing of Agreement, list, as described in previous paragraph, shall be furnished within ten (10) days of signing Agreement.

8. PROTECTION - Supplement, ARTICLE 10, AIA GENERAL CONDITIONS
- A. Refer to Paragraph - WEATHER CONDITIONS.
 - B. Each Contractor shall assume responsibility for their materials stored on the premises.
 - C. General Contractor shall take charge and assume general responsibility for proper protection of project during construction.
 - D. The General Contractor shall protect trees, shrubs, lawns, and all landscape from damage, providing guards and covering. Damaged work shall be repaired or replaced at their expense. Protect streets and sidewalks and make repairs at their expense.
 - 1) Water Protection. The General Contractor shall, at all times, protect the excavation, trenches, and/or the building from damage by rain water, spring water, ground water, backing up of drains or sewers and all other water. They shall provide all pumps and equipment and enclosures to provide this protection.
 - 2) Bracing, Shoring, and Sheeting. The General Contractor shall provide all shoring, bracing and sheeting as required for safety and for the proper execution of the work and have same removed when the work is completed.
 - 3) Guard Lights. The General Contractor shall provide and maintain guard lights at all barricades, railings, obstructions in the streets, roads or sidewalks and at all trenches or pits adjacent to public walks or roads.
 - 4) Weather Conditions. The General Contractor shall, at all times, provide protection against weather; rain, winds, storms, frost, or heat, so as to maintain all work, materials, apparatus, and fixtures, free from injury or damage. At the end of the day's work, all new work likely to be damaged shall be covered.
9. WEATHER CONDITIONS
- The Contractor shall protect all portions of their work and all materials, at all times from damage by water, freezing, frost and is to repair, replace and make good to the satisfaction of the Architect, any portion of same which may in the Architect's opinion, have been damaged by the elements.
10. GRADES, LINES, LEVELS, AND SURVEYS
- The Owner will establish the lot lines, restrictions and a bench mark. All other grades, lines, levels, and bench marks shall be established and maintained by the General Contractor, who shall be responsible for same. The General Contractor shall verify all grades, lines, levels, and dimensions as shown on the Drawings and they shall report all errors or inconsistencies in the above to the Architect before commencing work.
- A. The General Contractor shall provide and maintain well-built batter boards at all corners. They shall establish bench marks in not less than two (2) widely separated places. As the work progresses, he shall establish bench marks at each floor, giving exact levels of the various floors.
 - B. As the work progresses, the General Contractor shall lay out in the forms and the rough flooring the exact location of all partitions as a guide to all trades.
 - C. The General Contractor shall verify all grades, lines, levels, and dimensions as shown on the Drawings and they shall report any errors or inconsistencies in the above to the Architect before commencing work.
11. REQUIREMENTS IMMEDIATELY AFTER EXECUTION OF CONTRACT
- Immediately after execution of the Contract, the Contractor shall deliver to the Architect the following items which are described more fully in following Articles:
- Schedule of Values
 - Schedule of Operations
 - Progress Charts
 - Samples
 - Superintendent's name and resume of experience
 - List of Subcontractors and Material Suppliers
- A. Schedule of Values on AIA Form G702, or other form approved by the Architect, a detailed breakdown of the Contract Sum indicating the amounts allotted to the various divisions of the work for labor and material. The schedule will serve as a guide to the Architect in determining the amounts due each month as the work progresses. The schedule shall be broken down as directed by the Architect.

- B. Schedule of Operations based on the above Schedule of Values and indicating the progress of the work up to the first day of each month shall be prepared by the Contractor in a form approved by the Architect and shall be delivered to the Architect in duplicate with each application for payment.
- C. Progress Charts based on the above specified schedule of operations and indicating the progress of the work up to the first day of each month shall be prepared by the Contractor in a form approved by the Architect and shall be delivered to the Architect in duplicate with each application for payment. Progress charts shall be in the form of a bar graph. Along with progress charts the Contractor shall provide an estimated monthly cash flow chart.

12. CONSTRUCTION PROCEDURE

- A. Each Contractor shall schedule their work so as to cause a minimum of interference with business operations during all of the construction work.
- B. Precautions and Cooperation
 - 1) Notify the Owner 7 days in advance before any utility (natural gas, water, electricity, or sewer) is to be interrupted.
 - 2) With proper notification, interruption in utilities up to 4 hours will be permitted without special provisions by the Contractor. *If any interruption of a utility exceeds 4 hours the Contractor must make arrangements for temporary alternate utility service.
 - 3) Interruption of utilities must be coordinated with the Owner with changeovers and out of service at night. Weekend and evening changeovers of utilities shall occur with no additional cost to the Owner.
 - 4) Openings to be cut in existing exterior walls must be saw cut. No jackhammer work will be permitted. Notify the Owner 7 days in advance of cutting of exterior walls.

13. TIME EXTENSIONS ADVERSE WEATHER

- A. The Contractor shall comply with all provisions of the General Conditions in submitting any request for extension of Contract Time due to unusually severe weather.
- B. Definitions:
 - 1. Adverse Weather - Atmospheric conditions at a definite time and place which are unfavorable to construction activities.
 - 2. Unusually Severe Weather - Weather which is more severe than the adverse weather anticipated for the season, location, or activity involved.
- C. In order for any request of time extension due to unusually severe weather to be valid, the Contractor must document both of the following conditions.
 - 1. The weather experienced at the project site during the Contract period is more severe than the adverse weather anticipated for the project location during any given month.
 - 2. The unusually severe weather actually caused a delay to the completion of the project. The delay must be beyond the control and without fault or negligence by the Contractor.
- D. The following schedule of monthly anticipated adverse weather delays will constitute the baseline for monthly weather time evaluations. The Contractor's Progress Schedule must reflect these anticipated adverse weather delays in all weather-affected activities:
MONTHLY ANTICIPATED ADVERSE WEATHER DELAY WORK DAYS BASED ON FIVE (5) DAY WORK WEEK.

<u>JAN</u>	<u>FEB</u>	<u>MAR</u>	<u>APR</u>	<u>MAY</u>	<u>JUN</u>	<u>JUL</u>	<u>AUG</u>	<u>SEP</u>	<u>OCT</u>	<u>NOV</u>	<u>DEC</u>
10	8	7	6	7	7	5	5	5	4	5	9

END OF SECTION 01010

SECTION 01019
SPECIAL PROVISIONS

1. GENERAL
Should conflict occur between these Special Provisions and the General Conditions, the requirements of the Special Provisions shall take precedence.
2. TIME OF CONSTRUCTION – PENALTY CLAUSE
 - a. Time of Construction - The Contractor will commence the work within ten (10) days after the Architect shall have given the Contractor written notice to commence construction to the satisfaction of the Owner within the calendar days as stated in Paragraph 3, below. The time for completion herein set forth shall be extended for the period of any reasonable delay which is due exclusively to causes beyond the control and without the fault of the Contractor, including acts of God, fires, floods, and direction by the Architect. It is impractical to perform any operation of construction and acts of omissions of the Owner with respect to matters for which Owner is solely responsible; provided, however, that no such extension of time for completion shall be granted the Contractor, unless within ten (10) days after the happening of any event relied upon by the Contractor for such extension of time, the Contractor shall have made a request, therefore, in writing to the Architect. Extended time will be submitted with pay request for Owner's approval.
 - b. Penalty Clause - The time of completion of the construction of the project is of the essence of this Contract. Should the Contractor neglect, refuse, or fail to complete the project (100%) within the time herein agreed upon, after giving effect to extensions of time, if any, herein provided; the Owner shall have the right to deduct from and retain out of such money, which may then be due or which may become due and payable to the Contractor, the sum of TWO HUNDRED DOLLARS (\$200.00) per day for each and every day that such construction is delayed in its completion beyond the specified time. If the amount due and to become due from the Contractor to the Owner is insufficient to pay in full any such penalties, the Contractor shall pay to the Owner the amount necessary to effect such payment in full; provided, however, that the Owner shall promptly notify the Contractor in writing of the manner in which the amount retained, deducted or claimed. No award is given to the Contractor for early completion.
 - c. Joint Responsibility - The General Contractor and/or Subcontractors causing the delay in completion of the project shall be responsible for payment of the penalty. In no case shall the total penalty for all contracts exceed the sum of daily penalty multiplied by the number of days of delay in completion.
3. WORK SEQUENCE, SCHEDULE FOR COMPLETION AND LIQUIDATED DAMAGES
 - a. Schedule requirements for each area are outlined as follows.

Work	Available Start	Substantial Completion	Liquidated Damages
Interior Stage Renovation	November 1, 2026	September 1, 2027	\$200/Calendar Day
New Addition	December 1, 2026	September 1, 2027	\$200/Calendar Day
 - b. Schedule requirements for final completion – 30 days following substantial completion with liquidated damages equivalent to those identified for substantial completion.
 - c. Stage area Renovation may be completed in stages as allowed by the Theatre Salina Main Stage performance schedule. Available dates for work at the main stage for renovation/expansion are:
October 11-31, 2026
December 21, 2026-January 29, 2027
May 3 – 21 2027
July 12 - August 13, 2027
4. ALTERNATES - Refer to Alternate Schedule, Section 01030
 - a. Alternates specified are not a part of Base Bid, but are Alternates to same, their acceptance being at option of Owner.
5. CASH ALLOWANCES
 - a. Costs included in Allowances: Cost of Product to Contractor or Subcontractor, less applicable trade discounts, delivery to site, except those taxes saved by use of Owner's tax exemption.
 - b. Costs Not Included in the Allowance: Fees for overhead and profit, product handling at the site, including unloading, uncrating, and storage; protection of Products from elements and from damage and labor for installation and finishing.
 - c. Architect Responsibilities:
 1. Consult with Contractor in consideration and selection of Products, suppliers and installers.
 2. Select Products in consultation with Owner and transmit decision to Contractor.
 3. Prepare Proposal Requests and Change Orders.

- d. Contractor Responsibilities:
 - 1. Assist Architect/Engineer in selection of Products, suppliers and installers.
 - 2. Obtain proposals from suppliers and installers and offer recommendations.
 - 3. On notification of selection by Architect, execute purchase agreement with designated supplier and installer.
 - 4. Arrange for and process shop drawings, product data, and samples. Arrange for delivery.
 - 5. Promptly inspect Products upon delivery for completeness, damage, and defects. Submit claims for transportation damage.
 - 6. Product handling at the site, including unloading, uncrating and storage, protection of Products from elements and from damage and labor for installation and finishing.
 - 7. The Contractor shall include in his Bid all fees for all cash allowances.
- e. Funds will be drawn from Cash Allowances only by written authorization from Owner (District).
- f. Cash Allowances:
 - 1. Section 08710 Door Hardware. Note this allowance is to include hardware for doors and frames, excluding overhead doors. **Amount \$25,000.00.**
 - 2. Section 10850 Building Specialties, Interior Building Signage. **Amount \$15,000.00.**
 - 3. Inspection and Testing Allowance – The contractor shall include in his bid, an allowance of **\$20,000.00** for direct cost of testing by the approved testing companies. The contractor shall bear all costs associated with coordination, administration scheduling, and supervision of testing companies, and include those costs in his bid.
 - 4. Contingency Allowance – In addition to the specification sections listed above, include an allowance of **\$50,000.00** in the general bid and contract amount to be included in the contractors base bid. This allowance shall be used at the sole discretion of the Architect and/or Owner specifically for hidden conditions discovered in the field or on site, the addition of labor, parts and/or materials required for timely completion in conjunction with the general scope of work.
 - 5. Gas Utility Relocation Allowance – The contractor shall include an allowance for the relocation of the gas service to the NE corner of the existing building. **Amount \$16,000.00.**

6. **ENUMERATION OF DRAWINGS AND SPECIFICATIONS**

- a. Correlation. Accompanying these Specifications are the Drawings, which jointly with these Specifications, are intended to explain each other and describe and coordinate the work to be performed under the Contract.
- b. Verification of Documents. Before submitting his bid, each Bidder shall check his set(s) of Drawings and Specifications and advise the Architect if any sheets are missing.
- c. Specifications Explanations. For convenience of reference, the Specifications are separated into Titled Divisions and Sections. Such separation shall not, however, operate to make the Architect an arbiter to establish limits between the Contractor and Subcontractor or Sub-Subcontractor.
- d. Drawings. Refer to LIST OF DRAWINGS.
- e. Specifications. Refer to TABLE OF CONTENTS.

7. **WARRANTIES**

Before being eligible for final payment, Contractor shall deliver to Owner, through Architect, all special warranties specified for materials, equipment and installation.

8. **OPERATING INSTRUCTIONS**

Before being eligible for final payment, Contractor shall deliver to Owner, through Architect, three (3) copies of manufacturer's operating and maintenance instructions, and one (1) CD/DVD containing complete set or manufacturers operating instructions, a complete set of shop drawings on each piece of equipment. Electronic files shall be in PDF format with files organized into single documents for Architectural, Mechanical, and Electrical divisions.

9. **AS-BUILT DRAWINGS**

Before being eligible for final payment, the Electrical and Mechanical Contractors shall prepare and deliver to Owner, through Architect, One (1) CD/DVD containing AS-BUILT DRAWINGS in PDF format. These drawings shall consist of marked-up prints, and shall show the correct location of every item of equipment, piping, conduit, panel boards, ductwork, switches, valves, etc. If marked-up prints are used, and scanned, they shall be new white prints without miscellaneous markings. All markings shall be clearly legible and identified.

10. **CERTIFICATE OF COMPLIANCE**

Upon completion of project, Contractor is to furnish written Certification to the Architect that he has complied with every paragraph of the Specifications and Drawings.

11. **CONTRACTOR'S AFFIDAVIT OF RELEASE OF LIENS**

Upon completion of project, Contractor shall submit to Owner a signed Contractor's Affidavit of Release of Liens prior to final payment.

12. **CONTRACTOR'S MONTHLY APPLICATION FOR PAYMENT FORM**
Contractor's monthly Application for Payment shall be submitted as per General Conditions. AIA Document G702, Application and Certificate for Payment is approved and acceptable.
13. **FILING AND RECORDING OF BONDS**
In addition to furnishing the number of combination Performance Bond and Labor and Materials Payment Bond, and Statutory Bond, if required, the Contractor shall file copies of such bonds with Clerk of the District Court and furnish Architect with receipt furnished by Clerk of the District Court, covering charges for filing and recording of said bonds.
14. **STATUTORY BONDS**
In addition to furnishing the combination Performance and Labor and Materials Payment Bond specified in General Conditions, the Contractor shall furnish Statutory Bond in an amount not less than 100% of the Agreement in such numbers and form stated in Sample Copy bound in the Specifications. Statutory Bond shall be filed and recorded with Clerk of the District Court, as specified in Paragraph - FILING AND RECORDING OF BONDS.
15. **DOCUMENTS FURNISHED CONTRACTORS**
The General Contractor will be furnished, free of charge, the following working drawings and specifications, including modifications for construction of the project - 20 sets. The General Contractor will be responsible for distribution of these sets to the Subcontractors and suppliers. The Contractor shall pay the actual cost of reproduction and postage for all additional sets requested by him.
16. **TESTING AND INSPECTIONS**
a. The General Contractor shall be responsible for coordination and scheduling of all inspections and testing as required by the Contract documents. The Contractor shall include a testing and inspection allowance in his bid as described in paragraph 5.f.3 of this section. The Contractor shall pay all costs associated with testing and all direct costs from the testing/inspection company and shall be deducted from the testing and inspection allowance. Re-testing/ inspection costs associated with incorrect or defective work shall be paid by the Contractor and such costs are not to be deducted from the allowance.
b. All sampling and testing procedures shall be performed by the inspection company responsible for inspection and testing.
17. **SALES TAX EXEMPTIONS**
a. Materials and equipment incorporated into this project **are not exempt** from the payment of sales tax under the laws of the State of Kansas and such sales tax **shall be included in the Bid** of the Bidder.
b. The Owner will provide the Contractor with a proper exemption certificate within twenty (20) days of the Contract date.
1) Should the Owner fail to provide an exemption certificate within the required time period, the Contractor shall be reimbursed monthly for all sales tax amounts for which he becomes liable until such certificate is provided.
2) To minimize the Contractor's record keeping expense, the Owner shall provide an exemption certificate within sixty (60) days or it shall be presumed that the project will proceed on a non-exempt basis, and the Contract amount shall be equitably adjusted in writing in a lump sum amount sufficient to cover the Contractor's sales tax expense.
3) Upon issuance of a proper exemption certificate to the Contractor, the Contractor shall assume full responsibility for his own proper use of the certificate, and shall pay all costs of any legally assessed penalties relating to the Contractor's use of the exemption certificate.

END OF SECTION 01019

SECTION 01030

ALTERNATES

PART 1 – GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for alternates.

1.3 GENERAL

- 1. The General Contractor shall state in his Bid Form the amount of dollars to be ADDED or DEDUCTED from his Base Bid for the following Alternates.
- 2. Alternates are not in order of acceptance.
- 3. It shall be the responsibility of the General Contractor to advise all necessary personnel and suppliers as to the nature and extent of all alternates selected by the owner.
- 4. Circle Add or Deduct to indicate that the alternate price is to be added or subtracted from the base bid.

1.4 DEFINITIONS

- A. Alternate: An amount proposed by bidders and stated on the Bid Form for certain work defined in the Bidding Requirements that may be added to or deducted from the Base Bid amount if Owner decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.
 - 1. The cost or credit for each alternate is the net addition to or deduction from the Contract Sum to incorporate alternate into the Work. No other adjustments are made to the Contract Sum.

1.5 PROCEDURES

- A. Coordination: Modify or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.
 - 1. Include as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation whether or not indicated as part of alternate.
- B. Notification: Immediately following award of the Contract, notify each party involved, in writing, of the status of each alternate. Indicate if alternates have been accepted, rejected, or deferred for later consideration. Include a complete description of negotiated modifications to alternates.
- C. Execute accepted alternates under the same conditions as other work of the Contract.
- D. Schedule: A Schedule of Alternates is included at the end of this Section. Specification Sections referenced in schedule contain requirements for materials necessary to achieve the work described under each alternate.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULE OF ALTERNATES

1. ALTERNATE NO. 1

The Contractor shall state the amount of dollars to be added/deducted to the base bid for all work associated with installation of EIFS at the dance studio façade in lieu of ACM panels.

Add/Deduct \$ _____

2. ALTERNATE NO. 2

The Contractor shall state the amount of dollars to be deducted to the Base Bid for all work, labor and materials, associated with eliminating the painting the steel structure, and ductwork, conduit, piping, etc. at the Backstage Addition.

Add/Deduct \$ _____

3. ALTERNATE NO. 3

The Contractor shall state the amount of dollars to be added/deducted to the Base Bid for all work, labor and materials, associated with EIFS system warranty of 20 years. This shall include all material substrate and vapor barrier requirements required by the manufacturer for the 20 year warranty.

Add/Deduct \$ _____

4. ALTERNATE NO. 4

The Contractor shall state the amount of dollars to be added/deducted to the Base Bid for all work, labor and materials, associated with the installation of the Dance Studio Floor.

Add/Deduct \$ _____

5. ALTERNATE NO. 5

The Contractor shall state the amount of dollars to be added/deducted to the Base Bid for all work, labor and materials, associated with... (applicable only for alternates added by addendum)

Add/Deduct \$ _____

END OF SECTION 01030

SECTION 01270

UNIT PRICES

PART 1 - GENERAL

1. GENERAL

- A. Work contemplated under various proposed Unit Prices shall include all labor, materials, equipment and services necessary for, or incidental to, completion of all Work under each item.
- B. Unit Prices shall comply with similar conditions of the Drawings and Specifications provided under the Base Bid.
- C. Furnish separate Bids for each Unit Price in the space provided on the Form of Bid stating the amount to ADD to the Base Bid in the event of acceptance.
- D. Each Unit Price proposed shall include all ultimate costs for all omissions, additions, substitutions and adjustments made by all trades involved.

2. UNIT PRICES

- A. Unit Prices generally will not be considered in determining the lowest responsible Bidder for the Project. However, if the Owner feels the low Bidder has submitted an inordinately high unit price, it may factor in an estimated number of units and calculate the total unit prices. If this is done, the lowest responsible bidder will be determined by comparing the Base Bid, Alternates if any, and the Unit Price calculation.
- B. Unit Prices shall be as listed below:
 - 1. UNIT PRICE NO. 1
Remove unsuitable soil and replace with low volume change material. Existing unsuitable soil shall be excavated and removed from site. New material shall meet the requirements of the geotechnical report. New material shall be placed in lifts as required by the geotechnical report. The Base Bid shall include all removal, replacement, and conditioning as identified by the geotechnical report. The unit pricing is for incidental areas that are not identified, described, or could not be interpreted from the geotechnical investigation.

Add \$ _____ /C.Y.

END OF SECTION 01270

SECTION 013516

ALTERATION PROJECT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes special procedures for alteration work.

1.2 DEFINITIONS

- A. Alteration Work: This term includes remodeling, renovation, repair, and maintenance work performed within existing spaces or on existing surfaces as part of the Project.
- B. Consolidate: To strengthen loose or deteriorated materials in place.
- C. Design Reference Sample: A sample that represents the Architect's prebid selection of work to be matched; it may be existing work or work specially produced for the Project.
- D. Dismantle: To remove by disassembling or detaching an item from a surface, using gentle methods and equipment to prevent damage to the item and surfaces; disposing of items unless indicated to be salvaged or reinstalled.
- E. Match: To blend with adjacent construction and manifest no apparent difference in material type, species, cut, form, detail, color, grain, texture, or finish; as approved by Architect.
- F. Refinish: To remove existing finishes to base material and apply new finish to match original, or as otherwise indicated.
- G. Repair: To correct damage and defects, retaining existing materials, features, and finishes. This includes patching, piecing-in, splicing, consolidating, or otherwise reinforcing or upgrading materials.
- H. Replace: To remove, duplicate, and reinstall entire item with new material. The original item is the pattern for creating duplicates unless otherwise indicated.
- I. Replicate: To reproduce in exact detail, materials, and finish unless otherwise indicated.
- J. Reproduce: To fabricate a new item, accurate in detail to the original, and from either the same or a similar material as the original, unless otherwise indicated.
- K. Retain: To keep existing items that are not to be removed or dismantled.
- L. Strip: To remove existing finish down to base material unless otherwise indicated.

1.3 PROJECT MEETINGS FOR ALTERATION WORK

- A. Preliminary Conference for Alteration Work: Before starting alteration work, **General Contractor will conduct** conference at **Project site**.
 - 1. Attendees: In addition to representatives of Owner, **General Contractor**, Architect, and Contractor, shall be represented at the meeting.
 - 2. Agenda: Discuss items of significance that could affect progress of alteration work, including review of the following:
 - a. Fire-prevention plan.
 - b. Governing regulations.
 - c. Areas where existing construction is to remain and the required protection.
 - d. Hauling routes.
 - e. Sequence of alteration work operations.
 - f. Storage, protection, and accounting for salvaged and specially fabricated items.
 - g. Existing conditions, staging, and structural loading limitations of areas where materials are stored.
 - 3. Reporting: **General Contractor** will record conference results and distribute copies to everyone in attendance and to others affected by decisions or actions resulting from conference.

- B. Coordination Meetings: Conduct coordination meetings specifically for alteration work at **bi-weekly** intervals. Coordination meetings are in addition to specific meetings held for other purposes, such as progress meetings and pre-installation conferences.
 - 1. Agenda: Review and correct or approve minutes of previous coordination meeting. Review other items of significance that could affect progress of alteration work. Include topics for discussion as appropriate to status of Project.
 - 2. Reporting: Record meeting results and distribute copies to everyone in attendance and to others affected by decisions or actions resulting from each meeting.
- 1.4 MATERIALS OWNERSHIP
- A. Historic items, relics, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, antiques, and other items of interest or value to Owner that may be encountered or uncovered during the Work, regardless of whether they were previously documented, remain Owner's property.
- 1.5 QUALITY ASSURANCE
- A. Title X Requirement: Each firm conducting activities that disturb painted surfaces shall be a "Lead-Safe Certified Firm" according to 40 CFR 745, Subpart E, and use only workers that are trained in lead-safe work practices.
 - B. Alteration Work Program: Prepare a written plan for alteration work for whole Project, including each phase or process and protection of surrounding materials during operations. Show compliance with indicated methods and procedures specified in this and other Sections. Coordinate this whole-Project alteration work program with specific requirements of programs required in other alteration work Sections.
 - 1. Dust and Noise Control: Include locations of proposed temporary dust- and noise-control partitions and means of egress from occupied areas coordinated with continuing on-site operations and other known work in progress.
 - 2. Debris Hauling: Include plans clearly marked to show debris hauling routes, turning radii, and locations and details of temporary protective barriers.
 - C. Fire-Prevention Plan: Prepare a written plan for preventing fires during the Work, including placement of fire extinguishers, fire blankets, rag buckets, and other fire-control devices during each phase or process. Coordinate plan with Owner's fire-protection equipment and requirements. Include fire-watch personnel's training, duties, and authority to enforce fire safety.
 - D. Safety and Health Standard: Comply with ANSI/ASSE A10.6.
- 1.6 STORAGE AND HANDLING OF SALVAGED MATERIALS
- A. Salvaged Materials:
 - 1. Clean loose dirt and debris from salvaged items unless more extensive cleaning is indicated.
 - 2. Pack or crate items after cleaning; cushion against damage during handling. Label contents of containers.
 - 3. Store items in a secure area until delivery to Owner.
 - 4. Transport items to Owner's storage area **designated by Owner**.
 - 5. Protect items from damage during transport and storage.
 - B. Salvaged Materials for Reinstallation:
 - 1. Repair and clean items for reuse as indicated.
 - 2. Pack or crate items after cleaning and repairing; cushion against damage during handling. Label contents of containers.
 - 3. Protect items from damage during transport and storage.
 - 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment unless otherwise indicated. Provide connections, supports, and miscellaneous materials to make items functional for use indicated.

- C. Existing Materials to Remain: Protect construction indicated to remain against damage and soiling from construction work. Where permitted by Architect, items may be dismantled and taken to a suitable, protected storage location during construction work and reinstalled in their original locations after alteration and other construction work in the vicinity is complete.
- D. Storage: Catalog and store items within a weathertight enclosure where they are protected from moisture, weather, condensation, and freezing temperatures.
 - 1. Identify each item for reinstallation with a nonpermanent mark to document its original location. Indicate original locations on plans, elevations, sections, or photographs by annotating the identifying marks.
 - 2. Secure stored materials to protect from theft.
 - 3. Control humidity so that it does not exceed 85 percent. Maintain temperatures 5 deg F (3 deg C) or more above the dew point.

PART 2 - PRODUCTS - (Not Used)

PART 3 - EXECUTION

3.1 PROTECTION

- A. Protect persons, motor vehicles, surrounding surfaces of building, building site, plants, and surrounding buildings from harm resulting from alteration work.
 - 1. Use only proven protection methods, appropriate to each area and surface being protected.
 - 2. Provide temporary barricades, barriers, and directional signage to exclude the public from areas where alteration work is being performed.
 - 3. Erect temporary barriers to form and maintain fire-egress routes.
 - 4. Erect temporary protective covers over walkways and at points of pedestrian and vehicular entrance and exit that must remain in service during alteration work.
 - 5. Contain dust and debris generated by alteration work, and prevent it from reaching the public or adjacent surfaces.
 - 6. Provide shoring, bracing, and supports as necessary. Do not overload structural elements.
 - 7. Protect floors and other surfaces along hauling routes from damage, wear, and staining.
 - 8. Provide supplemental sound-control treatment to isolate demolition work from other areas of the building.
- B. Temporary Protection of Materials to Remain:
 - 1. Protect existing materials with temporary protections and construction. Do not remove existing materials unless otherwise indicated.
 - 2. Do not attach temporary protection to existing surfaces except as indicated as part of the alteration work program.
- C. Comply with each product manufacturer's written instructions for protections and precautions. Protect against adverse effects of products and procedures on people and adjacent materials, components, and vegetation.
- D. Utility and Communications Services:
 - 1. Notify Owner, Architect, authorities having jurisdiction, and entities owning or controlling wires, conduits, pipes, and other services affected by alteration work before commencing operations.
 - 2. Disconnect and cap pipes and services as required by authorities having jurisdiction, as required for alteration work.
 - 3. Maintain existing services unless otherwise indicated; keep in service, and protect against damage during operations. Provide temporary services during interruptions to existing utilities.

- E. Existing Drains: Prior to the start of work in an area, test drainage system to ensure that it is functioning properly. Notify Architect immediately of inadequate drainage or blockage. Do not begin work in an area until the drainage system is functioning properly.
 - 1. Prevent solids such as adhesive or mortar residue or other debris from entering the drainage system. Clean out drains and drain lines that become sluggish or blocked by sand or other materials resulting from alteration work.
 - 2. Protect drains from pollutants. Block drains or filter out sediments, allowing only clean water to pass.
- F. Existing Roofing: Prior to the start of work in an area, install roofing protection.

3.2 PROTECTION FROM FIRE

- A. General: Follow fire-prevention plan and the following:
 - 1. Comply with NFPA 241 requirements unless otherwise indicated.
 - 2. Remove and keep area free of combustibles, including rubbish, paper, waste, and chemicals, unless necessary for the immediate work.
 - a. If combustible material cannot be removed, provide fire blankets to cover such materials.
- B. Heat-Generating Equipment and Combustible Materials: Comply with the following procedures while performing work with heat-generating equipment or combustible materials, including welding, torch-cutting, soldering, brazing, removing paint with heat, or other operations where open flames or implements using high heat or combustible solvents and chemicals are anticipated:
 - 1. Obtain Owner's approval for operations involving use of **open-flame** or welding or other high-heat equipment. Notify Owner **at least 72 hours** before each occurrence, indicating location of such work.
 - 2. As far as practicable, restrict heat-generating equipment to shop areas or outside the building.
 - 3. Do not perform work with heat-generating equipment in or near rooms or in areas where flammable liquids or explosive vapors are present or thought to be present. Use a combustible gas indicator test to ensure that the area is safe.
 - 4. Use fireproof baffles to prevent flames, sparks, hot gases, or other high-temperature material from reaching surrounding combustible material.
 - 5. Prevent the spread of sparks and particles of hot metal through open windows, doors, holes, and cracks in floors, walls, ceilings, roofs, and other openings.
 - 6. Fire Watch: Before working with heat-generating equipment or combustible materials, station personnel to serve as a fire watch at each location where such work is performed. Fire-watch personnel shall have the authority to enforce fire safety. Station fire watch according to NFPA 51B, NFPA 241, and as follows:
 - a. Train each fire watch in the proper operation of fire-control equipment and alarms.
 - b. Prohibit fire-watch personnel from other work that would be a distraction from fire-watch duties.
 - c. Cease work with heat-generating equipment whenever fire-watch personnel are not present.
 - d. Have fire-watch personnel perform final fire-safety inspection each day beginning no sooner than **30 minutes** after conclusion of work **in each area** to detect hidden or smoldering fires and to ensure that proper fire prevention is maintained.
 - e. Maintain fire-watch personnel at **each area of** Project site until **60 minutes** after conclusion of daily work.
- C. Fire-Control Devices: Provide and maintain fire extinguishers, fire blankets, and rag buckets for disposal of rags with combustible liquids. Maintain each as suitable for the type of fire risk in each work area. Ensure that nearby personnel and the fire-watch personnel are trained in fire-extinguisher and blanket use.

- D. Sprinklers: Where sprinkler protection exists and is functional, maintain it without interruption while operations are being performed. If operations are performed close to sprinklers, shield them temporarily with guards.
 - 1. Remove temporary guards at the end of work shifts, whenever operations are paused, and when nearby work is complete.

3.3 PROTECTION DURING APPLICATION OF CHEMICALS

- A. Protect motor vehicles, surrounding surfaces of building, building site, plants, and surrounding buildings from harm or spillage resulting from applications of chemicals and adhesives.
- B. Cover adjacent surfaces with protective materials that are proven to resist chemicals selected for Project unless chemicals being used will not damage adjacent surfaces as indicated in alteration work program. Use covering materials and masking agents that are waterproof and UV resistant and that will not stain or leave residue on surfaces to which they are applied. Apply protective materials according to manufacturer's written instructions. Do not apply liquid masking agents or adhesives to painted or porous surfaces. When no longer needed, promptly remove protective materials.
- C. Do not apply chemicals during winds of sufficient force to spread them to unprotected surfaces.
- D. Neutralize alkaline and acid wastes and legally dispose of off Owner's property.
- E. Collect and dispose of runoff from chemical operations by legal means and in a manner that prevents soil contamination, soil erosion, undermining of paving and foundations, damage to landscaping, or water penetration into building interior.

3.4 GENERAL ALTERATION WORK

- A. Record existing work before each procedure (preconstruction), and record progress during the work. Use digital preconstruction documentation **photographs**. Comply with requirements in Section 013233 "Photographic Documentation."
- B. Perform surveys of Project site as the Work progresses to detect hazards resulting from alterations.
- C. Notify Architect of visible changes in the integrity of material or components whether from environmental causes including biological attack, UV degradation, freezing, or thawing or from structural defects including cracks, movement, or distortion.
 - 1. Do not proceed with the work in question until directed by Architect.

END OF SECTION 013516

SECTION 01500

TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

- 1.1 RELATED DOCUMENTS
 - A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.
- 1.2 SUMMARY
 - A. This Section includes requirements for temporary utilities, support facilities, and security and protection facilities.
- 1.3 DEFINITIONS
 - A. Permanent Enclosure: As determined by Architect, permanent or temporary roofing is complete, insulated, and weathertight; exterior walls are insulated and weathertight; and all openings are closed with permanent construction or substantial temporary closures.
- 1.4 USE CHARGES
 - A. Water Service: Water from Owner's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.
 - B. Electric Power Service: Electric power from Owner's existing system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.
- 1.5 SUBMITTALS
 - A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.
- 1.6 QUALITY ASSURANCE
 - A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
 - B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.
- 1.7 PROJECT CONDITIONS
 - A. Temporary Use of Permanent Facilities: Installer of each permanent service shall assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

PART 2 - PRODUCTS

- 2.1 MATERIALS
 - A. Portable Chain-Link Fencing: Minimum **2-inch (50-mm)**, 9-gage, galvanized steel, chain-link fabric fencing; minimum **6 feet (1.8 m)** high with galvanized steel pipe posts; minimum **2-3/8-inch- (60-mm-)** OD line posts and **2-7/8-inch- (73-mm-)** OD corner and pull posts, with **1-5/8-inch- (42-mm-)** OD top and bottom rails.
 - B. Lumber and Plywood: Comply with requirements in Division 6 Section.
 - C. Gypsum Board: Minimum **1/2 inch (12.7 mm)** thick by **48 inches (1219 mm)** wide by maximum available lengths; regular-type panels with tapered edges. Comply with ASTM C 36/C 36M.
 - D. Insulation: Unfaced mineral-fiber blanket, manufactured from glass, slag wool, or rock wool; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively.
 - E. Paint: Comply with requirements in Division 9 painting Sections.
- 2.2 TEMPORARY FACILITIES
 - A. Field Offices, General: Prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading.

- B. Common-Use Field Office: Of sufficient size to accommodate needs of construction personnel. Keep office clean and orderly. Furnish and equip offices as follows:
 - 1. Furniture required for Project-site documents including file cabinets, plan tables, plan racks, and bookcases.
 - 2. Conference room of sufficient size to accommodate meetings of 10 individuals. Provide electrical power service and 120-V ac duplex receptacles, with not less than 1 receptacle on each wall. Furnish room with conference table, chairs, and ~~4-foot-~~ (1.2-m-) square tack board.
 - 3. Drinking water and private toilet.
 - 4. Heating and cooling equipment necessary to maintain a uniform indoor temperature of ~~68 to 72 deg F~~ (20 to 22 deg C).
 - 5. Lighting fixtures capable of maintaining average illumination of ~~20 fc~~ (215 lx) at desk height.
- C. Storage and Fabrication Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.
 - 1. Store combustible materials apart from building.

2.3 EQUIPMENT

- A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.
- B. HVAC Equipment: Unless Owner authorizes use of permanent HVAC system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.
 - 1. Use of gasoline-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.
 - 2. Heating Units: Listed and labeled for type of fuel being consumed, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
 - 3. Permanent HVAC System: If Owner authorizes use of permanent HVAC system for temporary use during construction, provide filters at air grille in system. Before Substantial Completion, all units and ductwork shall be thoroughly cleaned and restored to new condition.

2.4 SIGN AND ADVERTISING

- A. The General Contractor shall furnish and erect one (1) painted sign, 8 x 12 in size, as shown on the last page of this Section and placed where directed. Sign shall show the following:
 - 1. Name of Project
 - 2. Name, Logo and Address of Architect
 - 3. Name, Logo and Address of General Contractor
 - 4. Name of Mechanical Subcontractor
 - 5. Name of Electrical Subcontractor
- B. Post entire construction area with DANGER and NO TRESPASSING signs to comply with safety and insurance regulations.
- C. Keep premises clear and free from other signs or posters.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.2 TEMPORARY UTILITY INSTALLATION

- A. General: Install temporary service or connect to existing service.
 - 1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
- B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.
 - 1. Connect temporary sewers to municipal system as directed by authorities having jurisdiction.
- C. Water Service: Use of Owner's existing water service facilities will be permitted, as long as facilities are cleaned and maintained in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.

- D. Sanitary Facilities: Provide temporary toilets, wash facilities, and drinking water for use of construction personnel. Comply with authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.
- E. Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed.
- F. Ventilation and Humidity Control: Provide temporary ventilation required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce ambient condition required and minimize energy consumption.
- G. Electric Power Service: Use of Owner's existing electric power service will be permitted, Coordination is required to provide power when new service is installed.
- H. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.
 - 1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.
 - 2. Install lighting for Project identification sign.
 - a. Principal subcontractors' field and home offices.
 - 2. Provide superintendent with cellular telephone for use when away from field office.
- I. Electronic Communication Service: Provide temporary electronic communication service, including electronic mail. Cellular e-mail service is acceptable.

3.3 SUPPORT FACILITIES INSTALLATION

- A. General: Comply with the following:
 - 1. Provide incombustible construction for offices, shops, and sheds located within construction area or within **30 feet (9 m)** of building lines. Comply with NFPA 241.
 - 2. Maintain support facilities until near Substantial Completion. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.
- B. Traffic Controls: Comply with requirements of authorities having jurisdiction.
 - 1. Protect existing site improvements to remain including curbs, pavement, and utilities.
 - 2. Maintain access for fire-fighting equipment and access to fire hydrants.
- C. Parking: Use designated areas of Owner's existing parking areas for construction personnel.
- D. Dewatering Facilities and Drains: Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water.
 - 1. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties nor endanger permanent Work or temporary facilities.
 - 2. Remove snow and ice as required to minimize accumulations.
- E. Project Identification and Temporary Signs: Provide Project identification and other signs as indicated. Install signs where indicated to inform public and individuals seeking entrance to Project. Unauthorized signs are not permitted.
 - 1. Provide temporary, directional signs for construction personnel and visitors.
 - 2. Maintain and touchup signs so they are legible at all times.
- F. Waste Disposal Facilities: Provide waste-collection containers in sizes adequate to handle waste from construction operations. Comply with requirements of authorities having jurisdiction.
- G. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.
 - 1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.
- H. Temporary Elevator Use: Refer to Division 14 Sections for temporary use of new elevators.
- I. Temporary Stairs: Until permanent stairs are available, provide temporary stairs where ladders are not adequate.
- J. Temporary Use of Permanent Stairs: Cover finished, permanent stairs with protective covering of plywood or similar material so finishes will be undamaged at time of acceptance.

3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction in ways and by methods that comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
 - 1. Comply with work restrictions specified in Division 1 Section "Summary."

- B. Temporary Erosion and Sedimentation Control: Comply with requirements specified in Division 2 Section "Site Clearing" and Erosion Control drawings.
 - C. Temporary Erosion and Sedimentation Control: Provide measures to prevent soil erosion and discharge of soil-bearing water runoff and airborne dust to adjacent properties and walkways, according to requirements of authorities having jurisdiction.
 - 1. Inspect, repair, and maintain erosion- and sedimentation-control measures during construction until permanent vegetation has been established.
 - 2. Reference erosion control drawings for additional requirement.
 - D. Stormwater Control: Comply with authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of stormwater from heavy rains.
 - E. Tree and Plant Protection: Install temporary fencing located as indicated or outside the drip line of trees to protect vegetation from damage from construction operations. Protect tree root systems from damage, flooding, and erosion.
 - F. Pest Control: Engage pest-control service to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests and to perform extermination and control procedures at regular intervals so Project will be free of pests and their residues at Substantial Completion. Obtain extended warranty for Owner. Perform control operations lawfully, using environmentally safe materials.
 - G. Site Enclosure Fence: **Before construction operations begin**, furnish and install site enclosure fence in a manner that will prevent people and animals from easily entering site except by entrance gates.
 - 1. Extent of Fence: As indicated on Drawings.
 - 2. Maintain security by limiting number of keys and restricting distribution to authorized personnel. **Provide Owner with one set of keys.**
 - H. Security Enclosure and Lockup: Install substantial temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security.
 - I. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.
 - J. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.
 - 1. Where heating or cooling is needed and permanent enclosure is not complete, insulate temporary enclosures.
 - K. Temporary Partitions: Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate areas occupied by Owner from fumes and noise.
 - 1. Construct dustproof partitions with gypsum wallboard with joints taped on occupied side, and fire-retardant plywood on construction operations side.
 - 2. Insulate partitions to provide noise protection to occupied areas.
 - 3. Seal joints and perimeter. Equip partitions with dustproof doors and security locks.
 - 4. Protect air-handling equipment.
 - 5. Weather strip openings.
 - 6. Provide walk-off mats at each entrance through temporary partition.
 - L. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses.
 - 1. Prohibit smoking in completed facilities.
 - 2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.
 - 3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
- 3.5 OPERATION, TERMINATION, AND REMOVAL
- A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
 - B. Maintenance: Maintain facilities in good operating condition until removal.
 - 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.

- C. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.
 2. Remove temporary paving not intended for or acceptable for integration into permanent paving. Where area is intended for landscape development, remove soil and aggregate fill that do not comply with requirements for fill or subsoil. Remove materials contaminated with road oil, asphalt and other petrochemical compounds, and other substances that might impair growth of plant materials or lawns. Repair or replace street paving, curbs, and sidewalks at temporary entrances, as required by authorities having jurisdiction.
 3. At Substantial Completion, clean and renovate permanent facilities used during construction period. Reference General Conditions.

END OF SECTION 01500

SECTION 01732

SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes the following:
 - 1. Demolition and removal of selected portions of building or structure.

1.2 QUALITY ASSURANCE

- A. Demolition Firm Qualifications: An experienced firm that has specialized in demolition work similar in material and extent to that indicated for this Project.
- B. Refrigerant Recovery Technician Qualifications: Certified by an EPA-approved certification program.
- C. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- D. Standards: Comply with ANSI A10.6 and NFPA 241.

1.3 PROJECT CONDITIONS

- A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.
- B. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.
- C. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.
 - 1. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Owner will remove hazardous materials under a separate contract.
- D. Storage or sale of removed items or materials on-site is not permitted.
- E. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.
 - 1. Maintain fire-protection facilities in service during selective demolition operations.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that utilities have been disconnected and capped.
- B. Survey existing conditions and correlate with requirements indicated to determine extent of selective demolition required.
- C. Inventory and record the condition of items to be removed and reinstalled and items to be removed and salvaged.
- D. When unanticipated mechanical, electrical, or structural elements that conflict with intended function or design are encountered, investigate and measure the nature and extent of conflict. Promptly submit a written report to Architect.
- E. Engage a professional engineer to survey condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective demolition operations.

3.2 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

- A. Existing Services/Systems: Maintain services/systems indicated to remain and protect them against damage during selective demolition operations.
 - 1. Cover/filter all return air registers and ducts that are to remain in use during construction. All exposed duct openings shall be covered with caps to prevent miscellaneous dust and debris from entering the ductwork.
- B. Service/System Requirements: Locate, identify, disconnect, and seal or cap off indicated utility services and mechanical/electrical systems serving areas to be selectively demolished. Delete subparagraph above or first subparagraph below to suit Project.
 - 1. Arrange to shut off indicated utilities with utility companies.
 - 2. If services/systems are required to be removed, relocated, or abandoned, before proceeding with selective demolition provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to other parts of building.

3. Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit after bypassing.
 - a. Where entire wall is to be removed, existing services/systems may be removed with removal of the wall.

3.3 PREPARATION

- A. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
- B. Temporary Facilities: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
 3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 4. Cover and protect furniture, furnishings, and equipment that have not been removed.
 5. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Division 1 Section "Temporary Facilities and Controls."
- C. Temporary Shoring: Provide and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
 1. Strengthen or add new supports when required during progress of selective demolition.

3.4 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
 1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping, to minimize disturbance of adjacent surfaces. Temporarily cover openings to remain.
 3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
 4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain fire watch and portable fire-suppression devices during flame-cutting operations.
 5. Maintain adequate ventilation when using cutting torches.
 6. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 7. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.
 8. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
 9. Dispose of demolished items and materials promptly.
- B. Reuse of Building Elements: Project has been designed to result in end-of-Project rates for reuse of building elements as follows. Do not demolish building elements beyond what is indicated on Drawings without Architect's approval.
- C. Removed and Reinstalled Items:
 1. Clean and repair items to functional condition adequate for intended reuse. Paint equipment to match new equipment.
 2. Protect items from damage during transport and storage.
 3. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.
- D. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.

3.5 ELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

- A. Concrete: Demolish in small sections. Cut concrete at junctures with construction to remain, using power-driven saw. Dislodge concrete from reinforcement at perimeter of areas being demolished, cut reinforcement, and then remove remainder of concrete indicated for selective demolition. Neatly trim openings to dimensions indicated.
- B. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power driven saw, then remove masonry between saw cuts. Revise paragraph below to suit Project.
- C. Floor Coverings: Remove floor coverings and adhesives.
 - 1. Remove residual adhesive and prepare substrate for new floor coverings.
- D. Air-Conditioning Equipment: Remove equipment without releasing refrigerants.
- E. Fireproofing Materials: Protect existing spray applied fireproofing of existing structural components. Re-apply where removed or exposed by demolition and construction related to this project.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. General: Except for items or materials indicated to be recycled, reused, salvaged, reinstalled, or otherwise indicated to remain Owner's property, remove demolished materials from Project site and legally dispose of them in an EPA-approved landfill.
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 - 3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
- B. Burning: Do not burn demolished materials
- C. Disposal: Transport demolished materials off Owner's property and legally dispose of them.

3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 01732

SECTION 02110

SITE CLEARING

PART 1 – GENERAL

1.01 SECTION INCLUDES

- A. Remove surface debris.
- B. Remove paving, curbs, and improvements.
- C. Clear site of plant life and grass.
- D. Remove trees and shrubs.
- E. Remove root system of trees and shrubs.
- F. Topsoil excavation.

1.02 REGULATORY REQUIREMENTS

- A. Conform to applicable local codes and ordinances for disposal of debris, burning debris on site, use of herbicides, etc.
- B. Coordinate clearing Work with utility companies as required.

PART 2 – PRODUCTS

Not Used

PART 3 – EXECUTION

3.01 PREPARATION

- A. Verify that existing plant life designated to remain is tagged or identified.

3.02 PROTECTION

- A. Locate, identify, and protect utilities that remain, from damage.
- B. Protect trees, plant growth, and features designated to remain, as final landscaping.
- C. Protect bench marks and existing structures from damage or displacement.

3.03 CLEARING

- A. Clear areas required for access to site and execution of Work.
- B. Remove paving, curbs, and improvements designated.
- C. Remove trees and shrubs indicated. Remove stumps, root system, surface rock, and other areas indicated or implied for completion of the project.
- D. Clear undergrowth and deadwood, without disturbing subsoil. Strip and clear vegetation from areas designated to be filled, excavated, regraded, or landscaped.

3.04 REMOVAL

- A. Remove debris, rock, and extracted plant life from site.

3.05 TOPSOIL EXCAVATION

- A. Excavate clean topsoil from areas to be further excavated, filled, re-landscaped, or regraded.
- B. Stockpile in area designated on site to depth not exceeding 8 feet. Protect from erosion. Remove excess topsoil not being reused, from site.

END OF SECTION 02110

SECTION 02205
SOIL MATERIALS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Subsoil and topsoil materials.

1.2 RELATED SECTIONS

- A. Document: Geotechnical Report for Theatre Salina Addition for general reference to soil conditions.

A.

1.3 REFERENCES

- A. ANSI/ASTM D698 - Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures, Using 5.5 lb (2.49 Kg) Rammer and 12 inch (304.8 mm) Drop.
- B. ASTM D2487 - Classification of Soils for Engineering Purposes.

PART 2 PRODUCTS

2.1 SOIL MATERIALS

- A. **Note the Contractor shall over excavate new addition area at Building Pad. Reference Geotechnical Report.**
- B. **Note the Geotechnical Report requirements for rammed aggregate pier stabilization.**
- C. Fill Material: Under slabs and within the zone of influence of foundation elements must be a material approved by the geotechnical engineer and as indicated in the geotechnical report.
- D. Fill and Backfill Material: Other areas, foundation backfill, site grading, and pavement, should be clean site material or similar borrow material, approved by the geotechnical Engineer. Foreign matter shall be limited in size to 1 ½ " in greatest dimension, and be limited to no more than 5% by volume or weight.
- E. Topsoil: Incorporate topsoil into subsoil 3"- 4". Topsoil should be blended and contain the following components by percentage:

Organic Matter:	4 - 6 %
Sand (ASTM - 300 and 75% between .25mm and .75mm):	40 - 50%
Silt:	20 - 25%
Clay:	25 - 40%

2.2 SOURCE QUALITY CONTROL

- A. Inspection and testing will be performed by an independent laboratory, Contractor shall bear all related costs under provisions of General Requirements.
- B. Tests and analysis of soil material will be performed in accordance with ANSI/ASTM D698.
- C. If tests indicate materials do not meet specified requirements, change material and retest at no cost to Owner.

PART 3 EXECUTION

3.1 STOCKPILING

- A. Stockpile materials on site at locations indicated or in areas that will not impact project completion.
- B. Stockpile in sufficient quantities to meet project schedule and requirements.
- C. Separate differing materials with dividers or stockpile apart to prevent mixing.
- D. Direct surface water away from stockpile site to prevent erosion or deterioration of materials.

3.2 STOCKPILE CLEANUP

- A. Remove stockpile, leave area in a clean and neat condition. Grade site surface to prevent free standing surface water.

END OF SECTION 02205

SECTION 02206

LAWNS AND GRASSES

PART 1 – GENERAL

1.01 SECTION INCLUDES

- A. Soil treatment
- B. Fine grading of topsoil
- C. Protection and maintenance
- D. Warranty and replacement.

1.02 RELATED SECTIONS

- A. Document: The Geotechnical report, bore hole locations and findings of subsurface materials for the subject project.

PART 2 – PRODUCTS

2.01 SOIL MATERIALS

- A. Lime (If required as a result of tests made under preceding Part a): Shall be ground limestone (Dolomite) containing not less than 85 Percent of total carbonates and shall be ground to such a fineness that 50 percent will pass through a 100 mesh sieve and 90 percent will pass through a 20 mesh sieve. Coarser material will be acceptable, provided the specified rates of application are increased proportionately on the basis of quantities passing the 100 mesh sieve.
- B. Fertilizer: Commercial fertilizer shall be used for initial preparation and shall conform to the applicable state fertilizer laws. Organic lawn fertilizer shall be used for surface application after grass is up. Fertilizer shall be uniform in composition, dry and free flowing, and shall be delivered to the site in the original, unopened containers, each bearing the manufacturer's guaranteed analysis. Any fertilizer which becomes caked or otherwise damaged, making it unsuitable for use, will not be acceptable.
 - 1. Fertilizer shall conform to the following standards:

<u>Nitrogen (N)</u>	<u>Phosphorus (P25)</u>	<u>Potassium (K20)</u>	<u>lbs/100 S.F.</u>
12%	12%	12%	1
- C. Water: Water will be available at the project site. Furnish necessary hose, equipment, attachments, and accessories for the adequate irrigation of planted areas as may be required to complete the Work as specified.
- D. Grass Seed: Shall be mixed and warranted by the dealer and applied in accordance with the following:
 - 1.

<u>Common Name</u>	<u>Proportion by Weight</u>
Bermuda	100 percent
 - a. Grass seed mixture shall be 95 percent pure and free of weeds and other harmful plants. It shall have a sufficient percentage of germination to provide a good stand of lawn within the requirements of these Specifications, approximately 85 to 87 percent minimum.
 - 2. Grass seed shall applied at the rate of not less than 2 to 3 lb/1000 sq. feet. Planting shall be by hydroseeding method or sprigging. Dry seed planting is not acceptable.
 - 3. The contractor may submit to the Architect for approval, specifications for a substitute mixture, which will provide a good stand of grass of similar character to that specified, if in his opinion it is desirable or necessary. Nothing in this Section shall be construed as relieving Contractor of the requirements of the Section "Maintenance".
- E. Mulch: Material for mulch shall consist of native hay. The use of straw or other locally available material must receive specific prior approval. Mulch material, which contains an excessive quantity of matured seed of noxious weeds or other species which would grow and be detrimental to overseeding or provide a menace to adjacent land will not be acceptable. Mulch material which is fresh or excessively brittle, or in such an advanced state of decomposition as to smother or retard the growth of grass or the seeded cover crop, will not be acceptable.

- F. Erosion Control Blanket: Use “Ero-Mat, standard” as manufactured by Verdyol and distributed by Erosion Control Systems, Inc., Tuscaloosa, Alabama; 1-800-942-1986. Install with 11 gauge or heavier steel wire staples with 6-inch long legs and a 1-inch crown. Note: “Ero-Mat, High Velocity” for use on slopes greater than 3:1 and 60 feet long ± or in areas where a high velocity of water is expected – duration is 4-1/2 to 5 feet/second range (in swales).
- G. Sod: Sod shall be strongly rooted, and free of pernicious weeds. It shall be mowed to a height not to exceed 3 inches before lifting and shall be of uniform thickness with not less than 1 inch of soil. Contractor has the option of providing sod in areas called for seeding if prior approval by the Architect is received.
 - 1. The foregoing will generally govern the requirements for any sod which is required by the Drawings or proposed by the contractor for work under this Section. In the event that sods of this type are not readily available, the Contractor may propose the use of a substitute complying with these requirements.

PART 3 – EXECUTION

3.01 PREPARATION OF SEEDBED:

- A. Seedbeds shall be prepared by discing, harrowing, and firming. Surface of seedbeds shall be tilled to a depth of at least six inches. On all slope areas, discing, harrowing and firming shall be done longitudinally, at right angles to the direction of slope. Surface of the seedbeds shall be firm and there shall be no loose dust or uncompacted earth more than one-half inch in depth. All debris shall be removed and disposed of in an approved manner at authorized locations. Grades on the areas to be seeded which have been established, shall be maintained in a true and even condition. Seeding shall include any necessary repairs to previously graded areas. When grades have not been established, the area shall be graded properly and all surfaces shall be left at the prescribed grades in an even and properly compacted condition so as to prevent the formation of water-retaining depressions. Grass seed shall be applied at the rate specified above.
- B. Fertilization: Commercial Fertilizer as specified above shall be uniformly applied to the seedbed surface at the time of seeding. Fertilizer shall be applied at the rate specified above.
 - 1. Application of Seed and Fertilizer: Grass seed and fertilizer shall be applied separately or may be applied simultaneously in separate bins with a suitable and acceptable separated bin drill or drills. Broadcasting or seeding with a suitable hand grass seeder, or seeding by hand, will be required on all areas where it is impossible to operate drill or drills. All drills used shall be fully adjustable so that they will deliver the seed and fertilizer at the rates specified, and shall be equipped so as to prevent the seeds from being planted and covered to a depth of more than 1/8 inch. Drills shall be equipped with packing wheels or a roller, which will thoroughly compact the soil, or compaction must follow the seeding and fertilizing operation. In hand seeded areas, or where hand-operated grass seeders are used, compaction with a hand-operated cultipacker or roller shall follow seeding and fertilizing.
- C. Time and Seeding: Time and seeding shall be between the dates of 15 June thru 1 August.
- D. Invoices: Contractor shall furnish Architect with copies of all invoices for all seeds and fertilizers used on this project.
- E. Inspection: Upon completion of the sowing operations, a final check of the total quantities of materials used in seeding and fertilizing will be made against the total area seeded. If the minimum rate of application has not been met, or if inspection after a show of germinated seed indicates that areas have been missed to the failure to properly operate equipment, or other causes, Contractor will be required to reseed and/or apply additional fertilizer on areas designated by Architect or his representative to the extent required to meet Specifications.
- F. Mulching Material: Mulching Material shall be spread uniformly over the seeded areas to the depth of three inches. Mulch material shall be anchored into the soil a minimum depth of two inches to provide a standing stubble mulch.
- G. Establishment
 - 1. Contractor shall be responsible for proper care of all seeded areas while turf is becoming established for a period for 30 days after seeding operations have been completed, unless the desired cover is established in a shorter period of time and Architect agrees to shorten the responsibility period. Lawn areas requiring additional seed and fertilizer may be designated by Architect during the establishment period. These areas shall be reseeded and refertilized during the next time of seeding by Contractor at no additional cost to Owner. The rates of application and seedbed preparation shall be the same as specified herein before in this section.

2. Contractor shall be responsible for care of seeded areas at a minimum through a “show of green” and first mowing by Contractor or a minimum of 30 days, whichever is longer.

3.02 SODDING

- A. Preparation of Sod Bed. Sod beds shall be prepared by discing, harrowing, and firming. The sod bed shall be prepared and tilled to a depth of three inches. Discing, harrowing and firming shall be done longitudinally on slope areas. Surface of the sod bed shall be firm and there shall be no loose dust or uncompacted earth more than one-half inch. All debris from construction activities or otherwise shall be removed and disposed of in such place designated by the City.
 1. Grades on the areas to be sodded, which have been established, shall be maintained in a true and even condition. Sodding shall include any necessary repairs to previously graded areas. When grades have not been established, the area shall be graded and all surfaces shall be left at the prescribed grades in an even and properly compacted condition so as to prevent the formation of water-retaining depressions.
- B. Installation of Sod
 1. The fertilized sod beds shall be in a firm but not too compacted condition with relatively fine texture at the time of sodding. During periods of drought or higher than optimal temperatures for bluegrass sod installation and after all unevenness in the soil surface has been corrected, the soil shall be lightly moistened immediately prior to laying the sod cover.
 2. Freshly grades and/or tilled areas which have set long enough to become dry and crusted over shall be tilled as specified above prior to placing the sod cover.
 3. The first row of sod shall be laid in a straight line with subsequent rows placed parallel to and tightly against each other. Lateral joints shall be staggered to promote more uniform growth and strength. Care shall be exercised to ensure that the sod is not stretched or over-lapped and that all joints are butted tight in order to prevent voids which would cause air drying of the roots.
 4. On slopes having a grade of 3:1 or steeper, sod shall be anchored with one-half (1/2) inch square by eight (8) inches long wooden pegs driven into the ground using not less than three (3) pegs per square yard (or other approved methods) as necessary to anchor the sod. Pegging shall be done immediately after the sod has been firmed.
 5. Sod shall be watered immediately after transplanting to prevent excessive drying during progress of the work. As sodding is completed in any one section, the entire area shall be rolled. It shall then be thoroughly watered to a depth sufficient that the underside of the new sod pad and the soil immediately below the sod are thoroughly wet. The general Contractor shall be responsible for having adequate water available at the site prior to and during sod transplanting operations.
 6. The Contractor shall guarantee work covered by this specification to the extent that all transplanted sod shall be uniform in color, leaf texture and shoot density and be reasonably free of visible imperfections at acceptance.
 7. Preliminary acceptance of the transplanted sod shall be on a daily basis within 12 hours of completion of a area or section unless otherwise agreed upon.
- C. Maintenance
 1. General: The Contractor shall furnish all labor, material and equipment required to maintain the transplanted sod as specified herein, and in accordance with the drawings. The Contractor shall be responsible for supply of adequate water to the site.
 2. Watering:
 - a. First Week. The Contractor shall provide all labor and arrange for all watering necessary for rooting of the sod. Soil on sod pads shall be kept moist at all times. In the absence of adequate rainfall, watering shall be performed daily or as often as necessary during the first week and in sufficient quantities to maintain moist soil to a depth of at least four inches. Watering should be done during the heat of the day to help prevent wilting.
 - b. Second and Subsequent Weeks. The Contractor shall water the sod as required to maintain adequate moisture, in the upper four inches of soil, necessary for the promotion of deep root growth. The first mowing shall not be attempted until the sod is firmly rooted and secure in place. Not more than 40 percent of the grass leaf shall be removed by the initial or subsequent mowings. Turf height shall be maintained between 1 ½ and 2 ½ inches unless otherwise agreed upon.
 3. Time Limitation: Duration of maintenance responsibilities shall be for 30 days.
 4. Disclaimer: The Contractor shall not be held liable for damages incurred to sod causing by deicing compounds, fertilizers, pesticides and other materials not applied by him or under his supervision nor those caused by acts of God or vandalism.

D. Final Acceptance

1. Following an expiration of the specified maintenance period, a final inspection of the completed sodding operation will be made to determine if the transplanted sod has been installed in accordance with the plans and specifications, and that the turf cover is in a viable and healthy condition. Areas not installed properly or not in a healthy condition at the time of final inspection shall be resodded by the Contractor during the next specified planning period at no additional cost to the Owner.
2. In the event landscaping and seeding is not installed/accepted prior to Owner occupancy, the Contractor shall be responsible to provide and pay for a landscaping bond to the City of Salina until the landscaping is complete and established. This is a possibility due to the warm planting weather requirements for Bermuda Grass.

END OF SECTION 02206

SECTION 02211

ROUGH GRADING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Removal of topsoil and subsoil.
- B. Cutting, grading, filling, and rough contouring the site for site structures, building pads and paving.

1.2 RELATED SECTIONS

- A. Document: Geotechnical Report for Theatre Salina Addition for general reference to soil conditions.

PART 2 PRODUCTS

2.1 MATERIALS

- A. Topsoil, Fill and Structural Fill: As specified in Section 02205.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that survey bench mark and intended elevations for the Work are as indicated.

3.2 PREPARATION

- A. Identify required lines, levels, contours, and datum.
- B. Stake and flag locations of known utilities. Locate, identify, and protect utilities that remain, from damage. Notify utility company to remove and relocate utilities.
- C. Protect above and below grade utilities that remain.
- D. Protect plant life, lawns, rock outcropping and other features remaining as a portion of final landscaping.
- E. Protect bench marks, existing structures, fences, sidewalks, paving, and curbs from excavating equipment and vehicular traffic.

3.3 SUBSOIL EXCAVATION

- A. Excavate subsoil from areas to be further excavated, re-landscaped, or re-graded.
- B. Stockpile in area designated on site to depth not exceeding 8 feet. Protect from erosion. Remove subsoil not being reused, from site.
- C. When excavating through roots, perform work by hand and cut roots with sharp axe.

3.4 FILLING

- A. Fill areas to contours and elevations with unfrozen materials.
- B. Place fill materials on continuous layers and compact in accordance with Schedule at end of Section.
- C. Maintain optimum moisture content of fill materials to attain required compaction density.
- D. Slope grade away from building minimum 2 inches in 10 ft. unless noted otherwise.
- E. Make grade changes gradual. Blend slope into level areas.
- F. Remove surplus fill materials from site.

3.5 TOLERANCES

- A. Top Surface of Subgrade: Plus or minus 1/10 foot.

3.6 FIELD QUALITY CONTROL

- A. Field inspection and testing will be performed under provisions of the General Requirements.
- B. Compaction testing will be performed in accordance with ANSI/ASTM D698.
- C. If tests indicate work does not meet specified requirements, remove work, replace, and retest at no additional cost to the Owner.

3.7 SCHEDULES

- A. Reference Soils Report, 4.2.3 Compaction Requirements Topsoil Fill:

END OF SECTION 02211

SECTION 02222

EXCAVATING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Excavating for building foundations and footings.
- B. Excavating for slabs-on-grade, paving, landscaping.
- C. Excavating for site structures and utilities.

1.2 RELATED SECTIONS

- A. Document: Geotechnical Report for Theatre Salina Addition for general reference to soil conditions.

PART 2 PRODUCTS

Not Used

PART 3 EXECUTION

3.1 PREPARATION

- A. Identify required lines, levels, contours, and datum.
- B. Locate, identify, and protect utilities that remain, from damage.
- C. Notify utility company to remove and relocate utilities.
- D. Protect plant life, lawns, rock outcropping and other features remaining as a portion of final landscaping.
- E. Protect bench marks, existing structures, fences, sidewalks, paving and curbs from excavation equipment and vehicular traffic.

3.2 EXCAVATION

- A. Underpin adjacent structures which may be damaged by excavation work.
- B. Excavate subsoil required to accommodate building foundations, slabs-on-grade, paving and site structures, construction operations.
- C. Machine slope banks to angle of repose or less, until shored.
- D. Do not interfere with 45 degree bearing splay of foundation unless shoring has been installed.
- E. Grade top perimeter of excavation to prevent surface water from draining into excavation.
- F. Hand trim excavation. Remove loose matter.
- G. Remove lumped subsoil, boulders, and rock up to 1/3 cu yd measured by volume.
- H. Notify Architect/Engineer of unexpected subsurface conditions and discontinue affected Work in area until notified to resume work.
- I. Correct areas over-excavated in accordance with Section 02223.
- J. Stockpile excavated material in area designated on site and remove excess material not being reused, from site.
- K. Shoring or Bracing will be required on the north and east wall of the new structure adjacent to the existing building. See the Geotechnical Report for recommendations.

3.3 FIELD QUALITY CONTROL

- A. Field inspection will be performed under provisions of the General Requirements.
- B. Provide for visual inspection of bearing surfaces.

3.4 PROTECTION

- A. Protect excavations by methods required to prevent cave-in or loose soil from falling into excavation.
- B. Protect bottom of excavations and soil adjacent to and beneath foundation, from freezing.

END OF SECTION 02222

SECTION 02223
BACKFILLING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Building perimeter and site structure backfilling to subgrade elevations.
- B. Site filling and backfilling.
- C. Fill under slabs-on-grade, paving.
- D. Consolidation and compaction as scheduled.
- E. Fill for over-excavation.

1.2 RELATED SECTIONS

- A. Document: Geotechnical Report for Theatre Salina Addition for general reference to soil conditions.

1.3 REFERENCES

- A. ANSI/ASTM D698 - Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures, Using 5.5 lb (2.49 Kg) Rammer and 12 inch (304.8 mm) Drop.

PART 2 PRODUCTS

2.1 FILL MATERIALS

- A. Fill: As specified in Section 02205.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify subdrainage, dampproofing or waterproofing installation has been inspected and completed.

3.2 PREPARATION

- A. Compact subgrade to density requirements for subsequent backfill materials.
- B. Cut out soft areas of subgrade not capable of in situ compaction. Backfill with fill and compact to density equal to or greater than requirements for subsequent fill material.
- C. Scarify and proof roll subgrade surface to a depth of 8 to 12 inches to identify soft spots; fill and compact to density equal to or greater than requirements for subsequent fill material.

3.3 BACKFILLING

- A. Backfill areas to contours and elevations with unfrozen materials.
- B. Systematically backfill to allow maximum time for natural settlement. Do not backfill over porous, wet, frozen, or spongy subgrade surfaces.
- C. Fill, Place and compact materials in continuous layers not exceeding 8 inches in compacted depth.
- D. Employ a placement method that does not disturb or damage other work.
- E. Maintain optimum moisture content of backfill materials to attain required compaction density. Backfill against supported foundation walls. Do not backfill against unsupported foundation walls.
- F. Backfill simultaneously on each side of unsupported foundation walls until supports are in place.
- G. Slope grade away from building minimum 2 inches in 10 ft. unless noted otherwise.
- H. Make gradual grade changes. Blend slope into level areas.
- I. Remove surplus backfill materials from site.

- J. Leave fill material stockpile areas free of excess fill materials.

3.4 TOLERANCES

- A. Top Surface of Backfilling Under Paved Areas: Plus or minus 1 inch from required elevations.
- B. Top Surface of General Backfilling: Plus or minus 1 inch from required elevations.

3.5 FIELD QUALITY CONTROL

- A. Field inspection and testing will be performed under provisions of the General Requirements.
- B. Compaction testing will be performed in accordance with ANSI/ASTM D698.
- C. If tests indicate Work does not meet specified requirements, remove Work, replace, and retest at no additional cost to the Owner.
- D. Proof roll compacted fill surfaces under slabs-on-grade, and paving.

3.6 PROTECTION OF FINISHED WORK

- A. Protect finished Work under provisions of the General Requirements.
- B. Reshape and re-compact fills subjected to vehicular traffic.

3.7 SCHEDULE

- A. Interior Slab-On-Grade:
 - 1. Fill compacted to 98 percent of standard Proctor.
 - 2. Cover with Sand Fill 2 inches thick, compacted to 95 percent.
- B. Exterior Side of Foundation Walls Retaining Walls and Over Granular Filter Material and Foundation Perimeter Drainage:
 - 1. Fill to subgrade elevation, each lift, compacted to 90 percent (minimum) of standard Proctor.
- C. Fill Under Grass Areas:
 - 1. Fill to 4 inches below finish grade.
- D. Fill Under Asphalt or Concrete Paving:
 - 1. Compact subsoil to 95 percent of its maximum dry density.
- E. Fill to Correct Overexcavation:
 - 1. Lean concrete to minimum compressive strength of 1000 psi.
 - 2. Compact approved fill to 95 percent of its maximum dry density.

END OF SECTION 02223

SECTION 02225

TRENCHING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Excavating trenches for utilities from 5 feet outside building to municipal utilities.
- B. Compacted fill from top of utility bedding to subgrade elevations.
- C. Backfilling and compaction.

1.02 RELATED SECTIONS

- A. Document: Geotechnical Report for Theatre Salina Addition for general reference to soil conditions.

1.03 REFERENCES

- A. ANSI/ASTM D698 - Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures, Using 5.5 lb (2.49 Kg) Rammer and 12 inch (304.8 mm) Drop.

1.04 FIELD MEASUREMENTS

- A. Verify that survey bench mark and intended elevations for the Work are as shown on drawings.

1.05 COORDINATION

- A. Coordinate all work as required.
- B. Verify work associated with lower elevation utilities are complete before placing higher elevation utilities.

PART 2 PRODUCTS

2.01 FILL MATERIALS

- A. Fill: As specified in Section 02205.

PART 3 EXECUTION

3.01 PREPARATION

- A. Identify required lines, levels, contours, and datum.
- B. Protect plant life, lawns, rock outcropping and other features remaining as a portion of final landscaping.
- C. Protect bench marks, existing structures, fences, sidewalks, paving, and curbs from excavation equipment and vehicular traffic.
- D. Maintain and protect above and below grade utilities which are to remain.
- E. Cut out soft areas of subgrade not capable of in situ compaction. Backfill with fill and compact to density equal to or greater than requirements for subsequent backfill material.

3.02 EXCAVATION

- A. Excavate subsoil required for utilities to municipal utilities.
- B. Cut trenches sufficiently wide to enable installation and allow inspection.
- C. Do not interfere with 45 degree bearing splay of foundations.
- D. Hand trim excavation. Remove loose matter.
- E. Remove lumped subsoil, boulders, and rock up to 1/3 cu yd measured by volume.
- F. Correct areas over excavated in accordance with Section 02222.
- G. Stockpile excavated material in area designated on site and remove excess material not being used, from site.

3.03 BACKFILLING

- A. Backfill trenches to contours and elevations with unfrozen materials.
- B. Systematically backfill to allow maximum time for natural settlement. Do not backfill over porous, wet, frozen, or spongy subgrade surfaces.

- C. Granular Fill: Place and compact materials in continuous layers not exceeding 8 inches compacted depth.
 - D. Soil Fill: Place and compact material in continuous layers not exceeding 8 inches compacted depth.
 - E. Employ a placement method that does not disturb or damage foundation perimeter drainage, conduit or pipes in trench.
 - F. Maintain optimum moisture content of fill materials to attain required compaction density.
 - G. Remove surplus fill materials from site.
 - H. Leave fill material stockpile areas completely free of excess fill materials.
 - I. When backfilling utilities outside of building footprint, install warning tape minimum 1' above materials being back filled.
- 3.04 TOLERANCES
- A. Top Surface of Backfilling: Plus or minus 1 inch from required elevations.
- 3.05 FIELD QUALITY CONTROL
- A. Field inspection and testing will be performed under provisions of the General Requirements.
 - B. Compaction testing will be performed in accordance with ANSI/ASTM D698.
 - C. If tests indicate Work does not meet specified requirements, remove Work, replace, compact, and retest at no additional cost to the owner.
- 3.06 PROTECTION OF FINISHED WORK
- A. Protect or reshape and recompact fills subjected to vehicular traffic during construction.

END OF SECTION 02225

SECTION 02260

EXCAVATION SUPPORT AND PROTECTION

PART 1 - GENERAL

- 1.1 RELATED DOCUMENTS
 - A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.
- 1.2 SUMMARY
 - A. Section includes temporary excavation support and protection systems. **Contractor is responsible for all excavation support and protection systems as required by local, state, and OSHA regulations.**
 - B. Related Sections:
 - 1. Division 1 Section "Temporary Facilities and Controls" for temporary utilities and support facilities.
- 1.3 PERFORMANCE REQUIREMENTS
 - A. Furnish, install, monitor, and maintain excavation support and protection system capable of supporting excavation sidewalls and of resisting soil and hydrostatic pressure and superimposed and construction loads.
 - 1. Prevent surface water from entering excavations by grading, dikes, or other means.
 - 2. Install excavation support and protection systems without damaging existing buildings, structures, and site improvements adjacent to excavation.
 - 3. Monitor vibrations, settlements, and movements.
 - B. Excavation support and protection must comply with ASHA, state and local requirements.
- 1.4 QUALITY ASSURANCE
 - A. Preinstallation:
 - 1. Review methods and procedures related to excavation support and protection system including, but not limited to, the following:
 - a. Geotechnical report.
 - b. Existing utilities and subsurface conditions.
 - c. Proposed excavations.
 - d. Proposed equipment.
 - e. Monitoring of excavation support and protection system.
 - f. Working area location and stability.
 - g. Coordination with waterproofing.
 - h. Abandonment or removal of excavation support and protection system.
- 1.5 PROJECT CONDITIONS
 - A. Interruption of Existing Utilities: Do not interrupt any utility serving facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary utility according to requirements indicated:
 - B. Project-Site Information: A geotechnical report has been prepared for this Project and is available for information only. The opinions expressed in this report are those of geotechnical engineer and represent interpretations of subsoil conditions, tests, and results of analyses conducted by geotechnical engineer. Owner will not be responsible for interpretations or conclusions drawn from the data.
 - 1. Make additional test borings and conduct other exploratory operations necessary for excavation support and protection.
 - 2. The geotechnical report is referenced elsewhere in the Project Manual.
 - C. Survey Work: Engage a qualified land surveyor or professional engineer to survey adjacent existing buildings, structures, and site improvements; establish exact elevations at fixed points to act as benchmarks. Clearly identify benchmarks and record existing elevations.
 - 1. During installation of excavation support and protection systems, regularly resurvey benchmarks, maintaining an accurate log of surveyed elevations and positions for comparison with original elevations and positions. Promptly notify Architect if changes in elevations or positions occur or if cracks, sags, or other damage is evident in adjacent construction.

PART 2 - PRODUCTS

- 2.1 MATERIALS
 - A. General: Provide materials that are either new or in serviceable condition.
 - B. Shotcrete: Comply with Division 3 Section "Shotcrete" for shotcrete materials and mixes, reinforcement, and shotcrete application.

- C. Cast-in-Place Concrete: ACI 301, of compressive strength required for application.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout, and other hazards that could develop during excavation support and protection system operations.
 - 1. Shore, support, and protect utilities encountered.
- B. Install excavation support and protection systems to ensure minimum interference with roads, streets, walks, and other adjacent occupied and used facilities.
 - 1. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by authorities having jurisdiction.
- C. Locate excavation support and protection systems clear of permanent construction so that forming and finishing of concrete surfaces are not impeded.
- D. Monitor excavation support and protection systems daily during excavation progress and for as long as excavation remains open. Promptly correct bulges, breakage, or other evidence of movement to ensure that excavation support and protection systems remain stable.
- E. Promptly repair damages to adjacent facilities caused by installing excavation support and protection systems.

END OF SECTION 02260

SECTION 02281
TERMITE CONTROL

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Soil treatment for termite control below grade, to interior and exterior foundation perimeter.
- B. Kansas Department of Agriculture has issued the attached Fact Sheet regarding Termite Pretreatment Applications. All contractors shall follow the recommendations addressed in the article.

1.2 QUALIFICATIONS

- A. Applicator: Company specializing in performing the work of this Section with minimum 5 years documented experience approved by manufacturer, licensed, and approved regulations.

1.3 REGULATORY REQUIREMENTS

- A. Conform to requirements for application, application licensing, authority to use toxicant chemicals, and in accordance with EPA.
- B. Provide certificate of compliance from authority having jurisdiction indicating approval of toxicants.

1.4 SEQUENCING

- A. Apply toxicant 12 hours prior to installation of vapor barrier under slabs-on-grade and finish grading work outside foundations.
- B. Notify Architect 24 hours prior to application.

1.5 WARRANTY

- A. Provide five year warranty under provisions of the General Requirements.
- B. Warranty: Include coverage for damage and repairs to building and building contents caused by termites. Repair damage. Re-treat where required.
- C. Inspect and report annually to Owner in writing. Owner reserves the right to renew warranty for an additional five years.

PART 2 PRODUCTS

2.1 MATERIALS

- A. Kansas Department of Agriculture has issued the attached Fact Sheet regarding Termite Pretreatment Applications. All contractors shall follow the recommendations addressed in this article.
- B. Toxicant Chemical: EPA and Local authority approved; synthetically color dyed to permit visual identification of treated soil.
- C. Diluent: Recommended by toxicant manufacturer.
- D. Mix toxicant to manufacturer's instructions.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify all the site conditions and become familiar with project scope.
- B. Verify that soil surfaces are unfrozen, sufficiently dry to absorb toxicant, and ready to receive treatment.
- C. Verify final grading is complete.

3.2 APPLICATION

- A. Spray apply or Inject toxicant in accordance with manufacturer's instructions.
- B. Apply toxicant at locations indicated in Schedule at end of Section.
- C. Apply extra treatment to structure penetration surfaces such as pipe or ducts, and soil penetrations such as grounding rods or posts.
- D. Re-treat disturbed treated soil with same toxicant as original treatment. Retreat around building perimeter after top soil has been placed, directly adjacent to foundation wall.
- E. If inspection or testing identifies the presence of termites, re-treat soil and re-test.

3.3 PROTECTION OF FINISHED WORK

- A. Protect finished Work, post signage to warn workers that soil poisoning has been applied.
- B. Do not permit soil grading over treated work.

3.4 SCHEDULES

- A. Locations:
 - 1. Under Slabs-on-Grade including basement floors, porches and stoops.
 - 2. Both Sides of Foundation Surfaces.
 - 3. Soil Within 10 feet of Building Perimeter.

END OF SECTION 02281

FACT SHEET

Termite Pretreatment Applications

The Kansas Pesticide Law and the Federal Insecticide Fungicide and Rodenticide Act require that pesticide products be applied according to label directions.

Pesticide product labels and the Kansas Pesticide Law state that it is unlawful for any person to use pesticides in a manner that is inconsistent with the pesticide's label instructions.


The Kansas Pesticide Law has additional requirements for termite pretreatment applications. They are outlined in K.A.R. 4-13-26, and state that in addition to label requirements, each preconstruction termite application must include both horizontal and vertical chemical barriers.

What does this mean?

Plainly stated, termite pretreatment applications must include both horizontal and vertical applications at the proper rates to be in compliance with state law.

What is a horizontal chemical barrier?

It is a continuous chemical barrier of termiticide that is applied to the soil beneath slab floors and porches, footing trenches for monolithic slabs and beneath stairs.

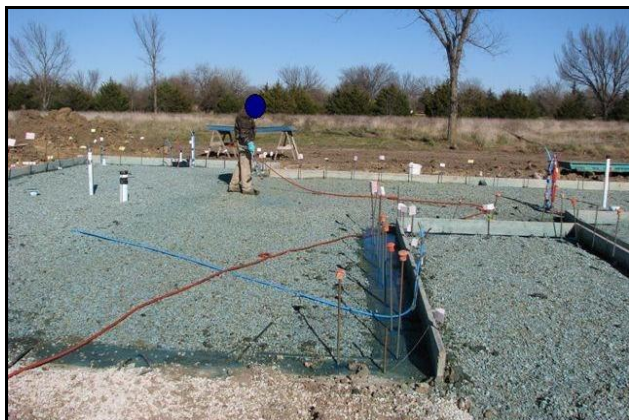

Above: After the interior final grade is established, the applicator applies termiticide to the flat surface over which cement will be poured.

What is a vertical chemical barrier?

Vertical chemical barriers must be established in the soil around the base of foundations, plumbing fixtures, foundation walls, support piers and voids in masonry, and any other critical area where structural components extend below grade.



Far left: The applicator completes the interior vertical application before the flat concrete surface is poured.

Left: The exterior vertical application is made after final grading is complete and sometimes after the turf and ornamentals are installed.

Vertical applications may be performed two ways. The applicator may dig a trench according to label directions and apply the termiticide in the trench. Alternatively, the applicator may dig a trench according to label directions and apply termiticide by rodding in the trench to the top of the footing or to a minimum depth of four feet.

What are the types and costs of termiticides?

There are two basic types of soil treatment termiticides offered on the market: repellent and nonrepellent. Repellent termiticides are generally less expensive than nonrepellent termiticides.

When estimating the cost of termiticides for your project, you should consider the cost of the termiticide and how much will need to be applied to follow label directions and state regulations.

Termiticide prices can be divided into three groups. The lowest priced group is repellent termiticides. The middle priced group includes the higher cost repellents and lower cost nonrepellent termiticides.

The highest priced group is nonrepellent termiticides.

An easy way to figure the cost of termiticide products in a job estimate is by the cost of a finished gallon of solution to be applied.

Low-cost termiticides are about 40 cents to 60 cents per finished gallon, mid-cost are about \$1 per finished gallon and high-cost are about \$1.65 per finished gallon.

How much should be applied?

You can estimate the amount of horizontal area to be treated for a flat slab building by first determining the size of the slab. For instance, a building that is 60 feet by 100 feet has a 6,000 square feet area to be treated. Most termiticide labels require a minimum of one gallon of finished solution per 10 square feet, so the horizontal application would require 600 gallons of finished solution.

Next, estimate the amount of vertical application volume to be applied. Assume the same 60 foot by 100 foot building has four-foot foundation footings. The vertical application has to be made to the inside and outside of the foundation wall, so the estimated linear feet to be treated are 640.

Using the formula four gallons for every 10 linear feet per foot of depth would give the following amount of termiticide to apply: $4 \times (640/10) \times 4$ foot of depth = 1,024 gallons of finished solution for the vertical application.

Combining the gallons of finished solution needed for the horizontal application (600) with the gallons needed for the vertical application (1,024) results in a total 1,624 gallons of finished solution to treat the building according to the label directions and state regulations. The cost of termiticide to treat this building would then be:

- Low-cost termiticide: \$650 to \$974
- Mid-cost termiticide: \$1,624
- High-cost termiticide: \$2,680

These estimates do not include the pest control company's labor, equipment and other operating costs.

What should I look for in a pretreatment bid?

Occasionally a bid is less than the cost of the termiticide needed to properly treat the structure. A reputable company cannot perform the treatment for less than the cost of the pesticide. Seek bids from several firms and make sure all bids are received in writing. You should also:

- get a label for the termiticide to be applied and read it carefully.
- check to make sure that bids received are in compliance with the pesticide label and the Kansas Pesticide Law.
- ask for a written contract that specifies what is to be done, who will do it, the termiticide to be used, the amounts to be used, and how the application will be performed.
- require a warranty and understand what it means to the property owner.

Most termite preconstruction treatments will require several applications at different times during the construction process. To keep your project on schedule and to be sure the termiticide is properly applied:

- notify the pest control company several days ahead of when an application can be made so that it is scheduled with ample time to complete it.
- be present when the termiticide is applied and record the amount of finished termiticide solution used.
- notify the pest control company when the structure and exterior final grade are completed, so the final exterior vertical application is made. This is the first line of defense against termites.

Contact the Kansas Department of Agriculture Pesticide and Fertilizer program at (785) 296-3786 any time you have questions about termite treatment bids or applications.

This project has been funded wholly or in part by the United States Environmental Protection Agency under assistance agreement BG99732308 to the Kansas Department of Agriculture. The contents do not necessarily reflect the views and policies of the Environmental Protection Agency, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.

Pesticide and Fertilizer Program
Kansas Department of Agriculture
109 SW 9th Street, 3rd Floor
Topeka, KS 66612
(785) 296-3786

SECTION 02520
PORTLAND CEMENT CONCRETE PAVING

PART 1 GENERAL

- 1.1 SECTION INCLUDES
 - A. Concrete sidewalks, parking lot, ramps, stairs, curbs, and curb cuts.
- 1.2 PERFORMANCE REQUIREMENTS
 - A. Paving: Designed for parking and light duty commercial vehicles.
- 1.3 QUALITY ASSURANCE
 - A. Perform work in accordance with ACI 301, requirements of Sections 03100, 03200 and 03300.
 - B. Obtain cementitious materials from same source throughout.
- 1.4 ENVIRONMENTAL REQUIREMENTS
 - A. Do not place concrete when base surface temperature is less than 40 degrees F, or surface is wet or frozen.

PART 2 PRODUCTS

- 2.1 FORM MATERIALS
 - A. Wood or Steel form material, profiled to suit conditions.
 - B. Joint Filler: ANSI/ASTM D1751 type; 3/4 inch thick.
- 2.2 REINFORCEMENT
 - A. Welded Steel Wire Fabric: Plain type, ANSI/ASTM A185; 6x6-W2.9 x W2.9 in flat sheets or coiled rolls; unfinished.
 - B. Reinforcing Steel: ASTM A615; 40 or 60 ksi yield grade; deformed billet steel bars; unfinished.
- 2.3 CONCRETE MATERIALS
 - A. Cement: ASTM C150 Air Entraining - Type IA Portland type, natural color.
 - B. Fine and Coarse Mix Aggregates: ASTM C33.
 - C. Water: Potable, not detrimental to concrete.
 - D. Air Entrainment: ASTM C260.
 - E. Chemical Admixture: ASTM C494, as approved by Architect.
- 2.4 CONCRETE MIX - BY PERFORMANCE CRITERIA
 - A. Mix concrete in accordance with, ACI 304. Deliver concrete in accordance with ASTM C94.
 - B. Provide concrete to the following criteria:
 - 1. Compressive Strength: Reference schedule below.
 - 2. Slump: 3 to 4 inches.
 - 3. Air Entrained: 5 percent.
 - C. Use accelerating admixtures in cold weather only when approved by Architect/Engineer. Use of admixtures will not relax cold weather placement requirements.
 - D. Use calcium chloride only when approved by Architect/Engineer.
 - E. Use set retarding admixtures during hot weather only when approved by Architect/Engineer.
- 2.5 SOURCE QUALITY CONTROL
 - A. Submit proposed mix design of each class of concrete to the architect and appointed testing laboratory firm for review prior to commencement of work.
 - B. Tests on cement and aggregates shall be performed to ensure conformance with specified requirements.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify compacted subgrade, granular base and stabilized soil is acceptable and ready to support paving and imposed loads.
- B. Verify gradients and elevations of base are correct.

3.2 PREPARATION

- A. Moisten base to minimize absorption of water from fresh concrete.
- B. Coat surfaces of manholes, catch basins, and frames with oil to prevent bond with concrete pavement.
- C. Notify Architect/Engineer minimum 24 hours prior to commencement of concreting operations.

3.3 FORMING

- A. Place and secure forms to correct location, dimension, and profile.
- B. Assemble formwork to permit easy stripping and dismantling without damaging concrete.
- C. Place joint filler vertical in position, in straight lines. Secure to formwork during concrete placement.

3.4 REINFORCEMENT

- A. Place reinforcement at mid-height of slabs-on-grade.
- B. Interrupt reinforcement at expansion joints.
- C. Place dowels and reinforcement to achieve pavement and curb alignment as detailed.
- D. Provide doweled joints 12 inch o.c. at interruptions of concrete.

3.5 PLACING CONCRETE

- A. Place concrete in accordance with ACI301.
- B. Ensure reinforcement, inserts, embedded parts, and are not disturbed during concrete placement.
- C. Place concrete continuously between predetermined construction joints. Do not break or interrupt successive pours such that cold joints occur.
- D. Place concrete to indicated pattern.

3.6 JOINTS

- A. Place 1/2 inch expansion joints at 40 foot intervals. Align curb, gutter, and sidewalk joints.
- B. Place joint filler between paving components and building or other appurtenances. Recess top of filler 1/4 inch for sealant placement by Section 07900.
- C. Provide scored or sawn joints at 6 feet intervals U.N.O. at sidewalks and curbs and 100 square feet at all pavement. Pattern to be roughly square. Submit jointing pattern for review.
- D. Saw cut contraction joints 3/16 inch wide at an optimum time after finishing. Cut 1/3 into depth of slab.
- E. At public sidewalk, all joints to be scored per City of Salina standards. Do not saw-cut sidewalk joints.

3.7 FINISHING

- A. Sidewalk Paving: Light broom, radius to 1/4 inch and trowel joint edges.
- B. Handicapped Ramps: Reference ADA.
- C. Curbs and Gutters: Trowel finish.
- D. Place curing compound on exposed concrete surfaces immediately after finishing. Apply in accordance with manufacturer's instructions.
- E. Parking: Light Broom.

3.8 FIELD QUALITY CONTROL

- A. Three concrete test cylinders shall be taken for every 100 or less cu yds of each class of concrete placed each day.
- B. One additional test cylinder shall be taken during cold weather and cured on site under same conditions as concrete it represents.
- C. One slump test shall be taken for each set of test cylinders taken.

3.9 PROTECTION

- A. Immediately after placement, protect pavement from premature drying, excessive hot or cold temperatures, and mechanical injury.

3.10 SCHEDULES

- A. Concrete sidewalks and integral curb and gutter: 4,000 psi 28 day concrete, 4 inches thick, 6x6 – W1.4 x W1.4 W.W.F. reinforced, natural color Portland cement, broom finish, detectable warnings per ADA at ramps and curb cuts.
- B. Concrete Parking and Drive: 4,000 psi 28 day concrete, 6 inches thick, 6x6 – W2.9 x W2.9 W.W.F. reinforced, natural color Portland cement, broom finish. To be placed over compacted sub-base and 6" crushed rock/concrete.

END OF SECTION 02520

SECTION 02764
PAVEMENT JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Expansion and contraction joints within cement concrete pavement.
 - 2. Joints between cement concrete and asphalt pavement.

1.3 SUBMITTALS

- A. Product Data: For each joint-sealant product indicated.
- B. Samples for Verification: For each type and color of joint sealant required. Install joint-sealant samples in ~~1/2-inch-~~ (13-mm-) wide joints formed between two ~~6-inch-~~ (150-mm-) long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.
- C. Product Certificates: For each type of joint sealant and accessory, signed by product manufacturer.
- D. Compatibility and Adhesion Test Reports: From sealant manufacturer, indicating the following:
 - 1. Materials forming joint substrates and joint-sealant backings have been tested for compatibility and adhesion with joint sealants.
 - 2. Interpretation of test results and written recommendations for primers and substrate preparation needed for adhesion.
- E. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for sealants.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: An employer of workers trained and approved by manufacturer.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. Product Testing: Obtain test results for "Product Test Reports" Paragraph in "Submittals" Article from a qualified testing agency based on testing of current sealant products within a 36-month period preceding the Work.
 - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C 1021 for testing indicated, as documented according to ASTM E 548.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in original unopened containers or bundles with labels indicating manufacturer, product name and designation, color, expiration date, pot life, curing time, and mixing instructions for multicomponent materials.
- B. Store and handle materials to comply with manufacturer's written instructions to prevent their deterioration or damage due to moisture, high or low temperatures, contaminants, or other causes.

1.6 PROJECT CONDITIONS

- A. Do not proceed with installation of joint sealants under the following conditions:
 - 1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer.
 - 2. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer or are below ~~40 deg F~~ (4.4 deg C).
 - 3. When joint substrates are wet or covered with frost.
 - 4. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
 - 5. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, products listed in other Part 2 articles.
- B. Products: Subject to compliance with requirements, provide one of the products listed in other Part 2 articles.

2.2 MATERIALS, GENERAL

- A. Compatibility: Provide joint sealants, backing materials, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer based on testing and field experience.
- B. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.3 COLD-APPLIED JOINT SEALANTS

- A. Single-Component Jet-Fuel-Resistant Urethane Sealant for Concrete: Single-component, pourable, coal-tar-modified, urethane formulation complying with ASTM C 920 for Type S; Grade P; Class 25; Uses T, M, and, as applicable to joint substrates indicated, O.
 - 1. Products:
 - a. Sonneborn, Div. of ChemRex, Inc.; Sonomeric 1.
- B. Type NS Silicone Sealant for Concrete: Single-component, low-modulus, neutral-curing, nonsag silicone sealant complying with ASTM D 5893 for Type NS.
 - 1. Products:
 - a. Crafcro Inc.; RoadSaver Silicone.
 - b. Dow Corning Corporation; 888.
- C. Type SL Silicone Sealant for Concrete and Asphalt: Single-component, low-modulus, neutral-curing, self-leveling silicone sealant complying with ASTM D 5893 for Type SL.
 - 1. Products:
 - a. Crafcro Inc.; RoadSaver Silicone SL.
 - b. Dow Corning Corporation; 890-SL.

2.4 JOINT-SEALANT BACKER MATERIALS

- A. General: Provide joint-sealant backer materials that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by joint-sealant manufacturer based on field experience and laboratory testing.
- B. Round Backer Rods for Cold- and Hot-Applied Sealants: ASTM D 5249, Type 1, of diameter and density required to control sealant depth and prevent bottom-side adhesion of sealant.
- C. Backer Strips for Cold- and Hot-Applied Sealants: ASTM D 5249; Type 2; of thickness and width required to control sealant depth, prevent bottom-side adhesion of sealant, and fill remainder of joint opening under sealant.
- D. Round Backer Rods for Cold-Applied Sealants: ASTM D 5249, Type 3, of diameter and density required to control sealant depth and prevent bottom-side adhesion of sealant.

2.5 PRIMERS

- A. Primers: Product recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting joint-sealant performance.
 - 1. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions.

- B. Joint Priming: Prime joint substrates where indicated or where recommended in writing by joint-sealant manufacturer, based on preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.

3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.
- B. Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install backer materials of type indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - 1. Do not leave gaps between ends of backer materials.
 - 2. Do not stretch, twist, puncture, or tear backer materials.
 - 3. Remove absorbent backer materials that have become wet before sealant application and replace them with dry materials.
- D. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses provided for each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- E. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
 - 1. Remove excess sealants from surfaces adjacent to joint.
 - 2. Use tooling agents that are approved in writing by joint-sealant manufacturer and that do not discolor sealants or adjacent surfaces.
- F. Provide joint configuration to comply with joint-sealant manufacturer's written instructions, unless otherwise indicated.
- G. Provide recessed joint configuration for silicone sealants of recess depth and at locations indicated.

3.4 CLEANING

- A. Clean off excess sealants or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved by manufacturers of joint sealants and of products in which joints occur.

3.5 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealants immediately and replace with joint sealant so installations with repaired areas are indistinguishable from the original work.

END OF SECTION 02764

SECTION 03100
CONCRETE FORMWORK

PART 1 GENERAL

- 1.1 SECTION INCLUDES
 - A. Formwork for cast-in place concrete, with shoring, bracing, and anchorage.
 - B. Openings for other work.
 - C. Form accessories.
 - D. Form stripping.
- 1.2 DELIVERY, STORAGE, AND HANDLING
 - A. Deliver, store, protect, and handle products to site per the suppliers and/or manufacturer's recommendations.
 - B. Store off ground in ventilated and protected manner to prevent deterioration from moisture.
- 1.3 COORDINATION
 - A. Coordinate this Section with other Sections of work which require attachment of components to formwork.
 - B. If formwork is placed after reinforcement resulting in insufficient concrete cover over reinforcement before proceeding, request instructions from Architect/Engineer.

PART 2 PRODUCTS

- 2.1 WOOD FORM MATERIALS
 - A. Form Materials: At the discretion of the Contractor.
- 2.2 PREFABRICATED FORMS
 - A. Preformed Steel Forms: Minimum gage matched, tight fitting, stiffened to support weight of concrete without deflection detrimental to tolerances and appearance of finished surfaces.
 - B. Glass Fiber Fabric Reinforced Plastic Forms: Matched, tight fitting, stiffened to support weight of concrete without deflection detrimental to tolerances and appearance of finished concrete surfaces.
- 2.3 FORMWORK ACCESSORIES
 - A. Form Ties: Removable or Snap-off type, metal, size and shape to minimize filling, waterproofing and refinishing concrete surfaces.
 - B. Form Release Agent: Colorless mineral oil which will not stain concrete, or absorb moisture, or impair natural bonding or color characteristics of coating intended for use on concrete.
 - C. Corners: Chamfer, exposed edges 1/2 inch unless otherwise noted or detailed on the drawings.
 - D. Dovetail Anchor Slot: Galvanized steel, 22 gage thick, release tape sealed slots, anchors for securing to concrete formwork.
 - E. Flashing Reglets: Galvanized steel 22 gage thick, longest possible lengths, with alignment splines for joints, release tape sealed slots, anchors for securing to concrete formwork.
 - F. Nails, Spikes, Lag Bolts, Through Bolts, Anchorages: Sized as required, of sufficient strength and character to maintain formwork in place while placing concrete.
 - G. Waterstops: Rubber Polyvinyl chloride, minimum 1,750 psi tensile strength, minimum 50 degrees F to plus 175 degrees F working temperature range, maximum possible lengths, ribbed profile, preformed corner sections, heat welded jointing.

PART 3 EXECUTION

- 3.1 EXAMINATION
 - A. Verify lines, levels, and centers before proceeding with formwork. Ensure that dimensions agree with drawings.
- 3.2 EARTH FORMS
 - A. Earth forms if permitted, hand trim sides and bottom of earth forms. Remove loose soil prior to placing concrete.

3.3 ERECTION – FORMWORK

- A. Erect formwork, shoring, and bracing to achieve design requirements, in accordance with requirements of ACI 301.
- B. Provide bracing to ensure stability of formwork. Shore or strengthen formwork subject to over stressing by construction loads.
- C. Arrange and assemble formwork to permit dismantling and stripping. Do not damage concrete during stripping. Permit removal of remaining principal shores.
- D. Align joints and make watertight. Keep form joints to a minimum.
- E. Obtain approval before framing openings in structural members which are not indicated on Drawings.
- F. Provide chamfer strips on external corners of beams joists columns and exposed decorative concrete edges.
- G. Install void forms in accordance with manufacturer's recommendations. Protect forms from moisture or crushing.

3.4 APPLICATION - FORM RELEASE AGENT

- A. Apply form release agent on formwork in accordance with manufacturer's recommendations.
- B. Apply prior to placement of reinforcing steel, anchoring devices, and embedded items.
- C. Do not apply form release agent where concrete surfaces will receive special finishes or applied coverings which are effected by agent. Soak inside surfaces of untreated forms with clean water. Keep surfaces coated prior to placement of concrete.

3.5 INSERTS, EMBEDDED PARTS, AND OPENINGS

- A. Provide formed openings where required for items to be embedded in passing through concrete work.
- B. Locate and set in place items which will be cast directly into concrete.
- C. Coordinate with work of other sections in forming and placing openings, slots, reglets, recesses, sleeves, bolts, anchors, other inserts, and components of other Work.
- D. Position recessed reglets for brick veneer masonry anchors to spacing and intervals specified in Section 04300.
- E. Install accessories in accordance with manufacturer's instructions, straight, level, and plumb. Ensure items are not disturbed during concrete placement.
- F. Install waterstops continuous without displacing reinforcement. Heat seal joints watertight.
- G. Provide temporary ports or openings in formwork where required to facilitate cleaning and inspection. Locate openings at bottom of forms to allow flushing water to drain.
- H. Close temporary openings with tight fitting panels, flush with inside face of forms, and neatly fitted so joints will not be apparent in exposed concrete surfaces.

3.6 FORM CLEANING

- A. Clean forms as erection proceeds, to remove foreign matter within forms.
- B. Clean formed cavities of debris prior to placing concrete.
- C. Flush with water or use compressed air to remove remaining foreign matter. Ensure that water and debris drain to exterior through clean-out ports.
- D. During cold weather, remove ice and snow from within forms. Do not use de-icing salts. Do not use water to clean out forms, unless formwork and concrete construction proceed within heated enclosure. Use compressed air or other means to remove foreign matter.

3.7 FORMWORK TOLERANCES

- A. Construct formwork to maintain tolerances required by ACI 301. Construct and align formwork for elevator hoistway in accordance with ANSI/ASME A17.1.

3.8 FIELD QUALITY CONTROL

- A. Inspect erected formwork, shoring, and bracing to ensure that work is in accordance with formwork design, and that supports, fastenings, wedges, ties, and items are secure.
- B. Do not reuse wood formwork more than 2 times for concrete surfaces to be exposed to view. Do not patch formwork.

3.9 FORM REMOVAL

- A. Do not remove forms or bracing until concrete has gained sufficient strength to carry its own weight and imposed loads.
- B. Loosen forms carefully. Do not wedge pry bars, hammers, or tools against finish concrete surfaces scheduled for exposure to view.
- C. Store removed forms in manner that surfaces to be in contact with fresh concrete will not be damaged. Discard damaged forms.

END OF SECTION 03100

SECTION 03200

CONCRETE REINFORCEMENT

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Reinforcing steel bars, wire fabric, and accessories for cast-in-place concrete.

1.2 SUBMITTALS

- A. Submit under provisions of the General Requirements.
- B. Shop Drawings: Indicate bar sizes, spacings, locations, and quantities of reinforcing steel and wire fabric, bending and cutting schedules, and supporting and spacing devices.

1.3 QUALITY ASSURANCE

- A. Perform Work in accordance with CRSI - Manual of Standard Practice ACI 301 – Specifications for Structural Concrete for Buildings, and ACI 318 – Building Code Requirements for Reinforced Concrete.

1.4 COORDINATION

- A. Coordinate with placement of formwork, formed openings and other Work.

PART 2 PRODUCTS

2.1 REINFORCEMENT

- A. Reinforcing Steel: ASTM A615, 40 or 60 ksi yield grade as indicated on the drawings; deformed billet steel bars, unfinished.
- B. Reinforcing Steel Plain Bar and Rod Mats: ASTM A704, ASTM A615, Grade 40 or 60 as indicated on the drawings; steel bars or rods, unfinished.
- C. Welded Steel Wire Fabric: ASTM A815; in flat sheets or coiled rolls; unfinished.
- D. Reference Structural Drawing notes for specific reinforcing requirements. Direction of the Structural notes shall take precedence over requirements stated in this specification.

2.2 ACCESSORY MATERIALS

- A. Tie Wire: Minimum 16 gage annealed type.
- B. Chairs, Bolsters, Bar Supports, Spacers: Sized and shaped for strength and support of reinforcement during concrete placement conditions including load bearing pad on bottom to prevent vapor barrier puncture.
- C. Special Chairs, Bolsters, Bar Supports, Spacers Adjacent to Weather Exposed Concrete Surfaces: Plastic coated steel type; size and shape as required.

2.3 FABRICATION

- A. Fabricate concrete reinforcing in accordance with CRSI Manual of Practice. Locate reinforcing splices not indicated on drawings, at point of minimum stress.

PART 3 EXECUTION

3.1 PLACEMENT

- A. Place, support and secure reinforcement against displacement. Do not deviate from required position.
- B. Do not displace or damage vapor barrier.
- C. Accommodate placement of formed openings.
- D. Maintain concrete cover around reinforcing as indicated on the drawings or if not indicated as follows:
- E.

Item	Coverage
Beams	1 1/2 inch
Column Ties	1 1/2 inch

Walls (exposed to weather or backfill)	2 inch
Footings and Concrete Formed Against Earth	3 inch
Slabs on Fill	3/4 inch

END OF SECTION 03200

SECTION 03 30 00
CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, and finishes.
- B. Related Requirements:
 - 1. Section 312000 "Earth Moving" for drainage fill under slabs-on-grade.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Design Mixtures: For each concrete mixture.
- C. Steel Reinforcement Shop Drawings: Placing Drawings that detail fabrication, bending, and placement.

1.3 INFORMATIONAL SUBMITTALS

- A. Material certificates.
- B. Material test reports.
- C. Formwork Shop Drawings: Prepared by or under the supervision of a qualified professional engineer, detailing fabrication, assembly, and support of formwork.
- D. Floor surface flatness and levelness measurements indicating compliance with specified tolerances.

1.4 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C94/C94M requirements for production facilities and equipment.
 - 1. Manufacturer certified according to NRMCA's "Certification of Ready Mixed Concrete Production Facilities."
- B. Testing Agency Qualifications: An independent agency, acceptable to authorities having jurisdiction, qualified according to ASTM C1077 and ASTM E329 for testing indicated.

1.5 PRECONSTRUCTION TESTING

- A. Preconstruction Testing Service: Engage a qualified testing agency to perform preconstruction testing on concrete mixtures.

1.6 FIELD CONDITIONS

- A. Cold-Weather Placement: Comply with ACI 306.1.
 - 1. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.
- B. Hot-Weather Placement: Comply with ACI 301 and ACI 305.1.

PART 2 - PRODUCTS

2.1 CONCRETE, GENERAL

- A. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:
 - 1. ACI 301.
 - 2. ACI 117.

2.2 FORM-FACING MATERIALS

- A. Smooth-Formed Finished Concrete: Form-facing panels that provide continuous, true, and smooth concrete surfaces. Furnish in largest practicable sizes to minimize number of joints.
- B. Rough-Formed Finished Concrete: Plywood, lumber, metal, or another approved material. Provide lumber dressed on at least two edges and one side for tight fit.
- C. Form-Release Agent: Commercially formulated, colorless form-release agent that will not bond with, stain, or adversely affect architectural concrete surfaces and will not impair subsequent treatments of those surfaces.

2.3 STEEL REINFORCEMENT

- A. Reinforcing Bars: ASTM A615/A615M, Grade 60, deformed.
- B. Low-Alloy-Steel Reinforcing Bars: ASTM A706/A706M, deformed.
- C. Plain-Steel Welded-Wire Reinforcement: ASTM A1064/A1064M, plain, fabricated from as-drawn steel wire into flat sheets.
- D. Deformed-Steel Welded-Wire Reinforcement: ASTM A1064/A1064M, flat sheet.
- E. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded-wire reinforcement in place. Manufacture bar supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice."

2.4 CONCRETE MATERIALS

- A. Cementitious Materials:
 - 1. Portland Cement: ASTM C150/C150M, Type I/II.
 - 2. Fly Ash: ASTM C618, Class C.
- B. Normal-Weight Aggregates: ASTM C33/C33M, graded.
 - 1. Maximum Coarse-Aggregate Size: 1 inch nominal.
 - 2. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.
- C. Air-Entraining Admixture: ASTM C260/C260M.
- D. Chemical Admixtures: Certified by manufacturer to be compatible with other admixtures and that do not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.
 - 1. Water-Reducing Admixture: ASTM C494/C494M, Type A.
 - 2. Retarding Admixture: ASTM C494/C494M, Type B.
 - 3. Water-Reducing and Retarding Admixture: ASTM C494/C494M, Type D.
 - 4. High-Range, Water-Reducing Admixture: ASTM C494/C494M, Type F.
 - 5. High-Range, Water-Reducing and Retarding Admixture: ASTM C494/C494M, Type G.
 - 6. Plasticizing and Retarding Admixture: ASTM C1017/C1017M, Type II.
- E. Water: ASTM C94/C94M and potable.

2.5 WATERSTOPS

- A. Flexible PVC Waterstops: CE CRD-C 572, with factory-installed metal eyelets, for embedding in concrete to prevent passage of fluids through joints. Factory fabricate corners, intersections, and directional changes.
 - 1. Sika/Greenstreak PVC Waterstop or equal by BoMetals or Vynylex Waterstop & Accessories.
 - a. Profile: Ribbed with center bulb
 - b. Dimensions: 6 inches by 1/8 inch to 3/16 inches thick; tapered
 - 2. Self-Expanding Butyl Strip Waterstop: Manufactured rectangular or trapezoidal strip, butyl rubber with sodium bentonite or other hydrophilic polymers, for adhesive bonding to concrete
 - a. CETCO Waterstop RX 101 or approved equal
 - b. 3/4 by 1 inch
 - 3. Base Seals Flexible PVC: For embedding into concrete walls at control joints on exterior faces of below grade walls, affixed to forms per manufacturers recommendations
 - a. Greenstreak/Sika #7772 or BoMetals, Inc. #BS-9316

2.6 VAPOR RETARDERS

- A. Sheet Vapor Retarder: 15 mil, ASTM E1745, Class 1, Include manufacturer's recommended adhesive or pressure-sensitive tape. Rated for .01 permance.

2.7 CURING MATERIALS

- A. Evaporation Retarder: Waterborne, monomolecular film forming, manufactured for application to fresh concrete.
- B. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. when dry.
- C. Moisture-Retaining Cover: ASTM C171, polyethylene film or white burlap-polyethylene sheet.
- D. Water: Potable.
- E. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C309, Type 1, Class B, dissipating.
- F. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C309, Type 1, Class B, nondissipating, certified by curing compound manufacturer to not interfere with bonding of floor covering.
- G. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C309, Type 1, Class B, 18 to 25 percent solids, nondissipating, certified by curing compound manufacturer to not interfere with bonding of floor covering.
- H. Clear, Solvent-Borne, Membrane-Forming Curing and Sealing Compound: ASTM C1315, Type 1, Class A.
- I. Clear, Waterborne, Membrane-Forming Curing and Sealing Compound: ASTM C1315, Type 1, Class A.

2.8 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ASTM D1751, non-extruding, resilient, bituminous type.
- A. Curing Compounds/Densifier/Hardner – For Dock, Trash Room, Pool Equipment Room, Resident Storage and Bike Storage Areas:
 - 1. Sonneborn - "Lapidolith"
 - 2. Ashford Formula, by Curecrete, or equal.
- B. Curing Compounds - One of the following for remaining areas:
 - 1. Sonneborn – “Kure-n-Seal WB” or equal.
 - 2. Wet cure w/ blankets.
- C. Perimeter foundation insulation shall be as indicated, 2” thick by 24” high Styrofoam brand square edge as manufactured by Dow Chemical Company or approved equal.
- D. Base under interior concrete slabs shall be a minimum of 6" thick (unless otherwise required by Structural or Geotechnical Engineer) base of 1/2" to 3/4" clean free draining crushed limestone over unless otherwise noted.

2.9 CONCRETE MIXTURES, GENERAL

- A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, according to ACI 301.
- B. Cementitious Materials: Use fly ash, pozzolan, slag cement, and silica fume as needed to reduce the total amount of portland cement, which would otherwise be used, by not less than 15 percent.
- C. Admixtures: Use admixtures according to manufacturer's written instructions.
 - 1. Use water-reducing or plasticizing admixture in concrete, as required, for placement and workability.
 - 2. Use water-reducing and retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
 - 3. Use water-reducing admixture in pumped concrete, concrete for heavy-use industrial slabs and parking structure slabs, concrete required to be watertight, and concrete with a water-cementitious materials ratio below 0.50.

2.10 CONCRETE MIXTURES FOR BUILDING ELEMENTS

- A. Proportion normal-weight concrete mixture for footings and grade beams as follows:
 - 1. Minimum Compressive Strength: 3500 psi at 28 days.
 - 2. Maximum Water-Cementitious Materials Ratio: 0.50.
 - 3. Slump Limit: 4 inches (100 mm), 8 inches (200 mm) for concrete with verified slump of 2 to 4 inches (50 to 100 mm) before adding high-range water-reducing admixture or plasticizing admixture plus or minus 1 inch (25 mm).
 - 4. Air Content: 6 percent, plus or minus 1.5 percent at point of delivery for 1-inch (25-mm) nominal maximum aggregate size.
- B. Proportion normal-weight concrete mixture for interior flatwork as follows:
 - 1. Minimum Compressive Strength: 4000 psi at 28 days.
 - 2. Maximum Water-Cementitious Materials Ratio: 0.46.
 - 3. Slump Limit: 4 inches (100 mm), 8 inches (200 mm) for concrete with verified slump of 2 to 4 inches (50 to 100 mm) before adding high-range water-reducing admixture or plasticizing admixture plus or minus 1 inch (25 mm).
 - 4. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.
 - 5. Submit test data proving concrete design mix shrinkage is less than 0.034% at 28 days when tested according to ASTM C157 (air drying method only).
- C. Proportion normal-weight concrete mixture for exterior flatwork as follows:
 - 1. Minimum Compressive Strength: 4500 psi at 28 days.
 - 2. Maximum Water-Cementitious Materials Ratio: 0.42.
 - 3. Slump Limit: 4 inches (100 mm), 8 inches (200 mm) for concrete with verified slump of 2 to 4 inches (50 to 100 mm) before adding high-range water-reducing admixture or plasticizing admixture plus or minus 1 inch (25 mm).
 - 4. Air Content: 6 percent, plus or minus 1.5 percent at point of delivery for 1-inch (25-mm) nominal maximum aggregate size.

2.11 FABRICATING REINFORCEMENT

- A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

2.12 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C94/C94M and ASTM C1116/C1116M, and furnish batch ticket information.
 - 1. When air temperature is between 85 and 90 deg F, reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 FORMWORK INSTALLATION

- A. Design, erect, shore, brace, and maintain formwork, according to ACI 301, to support vertical, lateral, static, and dynamic loads, and construction loads that might be applied, until structure can support such loads.
- B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.
- C. Chamfer exterior corners and edges of permanently exposed concrete.

3.2 EMBEDDED ITEM INSTALLATION

- A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.

3.3 VAPOR-RETARDER INSTALLATION

- A. Sheet Vapor Retarders: Place, protect, and repair sheet vapor retarder according to ASTM E1643 and manufacturer's written instructions.
 - 1. Lap joints 6 inches and seal with manufacturer's recommended tape.

3.4 STEEL REINFORCEMENT INSTALLATION

- A. General: Comply with CRSI's "Manual of Standard Practice" for fabricating, placing, and supporting reinforcement.
 - 1. Do not cut or puncture vapor retarder. Repair damage and reseal vapor retarder before placing concrete.

3.5 JOINTS

- A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.
- C. Contraction Joints in Slabs-on-Grade: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness as follows:
 - 1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch. Repeat grooving of contraction joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
 - 2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch wide joints into concrete when cutting action does not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks.
- D. Isolation Joints in Slabs-on-Grade: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.

3.6 WATERSTOP INSTALLATION

- A. Waterstops: Install in construction joints and at other locations indicated, according to manufacturer's written instructions.

3.7 CONCRETE PLACEMENT

- A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections are completed.
- B. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete is placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as indicated. Deposit concrete to avoid segregation.
 - 1. Consolidate placed concrete with mechanical vibrating equipment according to ACI 301.

3.8 FINISHING FORMED SURFACES

- A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects repaired and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
 - 1. Apply to concrete surfaces not exposed to public view.
- B. Smooth-Formed Finish: As-cast concrete texture imparted by form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams. Repair and patch tie holes and defects. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
 - 1. Apply to concrete surfaces exposed to public view, to receive a rubbed finish or to be covered with a coating or covering material applied directly to concrete.
- C. Rubbed Finish: Apply the following to smooth-formed-finished as-cast concrete where indicated:

1. Smooth-Rubbed Finish: Not later than one day after form removal, moisten concrete surfaces and rub with carborundum brick or another abrasive until producing a uniform color and texture. Do not apply cement grout other than that created by the rubbing process.
 2. Grout-Cleaned Finish: Wet concrete surfaces and apply grout of a consistency of thick paint to coat surfaces and fill small holes. Mix 1 part portland cement to 1-1/2 parts fine sand with a 1:1 mixture of bonding admixture and water. Add white portland cement in amounts determined by trial patches, so color of dry grout matches adjacent surfaces. Scrub grout into voids and remove excess grout. When grout whitens, rub surface with clean burlap and keep surface damp by fog spray for at least 36 hours.
 3. Cork-Floated Finish: Wet concrete surfaces and apply a stiff grout. Mix 1 part portland cement and 1 part fine sand with a 1:1 mixture of bonding agent and water. Add white portland cement in amounts determined by trial patches, so color of dry grout matches adjacent surfaces. Compress grout into voids by grinding surface. In a swirling motion, finish surface with a cork float.
- D. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.9 FINISHING FLOORS AND SLABS

- A. General: Comply with ACI 302.1R recommendations for screeding, restraighening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.
- B. Float Finish: Consolidate surface with power-driven floats or by hand floating if area is small or inaccessible to power driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraighening until surface is left with a uniform, smooth, granular texture.
 1. Apply float finish to surfaces to receive trowel finish and to be covered with fluid-applied or sheet waterproofing, built-up or membrane roofing, or sand-bed terrazzo.
- C. Trowel Finish: After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.
 1. Apply a trowel finish to surfaces exposed to view or to be covered with resilient flooring, carpet, ceramic or quarry tile set over a cleavage membrane, paint, or another thin-film-finish coating system.
 2. Finish and measure surface so gap at any point between concrete surface and an unleveled, freestanding, 10-ft.- (3.05-m-) long straightedge resting on two high spots and placed anywhere on the surface does not exceed 1/4 inch (6 mm).
- D. Trowel and Fine-Broom Finish: Apply a first trowel finish to surfaces where ceramic or quarry tile is to be installed by either thickset or thin-set method. While concrete is still plastic, slightly scarify surface with a fine broom.
 1. Comply with flatness and levelness tolerances for trowel-finished floor surfaces.
- E. Broom Finish: Apply a broom finish to exterior concrete platforms, steps, ramps, and elsewhere as indicated.
- F. Slip-Resistive Aluminum Granule Finish: Factory-graded, packaged, rustproof, nonglazing, abrasive aggregate of not less than 95 percent fused aluminum-oxide granules.
 1. BASF Corporation, MasterTop 120SR, or approved equal.

3.10 CONCRETE PROTECTING AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 305.1 for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing

operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.

- C. Formed Surfaces: Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces. If forms remain during curing period, moist cure after loosening forms. If removing forms before end of curing period, continue curing for remainder of curing period.
- D. Cure concrete according to ACI 308.1, by one or a combination of the following methods:
 - 1. Moisture Curing: Keep surfaces continuously moist for not less than seven days.
 - 2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches, and sealed by waterproof tape or adhesive. Cure for not less than seven days. Immediately repair any holes or tears during curing period, using cover material and waterproof tape.
 - 3. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and repair damage during curing period.
 - a. Removal: After curing period has elapsed, remove curing compound without damaging concrete surfaces by method recommended by curing compound manufacturer unless manufacturer certifies curing compound will not interfere with bonding of floor covering used on Project.
 - 4. Curing and Sealing Compound: Apply uniformly to floors and slabs indicated in a continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Repeat process 24 hours later and apply a second coat. Maintain continuity of coating and repair damage during curing period.

3.11 CONCRETE SURFACE REPAIRS

- A. Defective Concrete: Repair and patch defective areas when approved by Architect. Remove and replace concrete that cannot be repaired and patched to Architect's approval.

3.12 FIELD QUALITY CONTROL

- A. Testing and Inspecting: Owner will engage a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Inspections:
 - 1. Steel reinforcement placement.
 - 2. Verification of use of required design mixture.
 - 3. Concrete placement, including conveying and depositing.
 - 4. Curing procedures and maintenance of curing temperature.
- C. Concrete Tests: Testing of composite samples of fresh concrete obtained according to ASTM C 172 shall be performed according to the following requirements:
 - 1. Testing Frequency: Obtain one composite sample for each day's pour of each concrete mixture exceeding 5 cu. yd. (4 cu. m), but less than 25 cu. yd. (19 cu. m), plus one set for each additional 50 cu. yd. (38 cu. m) or fraction thereof.
 - 2. Slump: ASTM C 143/C 143M; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change.
 - 3. Air Content: ASTM C 231, pressure method, for normal-weight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 - 4. Concrete Temperature: ASTM C 1064/C 1064M; one test hourly when air temperature is 40 deg F (4.4 deg C) and below and when 80 deg F (27 deg C) and above, and one test for each composite sample.

5. Unit Weight: ASTM C 567, fresh unit weight of structural lightweight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
6. Compression Test Specimens: ASTM C 31/C 31M.
 - a. Cast and laboratory cure four standard cylinder specimens for each composite sample.
7. Compressive-Strength Tests: ASTM C 39/C 39M; test one set of two laboratory-cured specimens at 7 days and one set of two specimens at 28 days.
 - a. Test one set of two laboratory cured specimens at 7 days and one set of two specimens at 28 days.
 - b. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.
8. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, Contractor shall evaluate operations and provide corrective procedures for protecting and curing in-place concrete.
9. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi (3.4 MPa).
10. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
11. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
12. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42/C 42M or by other methods as directed by Architect.
13. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
14. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.

END OF SECTION 033000

SECTION 04100
MORTAR AND MASONRY GROUT

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Mortar and grout for masonry.

1.2 GENERAL

- A. All notes or specifications on structural drawings shall override any discrepancies listed.

1.3 SUBMITTALS

- A. Submit under provisions of the General Requirements.
- B. Include design mix, indicate whether the Proportion or Property specification of ASTM C270 is to be used, required environmental conditions, and admixture limitations.
- C. Samples: Submit two samples of mortar, illustrating mortar color and color range.

1.4 QUALITY ASSURANCE

- A. Perform Work in accordance with ACI 530 and ACI 530.1.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site under provisions of the General Requirements.
- B. Maintain packaged materials clean, dry, and protected against dampness, freezing, and foreign matter.

1.6 ENVIRONMENTAL REQUIREMENTS

- A. Maintain materials and surrounding air temperature to minimum 40 degrees F prior to, during, and 48 hours after completion of masonry work.
- B. Maintain materials and surrounding air temperature to maximum 90 degrees F prior to, during, and 48 hours after completion of masonry work.

PART 2 PRODUCTS

2.1 MATERIALS

- A. Portland Cement: ASTM C150, Type I, natural color, or color to be selected at exposed areas.
- B. Masonry Cement: ASTM C91, Type S, natural color, or color to be selected at exposed areas.
- C. Premix Mortar: ASTM C387, Type S, natural color, or color to be selected at exposed areas.
- D. Mortar Aggregate: ASTM C144, standard masonry type.
- E. Hydrated Lime: ASTM C207, Type S.
- F. Water: Clean and potable.
- G. Bonding Agent: Latex or Epoxy type.

2.2 MORTAR COLOR

- A. Mortar Color: **Match existing (standard gray). Provide coloring agent as necessary to match existing where abutting existing materials.**

2.3 MORTAR MIXES

- A. Mortar For Load Bearing Walls and Partitions: ASTM C270, Type M or S using the Property specification.
- B. Mortar For Non-Load Bearing Walls and Partitions: ASTM C270, Type M or S using the Property specification.
- C. Mortar For Engineered Masonry: ASTM C270, Type M or S using the Property specification.

- D. Pointing Mortar: ASTM C270, Type N or O using the Property specification.

2.4 MORTAR MIXING

- A. Thoroughly mix mortar ingredients in accordance with ASTM C270 in quantities needed for immediate use.
- B. Maintain sand uniformly damp immediately before the mixing process.
- C. Add mortar color and admixtures in accordance with manufacturer's instructions. Provide uniformity of mix and coloration.
- D. Do not use anti-freeze compounds to lower the freezing point of mortar.
- E. If water is lost by evaporation, re-temper only within two hours of mixing.
- F. Use mortar within two hours after mixing at temperatures of 90 degrees F, or two-and-one-half hours at temperatures under 40 degrees F.

2.5 GROUT MIXES

- A. Bond Beams, and Lintels: 2,000 psi strength at 28 days; 8-10 inches slump; premixed type in accordance with ASTM C476.
- B. Engineered Masonry: 2,000 psi strength at 28 days; 8-10 inches slump; premixed type in accordance with ASTM C476.

2.6 GROUT MIXING

- A. Mix grout in accordance with ASTM C476.
- B. Add admixtures in accordance with manufacturer's instructions; mix uniformly.
- C. Do not use anti-freeze compounds to lower the freezing point of grout.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Request inspection of spaces to be grouted.

3.2 INSTALLATION

- A. Install mortar and grout in accordance with premix mortar manufacturer's instructions.
- B. Install mortar and grout in accordance with ASTM C270 and C476.
- C. Work grout into masonry cores and cavities to eliminate voids.
- D. Do not install grout in lifts greater than 16 inches or two CMU courses without consolidating grout by rodding.
- E. Do not displace reinforcement while placing grout.
- F. Remove excess mortar from grout spaces.

3.3 FIELD QUALITY CONTROL

- A. Test and evaluate mortar in accordance with ASTM C780.
- B. Test and evaluate grout in accordance with ASTM C1019.

END OF SECTION 04100

SECTION 04300
UNIT MASONRY SYSTEM

PART 1 GENERAL

- 1.1 SECTION INCLUDES
 - A. Concrete masonry and brick units.
 - B. Reinforcement, anchorage, and accessories.
- 1.2 SUBMITTALS
 - A. Submit under provisions of the General Requirements.
 - B. Product Data: Provide data for masonry and brick units and fabricated wire reinforcement.
- 1.4 QUALIFICATIONS
 - A. Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.
- 1.5 DELIVERY, STORAGE, AND HANDLING
 - A. Deliver, store, protect and handle products to site under provisions of the General Requirements.
 - B. Accept units on site. Inspect for damage.
- 1.6 ENVIRONMENTAL REQUIREMENTS
 - A. Maintain materials and surrounding air temperature to minimum 40 degrees F prior to, during, and 48 hours after completion of masonry work.
 - B. Maintain materials and surrounding air temperature to maximum 90 degrees F prior to, during, and 48 hours after completion of masonry work.
 - C. Hot Cold Weather Requirements: IMIAC - Recommended Practices and Guide Specifications for Hot or Cold Weather Masonry Construction.

PART 2 PRODUCTS

- 2.1 CONCRETE MASONRY UNITS
 - A. Hollow Non-Load Bearing Block Units (CMU): All exterior exposed concrete masonry units and mortar shall contain integral water repellent. Units shall comply with ASTM C 33 and ASTM C 90, grade N water permanence per ASTM E 514 test. Wind driven protection per ASTM E 514-74, Class E. Full wall flexural bond strength per ASTM E 72-74 all interior concrete masonry shall be grade S, Type I, moisture controlled units.
 - B. Hollow Load and Non-Load Bearing Block Units (CMU): ASTM C90, Type I - Moisture Controlled; normal weight.
 - C. Hollow load and non-load bearing block units (CMU): ASTM C90, Type I – moisture controlled: Normal weight, standard gray to match existing.
 - D. Size and Shape: Nominal modular size of 4, 6, 8, 12 x 18 x 16 inches. Provide special units for 90 degree corners, bond beams and lintels.
 - E. Special fluted CMU Units: Four flutes per unit. Sizes 4” & 12” (not including flute) shall be made with integral water repellent admixture “Dry Block”. Standard gray to match existing.
- 2.2 BRICK UNITS
 - A. Face Brick: **Not USED**
- 2.3 REINFORCEMENT AND ANCHORAGE
 - A. Single and Multiple Wythe Joint Reinforcement: Truss type; steel wire, hot dip galvanized to ASTM A641 after fabrication, No. 9 side rods with No. 9 cross ties.

Manufacturers:
a) DUR-O-WALL

- b) TRU-MESH
 - c) BET-R-WALL
 - B. Reinforcing Steel: ASTM A615, 40 or 60 ksi yield grade, deformed billet bars, uncoated finish.
 - C. Wall Ties: Corrugated wall ties, 22 ga., hot dip galvanized to ASTM A123 steel finish, HB-213 Dur-O-Wall Anchor or Equal.
Manufacturers:
 - a) DUR-O-WALL
 - b) TRU-MESH
 - c) BET-R-WALL
- 2.4 MORTAR AND GROUT
 - A. Mortar and Grout: As specified in Section 04100. Reference Structural Drawing Notes.
- 2.5 FLASHINGS
 - A. Thru-Wall Flashings: Asphalt fabric backed copper, 3-5 oz.
 - B. Lap Sealant: Butyl type as specified in Section 07900.
- 2.6 ACCESSORIES
 - A. Preformed Control Joints: Rubber, Neoprene, Polyvinyl chloride material. Provide with corner and tee accessories, heat or cement fused joints.
 - B. Joint Filler: Closed cell polyvinyl chloride, polyethylene, polyurethane or rubber; oversized 50 percent to joint width; self expanding.
 - C. Building Paper: Not used. Reference Division 7 for Fluid Applied Vapor Barriers.
 - D. Nailing Strips: Softwood, preservative treated for moisture resistance, dovetail shape, sized to masonry joints.
 - E. Weeps: Locate at 32" o.c. at base of wall, window heads, and all horizontal material transitions.
 - F. Weep Vent: Open weave polyester mesh; insect resistant, hold back from face ¼". Color to match mortar. Product similar to H&B Mortar Trap Weep Vents.
 - G. Cleaning Solution: Non-acidic, not harmful to masonry work or adjacent materials.
 - H. Cavity wall Mortar Net: 90% open area, 10" H, 1" wide, 18" minimum density PVC or nylon material set behind bottom brick courses between brick and flashing around all exterior veneer walls.
- 2.7 LINTELS
 - A. As detailed on drawings.

PART 3 EXECUTION

- 3.1 EXAMINATION
 - A. Verify that field conditions are acceptable and are ready to receive work.
 - B. Verify items provided by other sections of work are properly sized and located.
 - C. Verify that built-in items are in proper location, and ready for roughing into masonry work.
- 3.2 PREPARATION
 - A. Direct and coordinate placement of metal anchors supplied to other sections.
 - B. Provide temporary bracing during installation of masonry work. Maintain in place until building structure provides permanent bracing.
- 3.3 COURSING
 - A. Establish lines, levels, and coursing indicated. Protect from displacement.
 - B. Maintain masonry courses to uniform dimension. Form vertical and horizontal joints of uniform thickness.
 - C. Concrete Masonry Units:

1. Bond: Running unless otherwise indicated.
 2. Bond at special Fluted CMU units: Stack bond to match existing.
 3. Coursing: One unit and one mortar joint to equal 8 inches.
 4. Mortar Joints: Concave, unless noted otherwise.
- D. Brick Units:
1. Bond: Running, unless noted otherwise.
 2. Coursing: Three units and three mortar joints to equal 8 inches.
 3. Mortar Joints: Concave, unless noted otherwise.

3.4 PLACING AND BONDING

- A. Lay solid masonry units in full bed of mortar, with full head joints, uniformly jointed with other work.
- B. Lay hollow masonry units with face shell bedding on head and bed joints.
- C. Buttering corners of joints or excessive furrowing of mortar joints are not permitted.
- D. Remove excess mortar as work progresses.
- E. Interlock intersections and external corners.
- F. Do not shift or tap masonry units after mortar has achieved initial set. Where adjustment must be made, remove mortar and replace.
- G. Perform job site cutting of masonry units with proper tools to provide straight, clean, unchipped edges. Prevent broken masonry unit corners or edges.
- H. Cut mortar joints flush where wall tile is scheduled, resilient base is scheduled, cavity insulation vapor barrier adhesive is applied, or bitumen damp proofing is applied.
- I. Isolate masonry partitions from vertical structural framing members with a control joint.
- J. Isolate top joint of masonry partitions from horizontal structural framing members and slabs or decks with compressible joint filler.

3.5 WEEPS

- A. Install weeps in veneer at 32 inches o.c. horizontally above through-wall flashing, above shelf angles and lintels, at bottom of walls, and under precast concrete window sills. Hold weep screens back from face 1/4 “.

3.6 CAVITY WALL

- A. Do not permit mortar to drop or accumulate into cavity air space or to plug weeps.
- B. Build inner wythe ahead of outer wythe to receive cavity insulation and air/vapor barrier adhesive.
- C. Install 10” High x 1” Thick x continuous “Mortar Net” cavity drainage fabric.
- D. Install 90% open weave polyester weep vents at 32” o.c. and at weep locations above windows and doors.

3.7 REINFORCEMENT AND ANCHORAGE

- A. Install horizontal joint reinforcement 16 inches o.c.
- B. Place masonry joint reinforcement in first and second horizontal joints above and below openings. Extend minimum 16 inches each side of opening.
- C. Place joint reinforcement continuous in first and second joint below top of walls.
- D. Lap joint reinforcement ends minimum 6 inches.
- E. Support and secure reinforcing bars from displacement. Maintain position within 1/2 inch of dimensioned position.
- F. At masonry veneer, attach wall ties to metal studs at back-up wall at maximum 24 inches o.c. vertically and 16 inches o.c. horizontally. Place at maximum 3 inches o.c. each way around perimeter of openings, and within 12 inches of openings.
 1. At top of CMU veneer, field bend and extend galvanized tie minimum 1” into CMU cavity and grout solid. Space at 16” o.c. Provide appropriate length of wall tie to extend into CMU

3.8 MASONRY FLASHINGS

- A. Extend flashings horizontally at foundation walls, above ledge or shelf angles and lintels, under parapet caps, and at bottom of walls.

- B. Turn flashing up minimum 8 inches and bed into mortar joint of masonry, seal to concrete, seal or underlap at sheathing over framed back-up.
- C. Lap end joints minimum 6 inches and seal watertight.
- D. Turn flashing, fold, and seal at corners, bends, and interruptions.

3.9 LINTELS

- A. Install loose steel or precast concrete lintels over openings as indicated or detailed on the Structural.
- B. Install reinforced unit masonry lintels over openings where steel or precast concrete lintels are not scheduled.
- C. Maintain minimum 8 inch bearing on each side of opening.

3.10 GROUTED COMPONENTS

- A. Reinforce bond beam as indicated or detailed.
- B. Lap splices minimum 24 bar diameters.
- C. Support and secure reinforcing bars from displacement. Maintain position within 1/2 inch of dimensioned position.
- D. Place and consolidate grout fill without displacing reinforcing.
- E. At bearing locations, fill masonry cores with grout for a minimum 12 inches either side of opening.

3.11 ENGINEERED MASONRY

- A. Lay masonry units with core cells vertically aligned and cavities between wythes clear of mortar and unobstructed.
- B. Place mortar in masonry unit bed joints back 1/4 inch (6 mm) from edge of unit grout spaces, bevel back and upward. Permit mortar to cure 7 days before placing grout.
- C. Reinforce masonry unit cores and cavities with reinforcement bars and grout as indicated.
- D. Retain vertical reinforcement in position at top and bottom of cells and at intervals not exceeding 192 bar diameters. Splice reinforcement in accordance with Section 03200.
- E. Wet masonry unit surfaces in contact with grout just prior to grout placement.
- F. Grout spaces less than 2 inches in width with fine grout using low lift grouting techniques. Grout spaces 2 inches or greater in width with course grout using high or low lift grouting techniques.
- G. When grouting is stopped for more than one hour, terminate grout 1-1/2 inch below top of upper masonry unit to form a positive key for subsequent grout placement.
- H. Low Lift Grouting: Place first lift of grout to a height of 16 inches to three CMU courses and rod for grout consolidation. Place subsequent lifts in 8 inch increments and rod for grout consolidation.
- I. High Lift Grouting:
 - 1. Provide cleanout opening no less than 4 inches high at the bottom of each cell to be grouted by cutting one face shell of masonry unit.
 - 2. In double wythe walls, omit every second masonry unit in one of the wythes for clean out and cell inspection purposes.
 - 3. In double wythe walls, construct vertical grout barriers or dams between the masonry wythes, with masonry units every 30 feet maximum.
 - 4. Clean out masonry cells and cavities with high pressure water spray. Permit complete water drainage.
 - 5. Request inspection of the cells and cavities. Allow 3 days advance notice of inspection.
 - 6. After cleaning and cell inspection, seal openings with masonry units.
 - 7. Pump grout into spaces. Maintain water content in grout to intended slump without aggregate segregation.
 - 8. Limit grout lift to 60 inches and rod for grout consolidation or mechanically vibrate. Wait 60 minutes before placing next lift.

3.12 CONTROL AND EXPANSION JOINTS

- A. Do not continue horizontal joint reinforcement through control and expansion joints.
- B. Form control joint with a sheet building paper bond breaker fitted to one side of the hollow

contour end of the block unit. Fill the resultant core with grout fill. Rake joint at exposed unit faces for placement of backer rod and sealant.

- C. Install preformed control joint device in continuous lengths. Seal butt and corner joints in accordance with manufacturer's instructions.
- D. Size control joint in accordance with Section 07900 for sealant performance.
- E. Form expansion joint as detailed.

3.13 BUILT-IN WORK

- A. As work progresses, install built-in metal door and glazed frames, fabricated metal frames, window frames, wood nailing strips, fireplace accessories, anchor bolts, plates, and other items to be built-in the work and furnished by other sections.
- B. Install built-in items plumb and level.
- C. Bed anchors of metal door and glazed frames in adjacent mortar joints. Fill frame voids solid with grout. Fill adjacent masonry cores with grout minimum 12 inches from framed openings.
- D. Do not build in organic materials subject to deterioration.

3.14 TOLERANCES

- A. Maximum Variation From Alignment of Columns: 1/4 inch.
- B. Maximum Variation From Unit to Adjacent Unit: 1/32 inch.
- C. Maximum Variation from Plane of Wall: 1/4 inch in 10 ft and 1/2 inch in 20 ft or more.
- D. Maximum Variation from Plumb: 1/4 inch per story non-cumulative; 1/2 inch in two stories or more.
- E. Maximum Variation from Level Coursing: 1/8 inch in 3 ft and 1/4 inch in 10 ft; 1/2 inch in 30 ft.
- F. Maximum Variation of Joint Thickness: 1/8 inch in 3 ft.
- G. Maximum Variation from Cross Sectional Thickness of Walls: 1/4 inch.

3.15 CUTTING AND FITTING

- A. Cut and fit for chases, pipes, conduit, sleeves, and grounds. Coordinate with other sections of work to provide correct size, shape, and location.
- B. Obtain approval prior to cutting or fitting masonry work not indicated or where appearance or strength of masonry work may be impaired.

3.16 MOCK-UP

- A. Provide a 4 ft. by 4 ft. mock-up panel on the job site to be used as a standard for similar masonry construction on the project.

3.17 CLEANING

- A. Remove excess mortar and mortar smears as work progresses.
- B. Replace defective mortar. Match adjacent work.
- C. Clean soiled surfaces with cleaning solution.
- D. Use non-metallic tools in cleaning operations.

3.18 PROTECTION OF FINISHED WORK

- A. Protect finished Work.
- B. Without damaging completed work, provide protective boards at exposed external corners which may be damaged by construction activities.

END OF SECTION 04300

SECTION 051200
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Structural steel.
 - 2. Grout.
- B. Related Sections include the following:
 - 1. Division 01 Section "Quality Requirements" for independent testing agency procedures and administrative requirements.
 - 2. Division 05 Section "Steel Decking" for field installation of shear connectors.
 - 3. Division 05 Section "Metal Fabrications" for steel lintels or shelf angles not attached to structural-steel frame, miscellaneous steel fabrications and other metal items not defined as structural steel.
 - 4. Division 09 painting Sections for surface preparation and priming requirements.

1.3 DEFINITIONS

- A. Structural Steel: Elements of structural-steel frame, as classified by AISC's "Code of Standard Practice for Steel Buildings and Bridges," that support design loads.

1.4 PERFORMANCE REQUIREMENTS

- A. Connections: Provide details of simple shear connections required by the Contract Documents to be selected or completed by structural-steel fabricator to withstand ASD-service loads indicated and comply with other information and restrictions indicated.
 - 1. Select and complete connections using schematic details indicated and AISC's "Manual of Steel Construction, Allowable Stress Design," Part 4.
 - 2. Engineering Responsibility: Fabricator's responsibilities include using a qualified professional engineer to prepare structural analysis data for structural-steel connections.
- B. Construction: Type PR, partially restrained.
- C. Construction: Type 2, simple framing.

1.5 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show fabrication of structural-steel components.
 - 1. Include details of cuts, connections, splices, camber, holes, and other pertinent data.
 - 2. Include embedment drawings.
 - 3. Indicate welds by standard AWS symbols, distinguishing between shop and field welds, and show size, length, and type of each weld.
 - 4. Indicate type, size, and length of bolts, distinguishing between shop and field bolts. Identify pretensioned and slip-critical high-strength bolted connections.
 - 5. For structural-steel connections indicated to comply with design loads, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
- C. Mill Test Reports: Signed by manufacturers certifying that the following products comply with requirements:
 - 1. Structural steel including chemical and physical properties.
 - 2. Bolts, nuts, and washers including mechanical properties and chemical analysis.

3. Direct-tension indicators.
 4. Tension-control, high-strength bolt-nut-washer assemblies.
 5. Shear stud connectors.
- D. Source quality-control test reports.

1.6 QUALITY ASSURANCE

- A. Fabricator Qualifications: A qualified fabricator who participates in the AISC Quality Certification Program and is designated an AISC-Certified Plant, Category STD.
- B. Shop-Painting Applicators: Qualified according to AISC's Sophisticated Paint Endorsement P3 or SSPC-QP 3, "Standard Procedure for Evaluating Qualifications of Shop Painting Applicators."
- C. Welding: Qualify procedures and personnel according to AWS D1.1, "Structural Welding Code--Steel."
- D. Comply with applicable provisions of the following specifications and documents:
 1. AISC's "Code of Standard Practice for Steel Buildings and Bridges."
 2. AISC's "Seismic Provisions for Structural Steel Buildings" and "Supplement No. 2."
 3. AISC's "Specification for Structural Steel Buildings--Allowable Stress Design and Plastic Design."
 4. AISC's "Specification for the Design of Steel Hollow Structural Sections."
 5. AISC's "Specification for Allowable Stress Design of Single-Angle Members."
 6. RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."
- E. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Management and Coordination."

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Store materials to permit easy access for inspection and identification. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers. Protect steel members and packaged materials from erosion and deterioration.
 1. Store fasteners in a protected place. Clean and relubricate bolts and nuts that become dry or rusty before use.
 2. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures. Repair or replace damaged materials or structures as directed.

1.8 COORDINATION

- A. Furnish anchorage items to be embedded in or attached to other construction without delaying the Work. Provide setting diagrams, sheet metal templates, instructions, and directions for installation.

PART 2 - PRODUCTS

2.1 STRUCTURAL-STEEL MATERIALS

- A. W-Shapes: ASTM A 992/A 992M, Grade 50 (345).
- B. Channels, Angles, M , S-Shapes: ASTM A 36/A 36M
- C. Plate and Bar: ASTM A 36/A 36M.
- D. Corrosion-Resisting Structural Steel: ASTM A 588/A 588M, Grade 50 (345).
- E. Cold-Formed Hollow Structural Sections: ASTM A 500, Grade C, structural tubing.
- F. Corrosion-Resisting Cold-Formed Hollow Structural Sections: ASTM A 847, structural tubing.
- G. Steel Pipe: ASTM A 53/A 53M, Type E or S, Grade B.
 1. Weight Class: Standard.
 2. Finish: Black, except where indicated to be galvanized.

- H. Medium-Strength Steel Castings: ASTM A 27/A 27M, Grade 65-35 (Grade 450-240), carbon steel.
- I. High-Strength Steel Castings: ASTM A 148/A 148M, Grade 80-50 (Grade 550-345), carbon or alloy steel.
- J. Welding Electrodes: Comply with AWS requirements.
- K. Recycled Content of Steel Products: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 25 percent.

2.2 BOLTS, CONNECTORS, AND ANCHORS

- A. High-Strength Bolts, Nuts, and Washers: ASTM A 325 (ASTM A 325M), Type 1, heavy hex steel structural bolts; ASTM A 563 (ASTM A 563M) heavy hex carbon-steel nuts; and ASTM F 436 (ASTM F 436M) hardened carbon-steel washers.
 - 1. Finish: Plain.
 - 2. Direct-Tension Indicators: ASTM F 959, Type 325 (ASTM F 959M, Type 8.8,) compressible-washer type.
 - a. Finish: Plain.
- B. High-Strength Bolts, Nuts, and Washers: ASTM A 490 (ASTM A 490M), Type 1, heavy hex steel structural bolts or tension-control, bolt-nut-washer assemblies with splined ends; ASTM A 563 (ASTM A 563M) heavy hex carbon-steel nuts; and ASTM F 436 (ASTM F 436M) hardened carbon-steel washers, plain.
 - 1. Direct-Tension Indicators: ASTM F 959, Type 490 (ASTM F 959M,) Type 10.9, compressible-washer type, plain.
- C. Tension-Control, High-Strength Bolt-Nut-Washer Assemblies: ASTM F 1852, Type 1, heavy hex head steel structural bolts with splined ends; ASTM A 563 (ASTM A 563M) heavy hex carbon-steel nuts; and ASTM F 436 (ASTM F 436M) hardened carbon-steel washers.
 - 1. Finish: Plain.
- D. Shear Connectors: ASTM A 108, Grades 1015 through 1020, headed-stud type, cold-finished carbon steel; AWS D1.1, Type B.
- E. Unheaded Anchor Rods: ASTM F 1554, Grade 36.
 - 1. Configuration: Hooked.
 - 2. Nuts: ASTM A 563 (ASTM A 563M) heavy hex carbon steel.
 - 3. Plate Washers: ASTM A 36/A 36M carbon steel.
 - 4. Washers: ASTM F 436 (ASTM F 436M) hardened carbon steel.
 - 5. Finish: Plain.
- F. Headed Anchor Rods: ASTM F 1554, Grade 36, straight.
 - 1. Nuts: ASTM A 563 (ASTM A 563M) heavy hex carbon steel.
 - 2. Plate Washers: ASTM A 36/A 36M carbon steel.
 - 3. Washers: ASTM F 436 (ASTM F 436M) hardened carbon steel.
 - 4. Finish: Plain.
- G. Threaded Rods: ASTM F 1554, Grade 36 and 105, as indicated.
 - 1. Nuts: ASTM A 563 (ASTM A 563M) heavy hex carbon steel.
 - 2. Washers: ASTM F 436 (ASTM F 436M) hardened carbon steel.
 - 3. Finish: Plain.

2.3 PRIMER

- A. Primer: Fabricator's standard lead- and chromate-free, nonasphaltic, rust-inhibiting primer.
- B. Galvanizing Repair Paint: MPI#18, MPI#19, or SSPC-Paint 20.

2.4 GROUT

- A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, nonmetallic aggregate grout, noncorrosive, nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

2.5 FABRICATION

- A. Structural Steel: Fabricate and assemble in shop to greatest extent possible. Fabricate according to AISC's "Code of Standard Practice for Steel Buildings and Bridges" and AISC's "Specification for Structural Steel Buildings--Allowable Stress Design and Plastic Design."
 - 1. Camber structural-steel members where indicated.
 - 2. Identify high-strength structural steel according to ASTM A 6/ A 6M and maintain markings until structural steel has been erected.
 - 3. Mark and match-mark materials for field assembly.
 - 4. Complete structural-steel assemblies, including welding of units, before starting shop-priming operations.
- B. Thermal Cutting: Perform thermal cutting by machine to greatest extent possible.
 - 1. Plane thermally cut edges to be welded to comply with requirements in AWS D1.1.
- C. Bolt Holes: Cut, drill, or punch standard bolt holes perpendicular to metal surfaces.
- D. Finishing: Accurately finish ends of columns and other members transmitting bearing loads.
- E. Cleaning: Clean and prepare steel surfaces that are to remain unpainted according to SSPC-SP 2, "Hand Tool Cleaning."
- F. Shear Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1 and manufacturer's written instructions.
- G. Steel Wall-Opening Framing: Select true and straight members for fabricating steel wall-opening framing to be attached to structural steel. Straighten as required to provide uniform, square, and true members in completed wall framing.
- H. Welded Door Frames: Build up welded door frames attached to structural steel. Weld exposed joints continuously and grind smooth. Plug-weld fixed steel bar stops to frames. Secure removable stops to frames with countersunk, cross-recessed head machine screws, uniformly spaced not more than 10 inches (250 mm) o.c., unless otherwise indicated.
- I. Holes: Provide holes required for securing other work to structural steel and for passage of other work through steel framing members.
 - 1. Cut, drill, or punch holes perpendicular to steel surfaces. Do not thermally cut bolt holes or enlarge holes by burning.
 - 2. Base-Plate Holes: Cut, drill, mechanically thermal cut, or punch holes perpendicular to steel surfaces.
 - 3. Weld threaded nuts to framing and other specialty items indicated to receive other work.

2.6 SHOP CONNECTIONS

- A. High-Strength Bolts: Shop install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
 - 1. Joint Type: Pretensioned or Slip critical.
- B. Weld Connections: Comply with AWS D1.1 for welding procedure specifications, tolerances, appearance, and quality of welds and for methods used in correcting welding work.
 - 1. Remove backing bars or runoff tabs, back gouge, and grind steel smooth.
 - 2. Assemble and weld built-up sections by methods that will maintain true alignment of axes without exceeding tolerances of AISC's "Code of Standard Practice for Steel Buildings and Bridges" for mill material.
 - 3. Verify that weld sizes, fabrication sequence, and equipment used for architecturally exposed structural steel will limit distortions to allowable tolerances. Prevent weld show-through on exposed steel surfaces.
 - a. Grind butt welds flush.
 - b. Grind or fill exposed fillet welds to smooth profile. Dress exposed welds.

2.7 SHOP PRIMING

- A. Shop prime steel surfaces except the following:
 - 1. Surfaces embedded in concrete or mortar. Extend priming of partially embedded members to a depth of 2 inches (50 mm).
 - 2. Surfaces to be field welded.
 - 3. Surfaces to be high-strength bolted with slip-critical connections.
 - 4. Surfaces to receive sprayed fire-resistive materials.
 - 5. Galvanized surfaces.
- B. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to the following specifications and standards:
 - 1. SSPC-SP 2, "Hand Tool Cleaning."
- C. Priming: Immediately after surface preparation, apply primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a dry film thickness of not less than 1.5 mils (0.038 mm). Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.
 - 1. Stripe paint corners, crevices, bolts, welds, and sharp edges.
 - 2. Apply two coats of shop paint to inaccessible surfaces after assembly or erection. Change color of second coat to distinguish it from first.
- D. Painting: Apply a 1-coat, nonasphaltic primer complying with SSPC-PS Guide 7.00, "Painting System Guide 7.00: Guide for Selecting One-Coat Shop Painting Systems," to provide a dry film thickness of not less than 1.5 mils (0.038 mm).

2.8 GALVANIZING

- A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel according to ASTM A 123/ A 123M.
 - 1. Fill vent holes and grind smooth after galvanizing.
 - 2. Galvanize lintels shelf angles attached to structural-steel frame and located in exterior walls.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify elevations of concrete- and masonry-bearing surfaces and locations of anchor rods, bearing plates, and other embedments, with steel erector present, for compliance with requirements.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place, unless otherwise indicated.

3.3 ERECTION

- A. Set structural steel accurately in locations and to elevations indicated and according to AISC's "Code of Standard Practice for Steel Buildings and Bridges" and "Specification for Structural Steel Buildings--Allowable Stress Design and Plastic Design."
- B. Base and Bearing Plates: Clean concrete- and masonry-bearing surfaces of bond-reducing materials, and roughen surfaces prior to setting base and bearing plates. Clean bottom surface of base and bearing plates.

1. Set base and bearing plates for structural members on wedges, shims, or setting nuts as required.
 2. Weld plate washers to top of base plate.
 3. Pretension anchor rods after supported members have been positioned and plumbed. Do not remove wedges or shims but, if protruding, cut off flush with edge of base or bearing plate before packing with grout.
 4. Promptly pack grout solidly between bearing surfaces and base or bearing plates so no voids remain. Neatly finish exposed surfaces; protect grout and allow to cure. Comply with manufacturer's written installation instructions for shrinkage-resistant grouts.
- C. Maintain erection tolerances of structural steel within AISC's "Code of Standard Practice for Steel Buildings and Bridges."
- D. Align and adjust various members forming part of complete frame or structure before permanently fastening. Before assembly, clean bearing surfaces and other surfaces that will be in permanent contact with members. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.
1. Level and plumb individual members of structure.
 2. Make allowances for difference between temperature at time of erection and mean temperature when structure is completed and in service.
- E. Splice members only where indicated.
- F. Remove erection bolts on welded, architecturally exposed structural steel; fill holes with plug welds; and grind smooth at exposed surfaces.
- G. Do not use thermal cutting during erection unless approved by Architect. Finish thermally cut sections within smoothness limits in AWS D1.1.
- H. Do not enlarge unfair holes in members by burning or using drift pins. Ream holes that must be enlarged to admit bolts.
- I. Shear Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1 and manufacturer's written instructions.
- 3.4 FIELD CONNECTIONS
- A. High-Strength Bolts: Shop install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
1. Joint Type: Pretensioned or Slip critical.
- B. Weld Connections: Comply with AWS D1.1 for welding procedure specifications, tolerances, appearance, and quality of welds and for methods used in correcting welding work.
1. Comply with AISC's "Code of Standard Practice for Steel Buildings and Bridges" and "Specification for Structural Steel Buildings--Allowable Stress Design and Plastic Design" for bearing, adequacy of temporary connections, alignment, and removal of paint on surfaces adjacent to field welds.
 2. Remove backing bars or runoff tabs, back gouge, and grind steel smooth.
 3. Assemble and weld built-up sections by methods that will maintain true alignment of axes without exceeding tolerances of AISC's "Code of Standard Practice for Steel Buildings and Bridges" for mill material.
 4. Verify that weld sizes, fabrication sequence, and equipment used for architecturally exposed structural steel will limit distortions to allowable tolerances. Prevent weld show-through on exposed steel surfaces.
 - a. Grind butt welds flush.
 - b. Grind or fill exposed fillet welds to smooth profile. Dress exposed welds.
- 3.5 FIELD QUALITY CONTROL
- A. Testing Agency: Design Builder will engage a qualified independent testing and inspecting agency to inspect field welds and high-strength bolted connections.

- B. Bolted Connections: Shop-bolted connections will be inspected according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."
- C. Welded Connections: Field welds will be visually inspected according to AWS D1.1.
 - 1. In addition to visual inspection, field welds at moment connections or as indicated on the drawings will be tested according to AWS D1.1 and the following inspection procedures, at testing agency's option:
 - a. Liquid Penetrant Inspection: ASTM E 165.
 - b. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration will not be accepted.
 - c. Ultrasonic Inspection: ASTM E 164.
 - d. Radiographic Inspection: ASTM E 94.
- D. In addition to visual inspection, test and inspect field-welded shear connectors according to requirements in AWS D1.1 for stud welding and as follows:
 - 1. Perform bend tests if visual inspections reveal either a less-than- continuous 360-degree flash or welding repairs to any shear connector.
 - 2. Conduct tests on additional shear connectors if weld fracture occurs on shear connectors already tested, according to requirements in AWS D1.1.
- E. Correct deficiencies in Work that test reports and inspections indicate does not comply with the Contract Documents.

3.6 REPAIRS AND PROTECTION

- A. Repair damaged galvanized coatings on galvanized items with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Touchup Painting: After installation, promptly clean, prepare, and prime or reprime field connections, rust spots, and abraded surfaces of prime-painted joists and accessories, bearing plates, and abutting structural steel.
 - 1. Clean and prepare surfaces by SSPC-SP 2 hand-tool cleaning or SSPC-SP 3 power-tool cleaning.
 - 2. Apply a compatible primer of same type as shop primer used on adjacent surfaces.
- C. Touchup Painting: Cleaning and touchup painting are specified in Division 9 painting Sections.

END OF SECTION 051200

SECTION 052100

STEEL JOIST FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. K-series steel joists.
 - 2. KCS-type K-series steel joists.
 - 3. Joist accessories.
- B. Related Sections include the following:
 - 1. Section 033000 "Cast-in-Place Concrete" for installing bearing plates in concrete.
 - 2. Section 042000 "Unit Masonry" for installing bearing plates in unit masonry.
 - 3. Section 051200 "Structural Steel Framing" for field-welded shear connectors.

1.3 DEFINITIONS

- A. SJI "Specifications": Steel Joist Institute's "Standard Specifications, Load Tables and Weight Tables for Steel Joists and Joist Girders."
- B. Special Joists: Joists requiring modification by the manufacturer to support nonuniform, unequal, or special loading conditions that invalidate SJI's "Standard Specifications Load Tables and Weight Tables for Steel Joists and Joist Girders."

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of joist, accessory, and product.
- B. Shop Drawings:
 - 1. Include layout, designation, number, type, location, and spacing of joists.
 - 2. Include joining and anchorage details, bracing, bridging, and joist accessories; splice and connection locations and details; and attachments to other construction.
 - 3. Indicate locations and details of bearing plates to be embedded in other construction.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For manufacturer.
- B. Welding certificates.
- C. Manufacturer certificates.
- D. Mill Certificates: For each type of bolt.
- E. Comprehensive engineering analysis of special joists signed and sealed by the qualified professional engineer responsible for its preparation.

1.6 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A firm experienced in manufacturing joists similar to those indicated for this Project and with a record of successful in-service performance.
 - 1. Manufacturer must be certified by SJI to manufacture joists complying with SJI standard specifications and load tables.
 - 2. Assumes responsibility for engineering special joists to comply with performance requirements. This responsibility includes preparation of Shop Drawings and comprehensive engineering analysis by a qualified professional engineer.
 - 3. Professional Engineer Qualifications: A professional engineer who is legally authorized to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those

performed for installations of joists that are similar to those indicated for this Project in material, design, and extent.

- B. SJI Specifications: Comply with SJI's "Standard Specifications Load Tables and Weight Tables for Steel Joists and Joist Girders" (hereafter, "Specifications"), applicable to types of joists indicated.
- C. Welding: Qualify procedures and personnel according to AWS D1.1, "Structural Welding Code--Steel"; and AWS D1.3 "Structural Welding Code--Sheet Steel."

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle joists as recommended in SJI's "Specifications."
- B. Protect joists from corrosion, deformation, and other damage during delivery, storage, and handling.

1.8 SEQUENCING

- A. Deliver steel bearing plates and other devices to be built into concrete and masonry construction.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Provide special joists and connections capable of withstanding design loads indicated.
 - 1. Use ASD; data are given at service-load level.
 - 2. Design special joists to withstand design loads with live-load deflections no greater than the following:
 - a. Roof Joists: Vertical deflection of 1/360 of the span.

2.2 K-SERIES STEEL JOISTS

- A. Manufacture steel joists of type indicated according to "Standard Specifications for Open Web Steel Joists, K-Series" in SJI's "Specifications," with steel-angle top- and bottom-chord members, underslung ends, and parallel top chord.
 - 1. Joist Type: K-series steel joists and KCS-type K-series steel joists.
- B. Steel Joist Substitutes: Manufacture according to "Standard Specifications for Open Web Steel Joists, K-Series" in SJI's "Specifications," with steel-angle or -channel members.
- C. Provide holes in chord members for connecting and securing other construction to joists.
- D. Top-Chord Extensions: Extend top chords of joists with SJI's Type S top-chord extensions where indicated, complying with SJI's "Specifications."
- E. Extended Ends: Extend bearing ends of joists with SJI's Type R extended ends where indicated, complying with SJI's "Specifications."
- F. Camber joists according to SJI's "Specifications."
- G. Equip bearing ends of joists with manufacturer's standard beveled ends or sloped shoes if joist slope exceeds 1/4 inch per 12 inches.

2.3 PRIMERS

- A. Low-Emitting Materials: Paints and coatings shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- B. Primer: SSPC-Paint 15, Type I, red oxide; FS TT-P-636, red oxide; or manufacturer's standard shop primer complying with performance requirements of either of these red-oxide primers.

2.4 JOIST ACCESSORIES

- A. Bridging: Provide bridging anchors and number of rows of horizontal or diagonal bridging of material, size, and type required by SJI's "Specifications" for type of joist, chord size, spacing, and span.
- B. Fabricate steel bearing plates from ASTM A 36/A 36M steel with integral anchorages of sizes and thicknesses indicated. Shop prime paint
- C. Steel bearing plates with integral anchorages are specified in section 055000 "Metal Fabrications."
- D. Supply ceiling extensions, either extended bottom-chord elements or a separate extension unit of enough strength to support ceiling construction. Extend ends to within 1/2 inch (13 mm) of finished wall surface, unless otherwise indicated.
- E. Welding Electrodes: Comply with AWS standards.
- F. Supply miscellaneous accessories, including splice plates and bolts required by joist manufacturer to complete joist installation.

2.5 CLEANING AND SHOP PAINTING

- A. Clean and remove loose scale, heavy rust, and other foreign materials from fabricated joists and accessories to be primed by hand-tool cleaning, SSPC-SP 2 or power-tool cleaning, SSPC-SP 3.
- B. Do not prime paint joists and accessories to receive sprayed fire-resistive materials.
- C. Apply one shop coat of primer to joists and joist accessories to be primed to provide a continuous, dry paint film not less than 1 mil (0.025 mm) thick.
- D. Painting of joists and joist accessories is specified in Division 9 Section "Painting."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine supporting substrates, embedded bearing plates, and abutting structural framing, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Do not install joists until supporting construction is in place and secured.
- B. Install joists and accessories plumb, square, and true to line; securely fasten to supporting construction according to SJI's "Specifications," joist manufacturer's written recommendations, and requirements in this Section.
 - 1. Before installation, splice joists delivered to Project site in more than one piece.
 - 2. Space, adjust, and align joists accurately in location before permanently fastening.
 - 3. Install temporary bracing and erection bridging, connections, and anchors to ensure that joists are stabilized during construction.
 - 4. Delay rigidly connecting bottom-chord extensions to columns or supports until dead loads have been applied.
- C. Field weld joists to supporting steel bearing plates and framework. Coordinate welding sequence and procedure with placement of joists. Comply with AWS requirements and procedures for welding, appearance, and quality of welds, and methods used in correcting welding work.
- D. Bolt joists to supporting steel framework using carbon-steel bolts, unless otherwise indicated.
- E. Bolt joists to supporting steel framework using high-strength structural bolts, unless otherwise indicated. Comply with RCSC's "Allowable Stress Design Specification for Structural Joints Using ASTM A 325 or ASTM A 490 Bolts" for high-strength structural bolt installation and tightening requirements.

- F. Install and connect bridging concurrently with joist erection, before construction loads are applied. Anchor ends of bridging lines at top and bottom chords if terminating at walls or beams.

3.3 FIELD QUALITY CONTROL

- A. Testing Agency: Design Builder will engage a qualified independent testing and inspecting agency to inspect field welds and high-strength bolted connections.
- B. Field welds will be visually inspected according to AWS D1.1/D1.1M.
- C. In addition to visual inspection, field welds will be tested according to AWS D1.1 and the following procedures, as applicable:
 - 1. Radiographic Testing: ASTM E 94 and ASTM E 142.
 - 2. Magnetic Particle Inspection: ASTM E 709.
 - 3. Ultrasonic Testing: ASTM E 164.
 - 4. Liquid Penetrant Inspection: ASTM E 165.
- D. Bolted connections will be visually inspected.
 - 1. High-strength, field-bolted connections will be tested and verified according to procedures in RCSC's "Allowable Stress Design Specification for Structural Joints Using ASTM A 325 or ASTM A 490 Bolts."
- E. Correct deficiencies in Work that inspections and test reports have indicated are not in compliance with specified requirements.
- F. Additional testing will be performed to determine compliance of corrected Work with specified requirements.

3.4 REPAIRS AND PROTECTION

- A. Repair damaged galvanized coatings on galvanized items with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Touchup Painting: After installation, promptly clean, prepare, and prime or reprime field connections, rust spots, and abraded surfaces of prime-painted joists and accessories, bearing plates and abutting structural steel.
 - 1. Clean and prepare surfaces by hand-tool cleaning, SSPC-SP 2, or power-tool cleaning, SSPC-SP 3.
 - 2. Apply a compatible primer of the same type as the shop primer used on adjacent surfaces.
- C. Touchup Painting: Cleaning and touchup painting are specified in Division 9 Section "Painting."
- D. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer that ensure joists and accessories are without damage or deterioration at time of Substantial Completion.

END OF SECTION 052100

SECTION 053100

STEEL DECKING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Roof deck.
 - 2. Acoustical roof deck
- B. Related Sections include the following:
 - 1. Section 099113 "Exterior Painting" for repair painting of primed deck and finish painting of deck.
 - 2. Section 099123 "Interior Painting" for repair painting of primed deck and finish painting of deck.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of deck, accessory, and product indicated.
- B. Shop Drawings:
 - 1. Include layout and types of deck panels, anchorage details, reinforcing channels, pans, cut deck openings, special jointing, accessories, and attachments to other construction.

1.4 INFORMATIONAL SUBMITTALS

- A. Welding certificates.
- B. Product Certificates: For each type of steel deck.
- C. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, indicating that each of the following complies with requirements:
 - 1. Power-actuated mechanical fasteners.
 - 2. Acoustical roof deck.
- D. Evaluation Reports: For steel deck.
- E. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who has completed steel deck similar in material, design, and extent to that indicated for this Project and whose work has resulted in construction with a record of successful in-service performance.
- B. Testing Agency Qualifications: An independent testing agency, acceptable to authorities having jurisdiction, qualified according to ASTM E 329 to conduct the testing indicated, as documented according to ASTM E 548.
- C. Welding: Qualify procedures and personnel according to AWS D1.1, "Structural Welding Code--Steel," and AWS D1.3, "Structural Welding Code--Sheet Steel."
- D. Fire-Test-Response Characteristics: Where indicated, provide steel deck units identical to those steel deck units tested for fire resistance per ASTM E 119 by a testing and inspection agency acceptable to authorities having jurisdiction.
 - 1. Fire-Resistance Ratings: Indicated by design designations from UL's "Fire Resistance Directory" or from the listings of another testing and inspecting agency.

2. Steel deck units shall be identified with appropriate markings of applicable testing and inspecting agency.
 - E. AISI Specifications: Calculate structural characteristics of steel deck according to AISI's "Specification for the Design of Cold-Formed Steel Structural Members."
 - F. FM Listing: Provide steel roof deck evaluated by FM and listed in FM's "Approval Guide, Building Materials" for Class 1 fire rating and Class 1-90 windstorm ratings.
- 1.6 DELIVERY, STORAGE, AND HANDLING
- A. Protect steel deck from corrosion, deformation, and other damage during delivery, storage, and handling.
 - B. Stack steel deck on platforms or pallets and slope to provide drainage. Protect with a waterproof covering and ventilate to avoid condensation.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. AISI Specifications: Comply with calculated structural characteristics of steel deck according to AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members."
- B. Fire-Resistance Ratings: Comply with ASTM E 119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 1. Indicate design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency.
- C. Low-Emitting Materials: Paints and coatings shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

2.2 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- B. Basis-of-Design product as indicated.
- C. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Steel Deck:
 - a. ASC Profiles, Inc.
 - b. Canam Steel Corp.; The Canam Manac Group.
 - c. Consolidated Systems, Inc.
 - d. DACS, Inc.
 - e. D-Mac Industries Inc.
 - f. Epic Metals Corporation.
 - g. Marlyn Steel Decks, Inc.
 - h. New Millennium Building Systems, LLC.
 - i. Nucor Corp.; Vulcraft Division.
 - j. Roof Deck, Inc.
 - k. United Steel Deck, Inc.
 - l. Valley Joist; Division of EBSCO Industries, Inc.
 - m. Vercor Manufacturing Co.
 - n. Wheeling Corrugating Company; Div. of Wheeling-Pittsburgh Steel Corporation.
 - o. Approved Equal

2.3 ROOF DECK

- A. Steel Roof Deck: Fabricate panels, without top-flange stiffening grooves, to comply with "SDI Specifications and Commentary for Steel Roof Deck," in SDI Publication No. 30, and with the following:
1. Galvanized Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 33 (230, G60 (Z180) zinc coating.
 2. Deck Profile: Type WR, wide rib.
 3. Profile Depth: 1-1/2 inches (38 mm).
 4. Design Uncoated-Steel Thickness: As indicated
 5. Span Condition: Triple span or more.
 6. Side Laps: Overlapped or interlocking seam at Contractor's option.

2.4 ACOUSTICAL ROOF DECK

- A. Acoustical Roof Deck: Fabricate panels, without top-flange stiffening grooves, to comply with "SDI Specifications and Commentary for Steel Roof Deck," in SDI Publication No. 31, and with the following:
1. Galvanized and Shop-Primed Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 40, G60 (Z180) zinc coating; cleaned, pretreated, and primed with manufacturer's standard baked-on, rust-inhibitive primer.
 - a. Color: Gray surface at underside only.
 2. Deck Profile: As indicated
 3. Cellular Deck Profile: As indicated, with bottom plate.
 4. Profile Depth: 1.5 inches
 5. Design Uncoated-Steel Thickness: As indicated
 6. Design Uncoated-Steel Thicknesses; Deck Unit/Bottom Plate: As indicated
 7. Span Condition: Triple span or more.
 8. Side Laps: Overlapped or interlocking seam at Contractor's option.
 9. Acoustical Perforations: Deck units with manufacturer's standard flat-bottom.
 10. Sound-Absorbing Insulation: Manufacturer's standard premolded roll or strip of glass or mineral fiber.
 - a. Factory install sound-absorbing insulation into cells of cellular deck.
 11. Acoustical Performance: NRC 0.90, tested according to ASTM C 423.

2.5 ACCESSORIES

- A. General: Provide manufacturer's standard accessory materials for deck that comply with requirements indicated.
- B. Side-Lap Fasteners: Corrosion-resistant, hexagonal washer head; self-drilling, carbon-steel screws, No. 10 (4.8 mm) minimum diameter.
- C. Flexible Closure Strips: Vulcanized, closed-cell, synthetic rubber.
- D. Miscellaneous Sheet Metal Deck Accessories: Steel sheet, minimum yield strength of 33,000 psi (230 MPa), not less than 0.0359-inch (0.91-mm) design uncoated thickness, of same material and finish as deck; of profile indicated or required for application.
- E. Steel Sheet Accessories: Steel sheet, of same material, finish, and thickness as deck, unless otherwise indicated.
- F. Pour Stops and Girder Fillers: Steel sheet, minimum yield strength of 33,000 psi (230 MPa), of same material and finish as deck, and of thickness and profile recommended by SDI Publication No. 29 for overhang and slab depth.
- G. Column Closures, End Closures, Z-Closures, and Cover Plates: Steel sheet, of same material, finish, and thickness as deck, unless otherwise indicated.
- H. Weld Washers: Uncoated steel sheet, shaped to fit deck rib, 0.0598 inch (1.52 mm) thick, with factory-punched hole of 3/8-inch (9.5-mm) minimum diameter.

- I. Recessed Sump Pans: Single-piece steel sheet, 0.0747 inch (1.90 mm) thick, of same material and finish as deck, with 3-inch- (76-mm-) wide flanges and level recessed pans of 1-1/2- inch (38-mm) minimum depth. For drains, cut holes in the field.
- J. Flat Sump Plate: Single-piece steel sheet, 0.0747 inch (1.90 mm) thick, of same material and finish as deck. For drains, cut holes in the field.
- K. Shear Connectors: ASTM A 108, Grades 1010 through 1020 headed stud type, cold-finished carbon steel, AWS D1.1, Type B, with arc shields.
- L. Galvanizing Repair Paint: ASTM A 780.
- M. Repair Paint: Lead- and chromate-free rust-inhibitive primer complying with performance requirements of FS TT-P-664.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine supporting frame and field conditions for compliance with requirements for installation tolerances and other conditions affecting performance.

3.2 INSTALLATION, GENERAL

- A. Install deck panels and accessories according to applicable specifications and commentary in SDI Publication No. 29, manufacturer's written instructions, and requirements in this Section.
- B. Install temporary shoring before placing deck panels, if required to meet deflection limitations.
- C. Locate decking bundles to prevent overloading of supporting members.
- D. Place deck panels on supporting frame and adjust to final position with ends accurately aligned and bearing on supporting frame before being permanently fastened. Do not stretch or contract side-lap interlocks.
- E. Place deck panels flat and square and fasten to supporting frame without warp or deflection.
- F. Cut and neatly fit deck panels and accessories around openings and other work projecting through or adjacent to decking.
- G. Provide additional reinforcement and closure pieces at openings as required for strength, continuity of decking, and support of other work.
- H. Comply with AWS requirements and procedures for manual shielded metal arc welding, appearance and quality of welds, and methods used for correcting welding work.
- I. Mechanical fasteners may be used in lieu of welding to fasten deck. Locate mechanical fasteners and install according to deck manufacturer's written instructions.

3.3 ROOF DECK INSTALLATION

- A. Fasten roof deck panels to wood supporting members as indicated on plan
- B. Side-Lap and Perimeter Edge Fastening: Fasten side laps and perimeter edges of panels between supports, at intervals not exceeding the lesser of 1/2 of the span or 18 inches (450 mm), and as follows:
 - 1. Mechanically fasten with self-drilling No. 10 (4.8-mm-) diameter or larger carbon-steel screws.
- C. End Bearing: Install deck ends over supporting frame with a minimum end bearing of 1-1/2 inches (38 mm), with end joints as follows:
 - 1. Lapped 2 inches (51 mm) minimum or butted at Contractor's option.
- D. Roof Sump Pans and Sump Plates: Install over openings provided in roof decking and weld flanges to top of deck. Space welds not more than 12 inches (305 mm) apart with at least 1 weld at each corner.
- E. Miscellaneous Roof Deck Accessories: Install ridge and valley plates, finish strips, cover plates, end closures, and reinforcing channels according to deck manufacturer's written instructions. Weld to substrate to provide a complete deck installation.

- F. Flexible Closure Strips: Install flexible closure strips over partitions, walls, and where indicated. Install with adhesive according to manufacturer's written instructions to ensure complete closure.

3.4 FIELD QUALITY CONTROL

- A. Testing: Design Builder will engage a qualified independent testing agency to perform field quality-control testing.
- B. Field welds will be subject to inspection.
- C. Shear connector stud welds will be inspected and tested according to AWS D1.1 for stud welding and as follows:
 - 1. Shear connector stud welds will be visually inspected.
 - 2. Bend tests will be performed if visual inspections reveal less than a full 360-degree flash or welding repairs to any shear connector stud.
 - 3. Tests will be conducted on additional shear connector studs if weld fracture occurs on shear connector studs already tested according to AWS D1.1.
- D. Testing agency will report test results promptly and in writing to Contractor and Architect.
- E. Remove and replace work that does not comply with specified requirements.
- F. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of corrected work with specified requirements.

3.5 REPAIRS AND PROTECTION

- A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on both surfaces of deck with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Repair Painting: Wire brush and clean rust spots, welds, and abraded areas on both surfaces of prime-painted deck immediately after installation, and apply repair paint.
 - 1. Apply repair paint, of same color as adjacent shop-primed deck, to bottom surfaces of deck exposed to view.
 - 2. Wire brushing, cleaning, and repair painting of bottom deck surfaces are included in Division 09.
- C. Provide final protection and maintain conditions to ensure that steel deck is without damage or deterioration at time of Substantial Completion.

END OF SECTION 053100

SECTION 05311

STEEL FLOOR DECK

PART 1 GENERAL

- 1.01 SECTION INCLUDES
- A. Steel floor deck and accessories.
 - B. Framing for openings up to and including 12 inches.
- 1.02 RELATED SECTIONS
- A. Section 05120 - Structural Steel: Structural framed openings larger than 12 inches.
- 1.03 PERFORMANCE REQUIREMENTS
- A. Design metal decking in accordance with SDI Design Manual for Composite Decks, Form Deck, and Roof Decks.
 - B. Calculate to structural working stress design and maximum vertical deck deflection of 1/180.
- 1.04 SUBMITTALS
- A. Shop Drawings: Indicate decking plan, support locations, projections, openings and reinforcement, pertinent details, and accessories. Accessories to include as a minimum, all flashings required to close deck units at columns, walls, and penetrations through the deck. Also include deck support at columns.
 - B. Product Data: Provide deck profile characteristics and dimensions, structural properties, and finishes.
 - C. Manufacturer's Installation Instructions: Indicate specific installation sequence, and special instructions.
- 1.05 QUALIFICATIONS
- A. Installer: Company specializing in performing the work of this Section with minimum 3 years' experience.
- 1.06 STORAGE AND HANDLING
- A. Store and protect products.
 - B. Cut plastic wrap to encourage ventilation.
 - C. Separate sheets and store decking on dry wood sleepers; slope for positive drainage.
- 1.07 FIELD MEASUREMENTS
- A. Verify that field measurements are as shown on shop drawings.

PART 2 PRODUCTS

- 2.01 MATERIAL
- A. Sheet Steel: ASTM A446, Grade A Structural Quality; precoated with prime coating of gray color as selected from manufacturer's standard range.
 - B. Welding Materials: AWS D1.1.
 - C. Touch-Up Primer: Red oxide type.
- 2.02 FABRICATION
- A. Stair Landing: Sheet steel, configured as follows:

<u>Span Design:</u>	<u>Multiple</u>
Minimum Metal Thickness (Excluding Finish):	28 Gage.
Nominal Height:	0.6 inches
Formed Sheet Width:	24, 30, or 36 inches
Side Joints:	Lapped
Flute Sides:	Plain vertical face
 - B. Floor Metal Decking: Sheet steel, configured as follows:

<u>Span Design:</u>	<u>Multiple</u>
Minimum Metal Thickness (Excluding Finish):	22 Gage.
Nominal Height:	1.5 inches

- | | |
|---------------------|----------------------|
| Formed Sheet Width: | 24, 30, or 36 inches |
| Side Joints: | Lapped |
| Flute Sides: | Plain vertical face |
- C. Weld Washers: Mild steel, uncoated, 3/4 inch outside diameter, 1/8 inch thick.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.
- B. Beginning of installation means installer accepts existing conditions.

3.02 INSTALLATION

- A. Erect metal decking in accordance with manufacturer's instructions.
- B. Bear decking on masonry support surfaces with 4-inch minimum bearing. Align and level.
- C. Bear decking on steel supports with 2 inch minimum bearing. Align and level.
- D. Fasten ribbed deck to steel support members at ends and intermediate supports with fusion welds through weld washers as required on the structural drawings.
- E. Weld in accordance with AWS D1.1.

END OF SECTION 05311

SECTION 054000

COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Exterior non-load-bearing wall framing.
 - 2. Interior non-load-bearing wall framing.
 - 3. Ceiling joist framing.
 - 4. Soffit framing.
- B. Related Sections include the following:
 - 1. Division 05 Section "Metal Fabrications" for masonry shelf angles and connections.
 - 2. Division 09 Section "Non-Structural Metal Framing" for interior non-load-bearing, metal-stud framing and ceiling-suspension assemblies.
 - 3. Division 09 Section "Gypsum Board Shaft Wall Assemblies" for interior non-load-bearing, metal-stud-framed, shaft-wall assemblies.

1.3 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Provide cold-formed metal framing capable of withstanding design loads within limits and under conditions indicated.
 - 1. Design Loads: As indicated on structural frames.
 - 2. Deflection Limits: Design framing systems to withstand design loads without deflections greater than the following:
 - a. Interior Non-Load-Bearing Framing: Horizontal deflection of 1/360.
 - b. Ceiling Joist Framing: Vertical deflection of 1/240 of the span for live loads and 1/240 for total loads of the span.
 - c. Soffit Framing: Vertical deflection of 1/240 of the span for live loads and 1/240 for total loads of the span.
 - 3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change of 120 deg F (67 deg C).
 - 4. Design framing system to maintain clearances at openings, to allow for construction tolerances, and to accommodate live load deflection of primary building structure as follows:
 - a. Upward and downward movement of 3/4 inch (19 mm).
- B. Cold-Formed Steel Framing, General: Design according to AISI's "Standard for Cold-Formed Steel Framing - General Provisions."
 - 1. Headers: Design according to AISI's "Standard for Cold-Formed Steel Framing - Header Design."
 - 2. Design exterior non-load-bearing wall framing to accommodate horizontal deflection without regard for contribution of sheathing materials.

1.4 SUBMITTALS

- A. Product Data: For each type of cold-formed metal framing product and accessory indicated.
- B. Shop Drawings: Show layout, spacings, sizes, thicknesses, and types of cold-formed metal framing; fabrication; and fastening and anchorage details, including mechanical fasteners.

Show reinforcing channels, opening framing, supplemental framing, strapping, bracing, bridging, splices, accessories, connection details, and attachment to adjoining work.

1. For cold-formed metal framing indicated to comply with design loads, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
- C. Welding certificates.
- D. Qualification Data: For professional engineer.
- E. Product Test Reports: From a qualified testing agency, unless otherwise stated, indicating that each of the following complies with requirements, based on evaluation of comprehensive tests for current products:
 1. Steel sheet.
 2. Expansion anchors.
 3. Power-actuated anchors.
 4. Mechanical fasteners.
 5. Vertical deflection clips.
 6. Horizontal drift deflection clips
 7. Miscellaneous structural clips and accessories.
- F. Research/Evaluation Reports: For cold-formed metal framing.

1.5 QUALITY ASSURANCE

- A. Engineering Responsibility: Preparation of Shop Drawings, design calculations, and other structural data by a qualified professional engineer.
- B. Testing Agency Qualifications: An independent testing agency, acceptable to authorities having jurisdiction, qualified according to ASTM E 329 to conduct the testing indicated.
- C. Product Tests: Mill certificates or data from a qualified independent testing agency indicating steel sheet complies with requirements, including base-metal thickness, yield strength, tensile strength, total elongation, chemical requirements, and metallic-coating thickness.
- D. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code--Steel," and AWS D1.3, "Structural Welding Code--Sheet Steel."
- E. Fire-Test-Response Characteristics: Where indicated, provide cold-formed metal framing identical to that of assemblies tested for fire resistance per ASTM E 119 by a testing and inspecting agency acceptable to authorities having jurisdiction.
- F. AISI Specifications and Standards: Comply with AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members" and its "Standard for Cold-Formed Steel Framing - General Provisions."
 1. Comply with AISI's "Standard for Cold-Formed Steel Framing - Truss Design."
 2. Comply with AISI's "Standard for Cold-Formed Steel Framing - Header Design."
- G. Comply with AISI's "Standard for Cold-Formed Steel Framing - Prescriptive Method for One and Two Family Dwellings."
- H. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination."

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Protect cold-formed metal framing from corrosion, deformation, and other damage during delivery, storage, and handling.
- B. Store cold-formed metal framing, protect with a waterproof covering, and ventilate to avoid condensation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering cold-formed metal framing that may be incorporated into the Work include, but are not limited to, the following:
- B. Manufacturers: Subject to compliance with requirements, provide cold-formed metal framing by one of the following:
 - 1. Allied Studco.
 - 2. AllSteel Products, Inc.
 - 3. California Expanded Metal Products Company.
 - 4. Clark Steel Framing.
 - 5. Consolidated Fabricators Corp.; Building Products Division.
 - 6. Craco Metals Manufacturing, LLC.
 - 7. Custom Stud, Inc.
 - 8. Dale/Incor.
 - 9. Design Shapes in Steel.
 - 10. Dietrich Metal Framing; a Worthington Industries Company.
 - 11. Formetal Co. Inc. (The).
 - 12. Innovative Steel Systems.
 - 13. MarinoWare; a division of Ware Industries.
 - 14. Quail Run Building Materials, Inc.
 - 15. SCAFCO Corporation.
 - 16. Southeastern Stud & Components, Inc.
 - 17. Steel Construction Systems.
 - 18. Steeler, Inc.
 - 19. Super Stud Building Products, Inc.
 - 20. United Metal Products, Inc.

2.2 MATERIALS

- A. Recycled Content of Steel Products: Provide products with an average recycled content of steel products so postconsumer recycled content plus one-half of preconsumer recycled content is not less than 25 percent.
- B. Steel Sheet: ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated, of grade and coating weight as follows:
 - 1. Grade: As required by structural performance.
 - 2. Coating: G60 (Z180).
- C. Steel Sheet for Vertical Deflection, Drift Clips: ASTM A 653/A 653M, structural steel, zinc coated, of grade and coating as follows:
 - 1. Grade: As required by structural performance.
 - 2. Coating: G90 (Z275).

2.3 EXTERIOR NON-LOAD-BEARING WALL FRAMING

- A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows (unless otherwise noted on the drawings):
 - 1. Minimum Base-Metal Thickness: 0.0428 inch (1.09 mm).
 - 2. Flange Width: 1-5/8 inches (41 mm).
- B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and as follows:
 - 1. Minimum Base-Metal Thickness: Matching steel studs.
 - 2. Flange Width: 1-1/4 inches (32 mm).

- C. Vertical Deflection Clips: Manufacturer's standard clips, capable of accommodating upward and downward vertical displacement of primary structure through positive mechanical attachment to stud web.
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Dietrich Metal Framing; a Worthington Industries Company.
 - b. MarinoWare, a division of Ware Industries.
 - c. SCAFCO Corporation
 - d. The Steel Network, Inc.
 - D. Single Deflection Track: Manufacturer's single, deep-leg, U-shaped steel track; unpunched, with unstiffened flanges, of web depth to contain studs while allowing free vertical movement, with flanges designed to support horizontal and lateral loads and transfer them to the primary structure, and as follows:
 - 1. Minimum Base-Metal Thickness: Matching connected studs.
 - 2. Flange Width: 1 inch (25 mm) plus the design gap noted on drawings (3/4" min).
 - E. Double Deflection Tracks: Manufacturer's double, deep-leg, U-shaped steel tracks, consisting of nested inner and outer tracks; unpunched, with unstiffened flanges.
 - 1. Outer Track: Of web depth to allow free vertical movement of inner track, with flanges designed to support horizontal and lateral loads and transfer them to the primary structure, and as follows:
 - a. Minimum Base-Metal Thickness: Matching connecting studs.
 - b. Flange Width: 1 inch (25 mm) plus the design gap noted on drawings (3/4" min).
 - 2. Inner Track: Of web depth indicated, and as follows:
 - a. Minimum Base-Metal Thickness: 0.0428 inch (1.09 mm).
 - F. Drift Clips: Manufacturer's standard bypass or head clips, capable of isolating wall stud from upward and downward vertical displacement and lateral drift of primary structure.
- 2.4 INTERIOR NON-LOAD-BEARING WALL FRAMING
- A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows (unless otherwise noted on the drawings):
 - 1. Minimum Base-Metal Thickness: 0.0329 inch (0.84 mm).
 - 2. Minimum Flange Width: 1-5/8 inches (41 mm).
 - B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and as follows:
 - 1. Minimum Base-Metal Thickness: Matching steel studs.
 - 2. Minimum Flange Width: 1-1/4 inches (32 mm).
 - C. Vertical Deflection Clips: Manufacturer's standard clips, capable of accommodating upward and downward vertical displacement of primary structure through positive mechanical attachment to stud web.
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Dietrich Metal Framing; a Worthington Industries Company.
 - b. MarinoWare, a division of Ware Industries.
 - c. SCAFCO Corporation
 - d. The Steel Network, Inc.

- D. Single Deflection Track: Manufacturer's single, deep-leg, U-shaped steel track; unpunched, with unstiffened flanges, of web depth to contain studs while allowing free vertical movement, with flanges designed to support horizontal and lateral loads and transfer them to the primary structure, and as follows:
 - 1. Minimum Base-Metal Thickness: 0.0428 inch (1.09 mm).
 - 2. Flange Width: 1 inch (25 mm) plus the design gap for 1-story structures.
- E. Double Deflection Tracks: Manufacturer's double, deep-leg, U-shaped steel tracks, consisting of nested inner and outer tracks; unpunched, with unstiffened flanges.
 - 1. Outer Track: Of web depth to allow free vertical movement of inner track, with flanges designed to support horizontal and lateral loads and transfer them to the primary structure, and as follows:
 - a. Minimum Base-Metal Thickness: 0.0677 inch.
 - b. Flange Width: 1.25 inch plus the design gap for 1-story structures.
 - 2. Inner Track: Of web depth indicated, and as follows:
 - a. Minimum Base-Metal Thickness: 0.0428 inch (1.09 mm).
- F. Drift Clips: Manufacturer's standard bypass or head clips, capable of isolating wall stud from upward and downward vertical displacement and lateral drift of primary structure.

2.5 CEILING JOIST FRAMING

- A. Steel Ceiling Joists: Manufacturer's standard C-shaped steel sections, of web depths indicated, [unpunched,] [punched with standard holes,] [punched with enlarged service holes,] with stiffened flanges, and as follows:
 - 1. Minimum Base-Metal Thickness: 0.0428 inch (1.09 mm)
 - 2. Flange Width: 1-5/8 inches (41 mm)

2.6 SOFFIT FRAMING

- A. Exterior Soffit Frame: Manufacturer's standard C-shaped steel sections, of web depths indicated, with stiffened flanges, and as follows:
 - 1. Minimum Base-Metal Thickness: 0.0329 inch (0.84 mm)
 - 2. Flange Width: 1-5/8 inches (41 mm)

2.7 FRAMING ACCESSORIES

- A. Fabricate steel-framing accessories from steel sheet, ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated, of same grade and coating weight used for framing members.
- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
 - 1. Supplementary framing.
 - 2. Bracing, bridging, and solid blocking.
 - 3. Web stiffeners.
 - 4. Anchor clips.
 - 5. End clips.
 - 6. Foundation clips.
 - 7. Gusset plates.
 - 8. Stud kickers, knee braces, and girts.
 - 9. Joist hangers and end closures.
 - 10. Hole reinforcing plates.
 - 11. Backer plates.

2.8 ANCHORS, CLIPS, AND FASTENERS

- A. Steel Shapes and Clips: ASTM A 36/A 36M, zinc coated by hot-dip process according to ASTM A 123/A 123M.

- B. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times design load, as determined by testing per ASTM E 488 conducted by a qualified independent testing agency.
- C. Powder-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times design load, as determined by testing per ASTM E 1190 conducted by a qualified independent testing agency.
- D. Mechanical Fasteners: ASTM C 1513, corrosion-resistant-coated, self-drilling, self-tapping steel drill screws.
 - 1. Head Type: Low-profile head beneath sheathing, manufacturer's standard elsewhere.
- E. Welding Electrodes: Comply with AWS standards.

2.9 MISCELLANEOUS MATERIALS

- A. Galvanizing Repair Paint: SSPC-Paint 20.
- B. Cement Grout: Portland cement, ASTM C 150, Type I; and clean, natural sand, ASTM C 404. Mix at ratio of 1 part cement to 2-1/2 parts sand, by volume, with minimum water required for placement and hydration.
- C. Nonmetallic, Nonshrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, portland cement, shrinkage-compensating agents, and plasticizing and water-reducing agents, complying with ASTM C 1107, with fluid consistency and 30-minute working time.
- D. Shims: Load bearing, high-density multimonomer plastic, nonleaching.
- E. Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch (6.4 mm) thick, selected from manufacturer's standard widths to match width of bottom track or rim track members.

2.10 FABRICATION

- A. Fabricate cold-formed metal framing and accessories plumb, square, and true to line, and with connections securely fastened, according to referenced AISI's specifications and standards, manufacturer's written instructions, and requirements in this Section.
 - 1. Fabricate framing assemblies using jigs or templates.
 - 2. Cut framing members by sawing or shearing; do not torch cut.
 - 3. Fasten cold-formed metal framing members by welding, screw fastening, clinch fastening, or riveting as standard with fabricator. Wire tying of framing members is not permitted.
 - a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - b. Locate mechanical fasteners and install according to Shop Drawings, with screw penetrating joined members by not less than three exposed screw threads.
 - 4. Fasten other materials to cold-formed metal framing by welding, bolting, or screw fastening, according to Shop Drawings.
- B. Reinforce, stiffen, and brace framing assemblies to withstand handling, delivery, and erection stresses. Lift fabricated assemblies to prevent damage or permanent distortion.
- C. Fabrication Tolerances: Fabricate assemblies level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet (1:960) and as follows:
 - 1. Spacing: Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.
 - 2. Squareness: Fabricate each cold-formed metal framing assembly to a maximum out-of-square tolerance of 1/8 inch (3 mm).

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine supporting substrates and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance.
 - 1. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Before sprayed fire-resistive materials are applied, attach continuous angles, supplementary framing, or tracks to structural members indicated to receive sprayed fire-resistive materials.
- B. After applying sprayed fire-resistive materials, remove only as much of these materials as needed to complete installation of cold-formed framing without reducing thickness of fire-resistive materials below that are required to obtain fire-resistance rating indicated. Protect remaining fire-resistive materials from damage.
- C. Install load bearing shims or grout between the underside of wall bottom track or rim track and the top of foundation wall or slab at stud or joist locations to ensure a uniform bearing surface on supporting concrete or masonry construction.
- D. Install sealer gaskets to isolate the underside of wall bottom track or rim track and the top of foundation wall or slab at stud or joist locations.

3.3 INSTALLATION, GENERAL

- A. Cold-formed metal framing may be shop or field fabricated for installation, or it may be field assembled.
- B. Install cold-formed metal framing according to AISI's "Standard for Cold-Formed Steel Framing - General Provisions" and to manufacturer's written instructions unless more stringent requirements are indicated.
- C. Install shop- or field-fabricated, cold-formed framing and securely anchor to supporting structure.
 - 1. Screw, bolt, or weld wall panels at horizontal and vertical junctures to produce flush, even, true-to-line joints with maximum variation in plane and true position between fabricated panels not exceeding 1/16 inch (1.6 mm).
- D. Install cold-formed metal framing and accessories plumb, square, and true to line, and with connections securely fastened.
 - 1. Cut framing members by sawing or shearing; do not torch cut.
 - 2. Fasten cold-formed metal framing members by welding, screw fastening, clinch fastening, or riveting. Wire tying of framing members is not permitted.
 - a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - b. Locate mechanical fasteners and install according to Shop Drawings, and complying with requirements for spacing, edge distances, and screw penetration.
- E. Install framing members in one-piece lengths unless splice connections are indicated for track or tension members.
- F. Install temporary bracing and supports to secure framing and support loads comparable in intensity to those for which structure was designed. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.
- G. Do not bridge building expansion and control joints with cold-formed metal framing. Independently frame both sides of joints.
- H. Install insulation, specified in Division 07 Section "Thermal Insulation," in built-up exterior framing members, such as headers, sills, boxed joists, and multiple studs at openings, that are inaccessible on completion of framing work.
- I. Fasten hole reinforcing plate over web penetrations that exceed size of manufacturer's standard punched openings.

- J. Erection Tolerances: Install cold-formed metal framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet (1:960) and as follows:
 - 1. Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

3.4 EXTERIOR NON-LOAD-BEARING WALL INSTALLATION

- A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure as indicated.
- B. Fasten both flanges of studs to top and bottom track, unless otherwise indicated. Space studs as follows:
 - 1. Stud Gage: As indicated on structural plans.
 - 2. Stud Spacing: As indicated on structural plans.
- C. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar requirements.
- D. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.
 - 1. Install single-leg deflection tracks and anchor to building structure.
 - 2. Install double deep-leg deflection tracks and anchor outer track to building structure.
 - 3. Connect vertical deflection clips to studs and anchor to building structure.
 - 4. Connect drift clips to cold formed metal framing and anchor to building structure.
- E. Install horizontal bridging in wall studs, spaced in rows indicated on Shop Drawings but not more than 48 inches (1220 mm) apart. Fasten at each stud intersection.
 - 1. Top Bridging for Single Deflection Track: Install row of horizontal bridging within 12 inches (305 mm) of single deflection track. Install a combination of flat, taut, steel sheet straps of width and thickness indicated and stud or stud-track solid blocking of width and thickness matching studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
 - a. Install solid blocking at centers indicated on Shop Drawings.
 - 2. Bridging: Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.
 - 3. Bridging: Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
 - 4. Bridging: Proprietary bridging bars installed according to manufacturer's written instructions.
- F. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, fasteners, and stud girts, to provide a complete and stable wall-framing system.

3.5 NONLOADBEARING WALL FRAMING

- A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure.
- A. Fasten both flanges of studs to top and bottom track, unless otherwise indicated. Space studs as follows:
 - 1. Stud Gage: As indicated on structural plans.
 - 2. Stud Spacing: As indicated on structural plans.
- B. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar requirements.
- C. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.
 - 1. Install single deep-leg deflection tracks and anchor to building structure.
 - 2. Install double deep-leg deflection tracks and anchor outer track to building structure.

3. Connect vertical deflection clips to studs and anchor to building structure.
4. Connect drift clips to cold-formed steel metal framing and anchor to building structure.
- D. Install horizontal bridging in wall studs, spaced vertically in rows indicated on Shop Drawings but not more than 48 inches (1220 mm) apart. Fasten at each stud intersection.
 1. Channel Bridging: Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.
 2. Strap Bridging: Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
 3. Bar Bridging: Proprietary bridging bars installed according to manufacturer's written instructions.
- E. Top Bridging for Single Deflection Track: Install row of horizontal bridging within 12 inches (305 mm) of single deflection track. Install a combination of bridging and stud or stud-track solid blocking of width and thickness matching studs, secured to stud webs or flanges.
 1. Install solid blocking at centers indicated on Shop Drawings – 96-inch max.
- F. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, and fasteners, to provide a complete and stable wall-framing system.

3.6 INSTALLATION TOLERANCES

- A. Install cold-formed steel framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet (1:960) and as follows:
 1. Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

3.7 FIELD QUALITY CONTROL

- A. Testing: Design Builder will engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Field and shop welds will be subject to testing and inspecting.
- C. Testing agency will report test results promptly and in writing to Contractor and Architect.
- D. Remove and replace work where test results indicate that it does not comply with specified requirements.
- E. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

3.8 REPAIRS AND PROTECTION

- A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on fabricated and installed cold-formed metal framing with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer that ensure that cold-formed metal framing is without damage or deterioration at time of Substantial Completion.

END OF SECTION 054000

SECTION 055000

METAL FABRICATIONS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Miscellaneous steel framing and supports.
2. Shelf angles.
3. Metal ladders.
4. Metal floor plate[**and supports**].
5. Structural-steel door frames.
6. Miscellaneous steel trim.
7. Metal bollards.
8. Loose bearing and leveling plates.

B. Products furnished, but not installed, under this Section include the following:

1. Loose steel lintels.
2. Anchor bolts, steel pipe sleeves, slotted-channel inserts, and wedge-type inserts indicated to be cast into concrete or built into unit masonry.
3. Steel weld plates and angles for casting into concrete.

1.2 ACTION SUBMITTALS

A. Product Data: For the following:

1. Nonslip aggregates and nonslip-aggregate surface finishes.
2. Fasteners.
3. Shop primers.
4. Shrinkage-resisting grout.
5. Slotted channel framing.
6. Manufactured metal ladders.
7. Ladder safety cages.
8. Metal bollards.
9. Vehicular barrier cable systems.
10. **[Pipe] [Downspout]** guards.
11. Abrasive metal **[nosings] [treads] [and] [thresholds]**.

B. Sustainable Design Submittals:

C. Shop Drawings: Show fabrication and installation details.[**Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items.**]

D. Samples: For each type and finish of extruded **[nosing] [and] [tread]**.

PART 2 - PRODUCTS

2.1 METALS

- A. Metal Surfaces, General: Provide materials with smooth, flat surfaces unless otherwise indicated. For metal fabrications exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes. B. Steel Plates, Shapes, and Bars: ASTM A 36/A 36M.

2.2 FASTENERS

- A. General: Unless otherwise indicated, provide **[Type 304]** stainless steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B633 or ASTM F1941/F1941M, Class Fe/Zn 5, at exterior walls. Select fasteners for type, grade, and class required.

1. Provide stainless steel fasteners for fastening **[aluminum] [stainless steel] [or] [nickel silver]**.

2. Provide bronze fasteners for fastening bronze.
- B. Cast-in-Place Anchors in Concrete: Either threaded or wedge type unless otherwise indicated; galvanized ferrous castings, either ASTM A47/A47M malleable iron or ASTM A27/A27M cast steel. Provide bolts, washers, and shims as needed, all hot-dip galvanized per ASTM F2329/F2329M.
- C. Post-Installed Anchors: [**Torque-controlled expansion anchors**] [**or**] [**chemical anchors**].
 1. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B633 or ASTM F1941/F1941M, Class Fe/Zn 5, unless otherwise indicated.
 2. Material for Exterior Locations and Where Stainless Steel Is Indicated: Alloy [**Group 1 (A1)**] [**Group 2 (A4)**] stainless steel bolts, **ASTM F593 (ASTM F738M)**, and nuts, **ASTM F594 (ASTM F836M)**.

2.3 MISCELLANEOUS MATERIALS

- A. Shop Primers: Provide primers that comply with [**Section 099113 "Exterior Painting."**] [**Section 099123 "Interior Painting."**] [**Section 099600 "High-Performance Coatings."**] [**Section 099113 "Exterior Painting," Section 099123 "Interior Painting," and Section 099600 "High-Performance Coatings."**]
- B. Universal Shop Primer: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79 and compatible with topcoat.
 1. Use primer containing pigments that make it easily distinguishable from zinc-rich primer.
- C. Water-Based Primer: Emulsion type, anticorrosive primer for mildly corrosive environments that is resistant to flash rusting when applied to cleaned steel, complying with MPI#107 and compatible with topcoat.
- D. Epoxy Zinc-Rich Primer: Complying with MPI#20 and compatible with topcoat.
- E. Shop Primer for Galvanized Steel: Primer formulated for exterior use over zinc-coated metal and compatible with finish paint systems indicated.
- F. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it.
- G. Shrinkage-Resistant Grout: Factory-packaged, nonmetallic, nonstaining, noncorrosive, nongaseous grout complying with ASTM C1107/C1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.
- H. Concrete: Comply with requirements in Section 033000 "Cast-in-Place Concrete" for normal weight, air-entrained concrete with a minimum 28-day compressive strength of **3500 psi**.

2.4 FABRICATION, GENERAL

- A. Shop Assembly: Preassemble items in the shop to greatest extent possible. Disassemble units only as necessary for shipping and handling limitations. Use connections that maintain structural value of joined pieces. Clearly mark units for reassembly and coordinated installation.
- B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately **1/32 inch (1 mm)** unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.
- C. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.
- D. Form exposed work with accurate angles and surfaces and straight edges.
- E. Weld corners and seams continuously to comply with the following:
 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove welding flux immediately.
 4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing [**and contour of welded surface matches that of adjacent surface**].
- F. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners or welds where possible. Where exposed fasteners are required, use Phillips flat-head (countersunk) fasteners unless otherwise indicated. Locate joints where least conspicuous.

- G. Fabricate seams and other connections that are exposed to weather in a manner to exclude water. Provide weep holes where water may accumulate.
 - H. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors, not less than **8 inches (200 mm)** from ends and corners of units and **24 inches (600 mm)** o.c.
- 2.5 MISCELLANEOUS FRAMING AND SUPPORTS
- A. Fabricate units from steel shapes, plates, and bars of welded construction unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction.
 - 1. Fire-Resistance Rating: [**As indicated**].
- 2.6 SHELF ANGLES
- A. Fabricate shelf angles from steel angles of sizes indicated and for attachment to concrete framing. Provide horizontally slotted holes to receive **3/4-inch (19-mm)** bolts, spaced not more than **6 inches (150 mm)** from ends and **24 inches (600 mm)** o.c., unless otherwise indicated.
 - 1. Provide mitered and welded units at corners.
 - 2. Provide open joints in shelf angles at expansion and control joints. Make open joint approximately **2 inches (50 mm)** larger than expansion or control joint.
 - B. For cavity walls, provide vertical channel brackets to support angles from backup masonry and concrete.
 - C. Galvanize [**and prime**] shelf angles located in exterior walls.
 - D. Prime shelf angles located in exterior walls with [**zinc-rich primer.**]
 - E. Furnish wedge-type concrete inserts, complete with fasteners, to attach shelf angles to cast-inplace concrete.
- 2.7 METAL LADDERS
- A. General:
 - 1. Comply with ANSI A14.3 [, **except for elevator pit ladders**].
 - 2. For elevator pit ladders, comply with ASME A17.1/CSA B44.
 - B. Steel Ladders:
 - 1. Space siderails [**16 inches (406 mm)**] apart unless otherwise indicated.
 - 2. Siderails: Continuous, [**3/8-by-2-1/2-inch (9.5-by-64-mm)** steel flat bars, with eased edges.
 - 3. Rungs: [**3/4-inch- (19-mm-) diameter**] [**3/4-inch- (19-mm-) square**] [**1-inch- (25-mm-) diameter**] [**1-inch- (25-mm-) square**], steel bars.
 - 4. Fit rungs in centerline of siderails; plug-weld and grind smooth on outer rail faces.
- 2.8 METAL FLOOR PLATE
- A. Fabricate from [**abrasive-surface floor**] plate of thickness indicated below:
 - 1. Thickness: [**1/4 inch (6.4 mm)**].
 - B. Provide [**steel**] angle supports as indicated.
 - C. Provide flush [**steel**] bar drop handles for lifting removable sections, one at each end of each section.
- 2.9 STRUCTURAL-STEEL DOOR FRAMES
- A. Fabricate structural-steel door frames from steel shapes, plates, and bars of size and to dimensions indicated, fully welded together, with **5/8-by-1-1/2-inch (16-by-38-mm)** steel channel stops, unless otherwise indicated. Plug-weld built-up members and continuously weld exposed joints. Reinforce frames and drill and tap as necessary to accept finish hardware.
 - 1. Provide with integrally welded steel strap anchors for securing door frames into adjoining concrete or masonry.
 - B. Galvanize [**exterior**] steel frames.
 - C. Prime [**exterior**] steel frames with [**zinc-rich primer.**]

2.10 MISCELLANEOUS STEEL TRIM

- A. Unless otherwise indicated, fabricate units from steel shapes, plates, and bars of profiles shown with continuously welded joints and smooth exposed edges. Miter corners and use concealed field splices where possible.
- B. Provide cutouts, fittings, and anchorages as needed to coordinate assembly and installation with other work.
 - 1. Provide with integrally welded steel strap anchors for embedding in concrete or masonry construction.
- C. Galvanize [**exterior**] miscellaneous steel trim.
- D. Prime [**exterior**] miscellaneous steel trim with [**zinc-rich primer.**]

2.11 METAL BOLLARDS

- A. Fabricate metal bollards from [**Schedule 80 steel pipe**] Retain subparagraph below if required; delete if bollards are concrete filled.
 - 1. Cap bollards with **1/4-inch- (6.4-mm-)** thick steel.
- B. Fabricate bollards with **3/8-inch- (9.5-mm-)** thick, [**steel**] [**stainless steel, ASTM A480/A480M, No. 4 finish**] baseplates for bolting to concrete slab. Drill baseplates at all four corners for **3/4-inch (19-mm)** anchor bolts.
- C. Fabricate sleeves for bollard anchorage from steel or stainless steel [**pipe**] with **1/4-inch- (6.4mm-)** thick, steel or stainless steel plate welded to bottom of sleeve. Make sleeves not less than **8 inches (200 mm)** deep and **3/4 inch (19 mm)** larger than OD of bollard.
- D. Prime steel bollards with [**zinc-rich primer.**]

2.12 LOOSE BEARING AND LEVELING PLATES

- A. Provide loose bearing and leveling plates for steel items bearing on masonry or concrete construction. Drill plates to receive anchor bolts and for grouting.
- B. Galvanize bearing and leveling plates.
- C. Prime plates with [**zinc-rich primer.**] [**primer specified in Section 099600 "High Performance Coatings."**]

2.13 LOOSE STEEL LINTELS

- A. Fabricate loose steel lintels from steel angles and shapes of size indicated for openings and recesses in masonry walls and partitions at locations indicated. Fabricate in single lengths for each opening unless otherwise indicated. Weld adjoining members together to form a single unit where indicated.
- B. Galvanize [**and prime**] loose steel lintels located in exterior walls.
- C. Prime loose steel lintels located in exterior walls with [**zinc-rich primer.**]

2.14 STEEL WELD PLATES AND ANGLES

- A. Provide steel weld plates and angles not specified in other Sections, for items supported from concrete construction as needed to complete the Work. Provide each unit with no fewer than two integrally welded steel strap anchors for embedding in concrete.

2.15 GENERAL FINISH REQUIREMENTS

- A. Finish metal fabrications after assembly.

2.16 STEEL AND IRON FINISHES

- A. Galvanizing: Hot-dip galvanize items as indicated to comply with ASTM A153/A153M for steel and iron hardware and with ASTM A123/A123M for other steel and iron products.
 - 1. Do not quench or apply post galvanizing treatments that might interfere with paint adhesion.
- B. Shop prime iron and steel items [**not indicated to be galvanized**] unless they are to be embedded in concrete, sprayed-on fireproofing, or masonry, or unless otherwise indicated.
 - 1. Shop prime with [**universal shop primer**]
- C. Preparation for Shop Priming: Prepare surfaces to comply with [**requirements indicated below:**]
 - 1. Exterior Items: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."

2. Items Indicated to Receive Zinc-Rich Primer: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
 3. Items Indicated to Receive Primers Specified in Section 099600 "High-Performance Coatings": SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
 4. Other Steel Items: SSPC-SP 3, "Power Tool Cleaning."
 5. Galvanized-Steel Items: SSPC-SP 16, "Brush-off Blast Cleaning of Coated and Uncoated Galvanized Steel, Stainless Steels, and Non-Ferrous Metals."
- D. Shop Priming: Apply shop primer to comply with SSPC-PA 1, "Paint Application Specification No. 1: Shop, Field, and Maintenance Painting of Steel," for shop painting.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.
- B. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.
- C. Field Welding: Comply with the following requirements:
 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove welding flux immediately.
 4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.
- D. Fastening to In-Place Construction: Provide anchorage devices and fasteners where metal fabrications are required to be fastened to in-place construction. Provide threaded fasteners for use with concrete and masonry inserts, toggle bolts, through bolts, lag screws, wood screws, and other connectors.
- E. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.

3.2 INSTALLATION OF MISCELLANEOUS FRAMING AND SUPPORTS

- A. Install framing and supports to comply with requirements of items being supported, including manufacturers' written instructions and requirements indicated on Shop Drawings.
- B. Anchor supports for **[ceiling hung toilet partitions]** **[operable partitions]** **[overhead doors]** **[and]** **[overhead grilles]** securely to, and rigidly brace from, building structure.
- C. Anchor shelf angles securely to existing construction with **[expansion anchors]** **[anchor bolts]** **[through bolts]**.
- D. Support steel girders on solid grouted masonry, concrete, or steel pipe columns. Secure girders with anchor bolts embedded in grouted masonry or concrete or with bolts through top plates of pipe columns.

3.3 INSTALLATION OF PREFABRICATED BUILDING COLUMNS

- A. Install prefabricated building columns to comply with ANSI/AISC 360, "Specifications for Structural Steel Buildings," and with requirements applicable to listing and labeling for fire resistance rating indicated.

3.4 INSTALLATION OF METAL BOLLARDS

- A. Fill metal-capped bollards solidly with concrete and allow concrete to cure seven days before installing.

- B. Anchor bollards in concrete [**with pipe sleeves preset and anchored into concrete**] [**in formed or core-drilled holes not less than 42 inches (1050 mm) deep and 3/4 inch (19 mm) larger than OD of bollard**]. Fill annular space around bollard solidly with shrinkage-resistant grout; mixed and placed to comply with grout manufacturer's written instructions. Slope grout up approximately 1/8 inch (3 mm) toward bollard.
 - C. Anchor bollards in place with concrete footings. Center and align bollards in holes 3 inches (75 mm) above bottom of excavation. Place concrete and vibrate or tamp for consolidation. Support and brace bollards in position until concrete has cured.
 - D. Fill bollards solidly with concrete, mounding top surface to shed water.
- 3.5 **INSTALLATION OF VEHICULAR BARRIER CABLE SYSTEMS**
- A. Install vehicular barrier cable systems at locations indicated, mounted at heights indicated on Drawings above the parking surface. Anchor [**wire ropes**] [**steel prestressing strand**] to structural columns and walls and tension to withstand vehicle loading as specified in "Performance Requirements" Article with no cable tensioned less than 3000 lbf (13.3 kN). Do not displace supporting components.
- 3.6 **INSTALLATION OF BEARING AND LEVELING PLATES**
- A. Clean concrete and masonry bearing surfaces of bond-reducing materials, and roughen to improve bond to surfaces. Clean bottom surface of plates.
 - B. Set bearing and leveling plates on wedges, shims, or leveling nuts. After bearing members have been positioned and plumbed, tighten anchor bolts. Do not remove wedges or shims but, if protruding, cut off flush with edge of bearing plate before packing with shrinkage-resistant grout. Pack grout solidly between bearing surfaces and plates to ensure that no voids remain.
- 3.7 **REPAIRS**
- A. Touchup Painting:
 - 1. Immediately after erection, clean field welds, bolted connections, and abraded areas. Paint uncoated and abraded areas with same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
 - B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A780/A780M.

END OF SECTION 05500

SECTION 05510

METAL STAIRS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Steel stair frame of structural sections, with closed risers.
- B. Pan to receive concrete fill stair treads and landings.

1.02 REFERENCES

- A. ANSI A117.1 - Buildings and Facilities - Providing Accessibility and Usability For Physically Handicapped People.
- B. ASTM A36 - Structural Steel.
- C. ASTM A53 - Hot-Dipped, Zinc-coated Welded and Seamless Steel Pipe.

1.03 DESIGN REQUIREMENTS

- A. Fabricate stair assembly to support live load of 100 lb/sq ft with deflection of stringer or landing framing not to exceed 1/240 of span.
- B. Railing assembly, wall rails, and attachments to resist lateral force of 75 lbs at any point without damage or permanent set.

1.04 SUBMITTALS

- A. Shop Drawings: Indicate profiles, sizes, connection attachments, reinforcing, anchorage, size and type of fasteners, and accessories.
- B. Indicate welded connections using standard AWS A2.0 welding symbols. Indicate net weld lengths.

1.05 FIELD MEASUREMENTS

- A. Verify that field measurements are as indicated on Drawings and shop drawings.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Steel Sections: ASTM A36.
- B. Pipe: ASTM A53, Grade B 1.9 inches O.D., as accepted by ADA.
- C. Stair Treads: Concrete in metal pan; as detailed on drawings.
- D. Concrete for Treads and Landings: Portland cement Type I, 3000 psi 28 day strength, 2 to 3 inch slump.
- E. Bolts, Nuts, and Washers: ASTM A325 galvanized to ASTM A153 for galvanized components.
- F. Flush countersunk screws or bolts; consistent with design of stair structure.
- G. Welding Materials: AWS D1.1; type required for materials being welded.
- H. Shop and Touch-Up Primer: SSPC 15, Type 1, red oxide.

2.02 FABRICATION - GENERAL

- A. Fit and shop assemble in largest practical sections, for delivery to site.
- B. Fabricate components with joints tightly fitted and secured.
- C. Continuously seal jointed pieces by continuous welds.
- D. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush, and hairline. Ease exposed edges to small uniform radius.
- E. Exposed Mechanical Fastenings: Flush countersunk screws or bolts; unobtrusively located; consistent with design of component, except where specifically noted otherwise.
- F. Supply components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as fabrication, except where specifically noted otherwise.
- G. Accurately form components required for anchorage of stairs, landings, and railings to each other and to building structure.

2.03 FABRICATION - PAN STAIRS AND LANDINGS

- A. Fabricate stairs and landings with closed risers and treads of metal pan construction, ready to receive concrete.
- B. Form treads and risers with minimum 12 gage minimum sheet steel stock.
- C. Secure reinforced tread pans to stringers with clip angles; welded or bolted in place.
- D. Form stringers with rolled steel channels as detailed.
- E. Form landings with minimum steel deck with reinforcement at the underside with angles per details to attain design load requirements.
- F. Form balusters as detailed.
- G. Prime paint all components.

2.04 FINISHES

- A. Clean surfaces of rust, scale, grease, and foreign matter prior to finishing.
- B. Do not prime surfaces in direct contact with concrete or where field welding is required.
- C. Prime paint items with one coat.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.
- B. Beginning of installation means erector accepts existing conditions.

3.02 PREPARATION

- A. Clean and strip primed steel items to bare metal where site welding is required.
- B. Supply items required to be cast into concrete and or embedded in masonry with setting templates, to appropriate sections.

3.03 INSTALLATION

- A. Install items plumb and level, accurately fitted, free from distortion or defects.
- B. Provide anchors, plates angles hangers and struts required for connecting stairs to structure.
- C. Allow for erection loads, and for sufficient temporary bracing to maintain true alignment until completion of erection and installation of permanent attachments.
- D. Field weld components indicated on Drawings. Perform field welding in accordance with AWS D1.1.
- E. Field bolt and weld to match shop bolting and welding. Conceal bolts and screws whenever possible. Where not concealed, use flush countersunk fastenings.
- F. Mechanically fasten joints butted tight, flush, and hairline. Grind welds smooth and flush.
- G. Obtain Architect/Engineer approval prior to site cutting or making adjustments not scheduled.
- H. After erection, prime welds, abrasions, and surfaces not shop primed, except surfaces to be in contact with concrete.

3.04 ERECTION TOLERANCES

- A. Maximum Variation From Plumb: 1/4 inch per story, non-cumulative.
- B. Maximum Offset From True Alignment: 1/4 inch.

END OF SECTION 05510

SECTION 05520

HANDRAILS AND RAILINGS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Steel pipe and tube handrails, balusters, and fittings.

1.2 DESIGN REQUIREMENTS

- A. Railing assembly, wall rails, and attachments to resist lateral force of 75 lbs. at any point without damage or permanent set.

1.3 SUBMITTALS

- A. Shop Drawings: Indicate profiles, sizes, connection attachments, anchorage, size and type of fasteners, and accessories.

1.4 FIELD MEASUREMENTS

- A. Verify that field measurements are as indicated on shop drawings.

PART 2 PRODUCTS

2.1 STEEL RAILING SYSTEM

- A. Rails and Posts: As detailed and indicated on the drawings.
- B. Fittings: Elbows, T-shapes, wall brackets, escutcheons; machined steel.
- C. Mounting: Adjustable brackets and flanges, with steel inserts for casting in concrete and/or steel brackets for embedding in masonry. Prepare backing plate for mounting in wall construction.
- D. Exposed Fasteners: Flush countersunk screws or bolts; consistent with design of railing.
- E. Splice Connectors: Steel concealed spigots, welding collars.

2.2 FABRICATION

- A. Fit and shop assemble components in largest practical sizes, for delivery to site.
- B. Fabricate components with joints tightly fitted and secured.
- C. Exposed Mechanical Fastenings: Flush countersunk screws or bolts; unobtrusively located; consistent with design of component, except where specifically noted otherwise.
- D. Supply components required for anchorage of fabrications. Fabricate anchors and related components of same material and finish as fabrication, except where specifically noted otherwise.
- E. Continuously seal joined pieces by continuous welds.
- F. Grind exposed joints flush and smooth with adjacent finish surface. Make exposed joints butt tight, flush, and hairline. Ease exposed edges to small uniform radius.
- G. Accurately form components to suit stairs and landings, to each other and to building structure.
- H. **Exterior railings and associated fasteners shall be galvanized and field painted.**

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field conditions are acceptable and are ready to receive work.
- B. Beginning of installation means erector accepts existing conditions.

3.2 PREPARATION

- A. Clean and strip primed steel items to bare metal where site welding is required.
- B. Supply items required to be cast into concrete and/or embedded in masonry, placed in partitions with setting templates, to appropriate Sections.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Install components plumb and level, accurately fitted, free from distortion or defects.
- C. Provide anchors, plates angles required for connecting railings to structure. Anchor railing to structure.
- D. Field weld anchors as indicated on Drawings. Touch-up welds with primer. Grind welds smooth.
- E. Conceal bolts and screws whenever possible. Where not concealed, use flush countersunk fastenings.

3.4 ERECTION TOLERANCES

- A. Maximum Variation From Plumb: 1/4 inch per story, non-cumulative.
- B. Maximum Offset From True Alignment: 1/4 inch.

END OF SECTION 05520

SECTION 06100

ROUGH CARPENTRY

PART 1 - GENERAL

- 1.1 RELATED DOCUMENTS
 - A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.
- 1.2 SUMMARY
 - A. This Section includes the following:
 - 1. Wood blocking, cants, and nailers.
 - 2. Wood furring.
 - 3. Plywood backing panels.
 - 4. Building wrap.
- 1.3 QUALITY ASSURANCE
 - A. Testing Agency Qualifications: An independent testing agency, acceptable to authorities having jurisdiction, with the experience and capability to conduct the testing indicated, as documented according to ASTM E 548.
 - B. Source Limitations for Engineered Wood Products: Obtain each type of engineered wood product through one source from a single manufacturer.
 - C. Source Limitations for Fire-Retardant-Treated Wood: Obtain each type of fire-retardant-treated wood product through one source from a single producer.
- 1.4 DELIVERY, STORAGE, AND HANDLING
 - A. Stack lumber, plywood, and other panels; place spacers between each bundle to provide air circulation. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

- 2.1 WOOD PRODUCTS, GENERAL
 - A. Lumber: DOC PS 20 and applicable rules of lumber grading agencies certified by the American Lumber Standards Committee Board of Review.
 - 1. Factory mark each piece of lumber with grade stamp of grading agency.
 - 2. For exposed lumber indicated to receive a stained or natural finish, mark grade stamp on end or back of each piece.
 - 3. Where nominal sizes are indicated, provide actual sizes required by DOC PS 20 for moisture content specified. Where actual sizes are indicated, they are minimum dressed sizes for dry lumber.
 - 4. Provide dressed lumber, S4S, unless otherwise indicated.
 - 5. Provide dry lumber with 19 percent maximum moisture content at time of dressing for 2-inch nominal thickness or less, unless otherwise indicated.
 - 6. Provide dry lumber with 15 percent maximum moisture content at time of dressing for 2-inch nominal thickness or less, unless otherwise indicated.
 - 7. **All plywood blocking shall be fire retardant treated.**
 - B. Engineered Wood Products: Provide engineered wood products acceptable to authorities having jurisdiction and for which current model code research or evaluation reports exist that show compliance with building code in effect for Project.
 - 1. Allowable Design Stresses: Provide engineered wood products with allowable design stresses, as published by manufacturer that meet or exceed those indicated. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency.
 - C. Wood Structural Panels:
 - 1. Plywood: DOC PS 1.
 - 2. Oriented Strand Board: DOC PS 2.
 - 3. Thickness: As needed to comply with requirements specified but not less than thickness indicated.

4. Comply with "Code Plus" provisions in APA Form No. E30K, "APA Design/Construction Guide: Residential & Commercial."
5. Factory mark panels according to indicated standard.
6. All plywood sheathing shall be fire retardant treated.

2.2 WOOD-PRESERVATIVE-TREATED MATERIALS

- A. Preservative Treatment by Pressure Process: AWP C2 lumber except that lumber that is not in contact with the ground and is continuously protected from liquid water may be treated according to AWP C31 with inorganic boron (SBX).
 1. Preservative Chemicals: Acceptable to authorities having jurisdiction and one of the following:
 - a. Chromated copper arsenate (CCA).
 - b. Ammoniacal copper zinc arsenate (ACZA).
 - c. Ammoniacal, or amine, copper quat (ACQ).
 - d. Copper bis (dimethyldithiocarbamate) (CDDC).
 - e. Ammoniacal copper citrate (CC).
 - f. Copper azole, Type A (CBA-A).
 - g. Oxine copper (copper-8-quinolinolate) in a light petroleum solvent.
 2. For exposed items indicated to receive a stained or natural finish, use chemical formulations that do not require incising, contain colorants, bleed through, or otherwise adversely affect finishes.
- B. Kiln-dry material after treatment to a maximum moisture content of 19 percent for lumber and 15 percent for plywood. Do not use material that is warped or does not comply with requirements for untreated material.
- C. Mark each treated item with the treatment quality mark of an inspection agency approved by the American Lumber Standards Committee Board of Review.
- D. Application: Treat items indicated on Drawings, and the following:
 1. Wood cants, nailers, curbs, equipment support bases, blocking, stripping, and similar members in connection with roofing, flashing, vapor barriers, and waterproofing.
 2. Wood sills, sleepers, blocking, furring, stripping, and similar concealed members in contact with masonry or concrete.
 3. Wood framing members less than 18 inches above grade.
 4. Wood floor plates that are installed over concrete slabs directly in contact with earth.

2.3 FIRE-RETARDANT-TREATED MATERIALS

- A. General: Where fire-retardant-treated materials are indicated, provide materials that comply with performance requirements in AWP C20 lumber and AWP C27 plywood. Identify fire-retardant-treated wood with appropriate classification marking of UL, U.S. Testing, Timber Products Inspection, or another testing and inspecting agency acceptable to authorities having jurisdiction.
 1. Use treatment for which chemical manufacturer publishes physical properties of treated wood after exposure to elevated temperatures, when tested by a qualified independent testing agency according to ASTM D 5664, for lumber and ASTM D 5516, for plywood
 2. Use treatment that does not promote corrosion of metal fasteners.
 3. Use Exterior type for exterior locations and where indicated.
 4. Use Interior Type A High Temperature (HT), unless otherwise indicated.
- B. For exposed items indicated to receive a stained or natural finish, use chemical formulations that do not bleed through, contain colorants, or otherwise adversely affect finishes.

2.4 MISCELLANEOUS LUMBER

- A. General: Provide lumber for support or attachment of other construction, including the following:
 1. Rooftop equipment bases and support curbs.
 2. Blocking.
 3. Cants.
 4. Nailers.
 5. Furring.
 6. Grounds.

- B. For items of dimension lumber size, provide Construction, Stud, or No. 2 grade lumber with 15 percent maximum moisture content.
 - C. For exposed boards, provide lumber with 15 percent maximum moisture content.
 - D. For concealed boards, provide lumber with 15 percent maximum moisture content.
 - E. For furring strips for installing plywood or hardboard paneling, select boards with no knots capable of producing bent-over nails and damage to paneling.
- 2.5 SHEATHING
- A. Reference specification Section 06112.
- 2.6 PLYWOOD BACKING PANELS
- A. Telephone and Electrical Equipment Backing Panels: DOC PS 1, Exposure 1, C-D Plugged, fire- retardant treated, in thickness indicated or, if not indicated, not less than 1/2 inch thick.
- 2.7 FASTENERS
- A. General: Provide fasteners of size and type indicated that comply with requirements specified in this Article for material and manufacture.
 - 1. Where rough carpentry is exposed to weather, in ground contact, or in area of high relative humidity, provide fasteners with hot-dip zinc coating complying with ASTM A 153/A 153M.
 - B. Nails, Brads, and Staples: ASTM F 1667.
 - C. Power-Driven Fasteners: CABO NER-272.
 - D. Wood Screws: ASME B18.6.1.
 - E. Screws for Fastening to Cold-Formed Metal Framing: ASTM C 954, except with wafer heads and reamer wings, length as recommended by screw manufacturer for material being fastened.
 - F. Lag Bolts: ASME B18.2.1.
 - G. Bolts: Steel bolts complying with ASTM A 307, Grade A with ASTM A 563 hex nuts and, where indicated, flat washers.
 - H. Expansion Anchors: Anchor bolt and sleeve assembly of material indicated below with capability to sustain, without failure, a load equal to 6 times the load imposed when installed in unit masonry assemblies and equal to 4 times the load imposed when installed in concrete as determined by testing per ASTM E 488 conducted by a qualified independent testing and inspecting agency.
 - 1. Material: Carbon-steel components, zinc plated to comply with ASTM B 633, Class Fe/Zn 5.
 - 2. Material: Stainless steel with bolts and nuts complying with ASTM F 593 and ASTM F 594, Alloy Group 1 or 2.
- 2.8 METAL FRAMING ANCHORS
- A. General: Provide framing anchors made from metal indicated, of structural capacity, type, and size indicated, and as follows:
 - 1. Research/Evaluation Reports: Provide products acceptable to authorities having jurisdiction and for which model code research/evaluation reports exist that show compliance of metal framing anchors, for application indicated, with building code in effect for Project.
 - 2. Allowable Design Loads: Provide products with allowable design loads, as published by manufacturer that meet or exceed those indicated. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency.
 - B. Galvanized Steel Sheet: Hot-dip, zinc-coated steel sheet complying with ASTM A 653/A 653M, G60 coating designation.
 - C. Stainless-Steel Sheet: ASTM A 666, Type 304.
 - 1. Use for exterior locations and where indicated.
 - D. Joist Hangers: U-shaped joist hangers with 2-inch- long seat and 1-1/4-inch- wide nailing flanges at least 85 percent of joist depth.
 - 1. Thickness: 0.050 inch.
 - E. I-Joist Hangers: U-shaped joist hangers with 2-inch- long seat and 1-1/4-inch- wide nailing flanges full depth of joist. Nailing flanges provide lateral support at joist top chord.

1. Thickness: 0.050 inch.
 - F. Top Flange Hangers: U-shaped joist hangers, full depth of joist, formed from metal strap with tabs bent to extend over and be fastened to supporting member.
 1. Strap Width: 1-1/2 inches.
 2. Thickness: 0.050 inch.
 - G. Bridging: Rigid, V-section, nailless type, 0.062 inch thick, length to suit joist size and spacing.
 - H. Post Bases: Adjustable-socket type for bolting in place with standoff plate to raise post 1 inch above base and with 2-inch- minimum side cover, socket 0.062 inch thick, and standoff and adjustment plates 0.108 inch thick.
 - I. Joist Ties: Flat straps, with holes for fasteners, for tying joists together over supports.
 1. Width: 3/4 inch.
 2. Thickness: 0.050 inch.
 3. Length: 16 inches.
 - J. Rafter Tie-Downs: Bent strap tie for fastening rafters or roof trusses to wall studs below, 1-1/2 inches wide by 0.050 inch thick. Tie fastens to side of rafter or truss, face of top plates, and side of stud below.
 - K. Rafter Tie-Downs (Hurricane or Seismic Ties): Bent strap tie for fastening rafters or roof trusses to wall studs below, 2-1/4 inches wide by 0.062 inch thick. Tie fits over top of rafter or truss and fastens to both sides of rafter or truss, face of top plates, and side of stud below.
 - L. Floor-to-Floor Ties: Flat straps, with holes for fasteners, for tying upper floor wall studs to band joists and lower floor studs, 1-1/4 inches wide by 0.050 inch thick by 36 inches long.
 - M. Hold-Downs: Brackets for bolting to wall studs and securing to foundation walls with anchor bolts or to other hold-downs with threaded rods and designed with first of two bolts placed seven bolt diameters from reinforced base.
 - N. Wall Bracing: T-shaped bracing made for letting into studs in saw kerf, 1-1/8 inches wide by 9/16 inch deep by 0.034 inch thick with hemmed edges.
 - O. Wall Bracing: Angle bracing made for letting into studs in saw kerf, 15/16 by 15/16 by 0.040 inch thick with hemmed edges.
- 2.9 MISCELLANEOUS MATERIALS
- A. Building Paper: Asphalt-saturated organic felt complying with ASTM D 226, Type I (No. 15 asphalt felt), unperforated.
 - B. Building Wrap: Air-retarder sheeting made from polyolefins; cross-laminated films, woven strands, or spun-bonded fibers; coated or uncoated; with or without perforations; and complying with ASTM E 1677, Type I. Tyvek Commercial Wrap.
 1. Thickness: Not less than 3 mils
 2. Permeance: Not less than 10 perms
 3. Flame-Spread Index: 25 or less per ASTM E 84.
 4. Allowable Exposure Time: Not less than three months.
 - C. Building Wrap Tape: Pressure-sensitive plastic tape recommended by building wrap manufacturer for sealing joints and penetrations in building wrap.
 - D. Sheathing Tape: Pressure-sensitive plastic tape for sealing joints and penetrations in sheathing and recommended by sheathing manufacturer for use with type of sheathing required.
 - E. Sill-Sealer Gaskets: Glass-fiber-resilient insulation, fabricated in strip form, for use as a sill sealer; 1- inch nominal thickness, compressible to 1/32 inch ; selected from manufacturer's standard widths to suit width of sill members indicated.
 - F. Sill-Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch thick, selected from manufacturer's standard widths to suit width of sill members indicated.
 - G. Adhesives for Field Gluing Panels to Framing: Formulation complying with ASTM D 3498 that is approved for use with type of construction panel indicated by both adhesive and panel manufacturers.
 - H. Water-Repellent Preservative: NWWDA-tested and -accepted formulation containing 3-iodo-2- propynyl butyl carbamate, combined with an insecticide containing chloropyrifos as its active ingredient.

PART 3 – EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set rough carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit rough carpentry to other construction; scribe and cope as needed for accurate fit. Locate furring, nailers, blocking, grounds, and similar supports to comply with requirements for attaching other construction.
- B. Do not use materials with defects that impair quality of rough carpentry or pieces that are too small to use with minimum number of joints or optimum joint arrangement.
- C. Apply field treatment complying with AWWA M4 to cut surfaces of preservative-treated lumber and plywood.
- D. Securely attach rough carpentry work to substrate by anchoring and fastening as indicated, complying with the following:
 - 1. CABO NER-272 for power-driven fasteners.
 - 2. Published requirements of metal framing anchor manufacturer.
 - 3. Table 23-II-B-1, "Nailing Schedule," and Table 23-II-B-2, "Wood Structural Panel/Roof Sheathing Nailing Schedule," in the Uniform Building Code.
 - 4. Table 2305.2, "Fastening Schedule," in the BOCA National Building Code.
 - 5. Table 2306.1, "Fastening Schedule," in the Standard Building Code.
 - 6. Table 602.3(1), "Fastener Schedule for Structural Members," and Table 602.3(2), "Alternate Attachments," in the International One- and Two-Family Dwelling Code.
- E. Use common wire nails, unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood; predrill as required.
- F. Use finishing nails for exposed work, unless otherwise indicated. Countersink nail heads and fill holes with wood filler.

3.2 WOOD GROUND, SLEEPER, BLOCKING, AND NAILER INSTALLATION

- A. Install where indicated and where required for screeding or attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.
- B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces, unless otherwise indicated. Build anchor bolts into masonry during installation of masonry work. Where possible, secure anchor bolts to formwork before concrete placement.
- C. Provide permanent grounds of dressed, pressure-preservative-treated, key-beveled lumber not less than **1-1/2 inches** wide and of thickness required to bring face of ground to exact thickness of finish material. Remove temporary grounds when no longer required.

3.3 BUILDING PAPER APPLICATION

- A. Apply building paper horizontally with **2-inch** overlap and **6-inch** end lap; fasten to sheathing with galvanized staples or roofing nails. Cover upstanding flashing with **4-inch** overlap.

3.4 BUILDING WRAP APPLICATION

- A. Cover wall sheathing with building wrap as indicated.
 - 1. Comply with manufacturer's written instructions.
 - 2. Cover upstanding flashing with **4-inch** overlap.
 - 3. Seal seams, edges, and penetrations with tape.
 - 4. Extend into jambs of openings and seal corners with tape.

END OF SECTION 06100

SECTION 06112

SHEATHING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Gypsum wall sheathing.
- B. APA rated (fire retardant treated) plywood at sloped metal accent roofs
- C. Telephone and electrical panel boards.

1.02 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site under provisions of the General Requirements.
- B. Protect sheathing from warping or other distortion by stacking.

PART 2 PRODUCTS

2.01 SHEATHING MATERIALS

- A. Wall Sheathing
 - 1. Gypsum (typical) Fiberglass Mat Faced
 - a) Fire resistant, 5/8 inch, glass mat, Type "X" core.
 - b) Manufacturer – Georgia Pacific Dens Glass Gold
- B. Structural Plywood Sheathing (special conditions and for blocking only)
 - 1. Exterior plywood, 3/4" thick.
 - 2. APA rated for spans indicated on drawings
 - 3. **Fire Retardant Treated.**

2.02 ACCESSORIES

- A. Fasteners and Anchors:
 - 1. Drywall Screws: Bugle head, hardened steel, power driven type, length three times thickness of sheathing, galvanized. Reference requirements of Section 05400 Cold-Formed Framing.
 - 2. Anchors: Toggle bolt type for anchorage to hollow masonry. Expansion shield and lag bolt type for anchorage to solid masonry or concrete. Bolt or ballistic fastener for anchorages to steel.
- B. Sill Gasket on Top of Foundation Wall: Contractor submit for approval by Architect.
- C. Building Paper: Tyvek Commercial Wrap at Plywood sheathed walls.

PART 3 EXECUTION

3.01 FRAMING

- A. Set structural members level and plumb, in correct position.
- B. Make provisions for erection loads, and for sufficient temporary bracing to maintain structure safe, plumb, and in true alignment until completion of erection and installation of permanent bracing.
- C. Place horizontal members flat, crown side up.
- D. Construct load bearing framing and curb members full length without splices.

3.02 SHEATHING

- A. Secure wall sheathing with long dimension perpendicular to wall studs, with ends over firm bearing and staggered.
- B. Place building paper horizontally over wall sheathing, weather lap edges, and ends.
- C. Install telephone and electrical panel boards with plywood sheathing material where required. Over size the panel by 12 on all sides.

3.03 TOLERANCES

- A. Framing Members: 1/4 inch from true position, maximum.
- B. Surface Flatness of Floor: 1/4 inch in 10 feet maximum, and 1/2 inch maximum in 30 feet.

END OF SECTION 06112

SECTION 06200

FINISH CARPENTRY

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Finish carpentry items, other than shop prefabricated casework.
- B. Hardware and attachment accessories.

1.2 QUALITY ASSURANCE

- A. Perform work in accordance with AWI Custom.

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site under provisions of the General Requirements.
- B. Protect work from moisture damage.

1.4 FIELD MEASUREMENTS

- A. Verify that field measurements are as indicated on shop drawings and as instructed by the manufacturer.

1.5 COORDINATION

- A. Coordinate the work with plumbing and electrical rough-in, and installation of associated and adjacent components.

PART 2 PRODUCTS

2.1 LUMBER MATERIALS

- A. Softwood Lumber: Graded in accordance with AWI Custom; Reference schedule at the end of this section; **Select White Birch**, maximum moisture content of 6 percent; suitable for transparent finish.

2.2 SHEET MATERIALS

- A. Exterior Plywood: Exposed to weather shall be group 1, Exterior type, Grade A-B or A-C as required for exposure.
- B. Interior Plywood: Interior or Exterior type, Group 1 or 2, Grade B-D where concealed, Grade A-C one side exposed and Grade A-A two sides exposed.
- C. Wood Particleboard: ANSI A208.1 Type 1; AWI standard, composed of wood chips, medium density, made with high waterproof resin binders; of grade to suit application; sanded faces.
- D. Exterior HardiePanel; fiber cement panels.

2.3 EXTERIOR HARDWOOD WALL CLADDING.

- A. Mataverde, IPE Wood Cladding.
- B. Tongue and groove style wood rainscreen installation. Boards 5/4"x6" nominal wood sizes, random length installation.
- C. Finish wood with natural oil finish and UV protectant. Product equal to Penofin Hardwood Formula Penetrating Oil Finish Sealant with UV Protectant, or equivalent product as recommended by Manufacturer.
- D. Install with manufacturer provided clips to offset the wood veneer from the building substrate.
- E. Install fire rated plywood blocking and weather barrier coating approved by the manufacturer for rainscreen installation.

2.4 FASTENERS

- A. Fasteners: Of size and type to suit application; Galvanized finish in concealed locations

and Brass or Chrome finish in exposed locations.

2.4 FABRICATION

- A. Fabricate to AWI Custom standards.
- B. Shop assemble work for delivery to site, permitting passage through building openings.
- C. Fit exposed sheet material edges with 3/8 inch matching hardwood edging. Use one piece for full length only.
- D. When necessary to cut and fit on site, provide materials with ample allowance for cutting. Provide trim for scribing and site cutting.

2.5 SHOP FINISHING

- E. Sand work smooth and set exposed nails and screws.
- F. Apply wood filler in exposed nail and screw indentations.
- G. On items to receive transparent finishes, use wood filler which matches surrounding surfaces and of types recommended for applied finishes.
- H. Seal, stain, and varnish exposed to view surfaces. Brush apply only.
 - 1. Prime paint. Seal surfaces in contact with cementitious materials.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify adequacy of backing and support framing.
- B. Verify mechanical, electrical, and building items affecting work of this section are placed and ready to receive this work.

3.2 INSTALLATION

- A. Install work in accordance with AWI Custom Quality Standard.
- B. Set and secure materials and components in place, plumb, and level.
- C. Carefully scribe work abutting other components, with maximum gaps of 1/32 inch. Do not use additional overlay trim to conceal larger gaps.
- D. Install components trim with nails, screws, bolts with blind fasteners or wall adhesive by gun application.
- E. Install hardware in accordance with manufacturer's instructions.

3.3 SITE APPLIED WOOD TREATMENT

- A. Apply preservative treatment in accordance with manufacturer's instructions.
- B. Brush apply two coats of preservative treatment on wood in contact with cementitious materials, roofing and related metal flashings. Treat site-sawn cuts.
- C. Allow preservative to dry prior to erecting members.

3.4 PREPARATION FOR SITE FINISHING

- A. Site Finishing: Refer to Section 09900.
- B. Before installation, prime paint surfaces of items or assemblies to be in contact with cementitious materials.

3.5 SCHEDULE

- A. Interior: Wood base, wood wall trim, wood window trim and sill, wood door trim, vanity front nosing:
3/4" thick material with varying widths (reference drawings). **Select White Birch** stained and finished.

END OF SECTION 06200

SECTION 06410

CUSTOM CASEWORK

PART 1 GENERAL

- 1.1 SECTION INCLUDES
 - A. Countertops, base and wall cabinets.
 - B. Cabinet hardware.
 - C. Prefinished surfaces and preparation for site finishing.
 - D. Preparation for installing utilities.
- 1.2 SUBMITTALS
 - A. Shop Drawings: Indicate materials, component profiles and elevations, assembly methods, joint details, fastening methods, accessory listings, hardware location, and schedule of finishes.
- 1.3 QUALIFICATIONS
 - A. Manufacturer: Company specializing in manufacturing the products specified in this section with minimum three years' documented experience.
- 1.4 DELIVERY, STORAGE, AND HANDLING
 - A. Deliver, store and handle products to site.
 - B. Protect units from moisture damage.
- 1.5 FIELD MEASUREMENTS
 - A. Verify that field measurements are as on shop drawings.
- 1.6 COORDINATION
 - A. Coordinate the work with plumbing and electrical rough-in.

PART 2 PRODUCTS

- 2.1 MANUFACTURERS
 - A. Salina Planning Mill.
 - B. Crestwood Inc.
 - C. Timberline Cabinetry & Millwork
 - D. Technique Manufacturing
 - E. Substitutions: Under provisions of the General Requirements.
- 2.2 WOOD MATERIALS
 - A. Softwood Lumber: FS MM-L-736; graded in accordance with AWI Premium Grade; average moisture content of 6 percent; species and grade as follows: **Select White Birch**, Edging & trim where indicated and detailed.
- 2.3 SHEET MATERIALS
 - A. Hardwood Plywood: S 51; graded in accordance with AWI, core materials of veneer, and lumber, type of glue recommended for application; face veneer and cuts as follows:

ITEM	FACE SPECIES
Drawer 'Box' Construction	Melamine (unless noted otherwise) - Per AWI Premium Grade.
Door Construction	Plastic Laminate (u.n.o.) - Per AWI Premium Grade.
Cabinet 'Body' Construction	Plastic Laminate at exposed (u.n.o.). Melamine at unexposed (u.n.o.) - Per AWI Premium Grade.
Backs	Plastic Laminate at exposed (u.n.o.). Melamine at unexposed (u.n.o.) - Per AWI Premium Grade.
Shelving	Melamine (u.n.o.) - Per AWI Premium Grade.

(Note: Full line of colors for all melamine selected by architect.)

- B. High Performance particleboard Core:
 - 1. Particleboard to be ¾" thick of 45 lb. Density, and balanced construction with moisture Content not to exceed 8%. All particleboards shall meet or exceed the requirements for its type and classification under Commercial Standard CS-236-66, Federal Specifications LLL-B-800A, and ASTM D 1037-78.
 - 2. Particleboard shall meet the following performance requirements. Submit compliance data from the manufacturer prior to fabrication:

Screw Holding, Face	471 lbs.
Modulus of Rupture	2,400 psi.
Modulus of Elasticity	450,000 psi.
Internal Bond	90 psi.
Surface Hardness	900 lbs.
 - C. Hardboard: Hardboard shall meet or exceed Commercial Standards CS-251 and Federal Specifications LLL-B-00810. Tempered hardboard ¼" thick, smooth both sides.
- 2.4 MANUFACTURERS - PLASTIC LAMINATE
- A. Wilsonart **premium grade**; equivalent by Formica (color to be selected from Full Line of all manufacturers).
- 2.5 SOLID SURFACE MATERIALS
- A. Not Used
- 2.6 LAMINATE MATERIALS
- A. Plastic Laminate: AWI, 0.040 inch Post Forming 0.050 inch General Purpose quality; color, pattern, and surface texture as selected.
 - B. Laminate Backing Sheet: 0.020 inch Backing Sheet grade, undecorated plastic laminate.
- 2.7 ACCESSORIES
- A. Adhesive: FS MMM-A-130 contact adhesive, type recommended by AWI and laminate manufacturer to suit application.
 - B. Fasteners: Size and type to suit application.
 - C. Bolts, Nuts, Washers, Lags, Pins, and Screws: Of size and type to suit application; approved finish in exposed locations.
 - D. Concealed Joint Fasteners: Threaded steel.
 - E. PVC Edge Band: 3mm Color and Pattern matched to plastic laminated face. Typical at all countertops, doors, drawers, and open cabinet edges.
- 2.8 HARDWARE
- A. Hinges: Grass #3803 120° – nickel finish.
 - B. Pulls: Hafele, Crescent Collection, Nickel, brushed
 - C. Drawer Slides: Hafele, Accuride #3832SC.
 - D. Adjustable shelf clips: Knap & Vogt, 3256 zinc finish.
 - E. Cushion Bumpers: Hafele #356.21.428 – clear. Two on each door & drawer.
 - F. "Recessed" Adjustable shelf standards: Knap & Vogt, #255, zinc finish.
 - G. Grommets: Hafele, Series #429, full range colors. Quantity (22). Locate per shop drawings review.
 - H. Catches: Amerock, #9783 magnetic.
- 2.9 FINISHING MATERIALS
- A. Stain, Varnish and Finishing Materials: As specified in Section 09900.
- 2.10 FABRICATION
- A. Shop assemble casework for delivery to site in units easily handled and to permit passage through building openings.
 - B. Fit shelves, doors, and exposed edges with .3mm pvc. Pattern and color match to laminate cabinets. Use one piece for full length only.
 - C. Cap exposed plastic laminate finish edges with material of same finish and pattern.
 - D. Door and Drawer Fronts: ¾ inch thick; overlay style.
 - E. When necessary to cut and fit on site, provide materials with ample allowance for cutting. Provide trim for scribing and sitecutting.

- F. Apply plastic laminate finish in full uninterrupted sheets consistent with manufactured sizes. Fit corners and joints hairline; secure with concealed fasteners. Slightly bevel arrises. Locate counter butt joints minimum 2 feet from sink cut-outs.
- G. Apply laminate backing sheet to reverse side of plastic laminate finished surfaces.
- H. Provide cutouts for plumbing fixtures, inserts, appliances, outlet boxes, fixtures, and fittings. Verify locations of cutouts from on-site dimensions. Seal contact surfaces of cut edges.

2.11 FINISHING

- A. Sand work smooth and set exposed nails and screws.
- B. Apply wood filler in exposed nail and screw indentations.
- C. On items to receive transparent finishes, use wood filler, which matches surrounding surfaces and of types recommended for applied finishes.
- D. Seal, stain, and varnish exposed to view surfaces.
- E. Seal, stain, and varnish internal exposed to view and semi-concealed surfaces.
Seal surfaces in contact with cementitious materials.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify adequacy of backing and support framing.

3.2 INSTALLATION

- A. Set and secure casework in place; rigid, plumb, and level.
- B. Use fixture attachments in concealed locations for wall mounted components.
- C. Use concealed joint fasteners to align and secure adjoining cabinet units and counter tops.
- D. Carefully scribe casework abutting other components, with maximum gaps of 1/32 inch. Do not use additional overlay trim for this purpose.
- E. Secure cabinet and counter bases to floor using appropriate angles and anchorages.
- F. Countersink anchorage devices at exposed locations. Conceal with solid wood plugs of species to match surrounding wood; finish flush with surrounding surfaces.

3.3 ADJUSTING

- A. Adjust moving or operating parts to function smoothly and correctly.

3.4 CLEANING

- A. Clean casework, counters, shelves, hardware, fittings, and fixtures.

3.5 SCHEDULE

- A. Adjustable shelving longer than 34" to be 1" thick.

END OF SECTION 06410

SECTION 07110

SHEET MEMBRANE WATERPROOFING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Adhesive applied elastomeric sheet membrane waterproofing.
- B. Cant strips.
- C. Protective cover.

1.02 REFERENCES

- A. ASTM D412 - Rubber Properties in Tension.
- B. ASTM D624 - Rubber Property - Tear Resistance.
- C. ANSI/ASTM D746 - Brittleness Temperature of Plastics and Elastomers by Impact.
- D. ASTM E96 - Water Vapor Transmission of Materials.

1.03 SYSTEM DESCRIPTION

- A. Waterproofing System: Capable of resisting water head of 15 feet and preventing moisture migration to interior.

1.04 SUBMITTALS

- A. Shop Drawings: Indicate special joint or termination conditions and conditions of interface with other materials.
- B. Product Data: Provide data for surface conditioner, flexible flashings, joint cover sheet, and joint and crack sealants, with temperature range for application of waterproofing membrane.
- C. Manufacturer's Installation Instructions: Indicate special procedures and perimeter conditions requiring special attention.

1.05 QUALIFICATIONS

- A. Membrane Manufacturer: Company specializing in waterproofing sheet membranes with three years experience.
- B. Applicator: Company specializing in performing the work of this Section with minimum two years documented experience and approved by manufacturer.

1.06 ENVIRONMENTAL REQUIREMENTS

- A. Maintain ambient temperatures above 40 degrees F for 24 hours before and during application and until liquid or mastic accessories have cured or as required by the manufacturer.

1.07 WARRANTY

- A. Provide three year warranty under provisions of the General Requirements.
- B. Warranty: Include coverage for waterproofing failing to resist penetration of water, except where such failures are the result of structural failures of building. Hairline cracking of concrete due to temperature change of shrinkage is not considered a structural failure.
- C. For warranty repair work, be responsible for removing and replacing materials concealing waterproofing.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Mel-Rol Inc.
- B. W.R. Gracie
- B. Substitutions: Under provisions of the General Requirements.

2.02 MEMBRANE MATERIALS

- A. Membrane: Sealtight PC-2, 56 mils thick; polymeric membrane by Mel-Rol – at below grade foundation walls above finished floor and elevator pit walls.

- 2.03 ADHESIVE MATERIALS
- A. Vertical Primer: 250-350 s.f. per gal. material and quantity as recommended by manufacture.
 - B. Elastomeric Mastic: 200 lin. ft. per gal.
 - C. Liquid Membrane: 135 lin. ft. per gal.
 - D. Thinner and Cleaner: As recommended by manufacturer, compatible with sheet membrane.
- 2.04 ATTACHMENT MATERIALS
- A. Battens, Disc Washers and Screws, Circular Membrane Discs, and Reglet Strip Devices: All as recommended by the manufacturer.
- 2.05 ACCESSORIES
- A. Sealant: As recommended by membrane manufacturer.
 - B. Protection Board: 3/4 inch thick extruded polystyrene sheet.
 - C. Cant Strips and Flexible Flashings: As recommended by manufacturer.
 - D. Counter Flashings: As recommended by manufacturer.

PART 3 EXECUTION

- 3.01 EXAMINATION
- A. Verify substrate surfaces are durable; free of matter detrimental to adhesion or application of waterproofing system.
 - B. Verify items which penetrate surfaces to receive waterproofing are securely installed.
- 3.02 PREPARATION
- A. Protect adjacent surfaces not designated to receive waterproofing.
 - B. Clean and prepare surfaces to receive waterproofing in accordance with manufacturer's instructions.
 - C. Do not apply waterproofing to surfaces unacceptable to manufacturer or applicator.
 - D. Seal cracks and joints with sealant materials using depth to width ratio as recommended by sealant manufacturer.
 - E. Apply surface conditioner at a rate recommended by manufacturer. Protect conditioner from rain or frost until dry.
- 3.03 INSTALLATION - ADHESIVE BONDED
- A. Install membrane waterproofing in accordance with manufacturer's instructions.
 - B. Roll out membrane. Minimize wrinkles and bubbles.
 - C. Apply adhesive in accordance with manufacturer's instructions. Bond sheet to substrate.
 - D. Lap sides and ends in accordance with membrane manufacturer's instructions.
 - E. Overlap edges and ends and seal with contact adhesive minimum 3 inches. Seal permanently waterproof. Apply uniform bead of sealant to joint edge.
 - F. Reinforce membrane with multiple thickness of membrane material over joints, whether joints are static or moving.
 - G. Weatherlap joints on sloped substrate in direction of drainage. Seal joints and seams. Coordinate with drain installation.
 - H. Install flexible flashings. Seal watertight to membrane.
 - I. Seal membrane and flashings to adjoining surfaces.
 - J. Extend membrane up cant strips and minimum of 6 inches onto vertical surfaces.
 - K. Seal items penetrating membrane and install counter flashing membrane material.
- 3.04 PROTECTION OF FINISHED WORK
- A. Protect finished Work.
 - B. Do not permit traffic over unprotected or uncovered membrane.
 - C. Protect membrane from damage by adhering protection board, applied with mastic over membrane surface. Scribe and cut boards around projections and interruptions.

END OF SECTION 07110

SECTION 07181

WATER REPELLENT COATING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Water repellent coating applied to exterior and interior exposed brick and masonry units walls.

1.2 SYSTEM DESCRIPTION

- A. Applied coating to repel moisture absorption in material being treated.

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site.
- B. Protect coating liquid from freezing.

1.4 ENVIRONMENTAL REQUIREMENTS

- A. Do not apply coating when ambient temperature is lower than 50 degrees F or higher than 100 degrees F.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. HYDROZO - Clear Double 7.
- B. Substitutions: Under provisions of the General Requirements.

2.2 MATERIALS

- A. Coating: Silane; containing 12 percent minimum solids.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify joint sealants are installed and cured.
- B. Verify surfaces to be coated are dry, clean, and free of efflorescence, oil, or other matter detrimental to application of coating.

3.2 PREPARATION

- A. Delay work until masonry mortar concrete substrate is cured a minimum of 5 days.
- B. Remove loose particles and foreign matter.
- C. Remove oil or foreign substance with a chemical solvent which will not affect coating.
- D. Scrub and rinse surfaces with water and let dry.

3.3 APPLICATION

- A. Apply coating in accordance with manufacturer's instructions.
- B. Install at all exposed CMU including fluted style.
- C. Apply at a rate of 80 sq. ft. per gallon by airless spray.
- D. Apply in one continuous, uniform coat.

END OF SECTION 07181

SECTION 07212

BOARD INSULATION

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Adhesive, sheet vapor and air barrier.
- B. Board insulation, Roofing, EPS & XPS.
- C. Board insulation at Brick Cavity walls.

1.2 REFERENCES

- A. ANSI/ASTM D2842 - Water Absorption of Rigid Cellular Plastics.
- B. ASTM C578 - Preformed Cellular Polystyrene Thermal Insulation.
- C. ASTM E96 - Test Methods for Water Vapor Transmission of Materials.

1.3 PERFORMANCE REQUIREMENTS

- A. Materials of this Section shall provide continuity of thermal barrier at building enclosure elements.
- B. Materials of this Section shall provide continuity of vapor and air barrier at building enclosure elements.

1.4 SUBMITTALS

- A. Product Data: Provide data on product characteristics, performance criteria, limitations.
- B. Manufacturer's Installation Instructions: Indicate special environmental conditions required for installation, installation techniques.

1.5 ENVIRONMENTAL REQUIREMENTS

- A. Do not install insulation adhesives when temperature or weather conditions are detrimental to successful installation.

PART 2 PRODUCTS

2.1 MANUFACTURERS - INSULATION MATERIALS

- A. Dow, & Dyplast Products
- B. Substitutions: Under provisions of the General Requirements.

2.2 ADHESIVES

- A. Adhesive: Type recommended by insulation manufacturer for application.

2.3 ACCESSORIES

- A. Tape: Polyethylene polyester self-adhering type, mesh reinforced, 2 inch wide.
- B. Insulation Fasteners: Impale clip of galvanized steel, to be mechanically fastened to surface to receive board insulation, length to suit insulation thickness and substrate, capable of securely and rigidly fastening insulation in place.

2.4 ROOF INSULATION

- A. Insulation, Roof: As provided by roofing Contractor/supplier **Polyisocyanurate**
 - Insulation Board Size: Maximum 48 x 96 inch
 - Board Thickness: 1 inch min. thickness Tapered
 - Density: .90-1.14 lb/ft³
 - Thermal Resistance: 5.7 minimum R value /inch
 - Board Edges: Square
 - Water Absorption: ASTM C272, less than 4% volume

- B. Insulation, Roof: **Dow Products, Deckmate, Extruded Polystyrene**
 Insulation Board: Board Size: Maximum 24 x 96 inch
 Board Thickness: 3 " min., ref drawings as indicated
 Density: D1621, 16 psi min.
 Thermal Resistance: 5 minimum R
 value per inch Board Edges: Shiplap
 Water Absorption: D2842, less than 0.9 %
 volume
- C. Insulation Wall Cavity: **Dow Products, Cavitymate, Extruded Polystyrene**
 Board Size: Maximum 16 x 96 inch
 Board Thickness: 1.5 " min., ref drawings as indicated
 Density: D1621, 15 psi min.
 Thermal Resistance: 5 minimum R
 value per inch Board Edges: Butt Edge
 Water Absorption: D2842, less than 0.7 %
 volume

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify site conditions.
- B. Verify that substrate, adjacent materials, and insulation boards are dry and ready to receive insulation.
- C. Verify substrate surface is flat, free of honeycomb fin irregularities, materials or substances that may impede adhesive bond.

3.2 PROTECTION OF FINISHED WORK

- A. Protect finished Work.
- B. Do not permit Work to be damaged prior to covering insulation.

END OF SECTION 07212

SECTION 07213

BATT INSULATION

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Batt insulation at exterior wall and roof locations.
- B. Batt insulation for filling perimeter window and door shim spaces, crevices in exterior wall and roof.
- C. Sound batt insulation at interior walls.
- D. Vapor retarder.

1.2 REFERENCES

- A. ASTM C665 - Mineral Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.
- B. ASTM E84 - Test Method for Surface Burning Characteristics of Building Materials.

1.3 SYSTEM DESCRIPTION

- A. Materials of This Section: Provide continuity of thermal barrier at building enclosure in conjunction with thermal insulating materials in Section 07212. Overlap insulations to ensure complete thermal envelope at all exterior surfaces.

1.4 COORDINATION

- A. Coordinate the work with all related Sections for installation of vapor retarder and other forms of insulation.

PART 2 PRODUCTS

2.1 MANUFACTURERS - INSULATION MATERIALS

- A. OWENS-CORNING FIBERGLASS Product - thermal batt insulation. Class A rated.
- B. Substitutions: Under provisions of the General Requirements.

2.2 MATERIALS

- A. Batt Insulation: ASTM C665; preformed glass fiber batts; loose laid and taped, conforming to the following:
 - 1. Thermal Resistance: R-19 at walls.
 - 2. Batt Size: 6" and 8" per exterior wall thickness.
 - 3. Facing: FSK Faced Flame spread 25 or less.
- B. Sound Batt Insulation:
 - 1. Batt size: 3" and 6".
 - 2. Facing: Unfaced.
- C. Sound Attenuating Mineral Fiber.
 - 1. 1 ½" and 5" per details. Owens Corning Thermafiber SAFB. **Used in High STC partition types 5 and 6**
- D. Tape: Self-adhering type as recommended by the manufacturer, mesh reinforced, 2 inches wide.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify site conditions.
- B. Verify that substrate, adjacent materials, and insulation are dry and ready to be installed.

3.2 INSTALLATION

- A. Install insulation and vapor retarder in accordance with manufacturer's instructions.
- B. Trim insulation neatly to fit spaces. Insulate miscellaneous gaps and voids.
- C. Fit insulation tight in spaces and tight to exterior side of mechanical and electrical services within the plane of insulation.

- D. Install with applied vapor retarder membrane facing warm side of building spaces. Lap ends and side flanges of membrane, caulk, or tape.
- E. Tape seal butt ends, lapped flanges, and tears or cuts in membrane.

END OF SECTION 07213

SECTION 072419
OUTSULATION® PLUS MD
SYSTEM
EXTERIOR INSULATION AND FINISH SYSTEM WITH MOISTURE DRAINAGE

PART 1 GENERAL

1.01 SUMMARY

A. Section Includes:

1. Based Bid, provide and install 12 year warranty, Outsulation Plus MD system.
2. Alternate #3, provide and install 20 year warranty, Outsulation Plus MD system.
3. This document is to be used in preparing specifications for an Exterior Insulation and Finish System(EIFS) with Moisture Drainage including:
 - a. An integral fluid applied air and water-resistive membrane barrier compatible with the substratesurface and adhesive application of the EIF system.
 - b. Accessory materials required for treating sheathing joints, fasteners, penetrations, rough openings,and material transitions compatible with substrate surfaces and the adhesive application of the EIFS.
 - c. Joint sealants compatible with specified EIFS for use in all exterior envelope joint waterproofing.
 - d. A comprehensive single source limited EIF system warranty inclusive of EIFS, fluid applied air andwater-resistive membrane barrier, accessory materials, and sealants.

1.02 ADMINISTRATIVE REQUIREMENTS

A. Pre-Construction Meetings

The warranty shall require a pre-construction meeting including representatives of the Manufacturer, the Applicator, the Owner, and the Consultant (ifapplicable) prior to installation of the Products. Work in this section requires coordination with related sections and trades.)The EIFS installer shall coordinate with the General Contractor to schedule, invite and administer a pre-construction meeting including but not limited to the architect of record, consultant(s), EIFS, sheathing board, accessory materials and sealant manufacturer's representatives and the owner to assure required integration of products selected as specified herein and for proper sequencing and installationdetailing.

B. Coordinate for related specification and integration of Selected Materials as referenced in Section 2.02.B.1, 2.02.B.2 and 2.02.C herein below.

C. Sequencing

1. Provide jobsite grading prior to installation of Exterior Insulation and Finish System with MoistureDrainage so that the system may be terminated at 8 in above grade or as required by code.
2. Coordinate installation of sheathing board and accessory materials, flashing, foundation waterproofing, roofing membrane, windows, doors, and other penetrations of the exterior walls to provide a continuousair and water-resistive membrane barrier.
3. Provide protection of rough openings before installing windows, doors, and other penetrations of theexterior walls.
4. Coordinate installation of windows and doors so air and water-resistive membrane barrier accessorymaterials, transitions, flashings, etc. are connected to them to provide a continuous barrier.
5. Install window and door head flashings immediately after windows and doors are installed.
6. Install diverter flashings wherever water can enter the wall assembly to direct water to the exterior.
7. Install copings and sealants immediately after installation of the Exterior Insulation and Finish Systemwith Moisture Drainage and when EIFS coatings are dry.
8. Attach penetrations through Exterior Insulation and Finish System to structural support and providewater-tight seals at penetrations.

- 1.03 ACTION SUBMITTALS / INFORMATIONAL SUBMITTALS
- A. Submit product data as required by Section 01 33 00, Administrative Requirements.
 - B. Submit shop drawings for panelized EIFS with Moisture Drainage showing wall layout, connections, details, expansion joints, and installation sequence.
 - C. Submit two (2) samples of the Exterior Insulation and Finish System with Moisture Drainage for each finish, texture, and color to be used on the project. Use the same tools and techniques proposed for the actual installation. Make the samples of sufficient size to accurately represent each color and texture being utilized on the project.
 - D. Submit a current copy of the manufacturer's Trained Contractor Certificate for the EIF system specified. Submit Owner/Architect-requested test results verifying the performance of the Exterior Insulation and Finish System with Moisture Drainage.
 - E. Submit a copy of the manufacturer's installation details and application instructions.
- 1.04 CLOSEOUT SUBMITTALS
- A. Submit a copy of the manufacturer's recommended maintenance and repair manual.
 - B. Submit a copy of the Exterior Insulation and Finish System with Moisture Drainage manufacturer's comprehensive single source limited warranty.
- 1.05 QUALITY ASSURANCE
- A. Manufacturer's Qualifications:
 - 1. A member in good standing of the EIFS Industry Members Association (EIMA).
 - 2. Manufacture Exterior Insulation and Finish System with Moisture Drainage materials at a facility covered by a current ISO 9001:2015 and ISO 14001:2015 certification. Certification of the facility is done by a registrar accredited by the American National Standards Institute, Registrar Accreditation Board (ANSI- RAB).
 - B. Contractor Qualifications:
 - 1. Knowledgeable in the proper installation of the Exterior Insulation and Finish System with Moisture Drainage.
 - 2. Possess a current copy of the manufacturer's Trained Contractor Certificate for the EIF systems specified.
 - 3. Successfully complete a minimum of three (3) projects of similar scope and scale to the specified project.
 - C. Insulation Board Manufacturer Qualifications:
 - 1. Listed by EIFS Manufacturer, and capable of producing the Expanded Polystyrene (EPS) in accordance with the current EIFS Manufacturer's Specification for Insulation Board.
 - 2. Subscribe to the Dryvit Third Party Certification and Quality Assurance Program.
 - D. Panel Fabricator Qualifications:
 - 1. Experienced and competent in the fabrication of architectural wall panels.
 - 2. Possess a current Outsulation Plus MD System Trained Contractor Certificate* issued by Dryvit Systems, Inc.
 - E. Panel Erector Qualifications:
 - 1. Experienced and competent in the installation of architectural wall panel EIF systems.
 - 2. Shall be:
 - a. The panel fabricator or
 - b. An erector approved by the panel fabricator or
 - c. An erector under the direct supervision of the panel fabricator.
 - F. Mock-Up:
 - 1. Provide the owner/architect with a mock-up for approval.
 - a. Of suitable size as required to accurately represent the products being installed, as well as each color and texture to be utilized on the project.
 - b. Prepared with the same products, tools, equipment and techniques required for the actual applications. Use finish from the same batch that is being used on the project.
 - c. Available and maintained at the jobsite.
 - 2. Regulatory Requirements: Separate the EPS insulation board from the interior of the

building by a minimum 15-minute thermal barrier.

3. Comply with local building codes for the use and maximum thickness of EPS insulation board.

G. Inspections:

1. Cooperate with independent, third-party inspectors when required by code or by contract documents.

1.06 DELIVERY, STORAGE AND HANDLING

- A. Deliver all Exterior Insulation and Finish System with Moisture Drainage components and materials to the job site in the original, unopened packages with labels intact.
- B. Inspect all Exterior Insulation and Finish System with Moisture Drainage components and materials upon arrival for physical damage, freezing or overheating. Do not use questionable materials.
- C. Store all Exterior Insulation and Finish System with Moisture Drainage components and materials at the jobsite in a cool, dry location, out of direct sunlight, protected from weather and other sources of damage. Maintain minimum and maximum storage temperature as stated in the product data sheets or specifications for the materials selected. NOTE: Minimize exposure of materials to temperatures over 90 °F (32 °C). Finishes exposed to temperatures over the published maximum storage temperature for even short periods may exhibit skinning and increased viscosity and should be inspected prior to use.
- D. Protect all products from inclement weather and direct sunlight.

1.07 SITE CONDITIONS

A. Ambient Conditions

1. Do not apply wet materials during inclement weather unless appropriate protection is provided. Protect materials from inclement weather until they are completely dry.
2. Verify the minimum air and wall surface temperatures at the time of application as stated in the product data sheets or specifications for the materials selected.
3. Maintain these temperatures with adequate air ventilation and circulation for a minimum of 24 hours (48 hours for specific Specialty Finishes) thereafter, or until the products are completely dry.
(Note to Specifier: The use of dark colors must be considered in relation to wall surface temperature as a function of local climatic conditions. Use of dark colors in high temperature climates can affect the performance of the EIF system.)

1.08 WARRANTY

A. Manufacturers' Limited EIF System Warranty

1. Manufacturer shall offer a limited material defect and labor to repair or replace defective material warranty stating the Products will be free from manufacturing defect and will perform as warranted in the manner specified for the stated term measured from the Date of Project Substantial Completion.
 - a. A pre-construction meeting, including representatives of the Manufacturer, the Applicator, the Owner, and the Consultant (if applicable), shall be required prior to installation of the Products.
 - b. The term of this warranty SHALL BE extended for an additional 2 years with involvement on the project of a Manufacturer-approved, third-party consultant ("Consultant") engaged by the Owner or its authorized representative, at the Owner's sole expense. Inspection reports generated by the Consultant shall be made available to the Manufacturer and the Owner.
 - c. The warranty is available upon written request.
2. The EIF system warranty shall additionally include the following for the term of the warranty or as specifically noted hereunder.
 - a. The Base Bid EIF system warranty term shall be 12-years.
 - b. Alternate #3, 20 yr EIF system warranty with the Tremco ExoAir 230 Air and Water-Resistive Membrane Barrier and Dymonic 100 Accessory Material, as referenced in Section 2.02.B.1 and 2.02.B.2 below. Delete those AWRB's and Accessory Materials

that do not apply. In addition provide Tremco (Company) Joinery and Sealants referenced in Section 2.02.C to be integrated.

- c. The EIFS will remain in a watertight condition when the EIFS is used in conjunction with approved Company Joinery and Sealants.
 - d. The EIFS will drain incidental moisture between the air/water-resistive barrier and the insulation board.
 - 1) Remedy includes repair or replacement of any sheathing or framing member that is damaged as a result of the EIF system failing to drain incidental moisture between the secondary weather barrier and the insulation board.
 - e. Finish will be UV fade resistant for 10 years, except for specially produced colors.
 - 1) Specially produced colors will be UV fade resistant for 5 years when high-performance colorants are used to formulate.
 - f. The EIFS shall be eligible to receive a renewal of the original warranty if the Owner satisfactorily completes the specific renovation requirements published by the Manufacturer.
- B. Installer Warranty
- 1. EIF system Installer shall provide a separate minimum 1-year warranty for all workmanship related to the proper installation and drainage performance of the EIFS application. Manufacturer shall not be responsible for workmanship associated with the installation of Exterior Insulation and Finish System with Moisture Drainage.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. Manufacturers List:
- 1. Dryvit Systems, Inc., One Energy Way, West Warwick, RI 02893, 800-556-7752, www.dryvit.com.
 - 2. Tremco, Inc., 3735 Green Road Beachwood, OH 44122 [800.321.7906](tel:800.321.7906), www.tremco.com.
- B. Substitution Limitations:
- 1. All components of the Outsulation® Plus MD System® including EPS Insulation Board shall be supplied or obtained from Dryvit Systems, Inc., Tremco, Inc. or their authorized distributors. Substitutions or additions of materials manufactured or supplied by others will void the EIF system warranty.
 - 2. Alternate EIFS manufacturers must demonstrate equivalency for all elements of EIF system such as but not limited to:
 - a. Material components, compatibility and testing
 - b. Standard and specialty finishes;
 - c. Color and texture matching; and,
 - d. Warranty criteria as specified herein.
 - 3. Submit alternate EIFS manufacturer's complete data highlighting equivalency for review through Substitution Requirements as defined in Division 1.

2.02 DESCRIPTION

- A. System Description: The Dryvit Outsulation Plus MD System is an Exterior Insulation and Finish System (EIFS) with Moisture Drainage, consisting of:
- a. An Air and Water-Resistive Membrane Barrier
 - b. Accessory Materials
 - c. Adhesive – installed in vertical ribbons to facilitate egress of incidental moisture
 - d. Expanded Polystyrene (EPS) insulation board
 - e. Base Coat
 - f. Reinforcing Mesh
 - g. Finish Coat
 - h. Joint Sealants as specified herein below
- B. Materials:
- 1. Fluid-Applied Air and Water-Resistive Barrier:

- a. Permeable:
 - 1) Dryvit Backstop® NTX: A standard film vapor permeable, low-temperature, flexible, polymer- based non-cementitious water-resistive and air barrier coating available in Texture and Smooth versions. Backstop NTX can be installed in ambient air and substrate surface temperatures of 25 °F (3.88 °C) and rising for a minimum 24 hours and exposed for up to 6 months during the construction process.
 - 2) 20 yr. Tremco ExoAir® 230: A thick film synthetic, permeable, elastomeric air/water-resistive membrane barrier designed to be roller or spray applied. ExoAir 230 can be installed in ambient air and substrate surface temperatures of 40 °F (5 °C) and rising, shall be protected from rain and washout prior to drying and can be exposed for up to 12 months during the construction process. ExoAir is specialty formulated for design options requiring assemblies that have been evaluated for NFPA 285.
(Note to Specifier: Coordinate item above for 20-year EIF system warranty as referenced in Section 1.09.A.2. Delete section 2.02.B.1.a.1 above and section 2.02.B.1.b below. Retain only section 2.02.B.a.2) above.)
- b. Non-Permeable – Vapor Retarder / Barrier:
 - 1) Dryvit Backstop® NT-VB (Vapor Barrier): A standard film non-permeable, Class I, low- temperature, flexible, polymer-based non-cementitious water-resistive and air barrier coating available in Texture and Smooth versions. Backstop NT-VB can be installed in ambient air and substrate surface temperatures of 40 °F (5 °C) and rising for a minimum 24 hours and exposed for up to 6 months during the construction process. Backstop NT-VB Texture is additionally used for treatment of sheathing board joints, inside / outside corners and spotting of fastener heads.
2. Accessory Materials for Fluid Applied Air and Water-Resistive Barrier (AWRB):
 - a. Provide compatible accessory materials as required by project conditions for substrate, rough opening and penetration preparation, bridge expansion joints in substrate, material transitions and flashing integration to produce a complete air and water-resistant assembly.
 - 1) Dryvit Grid Tape™: An open weave fiberglass mesh tape with pressure sensitive adhesive. Used in combination with Backstop NTX Texture for treating sheathing board joints and inside /outside corners and preparing rough openings and penetrations. Backstop NTX Texture is used alone for spotting fastener heads.
 - 2) Dryvit AquaFlash®: Fluid-applied, water-based polymer transition membrane. Used in preparing rough openings and penetrations, bridging expansion joints in substrate, material transitions and flashing integration. AquaFlash can be installed in ambient air and substrate surface temperatures of 40 °F (5 °C) and rising for 24 hours.
 - i. Dryvit AquaFlash Mesh and Corners: Polyester reinforcing mesh for use with AquaFlash.
 - 3) Dryvit Backstop Flash and Fill: A flexible, waterproof, low temperature gun applied material. Used in substrate preparation, treating sheathing board joints, inside/outside corners and fastener heads, preparing rough openings and penetrations, bridging expansion joints in substrate material transitions and flashing integration. Backstop Flash and Fill can be installed in ambient air and substrate surface temperatures of 32 °F (0 °C) and rising for 24 hours.
Note: Dryvit Backstop Flash and Fill may only be used with Dryvit Backstop NTX air/water- resistive barrier.
 - 4) 20 yr. Tremco Dymonic 100: A high-performance, high-movement, single-component, medium- modulus, low-VOC, UV-stable, non-sag, gun applied polyurethane sealant. Used in substrate preparation, treating sheathing board joints and inside/outside corners and fastener heads, preparing rough openings and penetrations, bridging expansion joints in substrate, material transitions and flashing integration. Dymonic 100 can be installed in ambient air and substrate

surface temperatures of 40 °F (5 °C) and rising. Where Dymonic 100 must be applied in temperatures below 40 °F, (5 °C), please refer to the Tremco Technical Bulletin for Applying Sealants in Cold Conditions (No. S-08-44 rev 1) that can be found at www.tremcosealants.com. Coordinate item above for 20 year EIF system warranty as referenced in Section 1.09.A.2. Delete sections 2.02.B.2.a.1) thru 2.02.B.2.a.3) above. Retain section 2.02.B.2.a.4) above.)

- 5) 20 yr, Tremco ExoAir 110AT: A 22-mil composite impermeable membrane that is comprised of 16 mils of butyl and 6 mills of HDPP facer. Used in limited applications as a membrane flashing that will not interfere with the adhesive application of EIFS.
3. Drainage Components:
 - a. Drainage Track UV treated PVC “J” channel perforated with weep holes, complying with ASTM D 1784 and ASTM C 1063. The use of Dryvit Drainage Track is limited to the base of the EIF system at finished grade level. Use Dryvit Drainage Strip at all other horizontal terminations.
 - b. Acceptable manufacturers of Drainage Track:
 - 1) Starter Trac STWP – without drip edge by Plastic Components, Inc.
 - 2) Starter Trac STDE – with drip edge by Plastic Components, Inc.
 - 3) Universal Starter Track by Wind-lock Corporation
 - 4) Sloped Starter Strip with Drip by Vinyl Corp.
 - c. Dryvit Drainage Strip™ corrugated plastic strip.
 - d. TREMPRO CHEM X PRO™ adhesive used to attach Drainage Track and Dryvit Drainage Strip to the sheathing.
4. Adhesives:
 - a. Liquid polymer-based adhesive field mixed with Portland cement.
 - 1) Dryvit Primus®
 - 2) Dryvit Genesis®
 - b. Ready mixed dry blend cementitious, copolymer-based adhesive field mixed with water.
 - 1) Dryvit Primus® DM
 - 2) Dryvit Genesis® DM
 - 3) Dryvit Genesis® DMS
 - 4) Rapidry DM™ 35-50
 - 5) Rapidry DM™ 50-75
5. Insulation Board:
 - a. Expanded Polystyrene; minimum thickness 25 mm (1 in); meeting Dryvit Specification [DS131](#) and ASTM E 2430.
6. Pre-Coated Insulation Starter Boards, Corners and Shapes:
 - a. Pre-Base Coated Insulation Starter Boards, Corners and Shapes provide for properly back wrapped and encapsulated EIF system termination edges typically scheduled to receive primers and sealants and are recommended. Non-Machine coated starter boards and shapes must be produced with Dryvit materials to be covered under the EIF system warranty.
 - b. Machine Coated Starter Boards, Corners and Shapes: Shall be produced by Tremco CPG. The term of the warranty may be extended for an additional 2 years with the use of Tremco-produced Machine Coated Starter Boards.
7. Base Coat:
 - a. Liquid polymer-based base coat field mixed with Portland cement.
 - 1) Dryvit Primus
 - 2) Dryvit Genesis
 - 3) Dryvit Dryflex
 - b. Ready mixed dry blend cementitious, copolymer-based base coat field mixed with water.
 - 1) Dryvit Primus DM
 - 2) Dryvit Genesis DM
 - 3) Dryvit Genesis DMS
 - 4) Rapidry DM 35-50

- 5) Rapidry DM 50-75
- 6) Dryvit NCB – Non-cementitious
- c. Liquid polymer-based base coat field mixed with Portland cement when specified.
 - 1) ShieldIt™
8. Reinforcing Mesh:
 - a. Open-weave, glass fiber fabric treated for compatibility with other EIF system materials.
 - b. Provide for ultra high impact mesh assembly including **Panzer 20 mesh** for all EIFS clad wall areas within 10'-0" of grade and where additionally indicated on contract drawings.

Reinforcing Mesh ¹ /Weight oz/yd ² (g/m ²)	Minimum Tensile Strengths	EIMA Impact Classification	EIMA Impact Range in-lbs (Joules)		Impact Test Results in-lbs (Joules)	
Standard - 4.3 (146)	150 lbs/in (27 g/cm)	Standard	25-49	(3-6)	36	(4)
Standard Plus - 6 (203)	200 lbs/in (36 g/cm)	Medium	50-89	(6-10)	56	(6)
Intermediate™ - 12 (407)	300 lbs/in (54 g/cm)	High	90-150	(10-17)	108	(12)
Panzer™ 15 ¹ - 15 (509)	400 lbs/in (71 g/cm)	Ultra High	>150	(>17)	162	(18)
Panzer 20 ¹ - 20.5 (695)	550 lbs/in (98 g/cm)	Ultra High	>150	(>17)	352	(40)
Detail Mesh™ Short Rolls - 4.3 (146)	150 lbs/in (27 g/cm)	n/a	n/a	n/a	n/a	n/a
Corner Mesh™ - 7.2 (244)	274 lbs/in (49 g/cm)	n/a	n/a	n/a	n/a	n/a
* It shall be colored blue and bear the Dryvit logo for product identification						
1. Shall be used in conjunction with Standard Mesh (recommended for areas exposed to high traffic)						

- c. Mesh weight transitions shall occur at joints in the wall finish/insulation to maintain even appearance.
9. Finish:
 - a. Hydrophobic (HDP™) Finishes: 100% acrylic coating with integral color and texture and formulated with hydrophobic properties:
 - 1) Textures:
 - a) **Limestone™ HDP**, custom color as selected by Architect – Owner.
 - b) **Sandpebble**. Located at low area accent walls only.
 - 2) Colors:
 - a) **Multiple colors to be selected. (5)** total colors selected from manufacturers standard.
- C. Joint Sealants:
 1. Silicone Sealant:
 - a. Tremco Spectrem 1: An ultra low modulus, high-performance, one-part, moisture-curing silicone joint sealant with physical properties making it an ideal sealant for sealing dynamic joints.
 - b. Tremco Spectrem 3: A general-purpose, low-modulus, high performance, one-part, neutral-cure, non-staining, low dirt pickup, construction-grade silicone sealant.
 - c. Tremco Spectrem 4-TS: A multi-component, neutral-curing, non-staining, low dirt pick up, low-modulus silicone sealant specially formulated for use in dynamically moving building joints. Spectrem 4-TS offers color flexibility with the opportunity to tint the material on site.
 - a. Coordination for custom sealant colors is required.
 - d. Where deemed necessary, use TREMprime Silicone Porous Primer.
 - e. See related specification section or consult with Tremco, Inc. for more information.
 2. Polyurethane Sealant:
 - a. Tremco Dymonic FC: A one component hybrid polyurethane sealant. Where deemed necessary, use TREMprime Silicone Porous Primer for porous surfaces and TREMprime Silicone Metal Primer for metals or plastics. Coordinate for primer use as indicated.
- D. Jobsite-Mixed Materials:
 1. Portland cement: verify is Type I, II or 1L, meeting ASTM C 150, white or gray in color, fresh and free of lumps.

- E. Water: verify is clean and free of foreign matter. Reference Documentation for Outsulation Plus MD System:
1. Data Sheet – DS929
 2. Details – DS944
 3. Application Instructions – DS934

PART 3 EXECUTION

3.01 EXAMINATION

A. Verification of Conditions:

1. Verify access to electric power, clean water and a clean work area at the location where the Dryvit materials are to be applied.
2. Verify the deflection of the substrate does not exceed 1/240 times the span. Verify substrate is flat within 1/4 in (6.4 mm) in a 4 ft (1.2 m) radius.
3. Verify substrate is sound, dry, connections are tight; has no surface voids, projections, or other conditions that may interfere with the Exterior Insulation and Finish System with moisture drainage installation or performance.
4. Verify the slope of inclined surfaces are not less than 6:12 (27 °) were the length of the slope does not exceed 12 in (305 mm) or 3:12 (14 °) were the length of the slope does not exceed 4 in (102 mm).
5. Verify metal roof flashings have been installed in accordance with Sheet Metal and Air Conditioning Contractors National Association (SMACNA) standards.
6. Verify all rough openings are flashed in accordance with the Exterior Insulation and Finish System with Moisture Drainage manufacturer's installation details, or as otherwise necessary to prevent water penetration. Verify chimneys, balconies and decks have been properly flashed as necessary to prevent water penetration.
7. Verify windows and doors are installed and flashed per manufacturer's requirements and installation details.
8. Notify general contractor of all discrepancies prior to the installation of the Exterior Insulation and Finish System with moisture drainage.
(Note to Specifier: Design and location of expansion joints in the Exterior Insulation and Finish System with Moisture Drainage is the responsibility of the project designer and as designated on contract drawings.)
9. Verify that expansion joints are installed:
 - a. Where expansion joints occur in the substrate system.
 - b. Where building expansion joints occur.
 - c. At floor lines in wood frame construction.
 - d. At floor lines of non-wood framed buildings where significant movement is expected.
 - e. Where the Exterior Insulation and Finish System with moisture drainage abuts dissimilar materials.
 - f. Where the substrate type changes.
 - g. Where prefabricated panels abut one another.
 - h. In continuous elevations at intervals not exceeding 75 ft (23 m).
 - i. Where significant structural movement occurs, such as changes in roof line, building shape or structural system.
10. Vapor Retarders: The use and location of vapor retarders within a wall assembly is the responsibility of the project designer and shall comply with local building code requirements. The type and location shall be noted on the project drawings and specifications. Vapor retarders may be inappropriate in certain climates and can result in condensation within the wall assembly.

3.02 PREPARATION

- A. Protect the Exterior Insulation and Finish System with Moisture Drainage materials by permanent or temporary means from inclement weather and other sources of damage prior to, during, and following application until completely dry.

- B. Protect adjoining work and property during installation of the Exterior Insulation and Finish System with Moisture Drainage.
- C. Prepare the substrate to be free of foreign materials, such as oil, dust, dirt, form-release agents, efflorescence, paint, wax, water repellants, moisture, frost, and any other condition that may inhibit adhesion.

3.03 INSTALLATION

- A. Install the EIF system in accordance with ASTM C1397 and the Dryvit Outsulation Plus MD System Application Instructions, DS934. Apply base coat sufficient to fully embed the reinforcing mesh. The recommended method is to apply the base coat in two (2) passes.
- B. Apply sealant to base coat surface prepared in accordance with [DS153](#).
- C. Install high impact reinforcing mesh as specified at ground level, high traffic areas and other areas exposed to or susceptible to impact damage as designated on contract drawings.
- D. Install Machine Coated Dryvit EPS Shapes in accordance with Dryvit Publication [DS854](#).

3.04 SITE QUALITY CONTROL

- A. Exterior Insulation and Finish System with Moisture Drainage manufacturer assumes no responsibility for on-site inspections or application of its products.
- B. EIFS sub-contractor to certify in writing the quality of work performed relative to the substrate system, details, installation procedures, and as to the specific products used.
- C. EPS supplier, if requested, to certify in writing that the EPS meets the Exterior Insulation and Finish System with Moisture Drainage manufacturer's specifications.
- D. The sealant contractor, if requested, to certify in writing that the sealant application is in accordance with the sealant manufacturer's and the Exterior Insulation and Finish System with Moisture Drainage manufacturer's recommendations.

3.05 CLEANING

- A. Remove all excess Exterior Insulation and Finish System materials from the job site by the contractor in accordance with contract provisions and as required by applicable law.
- B. Leave all surrounding areas, where the Exterior Insulation and Finish System with Moisture Drainage has been applied, free of debris and foreign substances resulting from the EIFS sub-contractor's work.

END OF SECTION 072419

SECTION 07 27 26

FLUID-APPLIED, VAPOR-PERMEABLE MEMBRANE AIR BARRIERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. A 40 mil thickness fluid-applied vapor-permeable membrane of synthetic polymer, fire retardant composition for use as an air and water resistive barrier in exterior walls.
- B. Monolithic, fully-adhered membrane and accessory products installed as a continuous air and water resistive barrier assembly over substrates of the Project's opaque walls as indicated on Drawings
- C. Air and water resistive barrier assembly providing air and water tight coverage over these conditions
 - 1. Joints between building materials such as sheathing joints, mortar joints and dissimilar materials.
 - 2. Joints around windows, curtain walls, louvers, door frames and other service openings
 - 3. Junctions between walls and floors, between walls at building corners and between walls, roofs and ceilings.
 - 4. Mechanical and electrical penetrations
 - 5. Fastener and hardware penetrations used to attach insulation, cladding, trim or other overburden
 - 6. Termination at footing, roof deck and existing construction
 - 7. Junction to air & water barrier in roof, below grade or other adjacent systems
- D. Air and water resistive barrier assembly providing air and water tight coverage while accommodating designed movement at expansion and control joints.
- E. Special Condition at EIFS Assemblies. Weather barrier product shall be type as specified in section 072419 EXTERIOR INSULATION AND FINISH SYSTEM WITH MOISTURE DRAINAGE, for the purpose of EIFS system warranty.

1.02 REFERENCES

- A. ASTM C 920 Standard Specification for Elastomeric Joint Sealants
- B. ASTM E 84 Standard Test Method for Surface Burning Characteristics of Building Materials
- C. ASTM E 96 Standard Test Methods for Water Vapor Transmission of Materials.
- D. ASTM E 2178 Standard Test Method for Air Permeance of Building Materials
- E. ASTM E 2357 Standard Test Method for Determining Air Leakage of Air Barrier Assemblies
- F. International Code Council Evaluation Services (ICC-ES) Acceptance Criteria for Water Resistive Coatings used as Water Resistive Barriers over Exterior Sheathing AC-212, Approved February 2015
- G. National Fire Protection Association (NFPA) 285 Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Non-Load-Bearing Wall Assemblies Containing Combustible Components

1.03 PERFORMANCE REQUIREMENTS

- A. Installed product and accessories shall exhibit an air leakage rate, infiltration and exfiltration modes, measured after pressure cycling, not to exceed 0.2 L/s*m² at 75 Pa [0.040 CFM/ft² at 1.57 PSF] according to ASTM E 2357.
- B. Product shall meet the water vapor transmission requirement water resistive coatings used as water resistive barriers: minimum 35 g/m²/24h (5 perms), tested to ASTM E 96 water method (B), ICC-ES AC-212, Section 4.4
- C. For Type I, II, III and IV construction: Installed product and accessories shall be tested to NFPA 285 and pass in wall assemblies of the Project or shall pass by engineering judgement.
- D. Installed product and accessories shall be recommended by manufacturer for at least 180 days of outdoor exposure.
- E. Installed product and accessories shall have an upper service temperature limit of 180°F or higher.
- F. Manufacturer shall provide product and accessories which have a minimum installation temperature of 25°F or lower.
- G. Product shall be of fire-retardant, non-asphalt synthetic polymer composition.

- H. Product shall be minimum 0.040 inch (40 mils) dry thickness membrane. Dry membrane thickness shall be calculated based on field-measured wet mil thickness using a comb gauge and volume % solids of the product. [Example 66% solids membrane applied at minimum 60 wet mils yields a minimum 40 mil thickness membrane].

1.04 SUBMITTALS

- A. Shop drawings showing locations and extent of air barrier and details of all typical conditions.
- B. Manufacturer's technical data sheets and safety data sheets for product and accessories.
- C. Manufacturer's installation instructions.
- D. Certification of compatibility by manufacturer, listing all materials on the project with which the product and accessories may come into contact.
- E. Free film sample of product at representative cured thickness, minimum 2 inch by 3 inch size.
- F. Sample of sheet detail flashing and transition membrane, minimum 2 inch by 3 inch size.

1.05 QUALITY ASSURANCE

- A. Installer Qualifications: Shall be experienced in applying the same or similar materials and shall be specifically approved in writing by Manufacturer.
- B. Single-Source Responsibility: Obtain product and accessories from single manufacturer.
- C. Product and Accessories shall comply with all state and local regulations controlling use of volatile organic compounds (VOCs).
- D. Field-Constructed Mock-Ups: Prior to installation on Project, apply product and accessories on mock-up to verify details under shop drawing submittals, to demonstrate tie-ins with adjoining construction and other termination conditions and to become familiar with properties of materials in application:
 - 1. Apply in field-constructed mockups of assemblies as specified in [\[Section 01 43 39 – Mockups\]](#)

1.06 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials to Project site in original packages with seals unbroken, labeled with manufacturer's name, product, lot number, and directions for storage.
- B. Store materials in their original undamaged packages in a clean, dry, protected location and within temperature range required by manufacturer.
- C. During cold weather, protect product in containers and spray equipment from freezing. Maintain product temperature within acceptable range for spray application, as required by air barrier manufacturer.
- D. Avoid spillage. Immediately notify Owner, [\[Architect\]](#) [\[Consultant\]](#) if spillage occurs and start clean up procedures. Clean spills and leave area as it was prior to spill.

1.07 PROJECT CONDITIONS

- A. Do not apply product or accessories during rain or accumulating snowfall.
- B. Apply product and accessories within approved ambient and substrate temperature range stated in manufacturer's literature.
- C. Do not apply product or accessories over incompatible materials.
- D. Observe safety and environmental measures indicated in manufacturer's SDS, and mandated by federal, state and local regulations.

1.08 WARRANTIES: Provide the manufacturer's minimum five year material warranty.

PART 2 PRODUCTS

2.01 PRODUCTS AND MANUFACTURERS :

- A. Carlisle Coatings & Waterproofing, Incorporated. 900 Hensley Lane, Wylie, TX 75098. Phone 1-800-527-7092. Website <http://www.carlisleccw.com>
 - 1. Fire Resist Barritech VP, for installation at 40 degrees F and above
 - 2. Fire Resist Barritech VP LT, for installation at 15 degrees F and above

2.02 ACCESSORIES: Provide from same manufacturer as air barrier membrane.

- A. Sheet Detail Flashing: Foil composite faced rubberized asphalt flashing, minimum 0.040 inch (40 mils) thickness.
 - 1. Fire-Resist 705 FR-A or Fire-Resist 705 FR-A LT low temperature application formula by Carlisle Coatings & Waterproofing, Incorporated
 - 2. Others as approved by air barrier membrane manufacturer
 - B. Contact Adhesive:
 - 1. Carlisle Coatings & Waterproofing, Incorporated: CCW-702 Solvent-Based, CCW-702 LV VOC Compliant Solvent-Based, CCW-702 WB Water-Based, CAV-GRIP™ Aerosol Spray or Travel-Tack portable aerosol spray cans
 - 2. Others as approved by air barrier membrane manufacturer
 - C. Liquid Detail Flashing. Silane-terminated polyether, minimum 90% solids. ASTM C 920 Type S, Grade NS, Class 25, Use NT. 0.040 inch (40 mil) thickness application
 - 1. Barribond
 - 2. Others as approved by air barrier membrane manufacturer
 - D. Detail Sealant:
 - 1. Barribond by Carlisle Coatings & Waterproofing, Incorporated
 - 2. Others as approved by air barrier membrane manufacturer
 - E. Transition Membrane:
 - 1. CCW SURE-SEAL Pressure-Sensitive Elastoform by Carlisle Coatings & Waterproofing, Incorporated
 - 2. Others as approved by air barrier membrane manufacturer
 - F. Transition Membrane Primer:
 - 1. Carlisle Coatings & Waterproofing, Incorporated: SURE-SEAL HP-250 Primer, SURE-SEAL EP-95 Splicing Cement or SURE-SEAL Low VOC EPDM Primer
 - 2. Others as approved by air barrier membrane manufacturer
 - G. Reinforcing Fabric: Woven, synthetic polymer fabric
 - 1. DCH Reinforcing Fabric by Carlisle Coatings & Waterproofing, Incorporated
 - 2. Others as approved by air barrier membrane manufacturer
 - H. Glass Mat: Randomly-oriented glass strands held in binder soluble in wet air barrier membrane. Offered in rolls of various widths
 - 1. LiquiFiber
 - 2. Others as approved by air barrier membrane manufacturer
 - I. Fill Compound: 2-part, non-sag polyurethane sealant
 - 1. Carlisle Coatings & Waterproofing, Incorporated: CCW-703 V or CCW-201
 - 2. Others as approved by air barrier membrane manufacturer
- 2.03 RELATED MATERIALS BY OTHERS
- A. Silicone Sealant, select any:
 - 1. Dow 758, 790, 791, 795
 - 2. Pecora AVB Silicone, 890, 891, 895
 - 3. GE Silpruf, Silpruf LM
 - 4. Other product approved by air barrier membrane manufacturer
 - B. Polyurethane Foam Sealant, select any:
 - 1. TVM Fireblock Foam
 - 2. Fomo Handifoam Fireblock
 - 3. Great Stuff PRO or Froth Pack by Dow Chemical Company
 - 4. Other product approved by air barrier membrane manufacturer
 - C. Insulation Adhesive, select any
 - 1. Barribond
 - 2. LM 800 XL
 - 3. QB-300 Multi-Purpose Construction Adhesive by OSI
 - 4. PL-300 VOC Foamboard Adhesive by Loctite
 - 5. Other product approved by air barrier membrane and board foam insulation manufacturer

PART 3 EXECUTION

3.01 EXAMINATION

- A. Examine substrates, areas, and conditions affecting installation of the air & vapor barrier and accessory products for compliance with requirements. Verify that surfaces and conditions are suitable prior to commencing Work of this section. Do not proceed with installation until unsatisfactory conditions have been corrected.
- B. Verify that wall assemblies are dried in, such that water intrusion will not occur from above, behind or around the air barrier installation.
- C. Concrete shall be cured for a minimum of seven days. It shall be smooth, with sharp protrusions such as form joints or fins removed and ground flush. Honeycomb and holes/cracks shall be filled with grout or mortar.
- D. Surfaces shall be sound, dry, and free of oil, grease, dirt, excess mortar or other contaminants.
- E. Surfaces shall be supported and flush at joints without large voids or sharp protrusions.
- F. Mortar joints shall be struck flush and shall be free of voids. Mortar droppings shall be removed from brick ties and all other surfaces accepting air barrier.
- G. Sheathing boards shall be flush at joints, with gaps between boards according to building code and sheathing manufacturer's requirements. Sheathing boards shall also be securely fastened to the structure with proper fastener type, technique and spacing according to building code and sheathing manufacturer's requirements. Sheathing boards shall be repaired or replaced if inspection reveals moisture damage, mechanical damage or if sheathing boards have exceeded the exposure duration or exposure conditions as required by the sheathing manufacturer.
- H. Plywood, OSB, lumber or pressure-treated wood moisture content, measured with a wood moisture meter in the core of the substrate, shall be below 20%.
- I. Inform Architect in writing of
 - 1. Unsatisfactory substrates
 - 2. Cracks in concrete and masonry.
 - 3. Gaps or obstructions such as steel beams, angles, plates and projections which cannot be spanned or covered by Product or Accessories.
 - 4. Anticipated problems applying product and accessories over substrate.

3.02 SURFACE PREPARATION

- A. Fill cracks, gaps, and joints with fill compound, detail sealant or other material approved by air barrier manufacturer.
- B. Fill rough gaps around pipe, conduit, and similar penetrations with mortar, non-shrink grout, fill compound or polyurethane foam sealant shaved flush.
- C. Apply a ¾ inch cant of fill compound or detail sealant at the intersection of the base of the wall and the footing.

3.03 DETAILING

- A. Additional materials and installation are required at joints, transitions, openings, terminations, penetrations and similar surface irregularities. Perform detailing before or after product installation.
- B. Install product and accessories in details as directed in manufacturer's literature.
- C. Sheathing joints, use one of the following methods:
 - 1. 4 inch reinforcing fabric imbedded in product and centered over joint.
 - 2. 2" width liquid flashing centered over joint.
- D. Sheathing inside and outside corners. Flashing or reinforcement shall bear 3 inches minimum onto either side of angle change. Use any of the following methods:
 - 1. Sheet detail flashing
 - 2. Liquid detail flashing centered over angle change
 - 3. Reinforcing fabric centered over angle change and imbedded in product
 - 4. Glass mat centered over angle change and imbedded in product
- E. Window openings. Flashing or reinforcement shall bear onto wall 3 inches minimum and shall return into window opening according to Project drawings. Use any of the following materials:
 - 1. Sheet detail flashing
 - 2. Liquid detail flashing
 - 3. Glass mat imbedded in product
- F. Pipe or duct penetrations. Flashing or reinforcement shall bear onto wall 3 inches minimum and shall bear onto pipe or duct 3 inches, or according to Project drawings. Select any:
 - 1. Sheet detail flashing

- 2. Liquid detail flashing
- 3. Glass mat imbedded in product
- G. Expansion or deflection joints. Flashing shall bear 3 inches minimum onto either side of joint. Select any:
 - 1. Sheet detail flashing bellows or expansion bulb
 - 2. Transition membrane expansion bulb
- H. Interface of dissimilar substrates: Flashing or reinforcement shall bear 3 inches minimum onto either side of joint. Select any:
 - 1. Sheet detail flashing
 - 2. Liquid detail flashing
 - 3. Reinforcing fabric imbedded in product
 - 4. Glass mat imbedded in product
- I. Seal all terminations of sheet detail flashing with a 1 inch width X 0.040 inch (40 mils) thick ribbon of detail sealant, centered over termination.

3.04 INSTALLATION

- A. Apply product and accessories over opaque wall surfaces as indicated in Project drawings.
- B. Use the manufacturer's standard or low temperature formula product as required by the project conditions.
- C. Apply product by spray, roller, brush or other method as recommended by air barrier manufacturer. Apply product at specified wet mil thickness in accordance with air barrier manufacturer's requirements.
- D. Verify compliance with air barrier manufacturer's minimum required thickness by documenting product use per area. Perform and document wet mil thickness measurements every 100 square feet, or more frequently if required, to establish uniform and adequate coverage.
- E. Installation shall produce complete coverage of opaque substrates as indicated in Drawings.
- F. Product and accessories shall be fully-adhered to substrates. Defects such as holes, fishmouths, blistering, de-lamination, bridging or thin spots shall be repaired according to air barrier manufacturer's instructions.

3.05 SCHEDULE

- A. Wall substrates and roof or temporary roof shall be in place, effectively enclosing interior space, before proceeding with air barrier installation.
- B. Seal penetrations made through installed product according to manufacturer's instructions and drawings.
- C. Seal fenestration to product with detail membrane, transition membrane, detail sealant, silicone sealant or polyurethane foam sealant according to Project drawings
- D. Through-wall flashing may be installed before or after product. Seal termination of through-wall flashing to product according product manufacturer's instructions.
- E. Exterior cladding shall be installed after product.
- F. Rigid or semi-rigid insulation installed over product shall be attached with mechanical fastening, insulation adhesive or a combination of these techniques, according to insulation manufacturer and air barrier manufacturer's instructions.
- G. Sequence Work to enable air barrier continuity at wall-to-foundation, shelf angle, wall-to-roof, fenestration, different wall assemblies, and other conditions as indicated in Project drawings.

3.06 REPAIR AND PROTECTION

- A. Protect from damage during application and remainder of construction period.
- B. Inspect and make necessary repairs before covering. Repair or replace damaged material according to manufacturer's literature.
- C. Product and accessories are not designed for permanent exposure. Cover with insulation or exterior cladding as soon as schedule allows.
- D. Outdoor exposure of installed product and accessories shall not exceed 180 days.

END OF SECTION 072726

SECTION 074213.23

ALUMINUM COMPOSITE MATERIAL WALL PANELS

PART 1 – GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. Definitions:
 - 1. An Aluminum Composite Material (ACM) panel consists of a thermoplastic core bonded on both sides to a sheet of aluminum.
 - 2. An ACM panel system consists of shop-fabricated ACM panels with aluminum panel components, panel attachment components, joint components, and miscellaneous materials to provide a weather-resisting, exterior wall covering.
- B. Section Includes:
 - 1. Exterior installation and performance of panels and panel system components.
- C. Related Sections:
 - 1. Division 03 – Concrete: Cast-In-Place Concrete
 - 2. Division 04 – Masonry: Unit Masonry
 - 3. Division 05 – Metals: Cold-Formed Metal Framing
 - 4. Division 05 – Metals: Structural Aluminum Framing
 - 5. Division 06 – Wood, Plastics, and Composites: Sheathing
 - 6. Division 07 – Thermal and Moisture Protection: Thermal Insulation
 - 7. Division 07 – Thermal and Moisture Protection: Weather Barriers
 - 8. Division 07 – Thermal and Moisture Protection: Fluid-Applied Membrane Air Barriers
 - 9. Division 07 – Thermal and Moisture Protection: Sheet Metal Flashing and Trim
 - 10. Division 08 – Openings: Aluminum Windows
 - 11. Division 08 – Openings: Glazing
 - 12. Division 08 – Openings: Glazed Aluminum Curtain Walls

1.03 REFERENCES

- A. General: Referenced Standards, including revisions by issuing authority, form a part of this Section to the extent indicated. Standards listed have either been identified by the 2018 International Building Code (IBC) or local building code or are specific requirements for this building construction type.
- B. Aluminum Association (AA):
 - 1. ADM: Aluminum Design Manual: Part 1 – A Specification for Aluminum Structures
 - 2. AA-M12C23A31: Anodized – Clear Coating
 - 3. AA-M12C23A34: Anodized – Color Coating
- C. American Architectural Manufacturers Association (AAMA):
 - 1. AAMA 501.1 Standard Test Method for Water Penetration of Windows, Curtain Walls and Doors Using Dynamic Pressure
 - 2. AAMA 501.2 Quality Assurance and Diagnostic Water Leakage Field Check of Installed Storefronts, Curtain Walls and Sloped Glazing Systems
 - 3. AAMA 509 Voluntary Test and Classification Method for Drained and Back Ventilated Rain Screen Wall Cladding Systems
 - 4. AAMA 609 & 610 Cleaning and Maintenance Guide for Architecturally Finished Aluminum
 - 5. AAMA 2605 Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels
- D. American Concrete Institute (ACI):
 - 1. ACI 318: Building Code Requirements for Structural Concrete
- E. American Iron and Steel Institute (AISI):
 - 1. AISI S100: North American Specification for the Design of Cold-formed Steel Structural Members, 2016
- F. American Society of Civil Engineers (ASCE):

1. ASCE/SEI 7: Minimum Design Loads and Associated Criteria for Buildings and Other Structures
- G. American Wood Council (AWC):
 1. ANSI/AWC NDS: National Design Specification (NDS) for Wood Construction – with 2018 NDS Supplement
- H. ASTM International (ASTM):
 1. ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
 2. ASTM B209 Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
 3. ASTM B221 Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
 4. ASTM C645 Standard Specification for Nonstructural Steel Framing Members
 5. ASTM D635 Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position
 6. ASTM D1929 Standard Test Method for Determining Ignition Temperature of Plastics
 7. ASTM D2244 Standard Practice for Calculation of Color Tolerances and Color Differences from Instrumentally Measured Color Coordinates
 8. ASTM D4214 Standard Test Methods for Evaluating the Degree of Chalking of Exterior Paint Films
 9. ASTM E84 Standard Test Method for Surface Burning Characteristics of Building Materials
 10. ASTM E283 Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
 11. ASTM E330 Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference
 12. ASTM E331 Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference
 13. ASTM E529 Standard Guide for Conducting Flexural Tests on Beams and Girders for Building Construction
- I. National Fire Protection Association (NFPA):
 1. NFPA 285 Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Wall Assemblies Containing Combustible Components
- J. The Masonry Society (TMS):
 1. TMS 402/602: Building Code Requirements and Specification for Masonry Structures

1.04 SYSTEM DESCRIPTION

- A. Performance Requirements:
 1. General: Provide installed panel system designed to withstand project-specific design wind loads while maintaining Installation Requirements, Testing Requirements, and Deflection and Thermal Movement Requirements without defects, damage, or failure as defined by Manufacturer and required by this Section.
- B. Installation Requirements:
 1. Types I, II, III, and IV Construction:
 - a. To any height above grade in accordance with provisions of IBC Section 1406.10, or
 - b. Up to 40 feet above grade in accordance with provisions of IBC Section 1406.11.1, or
 - c. Up to 50 feet above grade in accordance with provisions of IBC Section 1406.11.2, or
 - d. Up to 75 feet above grade (Option 1) in accordance with provisions of IBC Section 1406.11.3, or
 - e. Up to 75 feet above grade (Option 2) in accordance with provisions of IBC Section 1406.11.4
 2. Type V Construction: To any height above grade in accordance with provisions of IBC Section 1406.12
- C. Testing Requirements:
 1. AAMA 509:
 - a. ASTM E283: At a pressure of 1.57 psf, air flow measurement across panel system (excluding jamb conditions) shall be measured to determine V-axis classification on Chart 1b from AAMA 509.
 - b. ASTM E331 and AAMA 501.1: At pressures of 6.24 psf and 12.0 psf for both, average water from four (4) tests shall be collected, measured, and averaged to determine W-axis classification on Chart 1b from AAMA 509:
 - i. Panel system shall have a classification where V-axis classification number is greater than or equal to W-axis classification number (e.g., V2/W2 is acceptable; V1/W2 is not acceptable).
 2. ASTM E283: Air flow measurement across panel system (excluding jamb conditions) shall not exceed 0.06 cfm per sf of wall area when tested to a pressure difference of 1.57 psf and 6.24 psf.

3. ASTM E330: Panel system must be engineered to meet project-specific design wind loads for strength and serviceability requirements. In addition, panel system must meet or exceed Deflection and Thermal Movement Requirements when tested to a minimum pressure of +/-40.0 psf.
 4. ASTM E331: Water penetration across panel system shall not occur when tested to a pressure difference of 12.0 psf.
 5. NFPA 285: Exterior wall assemblies including panel system shall meet Conditions of Acceptance where required by code based on design of this project.
- D. Deflection and Thermal Movement Requirements: Provide installed panel system that has been designed to resist project-specific wind loads, acting both inward and outward:
1. Perimeter Framing Deflection: Deflection of panel perimeter framing member shall not exceed L/175 normal to plane of wall, where L is unsupported span of perimeter framing member between fastener locations.
 2. Panel Deflection: Deflection of panel face shall not exceed L/60 normal to plane of wall, where L is unsupported span of panel between load transfer locations.
 3. At 150% wind load pressure, no permanent deformation exceeding L/1000 or failure of structural members is permitted.
 4. Thermal Movement: Allow for free and noiseless horizontal and vertical thermal movement due to expansion and contraction of component parts over temperature range of -20°F to +180°F at panel surface:
 - a. Buckling, opening of joints, undue stress on fasteners, failure of sealants, or any other detrimental effects of thermal movement are not permitted.
 - b. Shop-fabrication and installation procedures shall consider ambient temperature range at time of respective operation.

1.05 SUBMITTALS

- A. General: Provide submittals in accordance with Conditions of Contract and Division 01 Submittal Procedures Section as follows:
- B. Product Data: Submit material descriptions, dimensions of individual components and profiles, and finishes for panel system.
- C. Panel system:
 1. Submit system-specific design details including, but not limited to, panels and insert strips, perimeter extrusions, panel stiffeners, and starter, joint, and end clips.
 2. Submit design data including, but not limited to, material properties, section properties, and capacities for each panel system component. Design data shall be supported by a qualified Design Professional licensed in the state of primary research and development, design, and manufacturing of the panel system.
 3. Submit panel system guide information.
 4. Submit Shop Drawings indicating, but not limited to, elevations and reflected ceiling plans with joint locations and panel sizes; sections with relevant dimensions; edge conditions; interfaces with dissimilar materials; corners and transitions; flashings, venting, fasteners, caulks, accessories; and/or colors.
- D. Samples:
 1. Selected Samples: Submit Manufacturer's color charts or chips illustrating full range of colors, finishes, patterns, and textures available for panels with factory-applied finishes. Custom color selection requires color sample to be submitted for approval. Approval signature(s) are required by [Owner] [Architect].
 2. Verification Samples:
 - a. Panel system assembly: Submit 11-1/2 inches x 11-1/2 inches, or size as required, demonstrating panel system assembly. Samples to be provided in thickness specified, including panels, insert strips, perimeter extrusions, panel stiffeners, and/or starter, joint, and end clips. Panel system sample need not be provided in specified color.
 - b. Submit two samples of each color or finish selected that measure approximately 3 inches x 4 inches, minimum.
 - c. Custom color samples may contain drawdown lines. Sizes for custom color samples may vary.
- E. Quality Assurance Submittals:
 1. ACM Material Certification: Submit official written statement from Manufacturer documenting product raw materials meet specified, applicable Referenced Standards. Certification shall be backed by test reports and/or material certificates.
 2. ACM Panel Certification: Submit official written statement from Manufacturer documenting panels comply with specified Composition and Testing Requirements. Certification shall be backed by test reports.

3. ACM Panel System Certification: Submit official written statement from Manufacturer/Fabricator documenting panel system complies with specified Installation Requirements, Testing Requirements, and Deflection and Thermal Movement Requirements. Certification shall be backed by test reports.
- F. Closeout Submittals:
1. Warranty: Submit Manufacturer and Installer warranty documents as specified within Warranty Section.
 2. Maintenance: Submit Manufacturer's recommendations document for Cleaning and Maintenance of panel system.

1.06 QUALITY ASSURANCE

A. Qualifications:

1. Manufacturer Qualifications: A company with a minimum of 20 years of continuous experience manufacturing ACM panels in United States of America of type specified:
 - a. Able to provide specified warranty on finish.
 - b. Able to provide list of other projects of similar size including approximate date of installation for each.
2. Fabricator Qualifications: Possess MCM Fabricator Certification through Metal Construction Association (MCA), or meet the following requirements and provide supporting documentation at least ten (10) days prior to Bid:
 - a. Submit official written statement from at least one (1) specified ACM Panel Manufacturer demonstrating shop fabrication of a minimum of 150,000 square feet of MCM per year at least 0.157 inch (4 mm) in thickness and used on architectural walls as part of the exterior wall envelope.
 - b. Panels and panel system components shall be shop fabricated.
 - c. Fabrication of other panel types or fabricator's goods does not qualify.
 - d. Shall have:
 - i. Been in business under present company name for at least five (5) years prior to start of project.
 - ii. Not have filed for protection from creditors under state or federal insolvency or debtor relief statutes or codes.
 - e. Submit official written statement from at least one (1) specified ACM Panel Manufacturer, demonstrating a working relationship with the Fabricator/Installer for at least three (3) consecutive years and at a scale of operations cited above.
3. Installer Qualifications:
 - a. Installer shall have:
 - i. Been in business of similar trade and under present company name for at least five (5) years prior to start of project.
 - ii. Experience with similar-sized ACM panel system projects.
 - iii. Installed at least three (3) successful projects of specified or similar ACM panel system within last five (5) years:
 - a) Acceptable, varying combinations of successful projects and/or years of experience shall be determined at discretion of Manufacturer.
 - b. Installer must be capable of providing field service representation during installation.

B. Regulatory Code Agencies Requirements: Where required, provide panel system that has been evaluated and/or is in compliance with the following:

1. International Code Council (ICC)

C. Mock-Ups: Install panel system mock-up at project jobsite using acceptable products and Manufacturer-approved details. Obtain **Architect's** acceptance of finish color (drawdown samples to be used for color approval of nonstandard coil coated colors), texture and pattern, and workmanship standard. Comply with Division 01 Quality Control, Mock-Up Requirements Section:

1. Size: Provide as detailed in construction documents if stand-alone mock-up is required.
2. Maintenance: Maintain mock-up during construction for workmanship comparison; remove and legally dispose of when no longer required.
3. Incorporation: Mock-up may be incorporated into final construction upon Owner's approval.
4. Additional Cost: Material required for custom color mock-ups may require special small quantity runs that increase cost and require additional time to obtain material.

D. Pre-installation Meeting: Conduct pre-installation meeting to verify project-specific requirements, substrate conditions, and Manufacturer's installation details.

1.07 DELIVERY AND STORAGE

- A. Upon receipt, perform visual inspection of panels and inventory to identify any damages that may have occurred during shipping or any missing panels.
- B. Storage:
 - 1. Store panels horizontally on pallets in dry, well-ventilated environment under protection of temporary or permanent structure. If required to be stored in exterior area, panels must be placed under well-ventilated, waterproof covering.
 - 2. Store panels minimum of 4 inches above ground level to avoid contact with standing moisture (e.g., water, snow, etc.).
 - 3. Store panels in an area protected from construction activities and associated debris.
 - 4. Storage temperatures are not to exceed 120°F. Protect panels from moisture and direct sunlight while on jobsite.
 - 5. Do not stack more than 1500 pounds of panels on one pallet. Other materials shall not be stacked on, or placed in contact with, panels to prevent staining, denting, or other damage.

1.08 PROJECT CONDITIONS

- A. Substrate Tolerances: General Contractor is responsible for providing acceptable substrate per Manufacturer's requirements including:
 - 1. Adjacent substrate surface out-of-plane offset: +/- 1/8 inch
 - 2. Level, plumb, and location control line deviation: 1/4 inch in any 20 feet
 - 3. Building elevation direction deviation: +/- 1/2 inch
- B. Field Measurements: Verify locations of wall framing members and wall opening dimensions by field measurements prior to shop-fabrication of panel system. Field measurements shall be taken once all substrate materials and adjacent materials are installed.

1.09 WARRANTY

- A. Project Warranty: Refer to Conditions of Contract for project warranty provisions.
- B. ACM Manufacturer's Material Warranty: Manufacturer shall submit to Owner standard warranty document executed by authorized company official. Warranty shall be in addition to, and not a limitation of, other rights Owner may have under Contract Documents:
 - 1. Warranty Period:
 - a. Material and Product Integrity: Five (5) years against delamination at any manufactured bond line.
 - b. Coil-Coated PVDF/Kynar 500 Painted Finish: Thirty (30) years against:
 - i. Chalking in excess of numerical rating of eight (8) when measured in accordance with ASTM D4214, Method A.
 - ii. Fading or color change in excess of five (5) E units (NBS) when calculated in accordance with ASTM D2244, paragraph 6.3.
 - iii. Cracking, chipping, splitting, blistering, peeling, or loss of adhesion. Minute fracturing (i.e., crazing or cracking) as a result of routing and bending of panels shall be excluded.
- C. Installation Warranty: Installer shall submit to Owner standard warranty document executed by authorized company official. Warranty shall be in addition to, and not a limitation of, other rights Owner may have under Contract Documents:
 - 1. Warranty Period:
 - a. Workmanship: **One (1) year** warranty period commencing on Date of Substantial Completion.

PART 2 – PRODUCTS

2.01 ACM PANEL MANUFACTURERS AND SHOP-FABRICATED ACM PANEL SYSTEM SUPPLIERS

- A. ACM Panel Manufacturers:
 - 1. Omega-Lite® FR ACM panels manufactured by Laminators Incorporated – www.laminatorsinc.com
 - 2. Other ACM panel manufacturer meeting requirements as specified within Manufacturer Qualifications Section.
- B. ACM Panel System Fabricators:
 - 1. AdaptaClad® RS panel system shop-fabricated by Laminators Incorporated – www.laminatorsinc.com

2. Other ACM Panel System fabricator meeting requirements as specified within Fabricator Qualifications Section.

2.02 PANEL DESCRIPTION

A. Composition:

1. Two sheets of aluminum bonded to a core of extruded thermoplastic manufactured in a laminated batch (i.e., discontinuous) process using adhesive(s) between dissimilar materials. Core material shall not contain foam plastic insulation.
2. Thickness: 0.236 inch (6 mm)
3. Sheets:
 - a. Face Thickness: 0.020 inch nominal or thicker
 - b. Backer Thickness: 0.012 inch nominal or thicker
 - c. Combined Minimum Thickness: 0.032 inch nominal

B. Testing Requirements:

1. ASTM D635: Panels shall meet Class CC1 or Class CC2 combustibility classification criteria as established by IBC Section 1406.11.3.3.
2. ASTM D1781: Panels shall have a Climbing Drum Peel Strength of at least 22.5 in-lb/in as intended for use. Bond integrity is based on chemical-bonding of sheets to core material in a laminated batch process.
3. ASTM D1929: Panels shall have a self-ignition temperature of at least 650°F as established by IBC Section 1406.11.3.3.
4. ASTM E84: Panels shall meet Class A classification criteria as established by IBC Section 803.1.2:
 - a. Flame Spread Index (FSI) shall not exceed 25 as intended for use.
 - b. Smoke-Developed Index (SDI) shall not exceed 450 as intended for use.

2.03 FINISH

A. Exterior Finish: Finish shall meet performance criteria of AAMA 2605:

1. Standard and Standard Metallic Finishes:
 - a. Selected from Manufacturer's standard color chart.

2.04 FABRICATION

- A. Prior to panel system fabrication, coordinate field measurements of site conditions with approved Shop Drawings for locations of exterior wall framing and panel system joints, edges, openings, transitions, and penetrations.
- B. Fabricate panels and insert strips to sizes and joint configurations indicated on approved Shop Drawings.
- C. Fabricate panels based on an assumed design temperature of 80°F. Allow for ambient temperature range at time of fabrication.
- D. Fabricate panels with sharply cut edges, no displacement of face or backer sheets, and no protrusion of core. Form angles, breaks, corners, lines, and returns to be sharp, true, consistent, and free of buckle and/or warp.
- E. Fabrication Tolerances:
 1. Length: +/- 1/16 inch
 2. Width: +/- 1/16 inch
 3. Squareness: +/- 1/16 inch

2.05 ACCESSORIES

- A. General: Provide Fabricator's standard panel system accessories, including anchor components, clips, fasteners, and other attachments for specific applications indicated on contract documents.

2.06 RELATED MATERIALS

- A. General: Refer to Related Sections specified herein for other materials, including concrete, masonry, metal framing, sheathing, insulation, barriers, flashing and trim, windows, glazing, and/or curtain walls.

PART 3 – EXECUTION

3.01 INSTALLER INSTRUCTIONS

- A. General: Comply with Manufacturer's product information, system guides, technical bulletins, technical data sheets, CAD details, and any other product packaging instructions.

3.02 PREPARATION

- A. General: Verify site conditions of substrate previously installed under other Sections are acceptable for panel system installation. Documentation should be provided to General Contractor indicating any conditions detrimental to performance of panel system.

3.03 INSTALLATION

- A. Panel Installation:
 - 1. Handling:
 - a. Protective masking should be left on each panel during installation to prevent damage. Protective masking should be removed from each insert strip and aluminum component prior to installation. All masking shall be removed within two weeks of installation.
 - b. Handle materials with clean work gloves to avoid hand injury from any sharp edges and to prevent staining of material surfaces from contaminants.
 - c. When transferring panels from shipping containers or storage conditions, always handle each panel individually to prevent damage.
 - 2. Install panel system level, plumb, and true in accordance with Manufacturer's Installation Requirements and approved Shop Drawings.
 - 3. Comply with Manufacturer's instructions for installation of fasteners.
 - 4. Installation Tolerances:
 - a. Panel joint width deviation: +/- 1/16 inch
 - b. Adjacent panel out-of-plane offset: +/- 1/16 inch
 - c. Adjacent panel out-of-plane edge alignment: +/- 1/16 inch
 - d. In-line panel joint intersection deviation: +/- 1/16 inch
 - e. Plumb/level panel joint deviation: 1/4 inch in any 20 feet
 - 5. Do not cut, trim, weld, or braze panel system components during installation in a manner which would damage finish, decrease strength, or result in visual imperfection or failure in performance.
 - 6. Separate contact of dissimilar metals with approved methods as defined by Manufacturer in order to eliminate possibility of corrosive or electrolytic action between metals.
- B. Related Materials Installation: Refer to Related Sections specified herein for installation of other materials.

3.04 FIELD QUALITY REQUIREMENTS

- A. Field Quality Control: When required, mock-up of panel system shall be constructed and tested at direction of **Architect and General Contractor**. Water-spray testing on mock-up shall be in accordance with AAMA 501.2.
- B. Testing Agency: If required, [Owner] [Architect] [General Contractor] shall engage a qualified testing agency to perform tests and inspections.

3.05 REMEDIATION AND CLEANING

- A. Remediation:
 - 1. Remove and replace panel system components damaged as a direct result of activities in Panel Installation Section.
 - 2. Remove protective masking immediately after panel installation. Masking intentionally left in place after panel installation on an elevation at direction of General Contractor shall become responsibility of General Contractor.
 - 3. Panel installation completion shall be agreed-upon between Installer and General Contractor.
 - 4. Following completion of panel installation, any determination of repair or replacement of panel system components is at discretion of Architect. Such repair or replacement shall become responsibility of General Contractor:
 - a. At discretion of Architect, repair damaged panel system components such that repairs are not discernible at a distance of 10 feet from surface at a 90° angle per AAMA 2605.
 - 5. Removal and replacement of panel system components damaged by other trades shall be responsibility of General Contractor.
 - 6. If required after panel installation, any additional protection of panel system shall be responsibility of General Contractor.
 - 7. Remove from project site damaged panel system components, protective masking, and other debris attributable to work of this Section.

B. Cleaning:

1. Final Cleaning shall not be part of work of this Section.
2. Cleaning and Maintenance of panels shall be performed at regular intervals in accordance with AAMA 609 & 610.

END OF SECTION 074213.23

SECTION 07425

LAMINATED METAL FASCIA PANEL SYSTEM

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Preformed laminated panel system for new addition fascia panel, with related flashings and accessory components.
- B. Furnish and install all metal-faced, factory laminated wall panels and accessories in accordance with the drawings, details to insure a weathertight system. Metal panel supplier shall be responsible for the design of the wall panel system, including, but not limited to, the anchorage details, sealant recommendations, extrusions, flashings, and expansion/contraction provisions for wall system.

1.02 SYSTEM DESCRIPTION

- A. System: Preformed and pre-finished metal panel system of horizontal and vertical profile; site assembled.

1.03 DESIGN REQUIREMENTS

- A. Design and size components to withstand dead and live loads caused by positive and negative wind pressure acting normal to plane of wall as calculated to a design pressure of 20 lb/sq ft.
- B. Maximum Allowable Deflection of Panel: $L/175$ (AAMA).
- C. System to accommodate, without damage to components or deterioration of seals, movement within system; movement between system and perimeter components when subject to seasonal temperature cycling; dynamic loading and release of loads; deflection of structural support framing.
- D. Accommodate positive drainage for moisture entering or condensation occurring within panel system, to exterior.
- E. Products of this section shall provide continuity of thermal barrier at building enclosure elements in conjunction with thermal insulating materials in Section 07213.

1.04 SUBMITTALS

- A. Submit under provisions of General Requirements.
- B. Shop Drawings: Indicate dimensions, layout, joints, construction details, methods of anchorage.
- C. Samples: Submit two samples of panel illustrating finish color, sheen, and texture.

1.05 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing the products specified in this section with minimum three years' experience.
- B. Installer: Company specializing in performing the Work of this section with minimum 2 years experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site.
- B. Protect panels from accelerated weathering by removing or venting sheet plastic shipping wrap.
- C. Stack pre-finished material to prevent twisting, bending, or abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
- D. Prevent contact with materials which may cause discoloration or staining.

1.07 FIELD MEASUREMENTS

- A. Verify that field measurements are as instructed by the manufacturer.

1.08 COORDINATION

- A. Coordinate work.
- B. Coordinate the work of framing for alignment and anchorage.

1.09 WARRANTY

- A. Warranty: Include coverage for degradation of panel finish including color fading and delamination caused by exposure to weather. Warranty period not to be less than 10 years.
- B. Warranty: Provide coverage of PVDF/KYNAR 500 finish against color fading, chalking, and film integrity. Warranty period not less than 20 years.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Mapes (800) 228-2391, as approved equal, submit details.
- B. Laminators, Inc., (800) 523-2347.
- C. Citadel (800) 446-8828, as approved equal, submit details.
- D. Substitutions: Under provisions of General Requirements.

2.02 PANEL SYSTEM

- A. The entire panel system shall be installed so as to eliminate all exposed sealants, except as otherwise noted in the contract documents. The use of exposed sealants or gaskets at the typical vertical and horizontal joints is unacceptable.

2.03 PANEL ASSEMBLY

- A. The basic panel shall consist of metal skins laminated to a water resistant board core, in thickness, lengths, and widths as illustrated on the drawings.
- B. Panels shall be laminated on a dead level platen in a vacuum press for a period of time sufficient to cure the thermo-setting adhesive. Under NO circumstances, shall panels that are laminated with a pinch roller or a stacked type of system be acceptable.
- C. The side joint shall be of the interlocking type allowing for positive attachment of both the interior and exterior skins through the use of concealed fasteners, in accordance with ICBO requirements to withstand both positive and negative wind loading. The panel joint shall provide for a 1/2-inch capillary break and nominal gutter height of 2 1/4 inches to create a rain screen and pressure equalization chamber.
- D. Exterior Face and Finish:
 - 1. The exterior face skin shall be manufactured from .032-inch aluminum sheets in a smooth texture, Kynar finish.
 - 2. The exterior face skin shall be finished with a Kynar 500 finish with a total nominal dry film thickness of 1.0 mil. Finish shall be applied at manufacturer's option, either by coil coating or spray painting in accordance with industry standards.
 - 3. Color to be **selected from Manufacturer's full range**.
 - 4. The non-exposed side of the exterior face skin shall be finished with a special primer compatible with the manufacturer's standard adhesive.
 - 5. The exposed side of the exterior face skin shall be protected with a strippable coating.
 - a. The strippable coating shall be compatible with the exterior finish.
 - b. The strippable coating shall be removed by the erector immediately upon installation of the panel.
- E. Interior Liner and Finish:
 - 1. The interior liner skin shall be manufactured from .032-inch mill finished aluminum.
 - 2. The non-exposed side of the interior liner skin shall be finished with a special primer compatible with the manufacturer's standard adhesive.
- F. Core Material:
 - 1. The core material shall be a water resistant polypropylene, corrugated core, 1/4" thick.
- G. Adhesive:
 - 1. The adhesive system shall be manufacturer's standard thermo-setting type adhesive, approved for application in sandwich panel construction per ICBO requirements.
 - 2. Under NO circumstances, will contact types of adhesives be acceptable.

2.04 ACCESSORIES

- A. Fasteners:
 - 1. All panels shall be positively attached to the structure through the use of concealed fasteners contained within the side joint of the assembly.
 - 2. No exposed fasteners will be accepted unless noted otherwise.
 - 3. Fastener types and sizes shall be designed to resist negative and positive wind loads.
- B. Extrusions and Flashings:
 - 1. All flashings noted in the documents as part of this section shall be fabricated as detailed from materials matching the specifications for the face materials, unless otherwise noted. The reverse side of all flashings and/or backer plated will be finished with a primer.
 - 2. All extrusions noted in the specifications as part of this section shall be fabricated as detailed and finished to match the exterior skin.

3. All flashings and extrusions will be formed in 10'-0" or 12'-0" lengths unless otherwise noted. All inside and outside corners intersections shall be field mitered from standard flashing or extrusions lengths.
 4. All vertical joints shall be installed with manufacturer's Reveal H molding.
 5. All joints at fastener molding and panel seams shall be sealed with manufacturer approved silicone or polyurethane caulk with 20-year life.
- C. Sealants:
1. All sealants shall be in accordance with the latest ASTM standards and shall comply with the sealant specifications of the specifications.
- D. Subgirts and Clips:
1. Subgirts and clips shall be furnished as part of the scope of this work as noted on the drawings and as required to provide a complete wall panel assembly. They shall be designed by the panel manufacturer to withstand the specified loads and shall typically be fabricated from mill finished, G90 galvanized steel, unless otherwise noted.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify substrate framing under provisions of the General Requirements.
- B. Verify that framing members are ready to receive panel system.

3.02 INSTALLATION

- A. Install metal siding system on walls in accordance with manufacturer's instructions.
- B. Protect surfaces in contact with cementitious materials and dissimilar metals with bituminous paint. Allow to dry prior to installation.
- C. Fasten siding to structural supports; aligned, level, and plumb.
- D. Locate joints over supports.
- E. Provide expansion control joints where indicated or as required.
- F. Use concealed fasteners unless otherwise approved by Architect/Engineer.
- G. Seal and place gaskets to prevent weather penetration. Sealant shall be 20 year type as approved by manufacturer and color matched to panel/trim. Sealant shall be applied continuous at all joints of panel and trim. Maintain neat appearance.
- H. Provide additional blocking as required to securely attach new panels over existing fascia system.

3.03 TOLERANCES

- A. Maximum Offset From True Alignment Between Adjacent Members Butting or In Line: 1/16 inch.
- B. Maximum Variation from Plane or Location Indicated on Drawings: 1/4 inch.

3.04 CLEANING

- A. Clean work under provisions of the General Requirements.
- B. Remove site cuttings from finish surfaces.
- C. Clean and wash pre-finished surfaces with mild soap and water, rinse with clean water.

END OF SECTION 07425

SECTION 075423
THERMOPLASTIC POLYOLEFIN (TPO) ROOFING

PART 1 – GENERAL

1.01 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.02 SUMMARY

- A. Section Includes:
1. Adhered **fleeceback** thermoplastic polyolefin (TPO) roofing system.
 2. Roof insulation.
- B. Section includes the installation of insulation strips in ribs of roof deck. Insulation strips are furnished under Section 053100 "Steel Decking."
- C. Related Requirements:
1. Section 061053 "Miscellaneous Rough Carpentry" for wood nailers, curbs, and blocking; and for wood-based, structural-use roof deck panels.
 2. Section 061600 "Sheathing" for wood-based, structural-use roof deck panels.
 3. Section 070150.19 "Preparation for Re-Roofing" for re-cover board beneath new roofing.
 4. Section 072100 "Thermal Insulation" for insulation beneath the roof deck.
 5. Section 076200 "Sheet Metal Flashing and Trim" for metal roof flashings and counterflashings.
 6. Section 077129 "Manufactured Roof Expansion Joints" for proprietary manufactured roof expansion-joint assemblies.
 7. Section 079200 "Joint Sealants" for joint sealants, joint fillers, and joint preparation.
 8. Section 221423 "Storm Drainage Piping Specialties" for roof drains.

1.03 SYSTEM DESCRIPTION

- A. TPO Sheet membrane roof assembly shall conform to UL requirements for a Class-A Rated assembly, and factory mutual requirements for I-90 wind uplift resistance. Wind rating as noted below in the system description.
- B. Roof system shall provide continuity of thermal and moisture barrier at building enclosure elements, and shall consist of the following (components listed are per basis of specification requirements):
1. **New Addition Areas – Adhered System Design 1 – 20 year 100 mph wind rating.**
UL Listed Class A Assembly
Edge Metal:
Membrane: Adhere 115 Mil Sure=Weld TPO FleeceBack membrane with 4” o.c. beads or manufacturer approved adhesive.
Cover Board: ½” Secure Shield HD Plus Secured with fasteners and plates as required to meet wind load rating. Min. 16 InsulFast fasteners and 3” plates per 4x8 board. Approval based on 300lb pullout.
Insulation: Tapered Insulbase polyiso. Layer and secure as required to meet roof slope, drainage, and warranty requirements. Slope/Thickness as indicated on drawings.
Substrate Board: 5/8” Type “X” G.B
Deck: 22 GA metal roof panel (reference structural drawings).

1.04 DEFINITIONS

- A. Roofing Terminology: Definitions in ASTM D 1079 and glossary in NRCA's "The NRCA Roofing and Waterproofing Manual" apply to work of this Section.

1.05 PREINSTALLATION MEETINGS

- A. Preinstallation Roofing Conference: Conduct conference at Project site.
 - 1. Meet with Owner, Architect, Owner's insurer if applicable, testing and inspecting agency representative, roofing Installer, roofing system manufacturer's representative, deck Installer, and installers whose work interfaces with or affects roofing, including installers of roof accessories and roof-mounted equipment.
 - 2. Review methods and procedures related to roofing installation, including manufacturer's written instructions.
 - 3. Review and finalize construction schedule, and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
 - 4. Examine deck substrate conditions and finishes for compliance with requirements, including flatness and fastening.
 - 5. Review structural loading limitations of roof deck during and after roofing.
 - 6. Review base flashings, special roofing details, roof drainage, roof penetrations, equipment curbs, and condition of other construction that affects roofing system.
 - 7. Review governing regulations and requirements for insurance and certificates if applicable.
 - 8. Review temporary protection requirements for roofing system during and after installation.
 - 9. Review roof observation and repair procedures after roofing installation

1.06 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For roofing system. Include plans, elevations, sections, details, and attachments to other work, including:
 - 1. Base flashings and membrane terminations.
 - 2. Tapered insulation, including slopes.
 - 3. Roof plan showing orientation of steel roof deck and orientation of roofing, fastening spacings, and patterns for mechanically fastened roofing.
 - 4. Insulation fastening patterns for corner, perimeter, and field-of-roof locations.
 - 5. Warranty confirmation shall be submitted with shop drawings.

1.07 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer and manufacturer.
- B. Manufacturer Certificates: Signed by roofing manufacturer certifying that roofing system complies with requirements specified in "Performance Requirements" Article.
 - 1. Submit evidence of compliance with performance requirements.
- C. Product Test Reports: For components of roofing system, tests performed by manufacturer and witnessed by a qualified testing agency.
- D. Research/Evaluation Reports: For components of roofing system, from ICC-ES.
- E. Field quality-control reports.
- F. Sample Warranties: For manufacturer's special warranties.

1.08 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For roofing system to include in maintenance manuals.

1.09 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A qualified manufacturer that is FM Global approved for roofing system identical to that used for this Project.
- B. Installer Qualifications: A qualified firm that is approved, authorized, or licensed by roofing system manufacturer to install manufacturer's product and that is eligible to receive manufacturer's special warranty.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Deliver roofing materials to Project site in original containers with seals unbroken and labeled with manufacturer's name, product brand name and type, date of manufacture, approval or listing agency markings, and directions for storing and mixing with other components.
- B. Store liquid materials in their original undamaged containers in a clean, dry, protected location and within the temperature range required by roofing system manufacturer. Protect stored liquid material from direct sunlight.
 - 1. Discard and legally dispose of liquid material that cannot be applied within its stated shelf life.
- C. Protect roof insulation materials from physical damage and from deterioration by sunlight, moisture, soiling, and other sources. Store in a dry location. Comply with insulation manufacturer's written instructions for handling, storing, and protecting during installation.
- D. Handle and store roofing materials, and place equipment in a manner to avoid permanent deflection of deck.

1.11 FIELD CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.

1.12 WARRANTY

- A. Provide roofer's two year warranty covering materials (including insulation and flashings) and workmanship for areas of incidental tie-in with existing roofing.
- B. Manufacturer's Special Warranty: Manufacturer agrees to repair or replace all components of roofing system that fail in materials or workmanship within specified warranty period.
 - 1. Special warranty shall be a complete systems warranty that includes roofing, base flashings, roof insulation, fasteners, cover boards, substrate board, equipment curbs, pipe penetrations, duct penetrations, roofing accessories, roof pavers, and other components of roofing system. Contractor/manufacturer shall provide any inspections and testing as required for this complete systems warranty as identified in the specifications.
 - 2. Warranty Period: **20 years** from date of Substantial Completion. Warranty shall be a No-Dollar-Limit, Single Source, Manufacturer's, Non-Prorated warranty.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Carlisle SynTec Incorporated., Sure-Weld and Sure-Weld Retrofit System or a comparable product by one of the following:
 - 1. Elevate/Firestone Building Products; UltraPly TPO.
 - 2. GenFlex Roofing Systems.
 - 3. Johns Manville; a Berkshire Hathaway company.
 - 4. Mule-Hide Products Co., Inc.
- B. Source Limitations: Obtain components including roof insulation fasteners for roofing system from same manufacturer as membrane roofing.

2.02 PERFORMANCE REQUIREMENTS

- A. General Performance: Installed roofing and base flashings shall withstand specified uplift pressures, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Roofing and base flashings shall remain watertight.
 - 1. Accelerated Weathering: Roofing system shall withstand 2000 hours of exposure when tested according to ASTM G 152, ASTM G 154, or ASTM G 155.

2. Impact Resistance: Roofing system shall resist impact damage when tested according to ASTM D 3746 or ASTM D 4272.
 - B. Material Compatibility: Roofing materials shall be compatible with one another and adjacent materials under conditions of service and application required, as demonstrated by roofing manufacturer based on testing and field experience.
 - C. Exterior Fire-Test Exposure: ASTM E 108 or UL 790, Class A; for application and roof slopes indicated; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - D. Fire-Resistance Ratings: Comply with fire-resistance-rated assembly designs indicated. Identify products with appropriate markings of applicable testing agency.
- 2.03 TPO ROOFING
- A. Fabric-Reinforced TPO Sheet: ASTM D 6878, internally fabric- or scrim-reinforced, uniform, flexible fabric-backed TPO sheet.
 1. Thickness: 115 mils nominal.
 2. Exposed Face Color: White.
- 2.04 ACCESSORIES
- A. Gypsum Sheathing: ANSI/ASTM C707; 5/8 inch thick Type X; uncoated face, fire rated.
 - B. Sheathing Adhesive: Non-combustible type, for adhering gypsum sheathing to metal deck.
 - C. Sheathing Joint Tape: Heat resistant type,
 - D. Sheet Vapor Retarder: N.A.
 - E. Dry Sheathing Paper: N.A.
 - F. Flexible Flashings: Flashing around perimeter, vents, pipes, stand supports, etc., shall be 115-mil thick TPO flashing material; white color; manufactured by primary membrane manufacturer.
 - G. Prefabricated Expansion Joint Flashing: Expansion joint cover shall be a non-reinforced, Form-supported TPO bellows with a bifurcated waterproof attachment to metal flanges; "Expand-o-Flash" Style CF-EJ 4, with Type E (EPDM) bellows and flange metal of 26 gage galvanized steel, as manufactured by Manville; or others as approved by Architect.
 1. All intersections and terminations shall be prefabricated by the manufacturer.
 2. All splices shall be made with materials supplied for this purpose by the manufacturer.
 - H. Fiber Cant and Tapered Edge Strips: N.A., unless required by roofing manufacturer.
 - I. Fasteners: Galvanized Type, as recommended by roofing manufacturer to secure insulation and coverboard.
 - J. Sealants: Sealants for use between various components of the membrane roof system shall be as recommended by roof manufacturer. Sealants for use between metal flashings and surrounding masonry or other construction, and at other miscellaneous locations shall be as specified in Section 07900.
 - K. Walkway Pads: Roof Membrane additional layer, 30" min. width. Locate at perimeter of all roof equipment and under piping and supports; approved and furnished by roofing manufacturer.
 - L. "Pitch Pans" and metal accessories necessary for flashing shall be 24-gage galvanized iron if not exposed to view. Exposed metal accessories shall be 24-gage pre-finished sheet metal as specified in section 07620.
 - M. Pourable sealer shall be as recommended and supplied by the manufacturer of the membrane.
 - N. Vent pipe flashing shall be molded TPO pipe flashing with stainless steel clamping ring all as supplied by the manufacturer.
 - O. Other miscellaneous components as shown or specified and/or as otherwise required by manufacturer for a complete and watertight installation.
- 2.05 ROOF INSULATION
- A. General: Preformed roof insulation boards manufactured by TPO roofing manufacturer, selected from manufacturer's standard sizes suitable for application, of thicknesses indicated.

- B. Polyisocyanurate Board Insulation: ASTM C 1289, Type II, Class 1, Grade 2, felt or glass-fiber mat facer on both major surfaces.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide InsulBase or a comparable product by one of the following:
 - a. Atlas Roofing Corporation, Acfoam Supreme.
 - b. Carlisle SynTec Incorporated.
 - c. Dyplast Products.
 - d. GAF Materials Corporation.
 - e. Hunter Panels.
 - f. Insulfoam LLC; a Carlisle company.
 - g. Johns Manville; a Berkshire Hathaway company.
 - h. Rmax, Inc.
 - 2. Thickness: As indicated on drawings to provide total R-22 (minimum) insulation value.
- C. Insulation: Provide factory-tapered insulation boards fabricated to slope of 1/4 inch per 12 inches. Reference drawings for areas where tapered insulation is 1/2 inch per 12 inches.
- D. Provide preformed saddles, crickets, tapered edge strips, and other insulation shapes where indicated for sloping to drain. Fabricate to slopes indicated.

2.06 INSULATION ACCESSORIES

- A. General: Roof insulation accessories recommended by insulation manufacturer for intended use and compatibility with roofing.
- B. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Global 4470, designed for fastening roof insulation and cover boards to substrate, and acceptable to roofing system manufacturer.
- C. Insulation Adhesive: Insulation manufacturer's recommended adhesive formulated to attach roof insulation to substrate or to another insulation layer as follows:
 - 1. Full-spread spray-applied, low-rise, two-component urethane adhesive.
- D. Cover Board: ASTM C 1177/C 1177M, glass-mat, water-resistant gypsum substrate, 1/2 inch (13 mm) thick, factory primed.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Georgia-Pacific Building Products; Dens Deck or a comparable product by one of the following:
 - a. CertainTeed Corporation.
 - b. National Gypsum Company.
 - c. United States Gypsum Company.

2.07 ASPHALT MATERIALS

- A. Roofing Asphalt: ASTM D 312, Type III or Type IV.
- B. Asphalt Primer: ASTM D 41/D 41M.

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance of the Work:
 - 1. Verify that roof openings and penetrations are in place, curbs are set and braced, and roof-drain bodies are securely clamped in place.
 - 2. Verify that wood blocking, curbs, and nailers are securely anchored to roof deck at penetrations and terminations and that nailers match thicknesses of insulation.
 - 3. Verify that surface plane flatness and fastening of steel roof deck complies with requirements in Section 053100 "Steel Decking."
 - 4. Verify that minimum concrete drying period recommended by roofing system manufacturer has passed.

5. Verify that concrete substrate is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method according to ASTM D 4263.
 6. Verify that concrete-curing compounds that will impair adhesion of roofing components to roof deck have been removed.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.02 PREPARATION

- A. Clean substrate of dust, debris, moisture, and other substances detrimental to roofing installation according to roofing system manufacturer's written instructions. Remove sharp projections.
- B. Prevent materials from entering and clogging roof drains and conductors and from spilling or migrating onto surfaces of other construction. Remove roof-drain plugs when no work is taking place or when rain is forecast.
- C. Install insulation strips according to acoustical roof deck manufacturer's written instructions

3.03 ROOFING INSTALLATION, GENERAL

- A. Install roofing system according to roofing system manufacturer's written instructions.
- B. Complete terminations and base flashings and provide temporary seals to prevent water from and discard temporary seals before beginning work on adjoining roofing.
- C. Install roofing and auxiliary materials to tie in to existing roofing to maintain weathertightness of transition and to not void warranty for existing roofing system.

3.04 SUBSTRATE BOARD INSTALLATION

- A. Install substrate board with long joints in continuous straight lines, perpendicular to roof slopes with end joints staggered between rows. Tightly butt substrate boards together.
 1. Fasten substrate board to top flanges of steel deck according to recommendations in FM Global's "RoofNav" and FM Global Loss Prevention Data Sheet 1-29 for specified Windstorm Resistance Classification.
 2. Fasten substrate board to top flanges of steel deck to resist uplift pressure at corners, perimeter, and field of roof according to roofing system manufacturers' written instructions.

3.05 INSULATION INSTALLATION

- A. Coordinate installing roofing system components so insulation is not exposed to precipitation or left exposed at the end of the workday.
- B. Comply with roofing system and insulation manufacturer's written instructions for installing roof insulation.
- C. Install tapered insulation under area of roofing to conform to slopes indicated.
- D. Install insulation under area of roofing to achieve required thickness. Where overall insulation thickness is 2.7 inches (68 mm) or greater, install two or more layers with joints of each succeeding layer staggered from joints of previous layer a minimum of 6 inches (150 mm) in each direction.
 1. Where installing composite and noncomposite insulation in two or more layers, install noncomposite board insulation for bottom layer and intermediate layers, if applicable, and install composite board insulation for top layer.
- E. Trim surface of insulation where necessary at roof drains so completed surface is flush and does not restrict flow of water.
- F. Install insulation with long joints of insulation in a continuous straight line with end joints staggered between rows, abutting edges, and ends between boards. Fill gaps exceeding 1/4 inch (6 mm) with insulation.
 1. Cut and fit insulation within 1/4 inch (6 mm) of nailers, projections, and penetrations.

- G. Mechanically Fastened Insulation: Install each layer of insulation and secure to deck using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to deck type.
 - 1. Fasten insulation to resist uplift pressure at corners, perimeter, and field of roof.
- H. Mechanically Fastened and Adhered Insulation: Install each layer of insulation to deck using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to deck type.
 - 1. Fasten first layer of insulation according to requirements in FM Global's "RoofNav" for specified Windstorm Resistance Classification.
 - 2. Fasten first layer of insulation to resist uplift pressure at corners, perimeter, and field of roof.
- I. Install cover boards over insulation with long joints in continuous straight lines with end joints staggered between rows. Offset joints of insulation below a minimum of 6 inches (150 mm) in each direction. Loosely butt cover boards together and fasten to roof deck.
 - 1. Fasten cover boards according to requirements in FM Global's "RoofNav" for specified Windstorm Resistance Classification.
 - 2. Fasten cover boards to resist uplift pressure at corners, perimeter, and field of roof.

3.06 ADHERED ROOFING INSTALLATION

- A. Adhere roofing over area to receive roofing according to roofing system manufacturer's written instructions. Unroll roofing and allow to relax before retaining.
- B. Start installation of roofing in presence of roofing system manufacturer's technical personnel.
- C. Accurately align roofing, and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.
- D. Bonding Adhesive: Apply to substrate and underside of roofing at rate required by manufacturer, and allow to partially dry before installing roofing. Do not apply to splice area of roofing.
- E. In addition to adhering, mechanically fasten roofing securely at terminations, penetrations, and perimeter of roofing.
- F. Apply roofing with side laps shingled with slope of roof deck where possible.
- G. Seams: Clean seam areas, overlap roofing, and hot-air weld side and end laps of roofing and sheet flashings according to manufacturer's written instructions, to ensure a watertight seam installation.
 - 1. Test lap edges with probe to verify seam weld continuity. Apply lap sealant to seal cut edges of sheet.
 - 2. Verify field strength of seams a minimum of twice daily, and repair seam sample areas.
 - 3. Repair tears, voids, and lapped seams in roofing that do not comply with requirements.
- H. Spread sealant bed over deck-drain flange at roof drains, and securely seal roofing in place with clamping ring.

3.07 BASE FLASHING INSTALLATION

- A. Install sheet flashings and preformed flashing accessories, and adhere to substrates according to roofing system manufacturer's written instructions.
- B. Apply bonding adhesive to substrate and underside of sheet flashing at required rate, and allow to partially dry. Do not apply to seam area of flashing.
- C. Flash penetrations and field-formed inside and outside corners with cured or uncured sheet flashing.
- D. Clean seam areas, overlap, and firmly roll sheet flashings into the adhesive. Hot-air weld side and end laps to ensure a watertight seam installation.
- E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

3.08 WALKWAY INSTALLATION

- A. Roof-Paver Walkways: Install walkway roof **membrane** according to manufacturer's written instructions in locations indicated, to form walkways.

3.09 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to inspect substrate conditions, surface preparation, membrane application, flashings, protection, and drainage components, and to furnish reports to Architect.
 - 1. Electric Field Vector Mapping (EFVM): Testing agency shall survey entire roof area for potential leaks using electric field vector mapping (EFVM).
- B. Flood Testing: Flood test each roofing area for leaks, according to recommendations in ASTM D 5957, after completing roofing and flashing but before overlying construction is placed. Install temporary containment assemblies, plug or dam drains, and flood with potable water.
 - 1. Flood to an average depth of 2-1/2 inches (65 mm) with a minimum depth of 1 inch (25 mm) and not exceeding a depth of 4 inches (100 mm). Maintain 2 inches (50 mm) of clearance from top of base flashing.
 - 2. Flood each area for 48 hours.
 - 3. After flood testing, repair leaks, repeat flood tests, and make further repairs until roofing and flashing installations are watertight.
- C. Final Roof Inspection: Arrange for roofing system manufacturer's technical personnel to inspect roofing installation on completion.
- D. Repair or remove and replace components of roofing system where inspections indicate that they do not comply with specified requirements.
- E. Additional testing and inspecting, at Contractor's expense, will be performed to determine if replaced or additional work complies with specified requirements.

3.10 PROTECTING AND CLEANING

- A. Protect roofing system from damage and wear during remainder of construction period. When remaining construction does not affect or endanger roofing, inspect roofing for deterioration and damage, describing its nature and extent in a written report, with copies to Architect and Owner.
- B. Correct deficiencies in or remove roofing system that does not comply with requirements, repair substrates, and repair or reinstall roofing system to a condition free of damage and deterioration at time of Substantial Completion and according to warranty requirements.
- C. Clean overspray and spillage from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

3.11 ROOFING INSTALLER'S WARRANTY

- A. WHEREAS _____ of _____, herein called the "Roofing Installer," has performed roofing and associated work ("work") on the following project:
 - 1. Owner: **<Insert name of Owner>**.
 - 2. Address: **<Insert address>**.
 - 3. Building Name/Type: **<Insert information>**.
 - 4. Address: **<Insert address>**.
 - 5. Area of Work: **<Insert information>**.
 - 6. Acceptance Date: _____.
 - 7. Warranty Period: **<Insert time>**.
 - 8. Expiration Date: _____.
- B. AND WHEREAS Roofing Installer has contracted (either directly with Owner or indirectly as a subcontractor) to warrant said work against leaks and faulty or defective materials and workmanship for designated Warranty Period.

- C. NOW THEREFORE Roofing Installer hereby warrants, subject to terms and conditions herein set forth, that during Warranty Period he will, at his own cost and expense, make or cause to be made such repairs to or replacements of said work as are necessary to correct faulty and defective work and as are necessary to maintain said work in a watertight condition.
- D. This Warranty is made subject to the following terms and conditions:
1. Specifically excluded from this Warranty are damages to work and other parts of the building, and to building contents, caused by:
 - a. lightning;
 - b. peak gust wind speed exceeding **<120 mph>**;
 - c. fire;
 - d. failure of roofing system substrate, including cracking, settlement, excessive deflection, deterioration, and decomposition;
 - e. faulty construction of parapet walls, copings, chimneys, skylights, vents, equipment supports, and other edge conditions and penetrations of the work;
 - f. vapor condensation on bottom of roofing; and
 - g. activity on roofing by others, including construction contractors, maintenance personnel, other persons, and animals, whether authorized or unauthorized by Owner.
 2. When work has been damaged by any of foregoing causes, Warranty shall be null and void until such damage has been repaired by Roofing Installer and until cost and expense thereof have been paid by Owner or by another responsible party so designated.
 3. Roofing Installer is responsible for damage to work covered by this Warranty but is not liable for consequential damages to building or building contents resulting from leaks or faults or defects of work.
 4. During Warranty Period, if Owner allows alteration of work by anyone other than Roofing Installer, including cutting, patching, and maintenance in connection with penetrations, attachment of other work, and positioning of anything on roof, this Warranty shall become null and void on date of said alterations, but only to the extent said alterations affect work covered by this Warranty. If Owner engages Roofing Installer to perform said alterations, Warranty shall not become null and void unless Roofing Installer, before starting said work, shall have notified Owner in writing, showing reasonable cause for claim, that said alterations would likely damage or deteriorate work, thereby reasonably justifying a limitation or termination of this Warranty.
 5. During Warranty Period, if original use of roof is changed and it becomes used for, but was not originally specified for, a promenade, work deck, spray-cooled surface, flooded basin, or other use or service more severe than originally specified, this Warranty shall become null and void on date of said change, but only to the extent said change affects work covered by this Warranty.
 6. Owner shall promptly notify Roofing Installer of observed, known, or suspected leaks, defects, or deterioration and shall afford reasonable opportunity for Roofing Installer to inspect work and to examine evidence of such leaks, defects, or deterioration.
 7. This Warranty is recognized to be the only warranty of Roofing Installer on said work and shall not operate to restrict or cut off Owner from other remedies and resources lawfully available to Owner in cases of roofing failure. Specifically, this Warranty shall not operate to relieve Roofing Installer of responsibility for performance of original work according to requirements of the Contract Documents, regardless of whether Contract was a contract directly with Owner or a subcontract with Owner's General Contractor.

E. IN WITNESS THEREOF, this instrument has been duly executed this _____ day of

_____, _____.

1. Authorized Signature: _____.

2. Name: _____.

3. Title: _____.

END OF SECTION 075423

SECTION 07611

PRE-MANUFACTURED SHEET METAL WALL AND SOFFIT PANEL

PART 1 GENERAL

- 1.01 SECTION INCLUDES
 - A. MBCI wall panels, associated integral flashings, and substrate.
 - B. Soffit panels and associated trim.
- 1.02 SYSTEM DESCRIPTION
 - A. Pre-coated interlocking exterior wall panel over 5/8" fiberglass mat gypsum board sheathing and vapor barrier.
- 1.03 SUBMITTALS
 - A. Submit under provisions of the General Requirements.
 - B. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.
- 1.04 QUALITY ASSURANCE
 - A. Perform work in accordance with SMACNA standard details and requirements.
- 1.05 QUALIFICATIONS
 - A. Fabricator and Installer: Company specializing in sheet metal roof and wall installations with minimum 5 years' documented experience.
- 1.06 REGULATORY REQUIREMENTS
 - A. Conform to applicable codes for structural requirements.
 - B. AISI: "Cold Form Steel Design Manual," American Iron and Steel Institute.
 - C. AISC: "Steel Construction Manual" American Institute of Steel Construction.
 - D. ASTM A792-83-AZ50: Specifications for steel sheet aluminum-zinc alloy coated (galvanized) by the hot dip process, general requirements.
- 1.07 DELIVERY, STORAGE, AND HANDLING
 - A. Deliver, store, protect and handle products to prevent damage to material or finish.
 - B. Stack preformed and prefinished material to prevent twisting, bending, or abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
 - C. Prevent contact with materials which may cause discoloration or staining.
- 1.08 COORDINATION
 - A. Coordinate the work with installing associated metal flashings, trims, gutters, downspouts, etc., as the work of this section progresses.
- 1.09 WARRANTY
 - A. Coordinate with warranties of roof system (including insulation, flashings, trim, gutters, downspouts.)
 - B. Provide manufacturer's 20-year warranty covering materials (wall panels, flashings, trim), and workmanship for weather tightness.
 - C. Warranty: Include coverage for degradation of panel finish including color fading and chalking caused by exposure to weather. Warranty period not to be less than 20 years.

PART 2 PRODUCTS

- 2.01 MANUFACTURERS
 - A. Wall Panel: MBCI FW 120-2 with beads. 24gauge, 12-inch wide with 1 ½" concealed fastener ribs.
 - B. Soffit Panel: MBCI FW 120 Flat. 24gauge, 12-inch wide with 1 ½" concealed fastener ribs.
 - C. Substitutions: Under provisions of the General Requirements, or as approved by Architect.

2.02 SHEET MATERIALS

- A. Pre-Coated Galvanized Steel: ASTM A446, Grade A, G90 zinc coating; 24 gage core steel, shop pre-coated with KYNAR 500 coating, COLOR TO BE SELECTED BY ARCHITECT from the manufactures full range of Kynar 500 finish.

2.03 ACCESSORIES

- A. Fasteners: Galvanized steel, with soft neoprene washers, per manufacturer's recommendations.
- B. Underlayment: Fluid Applied Vapor Barrier.
- C. Primer: Zinc chromate type.
- D. Protective Backing Paint: Zinc chromate alkyd.
- E. Sealant: Polyurethane type, as recommended by Manufacturer.
- F. Joint sealant tape: Type as recommended by manufacturer.
- G. Fasteners: Galvanized, type as recommended by manufacturer to meet structural requirements. Length as required for installation of panel over 5/8" gypsum substrate.
- H. 16ga galvanized "Zee" girts. 1 1/2" depth to accommodate continuous insulation. Spaced at 24" o.c., unless noted otherwise.
- H. Trim: provide corner trim, edge molding, closure trim of same material and color for complete and weathertight installation.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Inspect substrate verify it is clean and smooth, free of depressions, waves, or projections, vapor barrier is properly installed and seams taped.
- B. Verify substrate is dry and free of snow or ice. Verify joints in wood deck are solidly supported and fastened.
- C. Verify correct placement of trim, blocking, wall framing, etc..

3.02 PREPARATION

- A. Install starter and edge strips, and cleats before starting installation.
- B. Install trim, starter, and closure pieces true to lines and levels. Seal joints with sealant.

3.03 ERECTION - WALL AND ROOFING SYSTEMS

- A. Install in accordance with manufacturer's instructions.
- B. Exercise care when cutting pre-finished material to ensure cuttings do not remain on finish surface.
- C. Fasten cladding system to structural supports, aligned level and plumb.
- D. Locate end laps over supports. End laps minimum 2 inches. Place sidelaps over bearing.
- E. Provide expansion joints where indicated.
- F. Install sealant and gaskets to prevent weather penetration.
- G. System: Free of rattles, noise due to thermal movement and wind whistles.

3.04 TOLERANCES

- A. Framing Members: 1/4 inch from level; 1/8 inch from plumb.
- B. Siding and Roofing: 1/8 inch from true position.

3.05 BUILT-IN GUTTERS and FLASHINGS

- A. Refer to Section 07620.

3.06 PROTECTION OF FINISHED WORK

- A. Protect finished Work under provisions of the General Requirements.
- B. Do not permit traffic over unprotected roof surface.

END OF SECTION 07611

SECTION 07620

SHEET METAL FLASHING AND TRIM

PART 1 GENERAL

- 1.1 SECTION INCLUDES
 - A. Cap and sill flashings.
 - B. Gutter and Downspout
 - C. Counter flashings at roof mounted equipment and vent stacks.
 - D. Miscellaneous flashings and closure pieces.
- 1.2 SUBMITTALS
 - A. Shop Drawings: Indicate material profile, jointing pattern, jointing details, fastening methods, flashings, terminations, and installation details.
- 1.3 QUALITY ASSURANCE
 - A. Perform work in accordance with SMACNA standard details and requirements.
- 1.4 QUALIFICATIONS
 - A. Fabricator and Installer: Company specializing in sheet metal flashing work with three years documented experience.
- 1.5 DELIVERY, STORAGE, AND HANDLING
 - A. Deliver, store, protect, and handle products to site under provisions of the General Requirements.
 - B. Stack preformed and prefinished material to prevent twisting, bending, or abrasion, and to provide ventilation. Slope metal sheets to ensure drainage.
 - C. Prevent contact with materials which may cause discoloration or staining.

PART 2 PRODUCTS

- 2.1 SHEET MATERIALS
 - A. Pre-Coated Galvanized Steel: ASTM A446, Grade A, G90 zinc coating; 24 gage core steel, exposed flashings shall be shop prefinished with Signature 300, KYNAR 500 coating of color as selected.
 - B. Pre-Coated Aluminum: ASTM B209-14, 26gage equivalent (.47mm), Etched and primed for factory paint finish. Color to be selected from manufacturer's full range.
- 2.2 ACCESSORIES
 - A. Fasteners: Galvanized steel with soft neoprene washers.
 - B. Underlayment: ASTM D2178, No. 15 asphalt saturated roofing felt.
 - C. Slip Sheet: Rosin sized building paper.
 - D. Primer: Zinc chromate type.
 - E. Sealant: Polyurethane type, specified in Section 07900.
 - F. Bedding Compound: Rubber-asphalt type.
 - G. Plastic Cement: ASTM D4586, Type II.
 - H. Reglets: Recessed type, galvanized steel; face and ends covered with plastic tape.
 - I. Metal Anchors and Cleats: Stainless steel or Galvanized "hook" cleat at face side or all cap flashings to secure cap flashings/copings. Reference SMACNA Figure 3.1 Formed Metal Copings.
- 2.3 FABRICATION
 - A. Form sections true to shape, accurate in size, square, and free from distortion or defects.
 - B. Fabricate cleats of metal, same material as sheet, interlockable with sheet.
 - C. Form pieces in longest possible lengths. Hem exposed edges on underside 1/2 inch; miter and seam corners.

- D. Form material with flat lock seams.
- E. Fabricate corners from one piece with minimum 18 inch long legs; seam and/or solder for rigidity, seal with sealant.
- F. Fabricate vertical faces with bottom edge formed outward 1/4 inch and hemmed to form drip.
- G. Fabricate flashings to allow toe to extend 2 inches over roofing. Return and brake edges.
- H. Gutter profiles to be box style, equivalent to SMACNA **Style A**.

2.4 FINISH

- A. Exposed metal shall be pre-finished with Kynar finish color to be selected.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify roof openings, curbs, pipes, sleeves, ducts, or vents through roof are solidly set, reglets in place, and nailing strips located.
- B. Verify roofing termination and base flashings are in place, sealed, and secure.

3.2 PREPARATION

- A. Install starter and edge strips, and cleats before starting installation.
- B. Install surface mounted reglets true to lines and levels. Seal top of reglets with sealant.

3.3 INSTALLATION

- A. Conform to drawing details included in the SMACNA manual unless otherwise indicated on the drawings.
- B. Insert flashings into reglets to form tight fit. Secure in place with lead wedges. Pack remaining spaces with lead wool. Seal flashings into reglets with sealant.
- C. Apply plastic cement compound between metal flashings and felt flashings.
- D. Fit flashings tight in place. Make corners square, surfaces true and straight in planes, and lines accurate to profiles.
- E. **Install using continuous metal cleats at the face side per SMACNA Figure 3.1. No exposed fasteners at front face or top of cap flashing/copings permitted.**
- F. Seal metal joints watertight.

END OF SECTION 07620

SECTION 07900

JOINT SEALERS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Preparing substrate surfaces.
- B. Sealant and joint backing.

1.02 QUALITY ASSURANCE

- A. Perform work in accordance with sealant manufacturer's requirements for preparation of surfaces and material installation instructions.
- B. Perform acoustical sealant application work in accordance with ASTM C919.

1.03 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.
- B. Applicator: Company specializing in performing the work of this section with minimum years documented experience.

1.05 WARRANTY

- A. Provide five year warranty.
- B. Warranty: Include coverage for installed sealants and accessories which fail to achieve air tight seal, water tight seal, and exhibit loss of adhesion or cohesion, or do not cure.

PART 2 PRODUCTS

2.01 SEALANTS

- A. Exterior vertical joints shall be filled with a one-part nonacid-curing silicone sealant. Sealant shall be Type S, Grade NS, Class 25, and providing 35% movement in both extension and compression for a total of 70% movement.
 - 1. Acceptable products are as follows:
 - a. "Chem-Calk Ncure 2000"; Bostik Construction Products Div.
 - b. "Dow Corning 790"; Dow Corning Corp.
 - c. "Silglaze N SCS 2501"; General Electric Co.
 - d. "Silpruf SCS 2000"; General Electric Co.
 - e. "864"; Pecora Corp.
 - f. "Rhodorsil 5C"; Rhone-Poulenc Inc.
 - g. "Spectrum 1"; Tremco, Inc.
- B. Interior joints in toilet rooms, showers, janitor closets, and other similar locations shall be sealed with a one-part, mildew-resistant, silicone sealant. Sealant shall be type S, Grade NS, class 25 formulated with fungicide and intended for sealing interior joints with nonporous substrates and subject to in-service exposure to conditions of high humidity and temperature extremes.
 - 1. Acceptable products are as follows:
 - a. "Dow Corning 786"; Dow Corning Corp.
 - b. "SCS 1702 Sanitary"; General Electric Co.
 - c. "863 #345 White"; Pecora Corp.
 - d. "Rhodorsil 6B White"; Rhone-Poulenc Inc.
 - e. "Proglaze White"; Tremco Corp.
 - f. "OmniPlus"; Sonneborn Building Products Div.
- C. Interior joints in locations other than those otherwise specified, including at where new and existing windows meet other materials, shall be sealed with manufacturer's standard, one part, nonsag, mildew-resistant, acrylic-emulsion sealant complying with ASTM C 834, formulated to be paintable and recommended for exposed applications on interior and on protect exterior locations involving joint movement of not more than plus or minus 5%.
 - 1. Acceptable products are as follows:
 - a. "Chem-Calk 600"; Bostik Construction Products Div.
 - b. "AC-20"; Pecora Corp.
 - c. "Sonolac"; Sonneborn Building Products Div.; Rexnord Chem.

- D. At all sealant locations in fire rated assemblies provide manufacturer's standard fire-stopping sealant, with accessory materials, having fire-resistance ratings indicated as established by testing identical assemblies per ASTM E 814 by Underwriters Laboratory, Inc. or other testing and inspecting agency acceptable to authorities having jurisdiction.

1. Acceptable products are as follows:
 - a. "Dow Corning Fire Stop Foam"; Dow Corning Corp.
 - b. "Pensil 851"; General Electric Co.
 - c. "Fire Barrier CP-25 & 303"; 3M.

2.02 ACCESSORIES

- A. Primer: Non-staining type, recommended by sealant manufacturer to suit application.
- B. Joint Cleaner: Non-corrosive and non-staining type, recommended by sealant manufacturer; compatible with joint forming materials.
- C. Joint Backing: ASTM D1056; round, closed or open cell polyethylene foam rod; oversized 30 to 50 percent larger than joint width.
- D. Bond Breaker: Pressure sensitive tape recommended by sealant manufacturer to suit application.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that substrate surfaces and joint openings are ready to receive work.
- B. Verify that joint backing and release tapes are compatible with sealant.

3.02 PREPARATION

- A. Remove loose materials and foreign matter which might impair adhesion of sealant.
- B. Clean and prime joints in accordance with manufacturer's instructions.
- C. Perform preparation in accordance with manufacturer's instructions.
- D. Protect elements surrounding the work of this section from damage or disfiguration.

3.03 INSTALLATION

- A. Install sealant in accordance with manufacturer's instructions.
- B. Measure joint dimensions and size materials to achieve required 2:1 width/depth ratios.
- C. Install joint backing to achieve a neck dimension no greater than 1/3 of the joint width.
- D. Install bond breaker where joint backing is not used.
- E. Install sealant free of air pockets, foreign embedded matter, ridges, and sags.
- F. Apply sealant within recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.

3.04 SCHEDULE

- A. Interior: Caulk around all frames, windows, doors, openings, trim, etc., as required to seal or fill gaps, cracks, to make material transitions watertight and/or visually tight and finished.
- B. Exterior: Caulk around all frames, windows, doors, openings, trim, material transitions etc., as required to seal or fill gaps, cracks, to make material transitions watertight and/or visually tight finished.
- C. Paving: Caulk as required to seal or fill gaps, expansion joints, and cracks to make transitions watertight and/or visually tight.

END OF SECTION 07900

SECTION 08111

STANDARD STEEL DOORS AND FRAMES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Non-rated, fire rated and thermally insulated steel doors and frames.
- B. Interior and exterior glazed light frames.

1.2 REFERENCES

- A. ANSI A117.1 - Specifications for Making Buildings and Facilities Accessible to and Usable by Physically Handicapped People.
- B. ANSI/SDI-100 - Standard Steel Doors and Frames.
- C. Door Hardware Institute (DHI) - The Installation of Commercial Steel Doors and Steel Frames, Insulated Steel Doors in Wood Frames and Builder's Hardware.
- D. NFPA 80 - Fire Doors and Windows.
- E. NFPA 252 - Fire Tests for Door Assemblies.
- F. UL 10B - Fire Tests of Door Assemblies.

1.3 SUBMITTALS

- A. Submit under provisions of the General Requirements.
- B. Shop Drawings: Indicate door and frame elevations, internal reinforcement, closure method, and cut-outs for glazing and finish.
- C. Product Data: Indicate door and frame configurations, anchor types and spacings, location of cut-outs for hardware reinforcement.
- D. Manufacturer's Installation Instructions: Indicate special installation instructions.

1.4 REGULATORY REQUIREMENTS

- A. Fire Rated Door and Frame Construction: Conform to ASTM E152 and NFPA 252.
- B. Installed Door and Panel Assembly: Conform to NFPA 80 for fire rated class as scheduled.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site.
- B. Accept doors and frames on site in manufacturer's packaging. Inspect for damage.

1.6 FIELD MEASUREMENTS

- A. Verify that field measurements are as indicated on shop drawings.

PART 2 PRODUCTS

2.1 DOOR MANUFACTURERS

- A. Ceco Door Products
- B. Steel Craft
- C. Curries Co.
- D. Mesker
- E. Substitutions: Under provisions of the General Requirements.

2.2 DOORS

- A. Exterior Insulated Doors: Non-Thermally Broken: SDI-100 Grade III.
- B. Interior Doors (Non-rated and Fire Rated): SDI-100 Grade III.

2.3 DOOR CONSTRUCTION

- A. Face: Steel sheet in accordance with ANSI/SDI-100.
- B. Core: Polystyrene foam.
- C. Thermal Insulated Door: Total insulation R value of 7.7, measured in accordance with ASTM C236.

- 2.4 FRAMES
 - A. Exterior Frames: 16 gage thick material, base metal thickness.
 - B. Interior Frames: 16 gage thick material, base metal thickness.
- 2.5 ACCESSORIES
 - A. Removable Stops: Rolled steel channel shape, mitered corners; prepared for countersink style screws.
 - B. Primer: Zinc chromate type.
 - C. Silencers: Resilient rubber, fitted into drilled hole.
 - D. Fire/Sound Gasket – Resilient rubber. Located at all fire rated doors and frames, and all Practice Room and Studio Room doors and frames.
- 2.6 FABRICATION
 - A. Astragals for Double Doors: Steel, T shaped, specifically for double doors.
 - B. Fabricate doors with hardware reinforcement welded in place.
 - C. Attach fire rated label to each door unit.
 - D. Close top and bottom edge of exterior doors with flush end closure. Seal joints watertight.
 - E. Configure exterior doors with special profile to receive recessed weatherstripping.
 - F. Fabricate frames as welded unit.
 - G. Mullions for Double Doors: Removable type, of same profiles as jambs.
 - H. Transom Bars for Glazed Lights: Fixed type, of same profiles as jamb and head.
 - I. Fabricate frames with hardware reinforcement plates welded in place. Provide mortar guard boxes.
 - J. Reinforce frames wider than 48 inches with roll formed steel channels fitted tightly into frame head, flush with top.
 - K. Prepare frame for silencers. Provide three single silencers for single doors and mullions of double doors on strike side. Provide two single silencers on frame head at double doors without mullions.
 - L. Configure exterior frames with special profile to receive recessed weather stripping.
 - M. Fabricate frames to suit masonry wall coursing with 4 or 2 inch head member.
- 2.7 FINISH
 - A. Steel Sheet: Galvanized to ASTM A525.
 - B. Primer: Baked.
 - C. Coat inside of frame profile with bituminous coating to a thickness of 1/16 inch.

PART 3 EXECUTION

- 3.1 EXAMINATION
 - A. Verify that opening sizes and tolerances are acceptable.
- 3.2 INSTALLATION
 - A. Install doors and frames in accordance with ANSI/SDI-100 and DHI.
 - B. Coordinate installation of glass and glazing.
 - C. Install door louvers, plumb, and level.
 - D. Coordinate installation of doors and frames with installation of frames and hardware specified in Section 08710.
 - E. Coordinate with masonry and wallboard wall construction for anchor placement.
 - F. Install roll formed steel reinforcement channels between two abutting frames. Anchor to structure and floor.
- 3.3 ERECTION TOLERANCES
 - A. Maximum Diagonal Distortion: 1/16 inch measured with straight edge, corner to corner.
- 3.4 ADJUSTING
 - A. Adjust door for smooth and balanced door movement.

END OF SECTION 08111

SECTION 08211

FLUSH WOOD DOORS

PART 1 - GENERAL

- 1.1 SECTION INCLUDES
 - A. Flush wood doors; flush and flush glazed configuration; fire rated and non-rated, **pre-finished.**
 - B. **Graham Wood Doors or Equal, Select White Birch Color to be Selected**
- 1.2 SUBMITTALS
 - A. Shop Drawings: Illustrate door opening criteria, elevations, sizes, types, swings, undercuts required, special beveling, and special blocking for hardware, identify cutouts for glazing, and louvers.
 - B. Product Data: Indicate door core materials and construction; veneer species, type and characteristics; factory machining criteria, and factory finishing criteria.
 - C. Manufacturer's Installation Instructions: Indicate special installation instructions.
- 1.3 QUALITY ASSURANCE
 - A. Perform work in accordance with AWI Quality Standard Section 1300, Custom Grade.
 - B. Finish doors in accordance with AWI Quality Standard, grades identified in schedule.
- 1.4 QUALIFICATIONS
 - A. Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.
- 1.5 REGULATORY REQUIREMENTS
 - A. Fire Door Construction: Conform to NFPA 252, UL 10B.
 - B. Installed Fire Rated Door Assembly: Conform to NFPA 80 for fire rated class as scheduled.
- 1.6 DELIVERY, STORAGE, AND HANDLING
 - A. Deliver, store, protect, and handle products to site.
 - B. Accept doors on site in manufacturer's packaging. Inspect for damage. Do not store in damp or wet areas; or in areas where sunlight might bleach veneer. Seal top and bottom edges if stored more than one week. Break seal on-site to permit ventilation.
- 1.7 FIELD MEASUREMENTS
 - A. Verify that field measurements are as indicated on shop drawings.
- 1.8 COORDINATION
 - A. Coordinate the work with door opening construction, door frame and door hardware installation.
- 1.9 WARRANTY
 - A. Provide warranty to the following term:
 - 1. Exterior Doors: 5 years.
 - 2. Interior Doors: Life of original installation.
 - B. Include coverage for delamination of veneer, warping beyond specified installation tolerances, defective materials, telegraphing core construction.

PART 2 PRODUCTS

- 2.1 MANUFACTURERS
 - B. **Graham Wood Doors**
 - C. Mesker.
 - D. Eggers
 - E. VT Industries
 - F. Substitutions: Under provisions of the General Requirements.

2.2 DOOR TYPES

- A. Flush Interior Doors: 1-3/4 inches thick; solid core construction, fire rated as indicated.
- B. Flush interior sound doors: 1 3/4 wood veneer door with sound core construction, Required STC Rating of 50-52. Wood veneers must match the standard wood door finish. Reference Alternate 5.

2.3 DOOR CONSTRUCTION

- A. Core (Solid, Non-Rated): AWI Section 1300, Type PC-Particleboard.
- B. Core (Solid, Fire Rated): AWI Section 1300, Type FP or FM rating as required or indicated.

2.4 FLUSH DOOR FACING

- A. Veneer Facing (Flush Interior Doors): AWI Custom quality uniform grain.
 - 1. **Select White Birch**

2.5 ACCESSORIES

- A. Glazing Stops: Steel lite kits, for use in rated and insulated glass. prepared for countersink style screws. Frames shall be suitable for fire rated door assemblies utilizing fire rated glazing where scheduled. Steel lite frames to be field painted to match wood finish color.
 - 1. Steel lite kits shall receive insulated glass where indicated.

2.6 FABRICATION

- A. Fabricate non-rated doors in accordance with AWI Quality Standards requirements.
- B. Fabricate fire rated doors in accordance with AWI Quality Standards and to UL requirements. Attach fire rating label to door.
- C. Astragals for Fire Rated Double Doors: Steel, T shaped, overlapping and recessed at face edge, specifically for double doors.
- D. Provide lock blocks at lock edge and top of door for closer hardware reinforcement.
- E. Vertical Exposed Edge of Stiles: Of same species as veneer facing. Hardwood for transparent finish.
- F. Fit door edge trim to edge of stiles after applying veneer facing.
- G. Bond edge banding to cores.
- H. Factory machine doors for finish hardware in accordance with hardware requirements and dimensions. Do not machine for surface hardware. Provide solid blocking for through bolted hardware.
- I. Factory pre-fit doors for frame opening dimensions identified on shop drawings.
- J. Cut and configure exterior door edge to receive recessed weatherstripping devices. Provide edge clearances in accordance with AWI 1600.

2.7 FINISH

- A. Manufacturer's prefinished doors in accordance with AWI Quality Standard Section 1500 to the following finish designations:
 - 1. Pre-finished Doors: Submit full line of actual samples for selection.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that opening sizes and tolerances are acceptable.
- B. Do not install doors in frame openings that are not plumb or are out-of-tolerance for size or alignment.

3.2 INSTALLATION

- A. Install fire rated and non-rated doors in accordance with AWI Quality Standard, NFPA 80 and to Warnock Hersey requirements.
- B. Trim non-rated door width by cutting equally on both jamb edges.
- C. Trim door height by cutting bottom edges to a maximum of 3/4 inch (19 mm). Trim fire door height at bottom edge only, in accordance with fire rating requirements.
- D. Pilot drill screw and bolt holes. Use threaded through bolts for half surface hinges.
- E. Machine cut for hardware. Core for handsets and cylinders.

F. Coordinate installation of glass and glazing.

3.3 STALLATION TOLERANCES

- A. Maximum Diagonal Distortion (Warp): 1/8 inch measured with straight edge or taught string, corner to corner, over an imaginary 36 x 84 inch surface area.
- B. Maximum Vertical Distortion (Bow): 1/8 inch measured with straight edge or taught string, top to bottom, over an imaginary 36 x 84 inch surface area.
- C. Maximum Width Distortion (Cup): 1/8 inch measured with straight edge or taught string, edge to edge, over an imaginary 36 x 84 inch surface area.

3.4 ADJUSTING

- A. Adjust door for smooth and balanced door movement.

END OF SECTION 08211

SECTION 08331

OVERHEAD COILING DOORS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes: **Three Manually** operated overhead coiling doors, operators, controls and accessories.
- B. Related Sections:
 - 1. Division 5 Sections: Miscellaneous Metals for steel supports.
 - 2. Division 8 Sections: Hardware, Locks, Access Panels.
 - 3. Division 9 Sections: Finish Painting, Field Painting.

1.2 REFERENCES

- A. General: Standards listed by reference, including revisions by issuing authority, form a part of this specification section to the extent indicated. Standards listed are identified by issuing authority, authority abbreviation, designation number, title or other designation established by issuing authority. Standards subsequently referenced herein are referred to by issuing authority abbreviation and standard designation.
- B. American Society for Testing and Materials (ASTM):
 - 1. ASTM A 653/A 653M - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

1.3 PERFORMANCE REQUIREMENTS

- A. Structural Performance:
 - 1. Wind Loads: Uniform pressure of: **<20 psf.**

1.4 SUBMITTALS

- A. General: Submit listed submittals in accordance with Conditions of the Contract and Division 1 Submittal Procedures Section.
- B. Product Data: Submit manufacturer's product data and installation instructions.
- C. Shop Drawings: Provide drawings indicating guide details, head and jamb conditions, clearances, anchorage, accessories, finish colors, patterns and textures, operator mounts and other related information.
- D. Quality Assurance Submittals: Submit the following:
 - 1. Certificates: Submit manufacturer's certificate that products meet or exceed specified requirements.
 - 2. Certificates: Submit installer qualifications.
- E. Closeout Submittals: Submit the following:
 - 1. Warranty documents available at www.raynor.com or from your authorized Raynor Dealer.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Utilize an installer having demonstrated experience on projects of similar size and complexity, and trained and authorized by the door dealer to perform the work of this section.
- B. Regulatory Requirements and Approvals: **<2018 International Building Code.>**
- C. Preinstallation Meetings: Verify project requirements, substrate conditions, manufacturer's installation instructions and manufacturer's warranty requirements. Comply with Division 1 Project Management and Coordination (Project Meetings) Section.

1.6 DELIVERY, STORAGE & HANDLING

- A. General: Comply with Division 1 Product Requirements.
- B. Comply with manufacturer's ordering instructions and lead time requirements to avoid construction delays.
- C. Delivery: Deliver materials in manufacturer's original, unopened, undamaged containers with identification labels intact.

- D. Storage and Protection: Store materials protected from exposure to harmful environmental conditions and at temperature and humidity conditions recommended by the manufacturer.

1.7 WARRANTY

- A. Project Warranty: Refer to Conditions of the Contract for project warranty provisions.
- B. Manufacturer's Warranty: Submit, for Owner's acceptance, manufacturer's standard warranty document executed by authorized company official. Manufacturer's warranty is in addition to, and not a limitation of, other rights Owner may have under contract documents. **Warranty Period – 5 years from date of Substantial Completion**

PART 2 - PRODUCTS

2.1 MANUFACTURER

- A. Manufacturer: Raynor Door (Basis of Design)
 - 1. Contact: P.O. Box 448, 1101 East River Road, Dixon, IL 61021-0448; Telephone: (800) 472-9667, (815) 288-1431; Fax: (815) 288-7142; E-mail: thegarage@raynor.com; website: www.raynor.com.
- B. Manufacturer Product Designation: DURACOIL STANDARD.
- C. Approved Manufacturers
 - 1. Overhead Door
 - 2. Cheney Door
 - 3. Cornell
- D. Sizes: Approximately 6'-8"x12'; 7'-8"x12'; and 9'-0"x12'. Field verify with final new opening sizes.

2.2 DOOR OPERATORS

- A. Provide doors designed for **manual** operation.
 - 1. Drive Orientation: For hand-chain, hand-crank or electric motor operated doors, orient the drive from the left or right hand side when facing the reference side of the door (side with counterbalance or hood exposed) as appropriate to field conditions. Submit drawing with shop drawings indicating drive orientation for each location for review.

2.3 CURTAIN

- A. Material: Interlocking steel slats, **22 gauge (0.030 inch minimum thickness)**, roll-formed from commercial quality hot-dipped galvanized (G-90) steel in compliance with ASTM A-653.
 - 1. Slat Type: **Insulated Flat Slat with back cover.**
 - a. Insulation: Polyisocyanurate with R-value 6.24 and U-value 0.160.
 - b. Back Covers: Galvanized steel, **22 gauge (0.030 inch)** minimum thickness.
- B. Mounting: **Face Mounting: fasten to face of wall on each side of door opening.**
- C. Color and Finish: One finish coat of [ArmorBrite™ Powdercoat (color to be selected) applied over one coat of white epoxy primer.
- D. Endlocks: Lateral movement of the slats to be contained by means of zinc-plated malleable endlocks fastened with two zinc-plated steel rivets.
- E. Bottom Bar and Seal: Two roll-formed galvanized steel angles, minimum 1-1/2 inches by 1-1/2 inches by 1/8 inch (38.1 mm x 38.1 mm x 3.2 mm) with single-contact type bottom astragal. Structural angle bottom bar to receive one coat of rust-inhibitive primer.
- F. Vision Panels: **None.**
- G. Curtain Wear Straps: **None**

2.4 GUIDES

- A. Guide Assemblies: To consist of three structural steel angles, minimum 3 inches by 2 inches by 3/16 inch (76 mm by 51 mm by 4.8 mm) and fitted with removable curtain stops. Steel guides to be provided with one coat of rust-inhibitive primer.
- B. Jamb Construction: **Masonry jambs with new tube steel jambs and heads anchor bolt fasteners.**
- C. Weather Seal: **Snap-on vinyl seal.**

2.5 COUNTERBALANCE SYSTEM

- A. Headplates: 3/16 inch (4.8 mm) steel plate, attached to wall angle of guide assembly with 1/2 inch (12.7 mm) diameter class 5 case hardened bolts. Inside of drive bracket fitted with sealed ball bearing. Provide head plates with one coat of rust-inhibitive primer
- B. Barrel: Minimum 4-1/2 inches (114.3 mm) O.D. and 0.120 inch (3.1 mm) wall thickness structural steel pipe. Deflection of pipe under full load shall not exceed 0.03 inch (0.8 mm) per foot of span.
- C. Counterbalance: Provide torsion counterbalance mechanism as follows: **Torsion Spring: Oil-tempered, helical torsion springs, grease packed and mounted on a continuous steel torsion shaft**

2.6 ENCLOSURES

- A. Hood: **Round Hood: 24 gauge steel, finish-painted to match curtain.**
- B. Hood Baffle: **With EPDM rubber seal to inhibit air infiltration through hood cavity.**

2.7 HARDWARE

- A. Locks: Furnish door system with: **Cylinder Lock available for use with manual, hand chain, and hand crank operated doors.** Coordinate Keying requirements with Owner during submittal phase

PART 3 - EXECUTION

3.1 MANUFACTURER'S INSTRUCTIONS

- A. Comply with instructions and recommendations of door manufacturer.

3.2 ACCEPTABLE INSTALLERS

- A. Installer with minimum of 5 years of experience in routinely installing similar systems.

3.3 EXAMINATION

- A. Site Verification of Conditions: Verify through direct observation and field measurement that site conditions are acceptable for installation of doors, operators, controls and accessories. Ensure that openings square, flush and plumb.
- B. Do not proceed with installation of doors, operators, controls and accessories until unacceptable conditions are corrected.

3.4 INSTALLATION

- A. General: Install door, guide and operating equipment complete with all necessary accessories and hardware according to shop drawings, manufacturer's instructions.
- B. Site Tolerances: Site conditions shall meet manufacturer's requirements for installing of overhead coiling door installation. Door installation shall be fully weather tight.
- C. Related Products Installation: Refer to Related Sections paragraph for related products installation.

3.5 FIELD QUALITY CONTROL

- A. Manufacturer's Field Services: At Owner's request, provide manufacturer's field service consisting of product installation and use recommendations, and periodic site visits to observe and ensure product installation is done in accordance with manufacturer's recommendations.

3.6 ADJUSTING

- A. General: Lubricate bearings and sliding parts and adjust doors for proper operation, balance, clearance and similar requirements.

3.7 CLEANING

- A. Remove temporary coverings and protection of adjacent work areas. Repair or replace installed products damaged prior to or during installation.
- B. Clean installed products in accordance with manufacturer's instructions prior to Owner's acceptance. Remove and legally dispose of construction debris from project site.

END OF SECTION 08331

SECTION 08360
SECTIONAL OVERHEAD DOORS

PART 1 GENERAL

- 1.01 SECTION INCLUDES
- A. Electric overhead sectional door.
 - B. Steel insulated panels of flush design.
 - C. Operating hardware, controls, and supports.
- 1.02 SYSTEM DESCRIPTION
- A. Panels: Flush steel.
 - B. Vertical lift operating style and lift clearance as required with track and hardware.
 - C. Operation: Electric, Trolley and Jackshaft as indicated.
 - D. Design and size components to withstand dead and live loads caused by pressure and suction of wind acting normal to plane of wall as calculated in accordance with UBC 91 code.
- 1.03 SUBMITTALS
- A. Submit under provisions of the General Requirements.
 - B. Shop Drawings: Indicate opening dimensions and required tolerances, connection details, anchorage spacing, hardware locations, installation and details.
 - C. Product Data: Provide component construction, anchorage method, and hardware.
 - D. Manufacturer's Installation Instructions: Indicate special procedures, perimeter conditions requiring special attention.
- 1.04 OPERATION AND MAINTENANCE DATA
- A. Operation Data: Include electrical control adjustments.
 - B. Maintenance Data: Include data for motor and transmission, shaft and gearing, lubrication frequency, spare part sources.
- 1.05 WARRANTY
- A. Provide **Ten-year** system warranty. Include coverage for electric motor and transmission.

PART 2 PRODUCTS

- 2.01 MANUFACTURERS
- A. Overhead Door, Inc. – Series 470 Heavy Duty Steel Backed Insulated Sectional Doors.
 - B. Equivalent products by Raynor, Cheney Door, CHI.
 - B. Substitutions: Under provisions of the General Requirements.
- 2.02 MATERIALS
- A. Sheet Steel: ASTM A526 galvanized to G60, pre-painted with silicone polyester finish.
 - B. Insulation: Rigid polystyrene, 2 inch thick core bonded to facing, R=9.5.
 - C. Glass: Insulated double strength. (3) 24x18 sections per door, located approximately 4' above finish grade.
- 2.03 PANEL CONSTRUCTION
- A. Panels: Flush steel construction; outer steel sheet of 24 gage thick, flat profile; inner steel sheet of 26 gage thick, flat profile; rabbetted weather joints at meeting rails; insulated.
 - B. Door Nominal Thickness: 2 inches thick.
- 2.04 DOOR COMPONENTS
- A. Track: 13 gage thick; 3-inch wide rolled steel track, continuous one piece per side; galvanized steel mounting brackets, 1/4 inch thick **design all for vertical/high lift/follow roof line operation. Coordinate with building framing members**
 - B. Hinge and Roller Assemblies: Heavy duty hinges and adjustable roller holders of galvanized steel; floating hardened steel bearing rollers, located at top and bottom of each panel, each side.
 - C. Lift Mechanism: Torsion spring (25,000 Cycle) on cross head shaft, with braided steel lift cables.
 - D. Sill Weatherstripping: Resilient and hollow vinyl strip, one piece; fitted to bottom of door panel, full length contact.
 - E. Jamb Weatherstripping: Roll formed vinyl section full height of jamb, placed in moderate contact with door panels.
 - F. Lock: Door to have emergency/manual pull mechanism/release.

2.05 ELECTRICAL CHARACTERISTICS AND COMPONENTS

- A. Electrical Characteristics:
 - 1. 1/2 hp SEL, T & S Mount, manually operable in case of power failure, transit time of 11 inches per second.
 - 2. 115 volts, single phase, 60 Hz.
 - 3. Over current protection minimum circuit capacity.
- B. Motor: NEMA, Type 1 enclosure.
- C. Wiring Terminations: Provide terminal lugs to match branch circuit conductor quantities, sizes, and materials indicated. Enclose terminal lugs in terminal box sized to ANSI/NFPA 70.
- D. Disconnect Switch: Factory mount disconnect switch in control panel.
- E. Electric Operator: Draw bar operation.
- F. Control Station: Standard three button (open-close-stop) momentary type at interior sides, 24 volt circuit.
- G. Entrapment protection: Photo electric sensors.
- H. **Remote Operators: 2-total.**

2.06 FINISHES

- A. Exterior and Interior Surfaces: **Pre-Finish – White or Gray, submit color samples for final selection.**

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that wall openings are ready to receive work and opening dimensions and tolerances are within specified limits.
- B. Beginning of installation means acceptance of existing surfaces.

3.02 PREPARATION

- A. Prepare opening to permit correct installation of door unit to perimeter air and vapor barrier seal.
- B. Apply sealer conditioner to frame.
- C. Verify that electric power is available and of the correct characteristics.

3.03 INSTALLATION

- A. Install door unit assembly in accordance with manufacturer's instructions.
- B. Anchor assembly to wall construction and building framing without distortion or stress.
- C. Securely brace door tracks suspended from structure. Secure tracks to structural members only.
- D. Fit and align door assembly including hardware, level, and plumb, to provide smooth operation.
- E. Coordinate installation of electrical service. Complete power and control wiring from disconnect to unit components.
- F. Coordinate installation of sealants and backing materials at frame perimeter as specified in Section 07900.
- G. Install perimeter trim and closures.

3.04 TOLERANCES

- A. Maintain dimensional tolerances and alignment with adjacent work.
- B. Maximum Variation from Plumb and Level: 1/16 inch.
- C. Longitudinal or Diagonal Warp: Plus or minus 1/8 inch from 10 ft straight edge.

3.05 ADJUSTING

- A. Adjust door assembly to smooth operation.

3.06 CLEANING

- A. Clean doors, frames, and glass.
- B. Remove labels and visible markings.

3.07 PROTECTION OF FINISHED WORK

- A. Do not permit construction traffic through overhead door openings after adjustment and cleaning.

END OF SECTION 08360

SECTION 08410
ALUMINUM ENTRANCES AND STOREFRONTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Aluminum doors and frames.
- B. Vision glass and glass.
- C. Door hardware.
- D. Integral air and vapor barrier.
- E. Perimeter sealant.

1.02 SYSTEM DESCRIPTION

- A. Aluminum entrances and storefront system includes tubular aluminum sections with supplementary internal support framing, shop fabricated, factory prefinished, vision glass, related flashings, anchorage, and attachment devices.

1.03 PERFORMANCE REQUIREMENTS

- A. Design and size components to withstand dead and live loads caused by positive and negative wind pressure acting normal to plane of wall as calculated in accordance with codes.
- B. Limit mullion deflection to flexure limit of glass; with full recovery of glazing materials.
- C. System to accommodate, without damage to components or deterioration of seals, movement within system, movement between system and peripheral construction, dynamic loading and release of loads, deflection of structural support framing.
- D. Limit air leakage through assembly to 0.06 cfm/min/sq. ft. of wall area, measured at a reference differential pressure across assembly of psf as measured in accordance with AAMA 501.
- E. Water Leakage: None, when measured in accordance with AAMA 501 with a test pressure difference of 2.86 lbs/sq. ft.
- F. Maintain continuous air and vapor barrier throughout assembly, primarily in line with inside pane of glass and heel bead of glazing compound.
- G. System to provide for expansion and contraction within system components caused by a cycling temperature range of 170 degrees F over a 12 hour period without causing detrimental affect to system components.
- H. Drain water entering joints, condensation occurring in glazing channels, or migrating moisture occurring within system, to the exterior by a weep drainage network.

1.04 SUBMITTALS

- A. Shop Drawings: Indicate system dimensions, framed opening requirements and tolerances, affected related Work and expansion and contraction joint location and details.
- B. Submit samples of glass indicating tint and color for selection.
- C. Submit samples of aluminum indicating tint and color of anodized finish.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site.
- B. Protect pre-finished aluminum surfaces. Do not use adhesive papers or sprayed coatings which bond when exposed to sunlight or weather.

1.06 ENVIRONMENTAL REQUIREMENTS

- A. Do not install sealants when ambient temperature is less than 40 degrees F during and 48 hours after installation.

1.07 FIELD MEASUREMENTS

- A. Verify that field measurements are as indicated on shop drawings.

1.08 WARRANTY

- A. Provide ten-year warranty.
- B. Warranty: Include coverage for complete system for failure to meet specified requirements.
- C. Glazing shall have a 10 year warranty.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Manko – Product series – 2450 thermally broken , Door series – 150 heavy stile.
- B. Other acceptable manufacturers offering equivalent Products.
 - 1. Kawneer.
 - 2. Amarlite.
 - 3. EFCO.
- C. Substitutions: Under provisions of the General Requirements.

2.02 MATERIALS

- A. Extruded Aluminum: ANSI/ASTM B221; 6063 alloy, T5 temper. Color: **White**.
- B. Steel Sections: ANSI/ASTM A36; shaped to suit mullion sections.
- C. Fasteners: Galvanized steel.

2.03 COMPONENTS

- A. Window Frame: 4 1/2 x 2 inch nominal dimension; glazing stops; drainage holes; internal weep drainage system. **Complete with manufacturers trim, clips, head receptor and sub sill.**
- C. Doors: 2 inches thick, 4 1/4 inch wide top rail, 5 3/4 inch wide vertical stiles, 8 1/2 inch wide bottom rail, 10 3/4" mid-rail; square glazing stops; hardware provided and installed by manufacturer.
- D. Flashings: Aluminum, finish to match mullion sections where exposed. Sill Flashings will be required.

2.04 GLASS AND GLAZING MATERIALS

- A. Glass and Glazing Materials: As specified in Section 08800 of types described below:
 - 1. Glass at Exterior Lights: 1-inch insulated type, color and tint to be selected. Tempered where required. Glazing to include Low-E at third surface.
 - 2. Glass at Interior Lights: 1/4-inch. Tempered as required.

2.05 SEALANT MATERIALS

- A. Sealant and Backing Materials: As Recommended by Manufacturer. Reference Section 07900.
- B. Color to match storefront framing. Submit physical samples for approval.

2.06 HARDWARE

- A. Weather Stripping, Sill Sweep Strips, Thresholds, Hinges, Tubular Pull Handles, Panic Device, Closer: Manufacturers' standard type to suit application, and finish. Cylinder locks by hardware supplier.
- B. All exterior doors shall be fully equipped with complete hardware system as required for installation, use, and securing of building, including closures and panic devices by the storefront/curtain wall manufacturer.
 - 1. Weather Stripping, Sill Sweep Strips, Thresholds, Full surface continuous Roton hinges, Push/Pull Handles, Door-O-Matic 1490 Panic Device, LCN 4041, Closer: Cylinder locks by hardware supplier. All hardware for aluminum doors shall be included in the base bid, **NOT** in the hardware allowance.
- C. Cost of Storefront hardware shall be included in the **BID PRICE** of the storefront system provider. These costs are NOT to be included in the Hardware Allowance.

2.07 FABRICATION

- A. Fabricate components with minimum clearances and shim spacing around perimeter of assembly, yet enabling installation and dynamic movement of perimeter seal.
- B. Accurately fit and secure joints and corners. Make joints flush, hairline, and weatherproof.
- C. Prepare components to receive anchor devices. Fabricate anchors.
- D. Arrange fasteners and attachments to conceal from view.
- E. Prepare components with internal reinforcement for door hardware and door operator hinge hardware.
- F. Reinforce framing members for imposed loads.

2.08 FINISHES

- A. Finish coatings shall meet or exceed performance requirements of AAMA 2605.
- B. Exposed Aluminum Surfaces
 - 1. Electro statically applied high performance Flourapolymer coating, 2.5 – 3.5 mils thickness; Color: White, final color selection pending samples to match existing.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify site opening conditions.
- B. Verify dimensions, tolerances, and method of attachment with other work.
- C. Verify wall openings and adjoining air and vapor seal materials are ready to receive work of this Section.

3.02 INSTALLATION

- A. Install wall system in accordance with manufacturer's instructions and AAMA - Metal Curtain Wall, Window, Store Front and Entrance - Guide Specifications Manual.
- B. Attach to structure to permit sufficient adjustment to accommodate construction tolerances and other irregularities.
- C. Provide alignment attachments and shims to permanently fasten system to building structure.
- D. Align assembly plumb and level, free of warp or twist. Maintain assembly dimensional tolerances, aligning with adjacent work.
- E. Provide thermal isolation where components penetrate or disrupt building insulation.
- F. Install sill flashings.
- G. Coordinate attachment and seal of perimeter air and vapor barrier materials.
- H. Pack fibrous insulation in shim spaces at perimeter of assembly to maintain continuity of thermal barrier.
- I. Set thresholds in bed of mastic and secure.
- J. Install hardware using templates provided.
- K. Install glass in accordance with Section 08800, to glazing method required to achieve performance criteria.
- L. Install perimeter sealant to method required to achieve performance criteria, backing materials, and installation criteria in accordance with Section 07900.

3.03 TOLERANCES

- A. Maximum Variation from Plumb: 0.06 inches every 3 ft non-cumulative or 1/16 inches per 10 feet, whichever is less.
- B. Maximum Misalignment of Two Adjoining Members Abutting in Plane: 1/32 inch.

3.04 ADJUSTING

- A. Adjust operating hardware and sash for smooth operation.

3.05 CLEANING

- A. Remove protective material from prefinished aluminum surfaces.
- B. Wash down surfaces with a solution of mild detergent in warm water, applied with soft, clean wiping cloths. Take care to remove dirt from corners. Wipe surfaces clean.
- C. Remove excess sealant by method acceptable to sealant manufacturer.

3.06 PROTECTION OF FINISHED WORK

- A. Protect finished Work from damage.

END OF SECTION 08410

SECTION 08710

DOOR HARDWARE

PART 1 GENERAL

- 1.1 SECTION INCLUDES
 - A. Hardware for wood and hollow steel doors.
 - B. Thresholds.
 - C. Weather stripping, seals, and doorgaskets.
- 1.2 ALLOWANCES
 - A. Cash Allowance: This contractor shall install and furnish all Finish Hardware not specified in other sections, such as millwork. This contractor shall allow the sum of **\$20,000.00** for the purchase and delivery of hardware only.
 - B. Allowance includes purchase and delivery of hardware only. Installation is included in the Contractor's Bid price, not the allowance. Any differential in the allowance listed and the original invoices from suppliers will be adjusted in the contract price.
- 1.3 REFERENCES
 - A. ANSI A117.1 - Specifications for Making Buildings and Facilities Accessible to and Usable by Physically Handicapped People.
- 1.4 OPERATION AND MAINTENANCE DATA
 - A. Maintenance Data: Include data on operating hardware, lubrication requirements, and inspection procedures related to preventative maintenance.
- 1.5 QUALIFICATIONS
 - A. Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum 3 years' documented experience.
 - B. **Hardware Supplier: To be selected by Architect & Owner.**
- 1.6 DELIVERY, STORAGE, AND HANDLING
 - A. Deliver, store, protect, and handle products to site.
 - B. Package hardware items individually; label and identify each package with door opening code to match hardware schedule.
 - C. Deliver keys to Owner by security shipment direct from hardware supplier.
- 1.7 WARRANTY
 - A. Provide five year warranty.
- 1.8 MAINTENANCE MATERIALS
 - A. Provide special wrenches and tools applicable to each different or special hardware component.
 - B. Provide maintenance tools and accessories supplied by hardware component manufacturer.

PART 2 PRODUCTS

- 2.1 KEYING
 - A. Door Locks: Master keyed. Include construction keying, and key to existing keying system.
 - B. Codes and final keying provided by owner.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that doors and frames are ready to receive work and dimensions are as indicated on shop drawings.
- B. Verify that electric power is available to power operated devices and of the correct characteristics.

3.2 INSTALLATION

- A. Install hardware in accordance with manufacturer's instructions.
- B. Use templates provided by hardware item manufacturer.
- C. Mounting heights for hardware from finished floor to center line of hardware item:
 - 1. Locksets: 40"
 - 2. Push/Pulls: 45"
 - 3. Dead Locks: 48"
 - 4. Exit Devices: 42"
- D. Thresholds not to exceed ½" in height.

END OF SECTION 08710

SECTION 08800

GLAZING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Glass and glazing for Sections referencing this Section for products and installation.

1.02 PERFORMANCE REQUIREMENTS

- A. Glass and glazing materials of this Section shall provide continuity of building enclosure vapor and air barrier:
 - 1. To utilize the inner pane of multiple pane sealed units for the continuity of the air and vapor seal.
 - 2. Maintain continuous air and vapor barrier throughout glazed assembly from glass pane to heel bead of glazing sealant.
- B. Size glass to withstand dead loads and positive and negative live loads acting normal to plane of glass as calculated in accordance with UBC 91 code.
- C. Limit glass deflection to 1/200 flexure limit of glass with full recovery of glazing materials, whichever is less.

1.03 ENVIRONMENTAL REQUIREMENTS

- A. Do not install glazing when ambient temperature is less than 50 degrees F.
- B. Maintain minimum ambient temperature before, during and 24 hours after installation of glazing compounds.

1.04 FIELD MEASUREMENTS

- A. Verify that field measurements are as indicated on shop drawings.

1.05 COORDINATION

- A. Coordinate the Work with glazing frames, wall openings, and perimeter air and vapor seal to adjacent Work.

1.06 WARRANTY

- A. Provide five year manufacturer's warranty.
- B. Warranty: Include coverage for sealed glass units from seal failure, interpane dusting or misting, reflective coating on mirrors, delamination of laminated glass and replacement of same.

PART 2 PRODUCTS

2.01 FLAT GLASS MATERIALS

- A. Float Glass (Type FG): Clear, 1/4 inch thick minimum.
- B. Safety Glass (Type SG): Clear; fully tempered with horizontal tempering 1/4 inch thick minimum at all locations where glass is less than 18 inches above finished floor.
- C. Tinted Glass (Type TG): Float type, heat strengthened, light reducing, color (to be selected); 1/4 inch thick minimum.
- D. Wire Glass (Type WG): Clear, polished both sides diagonal mesh of woven stainless steel wire of 1/2 inch grid size; 1/4 inch thick.
- E. Mirror Glass (Type MG): Clear tempered safety type with copper and silver coating, organic overcoating, rounded, sanded, edges, 1/4 inch thick minimum, sizes as indicated.
- F. Shatter Resistant Glass: (Type SRG): Clear laminated, 5/16 inch composite - 2 - 1/8-inch thick panels laminated with .060 inner layer film, sizes as indicated.

2.02 SEALED INSULATING GLASS MATERIALS

- A. Insulated Glass Units (Type IG): ASTM E774 and E773; double pane with edge seal; outer pane of 1/4 inch glass tinted at exterior, inner pane of 1/4 inch glass. Low-E coating on third surface. Provide integral blinds and all operating hardware where indicated on drawings. **Gray Tint**
- B. Performance Requirements:
 - U-Value: Winter Night – 0.29 Summer Day – 0.27
 - R-Value – 3.43
 - Shading Coefficient (sc) – 0.37
 - Solar Heat Gain Coefficient (SHGC) – 0.32
 - Relative Heat Gain (RHG) – 77
 - Light to Solar Gain (LSG) – 1.23
 - Sound Transmission Class (STC) - 35

2.03 SPECIAL GLASS AND GLAZING SYSTEMS

- A. Fire rated glass to be part of a 90-minute-rated door/window assembly.
 - 1. Product – Fire Lite® Plus, Premium Grade.

2.04 GLAZING COMPOUNDS

- A. Exterior windows not shop installed shall be glazed with vinyl or neoprene gaskets, extruded elastic polybutene tape sealant, a combination of polysulphide base compound and elastic glazing compound, or a combination of extruded polysulphide tape, polysulphide base compound elastic glazing compound.
- B. Doors and interior stopped -in glass shall be glazed using putty or elastic glazing compound and stop beads.
- C. Exterior glazing of steel sash shall be DAP Metal Glaze. Interior glazing of steel sash shall be DAP Steel Sash Putty.

2.05 GLAZING ACCESSORIES

- A. Setting Blocks: Neoprene or Silicone, 80 - 90 Shore A durometer hardness, length of 0.1 inch for each square foot of glazing or minimum 4 inch x width of glazing rabbet space minus 1/16 inch x height to suit glazing method and pane weight and area.
- B. Spacer Shims: Neoprene or Silicone, 50 - 60 Shore A durometer hardness, minimum 3 inch long x one half the height of the glazing stop x thickness to suit application, self adhesive on one face.
- C. Glazing Tape: Preformed butyl compound with integral resilient tube spacing device; 10 - 15 Shore A durometer hardness; coiled on release paper.
- D. Glazing Clips: Manufacturer's standard type.
- E. Mirror Attachment Accessories: Mirror adhesive, chemically compatible with mirror coating and wall substrate.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that openings for glazing are correctly sized and within tolerance.
- B. Verify that surfaces of glazing channels or recesses are clean, free of obstructions, and ready to receive glazing.

3.02 PREPARATION

- A. Clean contact surfaces with solvent and wipe dry.
- B. Seal porous glazing channels or recesses with substrate compatible primer or sealer.
- C. Prime surfaces scheduled to receive sealant.
- D. Install glazing in accordance with Flat Jobbers Association Glazing Manual.

3.03 INSTALLATION - MIRRORS

- A. Set mirrors with adhesive, applied in accordance with adhesive manufacturer's instructions.
- B. Place plumb and level.

3.04 CLEANING

- A. Remove glazing materials from finish surfaces. Remove labels after work is complete. Clean glass and mirrors.

3.05 PROTECTION OF FINISHED WORK

- A. After installation, mark pane with an "X" by using removable plastic tape or paste. Do not mark heat absorbing or reflective glass units.

END OF SECTION 08800

SECTION 09260
GYPSUM BOARD SYSTEMS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Metal stud wall framing.
- B. Acoustical insulation.
- C. Gypsum board.
- D. Water resistant tile backer board.
- E. Taped and sanded joint treatment, **Level 5 finish**.

1.02 REFERENCES

- A. ASTM C36 - Gypsum Wallboard.
- B. ASTM C475 - Joint Treatment Materials for Gypsum Wallboard Construction.
- C. ASTM C630 - Water Resistant Gypsum Backing Board.

PART 2 PRODUCTS

2.01 MANUFACTURERS - GYPSUM BOARD SYSTEM

- A. National Gypsum Company.
- B. Other acceptable manufacturers offering equivalent products.
- C. Substitutions: Under provisions of the General Requirements.

2.02 FRAMING MATERIALS

- A. Reference Section 9111 Metal Stud.

2.03 GYPSUM BOARD MATERIALS

- A. Fire Rated Gypsum Board: ASTM C36; Gypsum, Type "X" fire resistive type, UL rated; 5/8 inch thick, maximum permissible length; ends square cut, tapered edges. Product – **Goldbond XP Fireshield**. Provide at all interior walls to 8' above finished floor, and at all exterior walls.
- B. Gypsum Wall Board: ASTM C36, Type "X" fire resistive type. UL Rated; 5/8" thick, maximum permissible length; Ends square cut and tapered edges. Product – **Goldbond FireShield**. Located at interior only miscellaneous buildings elements, ceilings, soffits, and bulkheads. **Not for use at interior walls**.
- C. Gypsum Wall Board: ASTM C36, Type "X" fire resistive type. Acoustical type, 2-piece laminated with viscoelastic polymer. UL Rated; 5/8" thick, maximum permissible length; Ends square cut and tapered edges. Product – **Goldbond Soundbreak XP**. **Located at perimeter walls of Chorus Room 113**.
- D. Gypsum Wall Board Tile Backer: ASTM C36; Gypsum, Type "X" fire resistive type, UL rated; 5/8 inch thick. Acrylic coated mold and moisture resistant panel. Panels to be cut to maximum permissible length; ends square cut, tapered edges. Product – **Goldbond eXP**. **Located at all interior and exterior walls scheduled to receive tile**.

2.04 ACCESSORIES

- A. Acoustical Insulation: glass fiber, friction fit type, unfaced, 3 1/2 or 5 1/2 inch thick.
- B. Corner Beads: Metal. Provide 1" Radius corners at EBD office and EBD classrooms.
- C. Edge Trim: GA 201 and GA 216; Type L bead.
- D. Joint Materials: ASTM C475; reinforcing tape, joint compound, adhesive, and water.
- E. Fasteners: ASTM C1002, Type S12, W, and GA-216.
- F. Resilient channel: USG, RC-1 or equal.
- G. Metal Stud Framing: Per Section 05400 and Structural drawings/details. No interior studs to be less than **20ga**.
- H. Molded Reveal Joints: Fry Reglet, 1/4" x 1/4"; DRM – 25 – 25.
- I. Sound Deadening Insulation: Mineral Wool Insulation Blanket, Owens Corning Thermafiber SAFB (sound attenuating fiber blanket). For use in high acoustical performance sound walls, as indicated on plans.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that site conditions are ready to receive work and opening dimensions are as indicated on shop drawings.

3.02 METAL STUD INSTALLATION

- A. Install studs in accordance with ASTM C754 and manufacturer's instructions.
- B. Metal Stud Spacing: 16 inches on center, unless noted otherwise.
- C. Refer to Drawings for indication of partitions, extend stud framing through the ceiling to the structure above, unless noted otherwise. Maintain clearance under structural building members to avoid deflection transfer to studs. Provide extended leg ceiling runners.
- D. Door Opening Framing: Install double studs at door frame jambs. Install stud tracks on each side of opening, at frame head height, and between studs and adjacent studs.
- E. Blocking: Nail wood blocking to studs or Bolt or screw steel channels to studs. Install blocking for support of plumbing fixtures, toilet partitions, wall cabinets, toilet accessories, and hardware.

3.03 WALL FURRING INSTALLATION

- A. Erect wall furring for direct attachment to concrete block walls.
- B. Erect furring channels vertically; space maximum 16 inches on center, not more than 4 inches from floor and ceiling lines, abutting walls.
- C. Install thermal insulation between furring channels directly attached to concrete masonry walls in accordance with manufacturer's instructions.
- D. Erect free-standing metal stud framing tight to concrete masonry walls, attached by adjustable furring brackets in accordance with manufacturer's instructions.

3.04 FURRING FOR FIRE RATINGS

- A. Install furring as required for fire resistance ratings indicated.
- B. Columns in rated walls shall be wrapped independently from wall system.

3.05 CEILING FRAMING INSTALLATION

- A. Coordinate location of hangers with other work.
- B. Install ceiling framing independent of walls, columns, and above ceiling work.
- C. Reinforce openings in ceiling suspension system which interrupt main carrying channels or furring channels, with lateral channel bracing. Extend bracing minimum 24 inches past each end of openings.
- D. Laterally brace entire suspension system.

3.06 ACOUSTICAL ACCESSORIES INSTALLATION

- A. Install resilient channels at maximum 12 inches on center. Locate joints over framing members.
- B. Place acoustical insulation in partitions tight within spaces, around cut openings, behind and around electrical and mechanical items within or behind partitions, and tight to items passing through partitions.
- C. Reference manufacturer's requirements for installation of components for high performance acoustic partition walls, located at Practice Rooms, Studios, Classrooms, and offices as indicated on plans.

3.07 GYPSUM BOARD INSTALLATION

- A. Install gypsum board in accordance with manufacturer's instructions.
- B. Erect single layer standard gypsum board vertical, with ends and edges occurring over firm bearing.
- C. Erect single layer fire rated gypsum board vertically, with edges and ends occurring over firm bearing.
- D. Use screws when fastening gypsum board to metal furring or framing.
- E. Place second layer perpendicular to first layer. Offset joints of second layer from joints of first layer.
- F. Erect exterior gypsum soffit board perpendicular to supports, with staggered end joints over supports.
- G. Treat cut edges and holes in moisture resistant gypsum board and exterior gypsum board with sealant.
- H. Place control joints consistent with lines of building spaces and as directed. Install at approximately 30' intervals in walls. Coordinate locations with Architect.
- I. Place corner beads at external corners as indicated. Use longest practical length. Place edge trim where gypsum board abuts dissimilar materials as indicated.
- J. Caulk at sound walls.

3.08 JOINT TREATMENT

- A. Tape, fill, and sand exposed joints, edges, and corners to produce smooth surface ready for finishes.
- B. Feather coats onto adjoining surfaces so that camber is maximum 1/32.
- C. Taping, filling, and sanding is not required at surfaces behind adhesive applied ceramic tile.
- D. Tape joints and corners of cementitious backing board using cement based joint compound as recommended by the manufacturer.
- E. **Level 5 finish.** Level 4 finish is acceptable at storage rooms only.

3.09 TOLERANCES

- A. Maximum Variation of Finished Gypsum Board Surface from True Flatness: 1/8 inch in 10 feet in any direction.

END OF SECTION 09260

SECTION 09260-A
Gypsum Board Systems Preinstallation Checklist

**Wall Framing Checklist for Construction Projects
Prior to Final Sheetrock Application**

Date: _____

Name of Inspector: _____

Location of walls inspected:

ITEMS TO INSPECT	
1. Clean all cavities in side wall frame with a vacuum. Do not leave any trash, dirt, dust or debris of any kind in side wall.	
2. Verify all framing is securely anchored and fastened. Verify no screws are missing. Any bent or twisted studs or track will be repaired or replaced. Verify anchoring is by specification or industry standard. Additional anchoring at door locations.	
3. Ensure all cross bracing and necessary seismic connections are in place when applicable.	
4. Any rusted framing or door frames will be removed and replaced with new material.	
5. Verify all door frame openings are properly fastened and frame grouted. Header installed, tabs anchored to the floor, heavy gage Jack studs and King studs used on each side of frame (Refer to spec for gage size).	
6. Verify all electrical boxes and conduits are anchored to stud securely in such a manner that pushing on any corners of the box will not allow the box to move inwards.	
7. All plumbing piping anchored securely. Verify all piping is connected, tested for leaks and insulated per specification.	
8. Verify all wall backing is installed for items such as hand rails and toilet accessories (refer to plans and specification for items and location). a. <u>Verify any wood backing used is labeled fire rated stock.</u>	
9. Verify all batt insulation is secured in place in such a manner to keep it from siding down over time once the wall is built. Supplement friction fit to ensure batts remaining as placed.	
10. Verify all sound attenuation material is installed per specification and manufactures instructions.	
11. Verify all trades have coordinated proper installation of items at the proper locations per project plans.	
12. Verify all medical gas piping is installed, supported an anchored per specification and code requirement.	
13. Verify mechanical ducting systems are installed, supported and anchored per specification and all joints fully sealed and insulation is completed.	
14. Verify all through floor or deck penetrations that will be within the wall are properly caulked and sealed with specified materials.	

SECTION 09306

FLOOR AND WALL TILE

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Ceramic tile floor finish using the thinset application method or as recommended by Manufacturer.
- B. Ceramic tile wall finish using the thinset application method.

1.02 SUBMITTALS

- A. Submit under provisions of the General Requirements.
- B. Product Data: Provide instructions for using adhesives and grouts.
- C. Samples: Submit two samples illustrating pattern, color variations, and grout color.

1.03 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site.
- B. Protect adhesives from freezing or overheating in accordance with manufacturer's instructions.

1.04 ENVIRONMENTAL REQUIREMENTS

- A. Do not install adhesives in an unventilated environment.
- B. Maintain 50 degrees F during installation of mortar materials.

1.05 EXTRA MATERIALS

- A. Provide 10 square feet (full/uncut) of each type of tile to Owner.

PART 2 PRODUCTS

2.01 TILE MANUFACTURER

- A. Crossville – Products: Reference Schedule.
- B. Substitutions: Under provisions of the General Requirements, Materials listed are for pricing purposes, final colors to be selected by Architect. Alternate tile manufacturers and styles may be selected at architect's discretion, based on similar cost and availability.

2.02 CERAMIC TILE MATERIALS

- A. Porcelain Floor, Wall & Base Tile: ANSI A137.1, reference schedule.

2.04 ADHESIVE MATERIALS

- A. Adhesives: Thinset bond type as recommended and/or manufactured by the tile manufacturer.

2.05 MORTAR MATERIALS

- A. Mortar Materials: Portland cement, sand, latex additive, and water as recommended and/or manufactured by the tile manufacturer, color to be selected.

2.06 GROUT MIX

- A. Mix and proportion pre-mix grout materials in accordance with manufacturer's instructions. Color to be selected.
- B. Manufacturer: TEC, AccuColor Power Grout, full range of colors.

2.07 ACCESSORIES

- A. Subfloor Filler: White premix latex; type recommended by adhesive material manufacturer.
- B. Primers and Adhesives: Waterproof; types recommended by flooring manufacturer.
- C. Edge and Corner Strips: Schluter Aluminum or Stainless Steel Edge Strips and transition Strips.
 - 1. Locate edge strips at top edge of tile. Profile Jolly; Depth to match thickness of tile.
 - 2. Locate Transition strips at doorways where abutting materials of differing height. Profile Ramp; Depth to match thickness of tile. Length to be maximum possible length for smoothest transition.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces are ready to receive work.

3.02 PREPARATION

- A. Protect surrounding work from damage or disfiguration.
- B. Vacuum clean surfaces and damp clean.
- C. Seal substrate surface cracks with filler. Level existing substrate surfaces to acceptable flatness tolerances.
- D. Apply sealer conditioner to substrate surfaces in accordance with adhesive manufacturer's instructions.

3.03 INSTALLATION - THINSET METHOD

- A. Install adhesive tile, thresholds, and grout in accordance with manufacturer's instructions and/or the TCA Handbook.
- B. Lay tile to pattern indicated. Do not interrupt tile pattern through openings.
- C. Place edge strips at exposed tile edges.
- D. Cut and fit tile tight to penetrations through tile. Form corners and bases neatly. Align floor, base and wall joints.
- E. Place tile joints uniform in width, Floor joints shall be as narrow (approximately 1/8") as allowed by manufacturer, subject to variance in tolerance allowed in tile size. Make joints watertight, without voids, cracks, excess mortar, or excess grout. **Provide mock-up area (approximately 4'x4') for owner review of joint spacing and grout depth prior to installation of finish floor tile.**
- F. Sound tile after setting. Replace hollow sounding units.
- G. Keep expansion, control joints free of adhesive or grout. Apply sealant to joints.
- H. Allow tile to set for a minimum of 48 hours prior to grouting.
- I. Grout tile joints.
- J. Apply sealant to junction of tile and dissimilar materials and junction of dissimilar planes.
- K. Install shower pans per manufacturer's instructions.

3.04 CLEANING

- A. Clean tile and grout surfaces.
- B. **Grout Joints shall be sealed (2 coats) using sealer product as recommended by the grout manufacturer.**

3.05 PROTECTION OF FINISHED WORK

- A. Do not permit traffic over finished floor surface for 4 days after installation.
- B. Install protective material as required to protect finished installation thru completion of construction.

3.06 SCHEDULE OF TILES

- A. Styles and colors identified are for bidding purposes, final styles and colors may vary depending on availability and alternate manufacturers or installers.
 1. Wall Tile CT1 (field) – Crossville, Argent, 12" x 12"; non-polished; Color – To be Selected. Located at Area B, Upper Lobby 101, Around Restroom Entry (3 walls) and at drinking fountain. Brick pattern/vertical orientation.
 2. Wall Tile CT2 (accent) – Crossville, Argent 12"x12", Non-polished; Color – To be selected. 3 accent colors to be selected. Installed in accent bands as indicated on drawings.
 3. Floor Tile – CT3 (Field) – Crossville, Argent 12x24", Non-Polished, Color – To Be Selected. manufacturer recommendations.

END OF SECTION 09306

SECTION 09511

SUSPENDED ACOUSTICAL CEILINGS

PART 1 GENERAL

- 1.01 SECTION INCLUDES
 - A. Suspended metal grid ceiling system and perimeter trim, to match existing.
 - B. Acoustical tile, to match existing.
- 1.02 SYSTEM DESCRIPTION
 - B. Suspension system to rigidly secure acoustical ceiling system including integral mechanical and electrical components with maximum deflection of 1/360.
- 1.03 SUBMITTALS
 - A. Product Data: Provide data on metal grid system components, and acoustical units.
 - B. Samples: Submit two samples illustrating material and finish of acoustical units.
 - C. Samples: Submit two samples each, of suspension system main runner, cross runner, and edge trim.
 - D. Manufacturer's Installation Instructions: Indicate special procedures, perimeter conditions requiring special attention.
- 1.04 QUALIFICATIONS
 - A. Grid and Tile Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.
 - B. Conform to applicable code for fire rated assembly and combustibility requirements for materials.
- 1.05 ENVIRONMENTAL REQUIREMENTS
 - A. Maintain uniform temperature of minimum 60 degrees F, and maximum humidity of 40 percent prior to, during, and after acoustical unit installation.

PART 2 PRODUCTS

- 2.01 MANUFACTURERS - SUSPENSION SYSTEM
 - A. Armstrong - Product: Prelude XL Heavy Duty Galvanized Exposed Tee 15/16"
 - B. Armstrong – Product Prelude Plus XL Heavy Duty Galvanized Exposed Tee 15/16"; Color Black
 - C. Substitutions: Under provisions of the General Requirements.
- 2.02 SUSPENSION SYSTEM MATERIALS
 - A. Grid Materials: Commercial quality cold rolled steel with galvanized coating.
 - B. Exposed Grid Surface Width: 15/16 inch.
 - C. Grid Finish: White; Black at Type 3 Ceiling
 - D. Accessories: Stabilizer bars, clips, splices, edge moldings, hold down clips, and light protection hoods required for rated suspended grid systems.
 - E. Support Channels and Hangers: Galvanized steel; size and type to suit application and ceiling system flatness requirement specified.
- 2.03 ACOUSTICAL UNIT MATERIALS
 - A. Acoustical Panels: ASTM E1264, conforming to the following:
 - 1. Type I – Armstrong Fine Fissured, High CAC, High NRC, 2'x2'x7/8", Angled Tegular edge. Item No. 1756, Non-Rated, Class A, Color White.
 - B. Acoustical Panels: ASTM E1264, conforming to the following:
 - 2. Type 2 – Armstrong Fine Fissured, High CAC, High NRC, 2'x2'x5/8", Square edge. Item No. 1728BL, Non-Rated, Class A, Color Black. Located Production Storage 124.
- 2.04 ACCESSORIES
 - A. Touch-up Paint: Type and color to match acoustical and grid units.
 - B. Extra Material: Provide one unopened carton of each ceiling type to the owner.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that layout of hangers will not interfere with other work.

3.02 INSTALLATION - LAY-IN GRID SUSPENSION SYSTEM

- A. Install suspension system in accordance with ASTM C636 and manufacturer's instructions and as supplemented in this section.
- C. Install system capable of supporting imposed loads to a deflection of 1/360 maximum.
- D. Lay out system to a balanced grid design with edge units no less than 50 percent of acoustical unit size.
- E. Locate system on room axis according to reflected plan.
- F. Install after major above ceiling work is complete. Coordinate the location of hangers with other work.
- G. Supply hangers or inserts for installation to Section with instructions for their correct placement.
- H. Hang suspension system independent of walls, columns, ducts, pipes and conduit. Where carrying members are spliced, avoid visible displacement of face plane of adjacent members.
- I. Where ducts or other equipment prevent the regular spacing of hangers, reinforce the nearest affected hangers and related carrying channels to span the extra distance.
- J. Do not support components on main runners or cross runners if weight causes total dead load to exceed deflection capability. Support fixture loads by supplementary hangers located within 6 inches of each corner; or support components independently.
- K. Do not eccentrically load system, or produce rotation of runners.
- L. Install edge molding at intersection of ceiling and vertical surfaces, using longest practical lengths. Miter corners. Provide edge moldings at junctions with other interruptions.
- M. Form expansion joints as required or detailed. Form to accommodate plus or minus 1 inch movement. Maintain visual closure.
- N. Install light fixture boxes constructed of gypsum board above light fixtures in accordance with UL assembly requirements at fire rated ceiling assemblies at rated ceiling assemblies.
- O. Install support hangers at (4) four corners of recessed light fixtures.

3.03 INSTALLATION - ACOUSTICAL UNITS

- A. Install acoustical units in accordance with manufacturer's instructions.
- B. Fit acoustical units in place, free from damaged edges or other defects detrimental to appearance and function.
- C. Lay directional patterned units one way with pattern parallel to shortest room axis. Fit border trim neatly against abutting surfaces.
- D. Install units after above ceiling work is complete.
- E. Install acoustical units level, in uniform plane, and free from twist, warp and dents.
- F. Cut tile to fit irregular grid and perimeter edge trim. Field rabbet tile edge. Double cut and field paint exposed edges of tegular units.
- G. Where bullnose concrete block corners or round obstructions occur, provide preformed closers to match edge molding.
- H. Install hold-down clips to retain panels tight to grid system as required to meet ratings.
- I. At Glue-up units. Prep substrate as required/recommended by Manufacturer for installation over concrete substrate.

3.04 ERECTION TOLERANCES

- A. Maximum Variation from Flat and Level Surface: 1/8 inch in 10 feet.

END OF SECTION 09511

SECTION 09650

RESILIENT FLOORING

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Resilient base.

1.02 SUBMITTALS

- A. Product Data: Provide data on specified products, describing physical characteristics; sizes, patterns and colors available.
- B. Samples: Submit one sample, illustrating color and pattern for each floor material.
- C. Manufacturer's Installation Instructions: Indicate special procedures, perimeter conditions requiring special attention, and seaming recommendations.

1.03 REGULATORY REQUIREMENTS

- A. Conform to code for flame/smoke rating requirements in accordance with ASTM E84.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site under provisions of the General Requirements.
- B. Protect roll materials from damage.

1.05 ENVIRONMENTAL REQUIREMENTS

- A. Store materials for three days prior to installation in area of installation to achieve temperature stability.
- B. Maintain ambient temperature required by adhesive manufacturer three days prior to, during, and 24 hours after installation of materials.

1.06 MAINTENANCE DATA

- A. Maintenance Data: Include maintenance procedures, recommended maintenance materials, and suggested schedule for cleaning, stripping, and re-waxing.

1.07 EXTRA MATERIALS

- A. Provide 10 lineal feet of base material specified.
- B. Provide 60 sf of each type & color of flooring.

PART 2 PRODUCTS

2.01 MATERIALS – Luxury Vinyl Tile and Plank Flooring

- A. Vinyl Plank Flooring: ASTM F1700, J&J Flooring, Into the Woods, Retreat, Class 3, Type B, color to be selected from manufacturer's full line.
 - 1. Size: 9" wide x 48" maximum permissible length. Install staggered joints, random length.
 - 2. Thickness: 5 mm, Wear layer 20mil
 - 3. Adhesives: Install using manufacturer recommended adhesives for 15 year commercial warranty.
 - a. Adhesive shall be type recommended and approved by the manufacturer for installation over subfloor with moisture content 99% or higher.
- B. Vinyl tile Flooring: ASTM F1700, J&J Flooring – Legend Series (Glue-down) Class 3, Type B, color to be selected from manufacturer's full line. Multiple colors to be selected from manufacturer's full range.
 - 1. Size: 18" wide x 36" units. Install staggered joints, random length.
 - 2. Thickness: 5 mm, Wear layer .020mil
 - 3. Adhesives: Install using manufacturer recommended adhesives for 15 year commercial warranty.
 - a. Adhesive shall be type recommended and approved by the manufacturer for installation over subfloor with moisture content 998% or higher.

2.02 MATERIALS - BASE

- A. Base: FS SS-W-40. Rubber; coved; premolded external corners only where mitering and bending of base is not possible or where returns are less than 4" long.
 - 1. Height: 4 inch
 - 2. Thickness: 1/8 inch thick

3. Length: Roll. Strips are not acceptable. Maximum of 1 joint/seam on any wall.
 4. Manufacturers:
 - a) Roppe.
 - b) Johnsonite
 - c) Or as approved equal.
 5. Color to be selected from manufacturer full range
 - B. Base: Rubber; Non-cove at base of columns.
- 2.03 MATERIAL – Sprung Wood Floor with Vinyl Surface layer.
- A. Sprung Wood Floor, O'Mara Dance Studio Flooring. *** This floor is to be provided by Theatre Salina with installation by Theatre Salina. Reference appendix A, this section for O'Mara Product specifications. Reference Alternate #4 to include installation by General Contractor.**
 1. Floor to consist of 8-ply, 18mm engineered wood floor, installed over 3"x3"x3/4 inch shock absorbing pads quantity and location as directed by O'Mara Flooring.
 2. Finish surface to be .1" vinyl flooring, 6' wide
 3. Vented wood base installed at room perimeter providing 1/4" gap at room perimeter.
- 2.04 ACCESSORIES
- A. Subfloor Filler: White premix latex; type recommended by adhesive material manufacturer.
 - B. Primers and Adhesives: Waterproof; types recommended by flooring manufacturer.
 - C. Edge and Corner Strips: Schluter Aluminum or Stainless Steel Edge Strips and transition Strips/Ramps.
 1. Locate edge strips at top edge of tile base. Profile varies depending on material transitions; Depth to match thickness of abutting floor surfaces.
 2. Locate Transition strips at doorways where abutting materials of differing height. Profile Ramp; Depth to match thickness of tile. Length to be maximum possible length for smoothest transition.
 3. All doorway transitions, abutting material of differing height, Contractor shall field verify all new and existing conditions and provide the appropriate transition strip/ramp.

PART 3 EXECUTION

- 3.01 EXAMINATION
- A. Verify concrete floors are dry to a maximum moisture content of 7 percent, and exhibit negative alkalinity, carbonization, or dusting.
 - B. Verify floor and lower wall surfaces are free of substances that may impair adhesion of new adhesive and finish materials.
- 3.02 PREPARATION
- A. Remove sub-floor ridges and bumps. Fill minor or local low spots, cracks, joints, holes, and other defects with sub-floor filler to achieve smooth, flat, hard surface.
 - B. The contractor and installer shall review existing floor condition. Existing carpet backing, adhesive residue, and any and all materials shall be thoroughly removed, cleaned, and prepped prior to any floor installation.
 - C. The Contractor and installer shall include all cost for labor and material to prep, level, skim, grind, and any other measures to ensure level and stable subfloor prior to installing flooring to ensure that final floor installation is free of bumps, waves, and physical and/or aesthetic flaws in the installation.
 - B. Prohibit traffic until filler is cured.
 - C. Vacuum clean substrate.
 - D. Apply primer as recommended by manufacturer.
- 3.04 INSTALLATION - BASE
- A. Fit joints tight and vertical. Maintain minimum measurement of 18 inches between joints.
 - B. Miter internal corners. At external corners, use premolded units or "V" cut back of base strip to 2/3 of its thickness and fold. At exposed ends, use premolded units.
 - C. Install base on solid backing. Bond tight to wall and floor surfaces.
 - D. Scribe and fit to door frames and other interruptions.
- 3.05 INSTALLATION – TILE AND PLANK FLOORING
- A. Install in accordance with manufacturer's instructions.
 - B. Mix tile from container to ensure shade variations are consistent when tile is placed.

- C. Spread only enough adhesive to permit installation of materials before initial set.
 - D. Set flooring in place, press with heavy roller to attain full adhesion.
 - E. Lay flooring with joints and seams parallel to building lines to produce symmetrical tile pattern.
 - F. Install tile to staggered joint pattern. Allow minimum 1/2 or 1/3 full size tile width at room or area perimeter.
 - G. Terminate flooring at centerline of door openings where adjacent floor finish is dissimilar.
 - H. Install resilient edge strips at unprotected or exposed edges, and where flooring terminates.
 - I. Scribe flooring to walls, columns, cabinets, floor outlets, and other appurtenances to produce tight joints.
- 3.06 CLEANING
- A. Clean all work as described in the General Requirements.
 - B. Remove excess adhesive from floor, base, and wall surfaces without damage.
 - C. Clean, seal, and buff floors in accordance with manufacturer's instructions.
- 3.07 PROTECTION OF FINISHED WORK
- A. Protect finished Work.
 - B. Prohibit traffic on floor finish for 48 hours after installation.

END OF SECTION 09650

SECTION 09688

CARPET TILE – GLUE DOWN

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Carpet placed with glue down method.
 - 1. Walk-off carpet.
 - 2. Standard carpet tile.
- B. Accessories.

1.02 ALLOWANCES

- A. Cash Allowance: N/A.

1.03 SUBMITTALS

- A. Product Data: Provide data on specified products, describing physical and performance characteristics; sizes, patterns, colors available, and method of installation.
- B. Samples: Submit one sample illustrating color and pattern for each carpet material specified.
- C. Submit one sample of edge strip, material for each color specified.
- D. Manufacturer's Installation Instructions: Indicate special procedures, perimeter conditions requiring special attention.

1.04 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing specified carpet with minimum three years documented experience.
- B. Installer: Company specializing in installing carpet with minimum three years documented experience and approved by manufacturer.

1.05 ENVIRONMENTAL REQUIREMENTS

- A. Store materials for 3 days prior to installation in area of installation to achieve temperature stability.
- B. Maintain minimum 70 degrees F ambient temperature 1 day prior to, during and 24 hours after installation.

1.06 MAINTENANCE DATA

- A. Maintenance Data: Include maintenance procedures, recommended maintenance materials, and suggested schedule for cleaning.

1.07 EXTRA MATERIAL

- A. Provide 1 full, unopened carton. of carpeting of each type, color, and pattern specified.

PART 2 PRODUCTS

2.01 ACCEPTABLE MANUFACTURERS - CARPETING

- A. J & J Industries or Invision
- B. Patcraft
- C. Lees
- D. Shaw Contract Group
- E. Substitutions: Under provisions of the General Requirements.

2.02 CARPET PRODUCTS

- A. Walk-off Carpet – J&J Flooring – Incognito 7069, Color to be selected. Install with staggered joint, ashlar pattern.
- B. Standard Carpet – J&J Flooring – Twill Weave 7586, Color to be selected. Install with staggered joint, ashlar pattern.

2.03 ACCESSORIES

- A. Sub-Floor Filler: White premix latex; type recommended by adhesive material manufacturer.
- B. Adhesive: Compatible with carpet material and as Recommended by carpet manufacturer. Adhesive shall be type approved by the manufacturer for slab moisture content of 95% or higher.

- C. Edge and Corner Strips: Schluter Aluminum or Stainless Steel Edge Strips and transition Strips/Ramps.
 - 1. Locate edge strips at top edge of carpet base. Profile varies depending on material transitions; Depth to match thickness of abutting floor surfaces.
 - 2. Locate Transition strips at doorways where abutting materials of differing height. Profile Ramp; Depth to match thickness of tile. Length to be maximum possible length for smoothest transition.
 - 3. All doorway transitions, abutting material of differing height, Contractor shall field verify all new and existing conditions and provide the appropriate transition strip/ramp.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces are smooth and flat with maximum variation of 1/4 inch in 10 ft., and are ready to receive work.
- B. Concrete Slabs:
 - 1. Moisture Testing: Perform tests so that each test area does not exceed **1000 s.f.**, and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.
 - a. Anhydrous Calcium Chloride Test: ASTM F1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. (1.36 kg of water/92.9 sq. m) in 24 hours.
 - b. Relative Humidity Test: Using in situ probes, ASTM F2170. Proceed with installation only after substrates have a maximum **75** percent relative humidity level measurement.
 - c. Perform additional moisture tests recommended in writing by adhesive and carpet tile manufacturers. Proceed with installation only after substrates pass testing.

3.02 PREPARATION

- A. General: Comply with the Carpet and Rug Institute's CRI 104 and with carpet tile manufacturer's written installation instructions for preparing substrates indicated to receive carpet tile.
- B. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes and depressions 1/8 inch (3 mm) wide or wider, and protrusions more than 1/32 inch (0.8 mm) unless more stringent requirements are required by manufacturer's written instructions.
- C. Concrete Substrates: Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by adhesive and carpet tile manufacturers. Provide all additional floor prep as required to ensure full compliance with adhesives or other materials used in the installation of flooring materials.
- D. Secure any and all loose flooring in which new materials are being installed over. If existing flooring is removed, areas shall be patched with similar material and/or filled with floor patching material.
- E. Contractor shall be aware of age of existing finishes, types of products installed, and removal and floor prep requirement for those products. Use removal and prep procedures appropriate for the existing conditions.
- F. The contractor and installer shall review existing floor condition. Existing carpet backing, adhesive residue, and any and all materials shall be thoroughly removed, cleaned, and prepped prior to any floor installation.
- G. The Contractor and installer shall include all cost for labor and material to prep, level, skim, grind, and any other measures to ensure level and stable subfloor prior to installing flooring to ensure that final floor installation is free of bumps, waves, and physical and/or aesthetic flaws in the installation. All floor patch and leveling shall be included in the Contractor's base bid. Contractor shall review existing site conditions, understand the existing conditions and flooring assemblies, and make conservative assumption regarding the floor patch requirement for the entirety of the project.
- H. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.03 INSTALLATION

- A. Apply carpet and adhesive in accordance with manufacturer's instructions.
- B. Verify carpet match before cutting to ensure minimal variation between dye lots.

- C. Double cut carpet, to allow intended seam and pattern match. Make cuts straight, true, and unfrayed. Edge seam carpet at traffic areas.
 - D. Locate seams in area of least traffic.
 - E. Join seams by hot adhesive tape method. Form seams straight, not overlapped or peaked, and free of gaps.
 - F. Lay carpet tight and flat on subfloor, well fastened at edges, with a uniform appearance. Provide monolithic color, pattern, and texture match within any one area.
 - G. Do not change run of pile in any room where carpet is continuous through a wall opening into another room. Locate change of color or pattern between rooms under door centerline.
 - H. Cut and fit carpet around interruptions.
 - I. Bind cut edges where not concealed by edge strips.
 - J. Fit carpet tight to intersection with vertical surfaces without gaps.
 - K. Where wall bases are scheduled, cut carpet tight to walls. Fit carpet tight to vertical interruptions, leaving no gaps.
- 3.04 CLEANING
- A. Remove excess adhesive without damage, from floor, base, and wall surfaces.
 - B. Clean and vacuum carpet surfaces.

END OF SECTION 09688

SECTION 09900

PAINTING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Surface preparation and field application of paints and coatings.

1.2 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing the Products specified in this section with minimum three years documented experience.
- B. Applicator: Company specializing in performing the work of this section with minimum years documented experience and approved by manufacturer.

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect, and handle products to site.
- B. Deliver products to site in sealed and labeled containers; inspect to verify acceptability.
- C. Container label to include manufacturer's name, type of paint, brand name, lot number, brand code, coverage, surface preparation, drying time, cleanup requirements, color designation, and instructions for mixing and reducing.
- D. Store paint materials at minimum ambient temperature of 45 degrees F and a maximum of 90 degrees F, in ventilated area, and as required by manufacturer's instructions.

1.4 ENVIRONMENTAL REQUIREMENTS

- A. Do not apply materials when surface and ambient temperatures are outside the temperature ranges required by the paint product manufacturer.
- B. Do not apply exterior coatings during rain or snow, or when relative humidity is outside the humidity ranges required by the paint product manufacturer.
- C. Minimum Application Temperatures for Latex Paints: 45 degrees F for interiors; 50 degrees F for exterior; unless required otherwise by manufacturer's instructions.
- D. Minimum Application Temperature for Varnish and Finishes: 65 degrees F for interior or exterior, unless required otherwise by manufacturer's instructions.
- E. Provide lighting level of 80 foot candles measured mid-height at substrate surface.

1.5 EXTRA MATERIALS

- A. Provide one gallon of each color to owner.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturer - Paint, Transparent Finishes, Stain, Primer Sealers, and Block Filler by SHERWIN- WILLIAMS or as approved equal.

2.2 MATERIALS

- A. Coatings: Ready mixed, except field catalyzed coatings. Process pigments to a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating; good flow and brushing properties; capable of drying or curing free of streaks or sags.
- B. Accessory Materials: Linseed oil, shellac, turpentine, paint thinners, and other materials not specifically indicated but required to achieve the finishes specified, of commercial quality.
- C. Patching Materials: Latex filler.
- D. Fastener Head Cover Materials: Latex filler.

2.3 FINISHES

- A. Refer to schedule at end of section for surface finish schedule.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that surfaces and substrate conditions are ready to receive work as instructed by the product manufacturer.
- B. Examine surfaces scheduled to be finished prior to commencement of work. Report any condition that may potentially affect proper application.
- C. Test shop applied primer for compatibility with subsequent cover materials.

3.2 PREPARATION

- A. Remove or mask electrical plates, hardware, light fixture trim, escutcheons, and fittings prior to preparing surfaces or finishing.
- B. Correct defects and clean surfaces which affect work of this section. Remove existing coatings that exhibit loose surface defects.
- C. Seal with shellac and seal marks which may bleed through surface finishes.
- D. Impervious Surfaces: Remove mildew by scrubbing with solution of trisodium phosphate and bleach. Rinse with clean water and allow surface to dry.
- E. Aluminum Surfaces Scheduled for Paint Finish: Remove surface contamination by steam or high pressure water. Remove oxidation with acid etch and solvent washing. Apply etching primer immediately following cleaning.
- F. Asphalt, Creosote, or Bituminous Surfaces Scheduled for Paint Finish: Remove foreign particles to permit adhesion of finishing materials. Apply compatible sealer or primer.
- G. Insulated Coverings: Remove dirt, grease, and oil from canvas and cotton.
- H. Concrete Floors: Remove contamination, acid etch, and rinse floors with clear water. Verify required acid-alkali balance is achieved. Allow to dry.
- I. Copper Surfaces Scheduled for a Paint Finish: Remove contamination by steam, high pressure water, or solvent washing. Apply vinyl etch primer immediately following cleaning.
- J. Copper Surfaces Scheduled for a Natural Oxidized Finish: Remove contamination by applying oxidizing solution of copper acetate and ammonium chloride in acetic acid. Rub on repeatedly for required effect. Once attained, rinse surfaces with clear water and allow to dry.
- K. Gypsum Board Surfaces: Fill minor defects with filler compound. Spot prime defects after repair.
- L. Galvanized Surfaces: Remove surface contamination and oils and wash with solvent. Apply coat of etching primer.
- M. Concrete and Unit Masonry Surfaces Scheduled to Receive Paint Finish: Remove dirt, loose mortar, scale, salt or alkali powder, and other foreign matter. Remove oil and grease with a solution of trisodium phosphate; rinse well and allow to dry. Remove stains caused by weathering of corroding metals with a solution of sodium metasilicate after thoroughly wetting with water. Allow to dry.
- N. Plaster Surfaces: Fill hairline cracks, small holes, and imperfections with latex patching plaster. Make smooth and flush with adjacent surfaces. Wash and neutralize high alkali surfaces.
- O. Uncoated Steel and Iron Surfaces: Remove grease, mill scale, weld splatter, dirt, and rust. Where heavy coatings of scale are evident, remove by hand, power tool wire brushing or sandblasting; clean by washing with solvent. Apply a treatment of phosphoric acid solution, ensuring weld joints, bolts, and nuts are similarly cleaned. Spot prime paint after repairs.
- P. Shop Primed Steel Surfaces: Sand and scrape to remove loose primer and rust. Feather edges to make touch-up patches inconspicuous. Clean surfaces with solvent. Prime bare steel surfaces.
- Q. Interior Wood Items Scheduled to Receive Paint Finish: Wipe off dust and grit prior to priming. Seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after primer has dried; sand between coats.
- R. Interior Wood Items Scheduled to Receive Transparent Finish: Wipe off dust and grit prior to sealing, seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes and cracks after sealer has dried; sand lightly between coats.
- S. Exterior Wood Scheduled to Receive Paint Finish: Remove dust, grit, and foreign matter. Seal knots, pitch streaks, and sappy sections. Fill nail holes with tinted exterior caulking compound after prime coat has been applied.

- T. Exterior Wood Scheduled to Receive Transparent Finish: Remove dust, grit, and foreign matter; seal knots, pitch streaks, and sappy sections with sealer. Fill nail holes with tinted exterior caulking compound after sealer has been applied.
- U. Glue-Laminated Beams: Prior to finishing, wash surfaces with solvent, remove grease and dirt.
- V. Wood and Metal Doors Scheduled for Painting: Seal top and bottom edges with primer.

3.3 APPLICATION

- A. Apply products in accordance with manufacturer's instructions.
- B. Do not apply finishes to surfaces that are not dry.
- C. Apply each coat to uniform finish.
- D. Apply each coat of paint slightly darker than preceding coat unless otherwise approved.
- E. Sand wood and metal lightly between coats to achieve required finish.
- F. Vacuum clean surfaces free of loose particles. Use tack cloth just prior to applying next coat.
- G. Allow applied coat to dry before next coat is applied.
- H. Where clear finishes are required, tint fillers to match wood. Work fillers into the grain before set. Wipe excess from surface.
- I. Prime concealed surfaces of interior and exterior woodwork with primer paint.
- J. Prime concealed surfaces of interior woodwork scheduled to receive stain or varnish finish with gloss varnish reduced 25 percent with mineral spirits.

3.4 FINISHING MECHANICAL AND ELECTRICAL EQUIPMENT

- A. Remove unfinished louvers, grilles, covers, and access panels on mechanical and electrical components and paint separately.
- B. Prime and paint insulated and exposed pipes, conduit, boxes, insulated and exposed ducts, hangers, brackets, collars, and supports except where items are prefinished.
- C. Paint interior surfaces of air ducts, and convector and baseboard heating cabinets that are visible through grilles and louvers with one coat of flat black paint, to visible surfaces. Paint dampers exposed behind louvers, grilles, and convector and baseboard cabinets to match face panels.
- D. Paint exposed conduit and electrical equipment occurring in finished areas.
- E. Paint both sides and edges of plywood backboards for electrical and telephone equipment before installing equipment.
- F. Reinstall electrical cover plates, hardware, light fixture trim, escutcheons, and fittings removed prior to finishing.

3.5 CLEANING

- A. Collect waste material, which may constitute a fire hazard, place in closed metal containers, and remove daily from site.

3.6 SCHEDULE

The following are for exterior and interior surfaces, and are all products of Sherwin-Williams.

EXTERIOR SURFACES

1. WOOD

- A. Flat Finish/Latex Base
 - 1st Coat: Exterior Wood Primer, B42W8041
 - 2nd Coat: A-100 Exterior Latex Satin A82 Series
 - 3rd Coat: A-100 Exterior Latex Satin A82 Series

2. FERROUS METAL

- A. Painted (Gloss Finish/Alkyd Base)
 - 1st Coat: Pro Industrial Pro-Cryl Universal Metal Primer, B66-310
 - 2nd Coat: Waterbased Acrolon 100 Polyurethane Gloss, B65-700 Series
 - 3rd Coat: Waterbased Acrolon 100 Polyurethane Gloss, B65-700 Series

3. GALVANIZED and ALUMINUM METALS
 - A. Painted (Semi-Gloss Finish/Latex Base)
 - 1st Coat: Pro Industrial Pro-Cryl Universal Metal Primer, B66-310
 - 2nd Coat: Pro Industrial Zero VOC Acrylic Semi-Gloss, B66 Series.
 - 3rd Coat: Pro Industrial Zero VOC Acrylic Semi-Gloss, B66 Series.
4. CONCRETE MASONRY UNITS
 - A. Painted (Flat Finish/Latex Base)
 - 1st Coat: Loxon Block Surfacers, A24W200
 - 2nd Coat: A-100 Exterior Latex Satin, A82 Series
 - 3rd Coat: A-100 Exterior Latex Satin, A82 Series
5. CONCRETE/BRICK
 - A. Painted (Flat Finish/Latex Base)
 - 1st Coat: Loxon Concrete and Masonry Primer, A24W8300
 - 2nd Coat: DuraCraft Exterior Latex Satin, C7 Series
 - 3rd Coat: DuraCraft Exterior Latex Satin, C7 Series
6. TRAFFIC AND PARKING LINE MARKING
 - A. Painted (ProMar Traffic Marking Paint)
 - 1st Coat: B29W1-WHITE , Handicap Stalls - BLUE

INTERIOR SURFACES

1. WOOD AND PLYWOOD
 - A. Painted (Eg-Shel Finish/Alkyd Base)
 - 1st Coat: ProMar 200 Zero VOC Primer, B28W2600
 - 2nd Coat: Pro Industrial Zero VOC Acrylic Semi-Gloss, B66-650 Series
 - 3rd Coat: Pro Industrial Zero VOC Acrylic Semi-Gloss, B66-650 Series
 - B. Stained and Varnished (Clear Finish) Opened Grained Wood
 - 1st Coat: Wood Classics, A49W800 Series
 - 2nd Coat: Wood Classics WB Polyurethane A68
 - 3rd Coat: Wood Classics WB Polyurethane A68
2. CONCRETE BLOCK (CMU)
 - A. Painted (Semi-Gloss Finish/Epoxy Base)
 - 1st Coat: PrepRite® Block Filler, B25W25
 - 2nd Coat: ProMar 200 Zero VOC Interior Latex Eg-Shel, B20W2650
 - 3rd Coat: ProMar 200 Zero VOC Interior Latex Eg-Shel, B20W2650

** use semi-gloss where matching existing finish surfaces. At existing theatre, and backstage areas.*
3. GYPSUM WALLBOARD
 - A. Painted (Eg-Shel Finish/Latex Base) **Special Services Office Rooms Hallways**
 - 1st Coat: ProMar 200, Zero VOC Interior Latex Primer, B28W2600
 - 2nd Coat: ProMar 200 Zero VOC Interior Latex Eg-Shel, B20W2650
 - 3rd Coat: ProMar 200 Zero VOC Interior Latex Eg-Shel, B20W2650
 - B. Painted (Semi-gloss Finish/Epoxy Base) **Stair S1/S2 and associated hallway/landing areas.**
 - 1st Coat: ProMar 200, Zero VOC Interior Latex Primer, B28W2600
 - 2nd Coat: Pro Industrial Pre-Catalyzed Water Based Epoxy, Semi-Gloss, K46W051 VOC
 - 3rd Coat: Pro Industrial Pre-Catalyzed Water Based Epoxy, Semi-Gloss, K46W051 VOC
4. FERROUS METAL
 - A. Painted (Gloss Finish/Alkyd Base)
 - 1st Coat: Pro Industrial Pro-Cryl Universal Primer, B66-310
 - 2nd Coat: Pro Industrial Zero VOC Waterbased Epoxy Gloss, B73-300 Series

3rd Coat: Pro Industrial Zero VOC Waterbased Epoxy Gloss, B73-300 Series
NOTE: No brush/roller marks will be accepted.
Exposed Steel structure shall be ground smooth, free of bumps and shards prior to painting.

5. GALVANIZED METAL

- A. Painted (Semi-Gloss Finish/Alkyd Base)
1st Coat: Pro Industrial Pro-Cryl Universal Primer, B66-310 Series
2nd Coat: Pro Industrial Pre-Catalyzed Water-Based Epoxy Semi-Gloss, K46 Series
3rd Coat: Pro Industrial Pre-Catalyzed Water-Based Epoxy Semi-Gloss, K46 Series
NOTE: Doors and Frames to be carefully prepped. No brush/roller marks will be accepted.

6. CONCRETE FLOORS (SEALED)

- A. Painted (Clear Acrylic Floor Finish)
1st Coat: WR Meadows Tiah Acrylic Concrete Sealer, Solvent Based.
2nd Coat: WR Meadows Tiah Acrylic Concrete Sealer, Solvent Based. High Sheen.

7. ROOF DECK AND EXPOSED STRUCTURE, PIPE, CONDUIT, DUCT, ETC.

- A. DRYFALL
1st Coat: Prep and prime as required for material being painted.
2nd Coat: SW Pro Industiral Waterborne Acrylic Dryfall
3rd&4th Coat as needed for full and complete coverage of all components.

END OF SECTION 09900

SECTION 10160

SOLID COLOR REINFORCED COMPOSITE TOILET COMPARTMENTS

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Black-Core phenolic toilet compartments, and changing compartments. floor mounted, overhead braced. Increased privacy style, with no site lines and extended panels and doors.
- B. Urinal screens; wall mounted.

1.02 SUBMITTALS

- A. Shop Drawings: Indicate partition plan, elevation views, dimensions, details of wall, floor, and ceiling supports, door swings.
- B. Product Data: Provide data on panel construction, hardware, and accessories.
- C. Samples: Submit complete set of actual material samples illustrating panel finish, color, and sheen.
- D. Manufacturer's Installation Instructions: Indicate special procedures, perimeter conditions requiring special attention.

1.03 FIELD MEASUREMENTS

- A. Verify that field measurements are as indicated on shop drawings and instructed by the manufacturer.

PART 2 PRODUCTS

2.01 ACCEPTABLE MANUFACTURERS

- A. ASI Accurate Partitions; Color- *To be selected from Manufacturer's full range*
 - 1. Floor Mounted/Overhead Braced.
- B. Substitutions: Manufacturer providing equivalent level of privacy components and color range.

2.02 MATERIALS

- A. Sheet: Black Core Phenolic with laminate finish.
- B. Core Construction: Black-core phenolic
 - 1. 1/2" thick pilasters. 78" min.
 - 2. 1/2" thick doors. 76" min.
 - 3. 1/2" thick panels. 78" min.

2.03 ACCESSORIES

- A. Pilaster Shoe: Formed stainless steel with polished finish, 4 inches high,
- B. Attachments, Screws, and Bolts: Stainless steel No. 304 brushed finish; vandal resistant type, heavy duty full height extruded stainless steel mounting brackets.
- C. Hardware: Heavy Duty type 304 Brushed Stainless Steel
 - 1. Minimum of 3 surface mounted hinges with brushed finish, self-closing.
 - 2. ASI Alpaca Latch with occupancy indicator. Latch to provide for emergency access in emergency indicator. ADA compliant at handicap stalls.
 - 3. Door strike and keeper with rubber bumpers.
 - 4. Coat hook with rubber bumper.
 - 5. Door pull for out-swinging doors at handicap units.
 - 6. Provide sex-bolt thru-bolts for secure anchoring of dispensers and surface applied toilet accessories.
- C. Floor Anchored/Overhead Bracing
 - 1. Compartment supported by stainless steel pedestal, 4".
 - 2. Pedestal to be adjustable to compensate for uneven floors.
 - 3. Pedestals to be secured with 2 1/2" corrosion resistant screws.
- D. Headrail: Extruded Aluminum or 304 Stainless Steel, brushed or powder coated finish.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify correct spacing of and between plumbing fixtures.
- B. Verify correct location of built-in framing, anchorage, and bracing.

3.02 INSTALLATION

- A. Install partitions secure, rigid, plumb, and level in accordance with manufacturer's instructions.
- B. Maintain 3/8 to 1/2 inch space between wall and panels and between wall and end pilasters.
- C. Attach panel brackets securely to walls using anchor devices.
- D. Attach panels and pilasters to brackets with tamper proof through bolts and nuts. Locate head rail joints at pilaster center lines.
- E. Anchor urinal screen panels to walls with panel brackets.
- F. Provide adjustment for floor variations with screw jack through steel saddles integral with pilaster. Conceal floor fastenings with pilaster shoes.
- G. Support pilasters from built-in framing using two adjustable hanging studs providing vertical leveling. Conceal ceiling fastenings with pilaster shoe.
- H. Equip each door with two hinges, one door latch, one coat hook and bumper; outswinging door with pull.
- I. Install door strike and keeper with door bumper on each pilaster in alignment with door latch.
- J. Replace damaged or scratched materials with new materials.

3.03 ERECTION TOLERANCES

- A. Maximum Variation From True Position: 1/4 inch.
- B. Maximum Variation From Plumb: 1/8 inch.

3.04 ADJUSTING

- A. Adjust and align hardware to uniform clearance at vertical edge of doors, not exceeding 3/16 inch.
- B. Adjust hinges to position doors in open position when unlatched. Return outswinging doors to closed position. Confirm final adjustment and door location with owner in the field.
- D. Adjust adjacent components for consistency of line or plane.

END OF SECTION 10160

SECTION 10431

SIGNAGE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Exterior ADA Parking Sign.
 - 2. Allowance for additional interior signage
 - 3. Street Sign – By Owner, not in this contract.

1.02 ALLOWANCES

- A. Cash Allowance: This contractor shall install and furnish the following signage types, and shall allow the sum of **\$15,000.00** for the purchase and delivery of such signage.
 - 1. "Office and Room" Signage
 - 2. "Donor" wall mounted custom signage
 - 3. "Dedication Plaque" custom wall mounted signage.
- B. Allowance includes purchase, delivery, and installation. Any differential in the allowance listed and the original invoices from suppliers will be adjusted in the contract price.
- C. Allowance includes the items identified in paragraph A, above. Reference other specification sections for specific signage to be included in the Base Bid.

1.3 DEFINITIONS

- A. ADA-ABA Accessibility Guidelines: U.S. Architectural & Transportation Barriers Compliance Board's "Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines."

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show fabrication and installation details for signs.
 - 1. Show sign mounting heights, locations of supplementary supports to be provided by others, and accessories.
 - 2. Provide message list, typestyles, graphic elements, including tactile characters and Braille, and layout for each sign.
- C. Samples for Initial Selection: Manufacturer's color charts consisting of actual units or sections of units showing the full range of colors.
- D. Samples for Verification: For each of the following products and for the full range of color, texture, and sign material indicated, of sizes indicated:
 - 1. Plaque Casting: 6 inches (150 mm) square including border.
 - 2. Dimensional Characters: Full-size Samples of each type of dimensional character letter, number, and graphic element.
 - 3. Aluminum: For each form, finish, and color, on **6-inch- (150-mm-)** long sections of extrusions and squares of sheet at least **4 by 4 inches (100 by 100 mm)**.
- E. Sign Schedule: Use same designations indicated on Drawings.
- F. Maintenance Data: For signs to include in maintenance manuals.
- G. Warranty: Special warranty specified in this Section.

1.5 QUALITY ASSURANCE

- A. Fabricator Qualifications: Shop that employs skilled workers who custom-fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.
- B. Source Limitations for Signs: Obtain each sign type indicated from one source from a single manufacturer.
- C. Regulatory Requirements: Comply with applicable provisions in ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.

- 1.6 PROJECT CONDITIONS
- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit installation of signs in exterior locations to be performed according to manufacturers' written instructions and warranty requirements.
 - B. Field Measurements: Verify recess openings by field measurements before fabrication and indicate measurements on Shop Drawings.
- 1.7 COORDINATION
- A. Coordinate placement of anchorage devices with templates for installing signs.
- 1.8 WARRANTY
- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Deterioration of metal and polymer finishes beyond normal weathering.
 - b. Deterioration of embedded graphic image colors and sign lamination.
 - 2. Warranty Period: **Five** years from date of Substantial Completion.

PART 2 - PRODUCTS

- 2.1 MATERIALS
- A. Aluminum Sheet and Plate: **ASTM B 209 (ASTM B 209M)**, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated, and with at least the strength and durability properties of Alloy 5005-H32.
 - B. Rooms, Offices & Restroom - Tactile and Braille Signage: **Per Allowance**, Manufacturer's standard process for producing text and symbols complying with ADA-ABA Accessibility Guidelines and with ICC/ANSI A117.1. Text shall be accompanied by Grade 2 Braille. Produce precisely formed characters with square-cut edges free from burrs and cut marks; Braille dots with domed or rounded shape.
 - 1. Panel Material: **Opaque and translucent acrylic sheet.**
 - 2. Raised-Copy Thickness: Not less than **1/32 inch (0.8 mm)**.
 - 3. Changeable sign inserts.
- 2.2 ACCESSORIES
- A. Anchors and Inserts: Provide nonferrous-metal or hot-dip galvanized anchors and inserts for exterior installations and elsewhere as required for corrosion resistance. Use toothed steel or lead expansion-bolt devices for drilled-in-place anchors. Furnish inserts, as required, to be set into concrete or masonry work.
- 2.3 FABRICATION
- A. General: Provide manufacturer's standard signs of configurations indicated.
 - 1. Welded Connections: Comply with AWS standards for recommended practices in shop welding. Provide welds behind finished surfaces without distortion or discoloration of exposed side. Clean exposed welded surfaces of welding flux and dress exposed and contact surfaces.
 - 2. Mill joints to tight, hairline fit. Form joints exposed to weather to exclude water penetration.
 - 3. Preassemble signs in the shop to greatest extent possible. Disassemble signs only as necessary for shipping and handling limitations. Clearly mark units for reassembly and installation, in location not exposed to view after final assembly.
 - 4. Conceal fasteners if possible; otherwise, locate fasteners where they will be inconspicuous.
- 2.4 FINISHES, GENERAL
- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
 - B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
 - C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.5 ACRYLIC SHEET FINISHES

- A. Colored Coatings for Acrylic Sheet: For copy **and background** colors, provide colored coatings, including inks, dyes, and paints, that are recommended by acrylic manufacturers for optimum adherence to acrylic surface and that are UV and water resistant for **three** years for application intended.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of work.
- B. Verify that items, **including anchor inserts** are sized and located to accommodate signs.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Locate signs and accessories where indicated, using mounting methods of types described and complying with manufacturer's written instructions.
 - 1. Install signs level, plumb, and at heights indicated, with sign surfaces free of distortion and other defects in appearance.
 - 2. Interior Wall Signs: Install signs on walls adjacent to latch side of door where applicable. Where not indicated or possible, such as double doors, install signs on nearest adjacent walls. Locate to allow approach within **3 inches (75 mm)** of sign without encountering protruding objects or standing within swing of door.

3.3 CLEANING AND PROTECTION

- A. After installation, clean soiled sign surfaces according to manufacturer's written instructions. Protect signs from damage until acceptance by Owner.

END OF SECTION 10431

SECTION 10522

FIRE EXTINGUISHERS, CABINETS, AND ACCESSORIES

PART 1 GENERAL

- 1.1 SECTION INCLUDES
 - A. Fire extinguishers. (4 total), 2 Fire Rated Cabinets; 2 Fire Extinguishers w/bracket install.
- 1.2 SUBMITTALS
 - A. Product Data: Provide extinguisher operational features, color and finish, and anchorage details.
 - B. Manufacturer's Installation Instructions: Indicate special criteria and wall opening coordination requirements.
- 1.3 ENVIRONMENTAL REQUIREMENTS
 - A. Do not install extinguishers when ambient temperature may cause freezing of extinguisher ingredients.

PART 2 PRODUCTS

- 2.1 MANUFACTURERS
 - A. LARSEN'S - Architectural Series 2409-R6, Vertical Duo Door, Stainless Steel, Baked Enamel interior finish.
 - B. Substitutions: Under provisions of the General Requirements.
- 2.2 EXTINGUISHERS
 - A. Dry Chemical Type: Larsen's MP series MP10, Cast steel tank, with pressure gage. (4 total). (2) Cabinet install, (2) Bracket install.
- 2.3 CABINETS
 - A. Interior Metal: Formed sheet steel, baked enamel box.
 - B. Configuration: Semi-recessed type, exterior nominal dimensions of 27 1/2 inch high x 13 inch wide x 5 inch deep.
 - C. Trim Type: Returned to wall surface, with 2 1/2 inch projection.
 - D. Exterior Door and Trim: Stainless Steel., reinforced for flatness and rigidity; latch with vertical glass.
 - E. Door Glazing: Glass, clear, 1/8 inch thick tempered.
 - F. Cabinet Mounting Hardware: Appropriate to cabinet.
- 2.4 FABRICATION
 - A. Form cabinet enclosure with right angle inside corners and seams. Formed trim and door stiles.
 - B. Pre-drill for anchors.
 - C. Hinge doors for 180 degree opening with continuous piano hinge. Provide roller type catch.
 - D. Weld, fill, and grind components smooth.
 - E. Glaze doors with resilient channel gasket glazing.
 - F. Provide **2 (2) Fire Rated Cabinets** as indicated on Code Footprint plan.

PART 3 EXECUTION

- 3.1 EXAMINATION
 - A. Verify rough openings for cabinet are correctly sized and located.
- 3.2 INSTALLATION
 - A. Install in accordance with manufacturer's instructions.
 - B. Install cabinets plumb and level in wall openings, 24 inches from finished floor to inside bottom of cabinet.
 - C. Secure rigidly in place.
 - D. Place extinguishers in cabinets.
 - E. Verify exact location with Architect.

END OF SECTION 10522

SECTION 10800

TOILET AND BATH ACCESSORIES

PART 1 GENERAL

- 1.01 SECTION INCLUDES
- A. Toilet and washroom accessories.
 - B. Grab bars.
 - C. Attachment hardware.

PART 2 PRODUCTS

- 2.01 MANUFACTURERS
- A. BOBRICK WASHROOM EQUIPMENT INC, or BRADLEY CORPORATION.
 - B. Accessory manufacturers as scheduled. BOBRICK and BRADLEY are approved manufacturers provided product is equivalent to scheduled item.
 - C. Substitutions: Under provisions of the General Requirements.
- 2.02 FABRICATION
- A. Weld and grind joints of fabricated components, smooth.
 - B. Form exposed surfaces from single sheet of stock, free of joints. Form surfaces flat without distortion. Maintain surfaces without scratches or dents.
 - C. Fabricate grab bars of tubing, free of visible joints, return to wall with end attachment flanges. Form bar with 1 1/2 inches clear of wall surface. Knurl grip surfaces.
 - D. Shop assemble components and package complete with anchors and fittings.
 - E. Provide steel anchor plates, adapters, and anchor components for installation.
- 2.03 FINISHES
- A. Galvanizing: ASTM A123 to 1.25 oz./sq. yd. Galvanize ferrous metal and fastening devices.
 - B. Chrome/Nickel Plating: ASTM B456, satin finish.
 - C. Stainless Steel: No. 4 satin luster finish.
 - D. Back paint components where contact is made with building finishes to prevent electrolysis.

PART 3 EXECUTION

- 3.01 EXAMINATION
- A. Verify that site conditions are ready to receive work and dimensions are as indicated on shop drawings and instructed by the manufacturer.
 - B. Verify exact location of accessories for installation. Coordinate with ADA requirements.
- 3.02 PREPARATION
- A. Deliver inserts and rough-in frames to site for timely installation. Provide templates and rough-in measurements as required.
- 3.03 INSTALLATION
- A. Install accessories in accordance with manufacturer's instructions and Americans with Disabilities Act. Also reference ANSI A117.1.
 - B. Install plumb and level, securely and rigidly anchored to substrate.
- 3.04 SCHEDULE
- A. Wall Mounted Soap Dispenser, SD: Provided by owner, installed by GC. (2 total)
 - B. Grab Bars, GB: Mount top of bars at 34-36" A.F.F Install 2-piece Grab Bar set at all Handicap toilet stalls. BOBRICK B-6806x36 & B-6806x42, (2-sets total).
 - C. Toilet Tissue Dispensers, TP: Surface mounted, double roll Bobrick 2740. Typical at all water closets (4 total).
 - D. Paper Towel Dispenser: PTD. Provided by Owner, installed by GC (2 total).
 - E. Waste Receptacle: Bobrick B-43644 Recessed Waste Receptacle with Liner Mate. Contura Series. (2 total)
 - F. **Mirrors, M: Install bottom on top of vanity backsplash. Mirrors to be provided by Glass contractor, Reference Section 08900.**

G. Sanitary Napkin Disposal, SND: Bobrick, B-270 Surface Mounted Disposal, Contour Series. (3 Total).

END OF SECTION 10800

SECTION 10850

BUILDING SPECIALTIES

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Building specialties shall be furnished and installed as shown and herein specified. Installation shall be in accordance with the respective manufacturer's instructions. Certain manufacturer's products have been selected as a basic standard, and reference to these products has been made. Other manufacturers' products of equal capacities and design characteristics may be used, if approved by the Architect prior to the Bidding. The Contractor shall submit for approval shop drawings or standard cuts and illustrations or a combination thereof showing all items he proposes to use.

1.02 FABRIC WRAPPED ACOUSTICAL WALL PANELS

- A. Manufacturer: Basis of Design - Traditional Series Acoustical Panels, Fabric Covered.
- B. Substitutions as Approved Equal.
- C. Located at **Dance Studio 1, Dance Studio 2, and Chorus Room 113** Size as indicated on drawings. Panels to be 2" minimum thickness, 6 lb. density panel with edges factory wrapped. 45 degree beveled edge typical at all panel edges.
- D. Provide all hardware and brackets for Z-Clip fastening to walls.
- E. Product to be Class A rated, Flame/Smoke Spread 25/50.
- F. Color to be selected from Gulliford of Maine 2100 Series full range. 50 Colors to choose from, minimum. Up to 6 colors will be selected.

1.03 CAST METAL LETTERS

- A. Manufacturer: Gemimi Incorporated, or equal. 1/4 " thick cast metal letters with baked enamel finish (full range of color selection) and 6" metal threaded posts on back side of lettering for mounting into fluted masonry. Letters may be custom laser cut and powder coated as optional system. This signage is NOT to be included in the Signage Allowance per Section 01019. All costs associated with installation of this signage shall be included in the Contractor's **Base Bid**.

- a. Custom 48" tall letters to read: "*Inspire*" Font to be Freestyle Script Bold as required for fit.. Offset 1" pin-mounted.

1.04 FIBERGLASS REINFORCED PLASTIC PANELING

- A. Product - Class A – Minimum .090 thickness panel. Include Manufacturer's vinyl molding at all corners, transitions, joints, and tops, bottoms, etc.
- B. Product shall be applied using manufacturer recommended adhesive and manufacturer recommended mechanical fasteners. Pre-drill rivet holes and silicone caulk prior to riveting.
- C. Located at mop sinks, extending from corner to 2' beyond outside edge of sink, located at (3) sides in room 119.

1.05 EXPANSION JOINT COVERS

- A. Interior Walls and Ceiling: Inpro, Jointmaster System. Surface mount concealed fastener cover, 1" joint width. Clear Anodized Aluminum finish at walls. White Finish at ceiling. Located at wall transitions between existing building and new Addition. Locate at Hallway 124 and Hallway 006 walls and ceiling. Model 811-A07-025. Provide similar system at corners.
- B. Exterior Walls Inpro Jointmaster System . Flush Mount concealed fastener cover. 2" joint width. Finish color to match CMU/Concrete. . Provide vapor barrier and integral backseal. Model 615-A09-050.
- C. Interior Floors: Inpro, Jointmaster System. Surface Mount Floor/Floor condition for 1/8" flooring. Model 103-A01-050. 1" joint width. Located at floor slab transition at new addition. Located at door transitions between new addition and existing building.

1.06 PENETRATION FIRESTOPPING DEVICES

- A. Install U.L. listed firestopping systems at pipe penetrations through rated wall and floor assemblies.
- B. Firestopping devices shall be appropriate for the condition being firestopped. Systems shall include but are not limited to firecaulk, pipe collars, pillows, wrap strips, etc.
- C. Contractor shall submit proposed system for approval to Authority Having Jurisdiction.
- D. Manufacturers: 3M fire Protection Products; Hilti; of equivalent systems as approved by AHJ.

- 1.07 MUSIC LIBRARY STORAGE SHELVING
- A. Manufacturer/Basis of Design: Wenger Corporation. Model 173G700. Seven (7) Shelf system
 - B. Substitutions as Approved Equal.
 - C. Boltless assembly, welded footplates.
 - D. Size 16"W x 44" (80"pulled out)D x 92.5"H. 11 drawers, Reference Drawings for unit layout (3 units)
 - E. 16ga. Tubular Steel Frame; Front, Side, and Rear panels, composite wood with plastic laminate finish.
 - F. Casters as required to move units.
 - G. Assembly by contractor.
- 1.08 WALL PROTECTION SYSTEMS
- A. Install C/S ACROVYN, surface mounted corner guards, crash rails, handrails and wall panels.
 - B. BALCO or IPC corner guard will be considered equal.
 - C. Colors as selected by Architect from manufacturer's full range.
 - D. Corner Guards – Located as indicated on plan drawings.
 - 1. Height: 92 inches tall (starting from top of base).
 - 2. Use SSM-20 at gypsum board corners where indicated. (16 total)
- 1.09 LOCKERS
- A. Three tier heavy duty metal Corridor Style Lockers, 12"x24"x72" meeting the following requirements:
 - 1. Three tier configurations. Reference drawings for locations and quantities.
 - 2. 16ga. steel body, 18ga. backs; One piece 16ga. formed and ventilated doors w/ 5-knuckle hinges
 - 3. Recessed Handles with integral padlock hasp.
 - 4. Numbering plates
 - 5. Powder coat paint finish, color to be selected from full range (minimum 10 colors to choose from).
 - 6. Angled top.
 - 7. "Z" base for full enclosed bottom edge.
 - B. Reference drawings for location and configuration.
 - 1. Hallway 114 (14 units/42 lockers); Dressing Room 109 (7 units/21 lockers); Dressing Room 111 (7 units/21 lockers)
 - C. Product equivalent to Lyon Heavy Duty Vented Locker system.
- 1.10 ROOF LADDER
- A. Manufacturer – Alaco Aluminum Wall Ladder. OSHA Compliant.
 - 1. Mill finish Aluminum
 - 2. Handrails to project above highest adjacent roof.
 - 3. Wall mount to wall structure. Provide blocking continuously at cold form framing and behind metal wall panel for secure attachment.
 - 4. Wall anchors to be gasketed/sealed for weather tight installation.
 - 5. Approximate height from roof to roof is 6'. F.V. Final roof conditions.
 - 6. Hardware: Provide all hardware and components for complete mounting and OSHA compliant ladder system.
- 1.11 WALL AND CEILING ACCESS PANELS
- A. Flush Mounted, Non-Rated Wall Access Panels. For installation in a drywall and metal stud assembly. No exposed fasteners. Provide wallboard bead for flush to ceiling installation
 - B. Product: JL Industries Model AT Gasketed Access Panel or equal. Size 16"x16".
 - C. Specification Requirements.
 - Frame - 16 ga. steel. Prime for field painting.
 - Door - 16 ga. steel Prime for field painting.
 - Finish - Galvanized. Product shall be field painted at exposed areas.
 - Hinge - Continuous type.
 - Latch - Flush Compression Latch; Screwdriver operated cam lock.
 - D. Locate as identified in field. For bidding purposes, provide 4 access panels.
- 1.12 VINYL WALL SIGNAGE
- A. Vinyl wall film letters for permanent wall mounting.
 - B. Solid color film with 12" high letters, Font and color to be selected by Owner/ Architect.
 - C. Individual letters to read STUDIO 1 (2 locations); STUDIO 2 (1 location).

1.13 PRE-FABRICATED STEEL FRAMING SUPPORTS

- A. Unistrut steel channel system. Series P1000
- B. 1 5/8"x1 5/8" 12ga. steel channels.
- C. Manufacturers standard pre-punched holes.
- D. Support with 1/2" Threaded steel rod, supported from structural joists above.
- E. Provided all manufacturer supplied hardware, including nuts, spring nuts, washers, clips, brackets, etc as required for a complete installation of the system
- F. All material to be field painted.

END OF SECTION 10850

SECTION 210500 - COMMON WORK RESULTS FOR FIRE SUPPRESSION

PART 1 - GENERAL

1.1 SUMMARY

- A. The Work of this Section includes:
 - 1. Sleeves without waterstop.
 - 2. Grout.
 - 3. Silicone sealants.
 - 4. Escutcheons.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. For each type of product, excluding motors which are included in Part 1 of the fire-suppression equipment Sections.
 - a. Include construction details, material descriptions, and dimensions of components.
 - b. Include operating characteristics and furnished accessories.

1.3 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 SLEEVES AND SLEEVE SEALS

- A. Sleeves without Waterstop:
 - 1. Cast-Iron Pipe Sleeves: Cast or fabricated of cast or ductile iron, with plain ends.
 - 2. Steel Pipe Sleeves: ASTM A53/A53M, Type E, Grade B, Schedule 40, hot-dip galvanized, with plain ends.
 - 3. Steel Sheet Sleeves: ASTM A653/A653M, 24 gauge minimum thickness; hot-dip galvanized, round tube closed with welded longitudinal joint.
 - 4. PVC Pipe Sleeves: ASTM D1785, Schedule 40.
 - 5. Molded-PVC Sleeves: With nailing flange.
 - 6. Molded-PE or -PP Sleeves: Removable, tapered-cup shaped, and smooth outer surface with nailing flange.
- B. Grout:
 - 1. Description: Nonshrink, for interior and exterior sealing openings in non-fire-rated walls or floors.
 - 2. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
 - 3. Design Mix: 5000 psi, 28-day compressive strength.
 - 4. Packaging: Premixed and factory packaged.

2.2 ESCUTCHEONS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. BrassCraft Manufacturing Co.; a Masco company
 - 2. Dearborn Brass
 - 3. Jones Stephens Corp.
 - 4. Keeney Manufacturing Company (The)
 - 5. Mid-America Fittings, LLC; A Midland Industries Company
 - 6. ProFlo; a Ferguson Enterprises, Inc. brand
- B. Escutcheon Types:
 - 1. One-Piece, Steel Type: With polished, chrome-plated finish and setscrew fastener.
 - 2. One-Piece, Stainless Steel Type: With polished stainless steel finish.
 - 3. One-Piece, Cast-Brass Type: With polished, chrome-plated finish and setscrew fastener.

4. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped steel with polished, chrome-plated finish and spring-clip fasteners.
 5. One-Piece, Stamped-Steel Type: With polished, chrome-plated finish and spring-clip fasteners.
 6. Split-Plate, Stamped-Steel Type: With polished, chrome-plated finish; concealed and exposed-rivet hinge; and spring-clip fasteners.
- C. Floor Plates:
1. Split Floor Plates: Steel with concealed hinge.

PART 3 - EXECUTION

3.1 INSTALLATION OF PIPE LOOPS AND SWING CONNECTIONS

- A. Install pipe loops and offsets in accordance with NFPA 13 requirements for expansion and contraction compensation.

3.2 INSTALLATION OF SLEEVES, GENERAL

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
 2. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.
 3. Using grout or silicone sealant, seal space outside of sleeves in floors/slabs/walls without sleeve-seal system. Select to maintain fire-resistance of floor/slab/wall.
- C. Install sleeves for pipes passing through interior partitions.
1. Cut sleeves to length for mounting flush with both surfaces.
 2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
 3. Seal annular space between sleeve and piping or piping insulation; use joint sealants that joint sealant manufacturer's literature indicates is appropriate for size, depth, and location of joint.
- D. Fire-Resistance-Rated Penetrations, Horizontal Assembly Penetrations, and Smoke Barrier Penetrations: Maintain indicated fire or smoke rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with fire- and smoke-stop materials. Comply with requirements for firestopping and fill materials specified in Division 7.

3.3 INSTALLATION OF ESCUTCHEONS

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.

3.4 FIELD QUALITY CONTROL

- A. Sleeves and Sleeve Seals:
1. Perform the following tests and inspections:
 - a. Leak Test: After allowing for a full cure, test sleeves and sleeve seals for leaks. Repair leaks and retest until no leaks exist.
 - b. Sleeves and sleeve seals will be considered defective if they do not pass tests and inspections.
 2. Prepare test and inspection reports.
- B. Escutcheons:
1. Using new materials, replace broken and damaged escutcheons and floor plates.

3.5 SLEEVES APPLICATION

- A. Use sleeves and sleeve seals for the following piping-penetration applications:
 - 1. Exterior Concrete Walls above and below Grade:
 - a. Sleeves with waterstops.
 - 1) Select sleeve size to allow for 1-inch annular clear space between piping and sleeve for installing sleeve-seal system.
 - 2. Concrete Slabs-on-Grade:
 - a. Sleeves with waterstops.
 - 1) Select sleeve size to allow for 1-inch annular clear space between piping and sleeve for installing sleeve-seal system.
 - 3. Concrete Slabs above Grade:
 - a. Sleeves with waterstops.
 - 4. Interior Walls and Partitions:
 - a. Sleeves without waterstops.

3.6 ESCUTCHEONS APPLICATION

- A. Escutcheons for New Piping and Relocated Existing Piping:
 - 1. Piping with Fitting or Sleeve Protruding from Wall: One piece, deep pattern.
 - 2. Chrome-Plated Piping: One piece, steel or split plate steel with polished, chrome-plated finish.
 - 3. Insulated Piping:
 - a. One piece, steel with polished, chrome-plated finish.
 - 4. Bare Piping at Wall and Floor Penetrations in Finished Spaces:
 - a. One piece, steel with polished, chrome-plated finish.
 - 5. Bare Piping at Ceiling Penetrations in Finished Spaces:
 - a. One piece, steel with polished, chrome-plated finish.
 - 6. Bare Piping in Unfinished Service Spaces:
 - a. One piece, stamped steel or split plate, stamped steel with concealed hinge with polished, chrome-plated finish.
 - 7. Bare Piping in Equipment Rooms:
 - a. One piece, stamped steel or split plate, stamped steel with concealed hinge with polished, chrome-plated finish.
- B. Install floor plates for piping penetrations of equipment room floors.
- C. Install floor plates with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
 - 1. New Piping and Relocated Existing Piping: One piece, floor plate.
 - 2. Existing Piping: Split floor plate.

END OF SECTION 210500

This page intentionally left blank.

SECTION 210523 - GENERAL-DUTY VALVES FOR WATER-BASED FIRE-SUPPRESSION PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Trim and drain valves.

1.2 DEFINITIONS

- A. NRS: Nonrising stem.
- B. OS&Y: Outside screw and yoke.
- C. SBR: Styrene-butadiene rubber.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of valve.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads, flange faces, and weld ends.
 - 3. Set valves open to minimize exposure of functional surfaces.
- B. Use the following precautions during storage:
 - 1. Maintain valve end protection.
 - 2. Store valves indoors and maintain at higher-than-ambient dew point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.
- C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use operating handles or stems as lifting or rigging points.
- D. Protect flanges and specialties from moisture and dirt.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain each type of valve from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. UL Listed: Valves shall be listed in UL's "Online Certifications Directory" under the headings listed below and shall bear UL mark:
 - 1. Fire Main Equipment: HAMV - Main Level.
 - a. Indicator Posts, Gate Valve: HCBZ - Level 1.
 - b. Ball Valves, System Control: HLUG - Level 3.
 - c. Butterfly Valves: HLXS - Level 3.
 - d. Check Valves: HMER - Level 3.
 - e. Gate Valves: HMRZ - Level 3.
 - 2. Sprinkler System and Water Spray System Devices: VDGT - Main Level.
 - a. Valves, Trim and Drain: VQGU - Level 1.
- B. ASME Compliance:
 - 1. ASME B1.20.1 for threads for threaded-end valves.
 - 2. ASME B16.1 for flanges on iron valves.
 - 3. ASME B31.9 for building services piping valves.
- C. AWWA Compliance: Comply with AWWA C606 for grooved-end connections.

- D. NFPA Compliance for Valves:
 - 1. Comply with NFPA 13, NFPA 14, NFPA 20, and NFPA 24.
- E. Valve Pressure Ratings: Not less than the minimum pressure rating indicated or higher, as required by system pressures.
- F. Valve Sizes: Same as upstream piping unless otherwise indicated.
- G. Valve Actuator Types:
 - 1. Worm-gear actuator with handwheel for quarter-turn valves, except for trim and drain valves.
 - 2. Handwheel: For other than quarter-turn trim and drain valves.
 - 3. Handlever: For quarter-turn trim and drain valves NPS 2 and smaller.

2.3 TRIM AND DRAIN VALVES

- A. Ball Valves:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - b. Croker; a Division of Morris Group International
 - c. Fire Protection Products Inc (FPPI); a brand of Anvil International and Smith-Cooper International
 - d. Flowserve Corporation
 - e. Jomar Valve
 - f. KITZ Corporation
 - g. Metso Automation USA Inc.
 - h. Milwaukee Valve Company
 - i. NIBCO INC.
 - j. Potter Roemer LLC; a Division of Morris Group International
 - k. Red-White Valve Corp.
 - l. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America
 - m. Victaulic Company
 - n. WATTS; A Watts Water Technologies Company
 - o. Zurn Industries, LLC
 - 2. Description:
 - a. Pressure Rating: 175 psig.
 - b. Body Design: Two piece.
 - c. Body Material: Forged brass or bronze.
 - d. Port size: Full or standard.
 - e. Seats: PTFE.
 - f. Stem: Bronze or stainless steel.
 - g. Ball: Chrome-plated brass.
 - h. Actuator: Handlever.
 - i. End Connections for Valves NPS 1 through NPS 2-1/2: Threaded ends.
 - j. End Connections for Valves NPS 1-1/4 and NPS 2-1/2: Grooved ends.
- B. Angle Valves:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Fire Protection Products Inc (FPPI); a brand of Anvil International and Smith-Cooper International
 - b. NIBCO INC.
 - c. United Brass Works, Inc
 - 2. Description:
 - a. Pressure Rating: 175 psig.
 - b. Body Material: Brass or bronze.
 - c. Ends: Threaded.
 - d. Stem: Bronze.

- e. Disc: Bronze.
 - f. Packing: Asbestos free.
 - g. Handwheel: Malleable iron, bronze, or aluminum.
- C. Globe Valves:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. NIBCO INC.
 - b. United Brass Works, Inc
 - 2. Description:
 - a. Pressure Rating: 175 psig.
 - b. Body Material: Bronze with integral seat and screw-in bonnet.
 - c. Ends: Threaded.
 - d. Stem: Bronze.
 - e. Disc Holder and Nut: Bronze.
 - f. Disc Seat: Nitrile.
 - g. Packing: Asbestos free.
 - h. Handwheel: Malleable iron, bronze, or aluminum.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.
- E. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION, GENERAL

- A. Comply with requirements in the following Sections for specific valve-installation requirements and applications:
 - 1. Section 211000 "Water-Based Fire-Suppression Systems" for application of valves in fire-suppression standpipes; wet-pipe, fire-suppression sprinkler systems; and dry-pipe, fire-suppression sprinkler systems.
- B. Install valves having threaded connections with unions at each piece of equipment arranged to allow easy access, service, maintenance, and equipment removal without system shutdown. Provide separate support where necessary.
- C. Install valves in horizontal piping with stem at or above the pipe center.
- D. Install valves in position to allow full stem movement.
- E. Install valve tags. Comply with requirements in Section 210553 "Identification for Fire-Suppression Piping and Equipment" for valve tags and schedules and signs on surfaces concealing valves; and the NFPA standard applying to the piping system in which valves are installed. Install permanent identification signs indicating the portion of system controlled by each valve.

END OF SECTION 210523

This page intentionally left blank.

SECTION 210529 - HANGERS AND SUPPORTS FOR FIRE-SUPPRESSION PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Pipe hangers and supports for fire-suppression piping - metal.
 - 2. Pipe hangers for fire-suppression piping - metal, trapeze type.
 - 3. Fastener systems.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. For each type of product.
- B. Shop Drawings: Signed and sealed by a qualified professional engineer. Show fabrication and installation details and include calculations for the following:
 - 1. Trapeze pipe hangers.
- C. Delegated Design Submittals: For trapeze hangers indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
 - 1. Detail fabrication and assembly of trapeze hangers.
 - 2. Include design calculations for designing trapeze hangers.

1.3 INFORMATIONAL SUBMITTALS

- A. Welding certificates.

1.4 QUALITY ASSURANCE

- A. Structural-Steel Welding Qualifications: Qualify procedures and personnel in accordance with AWS D1.1/D1.1M.
- B. Pipe Welding Qualifications: Qualify procedures and operators in accordance with 2021 ASME Boiler and Pressure Vessel Code, Section IX.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer to design trapeze pipe hangers and equipment supports.
- B. Structural Performance: Hangers and supports for fire-suppression piping and equipment are to withstand the effects of gravity loads and stresses within limits and under conditions indicated in accordance with ASCE/SEI 7.
 - 1. Design supports for multiple pipes, including pipe stands capable of supporting combined weight of supported systems, system contents, and test water.
- C. NFPA Compliance: Comply with NFPA 13.
- D. UL Compliance: Comply with UL 203.

2.2 PIPE HANGERS AND SUPPORTS FOR FIRE-SUPPRESSION PIPING - METAL

- A. Pipe Hangers and Supports for Fire-Suppression Piping - Carbon Steel:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Anvil; an ASC Engineered Solution
 - b. Cooper B-line; brand of Eaton, Electrical Sector
 - c. FNW; Ferguson Enterprises, Inc.

2. Description: Factory-fabricated components, NFPA approved, UL listed, or FM Global approved for fire-suppression piping support.
3. Galvanized Metallic Coatings: Pregalvanized or hot-dip galvanized.
4. Hanger Rods: Continuous-thread rod, nuts, and washer made of stainless steel.

B. Pipe/Tube Hangers and Supports for Fire-Suppression Piping - Copper:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Anvil; an ASC Engineered Solution
 - b. Cooper B-line; brand of Eaton, Electrical Sector
 - c. FNW; Ferguson Enterprises, Inc.
2. Description: Copper-coated-steel, factory-fabricated components, NFPA approved, UL listed, or FM Global approved for fire-suppression piping support.
3. Hanger Rods: Continuous-thread rod, nuts, and washer made of copper-coated steel.

2.3 PIPE HANGERS FOR FIRE-SUPPRESSION PIPING - METAL, TRAPEZE TYPE

- A. Description: MSS SP-58, Type 59, shop- or field-fabricated pipe-support assembly, made from structural-carbon-steel shapes, with NFPA-approved, UL-listed, or FM Global-approved carbon-steel hanger rods, nuts, saddles, and U-bolts.

2.4 FASTENER SYSTEMS

- A. Fastener System - NFPA/UL/FM Mechanical-Expansion Anchors: NFPA-approved, UL-listed, or FM Global-approved, insert-wedge-type anchors, for use in hardened portland cement concrete; with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cooper B-line; brand of Eaton, Electrical Sector
 - b. Empire Industries, Inc.
 - c. Hilti, Inc.
 - d. ITW Ramset/Red Head; Illinois Tool Works, Inc.
 - e. MKT Fastening, LLC
 2. Indoor Applications: Zinc coated or Stainless.
 3. Outdoor Applications: Stainless steel.

2.5 MATERIALS

- A. Aluminum: ASTM B221.
- B. Carbon Steel: ASTM A1011/A1011M.
- C. Structural Steel: ASTM A36/A36M, carbon-steel plates, shapes, and bars; black and galvanized.
- D. Stainless Steel: ASTM A240/A240M.
- E. Grout: ASTM C1107/C1107M, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout, suitable for interior and exterior applications.
 1. Properties: Nonstaining, noncorrosive, and nongaseous.
 2. Design Mix: 5000 psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 APPLICATION

- A. Comply with requirements in Division 07 Firestopping section for firestopping materials and installation, for penetrations through fire-rated walls, ceilings, and assemblies.
- B. Strength of Support Assemblies: Where not indicated, select sizes of components, so strength will be adequate to carry static loads within specified loading limits. Minimum static design load used for strength determination is to comply with NFPA 13 requirements, minimum 5 times the water-filled weight of piping and supported components plus 250 lb.

3.2 INSTALLATION OF HANGERS AND SUPPORTS

- A. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, permit freedom of movement between pipe anchors, and facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- B. Install lateral bracing with pipe hangers and supports to prevent swaying.
- C. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Coordinate location of concrete inserts before concrete is placed.
- D. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- E. Pipe Slopes: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- F. Metal Pipe-Hanger Installation: Comply with installation requirements of approvals and listings. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.
- G. Metal Trapeze Pipe-Hanger Installation: Comply with MSS SP-58. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.
 - 1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size, or install intermediate supports for smaller-diameter pipes as specified for individual pipe hangers.
 - 2. Field fabricate from ASTM A36/A36M carbon-steel shapes selected for loads being supported. Weld steel in accordance with AWS D1.1/D1.1M.
- H. Thermal Hanger-Shield Installation: Install in pipe hanger or shield for insulated piping.
- I. Fastener System Installation:
 - 1. Install mechanical-expansion anchors in concrete, after concrete is placed and completely cured. Install fasteners in accordance with manufacturer's written instructions. Install in accordance with approvals and listings.
- J. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.

3.3 METAL FABRICATIONS

- A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers.
- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. Finish welds at exposed connections, so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.4 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.5 PAINTING

- A. Touchup:

1. Clean field welds and abraded, shop-painted areas. Paint exposed areas immediately after erecting hangers and supports. Use same materials as those used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - a. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas, and apply galvanizing-repair paint to comply with ASTM A780/A780M.

3.6 HANGER AND SUPPORT SCHEDULE

- A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.
- B. Comply with NFPA requirements for pipe-hanger selections and applications that are not specified in piping system Sections.
- C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finishes.
- D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Use carbon-steel pipe hangers and supports and metal trapeze pipe hangers and attachments for general service applications.
- F. Use stainless steel pipe hangers and stainless steel or corrosion-resistant attachments for hostile environment applications.
- G. Use copper-plated pipe hangers and copper attachments for copper piping and tubing.
- H. Horizontal-Piping Hangers and Supports: Comply with NFPA requirements. Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30.
 2. Steel Pipe Clamps (MSS Type 4): For suspension of NPS 1/2 to NPS 24 if little or no insulation is required.
 3. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
 4. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 8.
 5. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 3.
 6. U-Bolts (MSS Type 24): For support of heavy pipes NPS 1/2 to NPS 30.
 7. Pipe Saddle Supports (MSS Type 36): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate.
 8. Pipe Stanchion Saddles (MSS Type 37): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate, and with U-bolt to retain pipe.
 9. Adjustable Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes NPS 2-1/2 to NPS 36 if vertical adjustment is required, with steel-pipe base stanchion support and cast-iron floor flange.
- I. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24.
 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers NPS 3/4 to NPS 24 if longer ends are required for riser clamps.
- J. Hanger-Rod Attachments: Comply with NFPA requirements.
- K. Building Attachments: Comply with NFPA requirements. Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 1. Steel or Malleable-Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.

2. C-Clamps (MSS Type 23): For structural shapes.
 3. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
- L. Saddles and Shields: Comply with NFPA requirements. Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
 3. Thermal Hanger-Shield Inserts: For supporting insulated pipe.
- M. Comply with NFPA requirements for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.
- N. Use mechanical-expansion anchors instead of building attachments where required in concrete construction.

END OF SECTION 210529

This page intentionally left blank.

SECTION 210553 - IDENTIFICATION FOR FIRE-SUPPRESSION PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Pipe labels.
 - 2. Stencils.
 - 3. Valve tags.
 - 4. Warning tags.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For color, letter style, and graphic representation required for each identification material and device.
- C. Valve-numbering scheme.
- D. Valve Schedules: Provide for fire-suppression piping system. Include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 PIPE LABELS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Actioncraft Products, Inc.; a division of Industrial Test Equipment Co., Inc.
 - 2. Brady Corporation
 - 3. Carlton Industries, LP
 - 4. Champion America
 - 5. Craftmark Pipe Markers
 - 6. emedco
 - 7. Kolbi Pipe Marker Co.
 - 8. LEM Products Inc.
 - 9. Marking Services Inc.
 - 10. Pipemarket.com; Brimar Industries, Inc.
 - 11. Seton Identification Products; a Brady Corporation company
- B. General Requirements for Manufactured Pipe Labels: Preprinted, color coded, with lettering indicating service and showing flow direction in accordance with ASME A13.1.
- C. Letter and Background Color: As indicated for specific application under Part 3.
- D. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- E. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- F. Pipe-Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings. Also include the following:
 - 1. Pipe size.
 - 2. Flow-Direction Arrows: Include flow-direction arrows on main distribution piping. Arrows may be either integral with label or applied separately.
 - 3. Lettering Size: At least 1/2 inch for viewing distances of up to 72 inches and proportionately larger lettering for greater viewing distances.

2.2 VALVE TAGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Actioncraft Products, Inc.; a division of Industrial Test Equipment Co., Inc.
 - 2. Brady Corporation
 - 3. Carlton Industries, LP
 - 4. Champion America
 - 5. Craftmark Pipe Markers
 - 6. emedco
 - 7. Kolbi Pipe Marker Co.
 - 8. LEM Products Inc.
 - 9. Marking Services Inc.
 - 10. Pipemarker.com; Brimar Industries, Inc.
 - 11. Seton Identification Products; a Brady Corporation company
- B. Description: Stamped or engraved with 1/4-inch letters for piping-system abbreviation and 1/2-inch numbers.
 - 1. Tag Material: Brass, 0.04 inch stainless steel, 0.024 inch aluminum, 0.031 inch or anodized aluminum, 0.031 inch thick, with predrilled or stamped holes for attachment hardware.
 - 2. Fasteners: Brass wire, link chain, beaded chain, or S-hook.
- C. Letter and Background Color: As indicated for specific application under Part 3.
- D. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
 - 1. Include valve-tag schedule in operation and maintenance data.

2.3 WARNING TAGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Brady Corporation
 - 2. Champion America
 - 3. Craftmark Pipe Markers
 - 4. emedco
 - 5. Kolbi Pipe Marker Co.
 - 6. LEM Products Inc.
 - 7. Marking Services Inc.
 - 8. Pipemarker.com; Brimar Industries, Inc.
 - 9. Seton Identification Products; a Brady Corporation company
- B. Description: Preprinted accident-prevention tags, of plasticized card stock.
 - 1. Size: Approximately 4 by 7 inches.
 - 2. Fasteners: Brass grommet and wire.
 - 3. Nomenclature: Large-size primary caption, such as "DANGER," "CAUTION," or "DO NOT OPERATE."
 - 4. Letter and Background Color: As indicated for specific application under Part 3.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean piping and equipment surfaces of incompatible primers, paints, and encapsulants, as well as dirt, oil, grease, release agents, and other substances that could impair bond of identification devices.

3.2 INSTALLATION GENERAL REQUIREMENTS

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be installed.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.
- D. Locate identifying devices so that they are readily visible from the point of normal approach.

3.3 INSTALLATION OF PIPE LABELS

- A. Install pipe labels showing service and flow direction with permanent adhesive on pipes.
- B. Pipe-Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
 - 1. Within 3 ft. of each valve and control device.
 - 2. At access doors, manholes, and similar access points that permit a view of concealed piping.
 - 3. Within 3 ft. of equipment items and other points of origination and termination.
 - 4. Spaced at maximum intervals of 25 ft. along each run. Reduce intervals to 10 ft. in areas of congested piping and equipment.
- C. Flow- Direction Arrows: Provide arrows to indicate direction of flow in pipes, including pipes where flow is allowed in both directions.
- D. Fire-Suppression Pipe Label Color Schedule:
 - 1. Fire-Suppression Pipe Labels: White letters on an ANSI Z535.1 safety-red background.

3.4 INSTALLATION OF VALVE TAGS

- A. Install tags on valves and control devices in fire-suppression piping systems. List tagged valves in a valve-tag schedule in the operating and maintenance manual. Include the identification "FSV" on all fire-suppression system valve tags.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and with captions similar to those indicated in "Valve-Tag Size and Shape" Subparagraph below.
 - 1. Valve-Tag Size and Shape:
 - a. Fire-Suppression Standpipe: 1-1/2 inches, round.
 - b. Wet-Pipe Sprinkler System: 1-1/2 inches, round.
 - c. Dry-Pipe Sprinkler System: 1-1/2 inches, round.
 - d. Preaction System: 1-1/2 inches, round.
 - 2. Valve-Tag Color: White letters on an ANSI Z535.1 safety-red background.

3.5 INSTALLATION OF WARNING TAGS

- A. Warning Tag Color: Black letters on an ANSI Z535.1 safety-yellow background.
- B. Attach warning tags, with proper message, to equipment and other items where indicated on Drawings.

END OF SECTION 210553

This page intentionally left blank.

SECTION 211000 - WATER-BASED FIRE-SUPPRESSION SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Fire-suppression piping, fittings, and appurtenances.
 - 2. Fire-suppression piping specialties.
 - 3. Sprinklers.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. For each type of product.
 - a. Include construction details, material descriptions, dimensions of individual components and profiles.
 - b. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings:
 - 1. Prior to preparation of shop drawings, convene a meeting including General Contractor and all subcontractors potentially impacted by installation of fire protection piping systems, to facilitate coordination of installation of all impacted systems. Submittal of plans and calculations is acknowledgement that coordination has been performed. Rework in the field due to conflicts between fire protection systems and other systems will be performed at no cost to the Owner, Architect, or Engineer.
 - 2. Prepare in accordance with NFPA 13 section "Working Plans."
 - a. Include plans, elevations, and sections of the system piping and details.
 - b. Include detailed riser diagram and schematic diagram showing system supply, supply connection, devices, valves, pipe and fittings, as well as the delineation of the standard-pressure and high-pressure portions of the fire-suppression system.
 - c. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 3. Prepare computer-generated hydraulic calculations in accordance with the following:
 - a. Name of hydraulic program used.
 - b. Water supply information, including fire hydrant flow test data report.
 - 4. Submit documents and calculations signed and sealed by qualified professional engineer responsible for their preparation
 - 5. Include diagrams for power, signal, and control wiring as applicable.
- C. Delegated Design Submittals: For fire-suppression systems indicated to comply with performance requirements and design criteria, including analysis data, signed and sealed by the qualified professional engineer responsible for their preparation.

1.3 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Fire-suppression system plans and sections, or Building Information Model (BIM), drawn to scale, showing the items described in this Section and coordinated with all building trades.
 - 1. Prior to full submittal, provide a coordination submittal indicating locations and types of all sprinkler heads coordinated with the Architects reflected ceiling plan. Additionally, indicate proposed locations of all exposed piping for review.
 - 2. Following approval of the initial coordination submittal described above, submit complete layout and calculations.
- B. Qualification Data: For qualified Installer and professional engineer.
- C. Design Data: Approved fire-suppression piping working plans, prepared in accordance with NFPA 13, including documented approval by AHJs, and including hydraulic calculations if applicable.

- D. Welding certificates.
- E. Field Test Reports:
 - 1. Indicate and interpret test results for compliance with performance requirements and as described in NFPA 13. Include "Contractor's Material and Test Certificate for Aboveground Piping."
 - 2. Fire-hydrant flow test report.
- F. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fire-suppression systems and specialties to include in emergency, operation, and maintenance manuals.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Sprinkler Cabinets: Finished, wall-mounted, steel cabinet with hinged cover, and with space for minimum of six spare sprinklers plus sprinkler wrench. Include number of sprinklers required by NFPA 13 and sprinkler wrench. Include separate cabinet with sprinklers and wrench for each type of sprinkler used on Project.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Installer's responsibilities include designing, fabricating, and installing fire-suppression systems and providing professional engineering services needed to assume engineering responsibility. Base calculations on results of fire-hydrant flow test.
 - a. Engineering Responsibility: Preparation of working plans, calculations, and field test reports by qualified professional engineer.
- B. Welding Qualifications: Qualify procedures and operators in accordance with ASME Boiler and Pressure Vessel Code.

1.7 FIELD CONDITIONS

- A. Interruption of Existing Fire-Suppression Service: Do not interrupt fire-suppression service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary fire-suppression service in accordance with requirements indicated:
 - 1. Notify Owner no fewer than seven days in advance of proposed interruption of fire-suppression service.
 - 2. Do not proceed with interruption of fire-suppression service without Owner's written permission.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Automatic wet-pipe sprinkler system.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Suppression System Components, Devices, and Accessories: Listed in ULSE's "Fire Protection Equipment Directory" and FM Approvals' "Approval Guide."
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Fire-suppression system equipment, specialties, accessories, installation, and testing to comply with NFPA 13, and ASME A17.1.
- D. Standard-Pressure Piping System Component: Listed for 175 psig minimum working pressure.
- E. Delegated Design: Engage a qualified professional engineer to design fire-suppression systems.

1. Fire-Hydrant Flow Test:
 - a. Perform fire-hydrant flow test and record the following conditions:
 - 1) Date:.
 - 2) Time:
 - 3) Performed by: .
 - 4) Location of Residual Fire Hydrant R: Insert location.
 - 5) Location of Flow Fire Hydrant F: Insert location.
 - 6) Static Pressure at Residual Fire Hydrant R:.
 - 7) Measured Flow at Flow Fire Hydrant F:.
 - 8) Residual Pressure at Residual Fire Hydrant R:.
 - b. Fire-hydrant flow test must be performed within previous 12 months prior to completion of design documents and hydraulic calculations.
 2. Margin of Safety for Available Water Flow and Pressure: 10 percent, including losses through water-service piping, valves, and backflow preventers.
 3. Sprinkler Occupancy Hazard Classifications: per NFPA 13.
 4. Minimum Density for Automatic-Sprinkler Piping Design: Per NFPA 13.
 5. Maximum protection area per sprinkler in accordance with ULSE listing.
 6. Total Combined Hose-Stream Demand Requirement: In accordance with NFPA 13 unless otherwise indicated or required by Authority Having Jurisdiction.
 7. Minimum residual pressure at each hose-connection outlet is as follows:
 - a. NPS 1-1/2 (DN 40) Hose Connections: 65 psig.
 - b. NPS 2-1/2 (DN 65) Hose Connections: 100 psig.
- F. Obtain documented approval of fire-suppression system design from AHJs.

2.3 FIRE-SUPPRESSION PIPING, FITTINGS, AND APPURTENANCES

- A. Steel Pipe, Fittings, and Appurtenances:
1. Schedule 40 Steel Pipe: black-steel pipe, ASTM A53/A53M, ASTM A135/A135M, or ASTM A795/A795M.
 - a. Standards:
 - 1) UL 852.
 - 2) FM 1630.
 - b. Factory-applied exterior coating.
 - c. Factory-applied bacterial-resistant internal coating to reduce microbiologically influenced corrosion.
 - d. Pipe ends may be factory or field formed to match joining method.
 2. Steel Pipe Nipples: Galvanized and black steel, ASTM A733, made of ASTM A53/A53M, standard-weight, seamless steel pipe with threaded ends.
 3. Steel Couplings: Galvanized steel, ASTM A865/A865M, threaded.
 4. Gray-Iron Threaded Fittings: Galvanized gray-iron threaded fittings, ASME B16.4, Class 125, standard pattern.
 5. Malleable- or Ductile-Iron Unions: ASME B16.3.
 6. Cast-Iron Flanges: ASME B16.1, Class 125.
 7. Steel Flanges and Flanged Fittings: ASME B16.5, Class 150.
 - a. Pipe-Flange Gasket Materials: AWWA C110, rubber, flat face, 1/8 inch thick.
 - 1) Class 125 and Class 250, Cast-Iron, Flat-Face Flanges: Full-face gaskets.
 - 2) Class 150 and Class 300, Ductile-Iron or -Steel, Raised-Face Flanges: Ring-type gaskets.
 - b. Metal, Pipe-Flange Bolts and Nuts: ASME B18.2.1 carbon steel unless otherwise indicated.
 8. Steel Welding Fittings: ASTM A234/A234M and ASME B16.9.
 - a. Welding Filler Metals: Comply with AWS D10.12M/D10.12 for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.
 9. Plain-End-Pipe Fittings:
 - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Gruvlok; an ASC Engineered Solution

- 2) Shurjoint; a part of Aalberts Integrated Piping Systems
 - 3) Victaulic Company
 - b. Pressure Rating: 175 psig minimum.
 - c. Plain-End Fittings for Steel Piping: Painted plain-end fittings, ASTM A53/A53M, carbon steel or ASTM A106/A106M, forged steel with dimensions matching steel pipe.
 - d. Plain-End-Pipe Couplings for Steel Piping: Rigid pattern for steel-pipe dimensions, ductile-iron or malleable-iron housing. Include EPDM-rubber gasket, and bolts and nuts.
10. Grooved-Joint, Steel-Pipe Appurtenances:
- a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) CPS Products, Inc.
 - 2) Gruvlok; an ASC Engineered Solution
 - 3) Shurjoint; a part of Aalberts Integrated Piping Systems
 - 4) Smith-Cooper International
 - 5) SPF/Anvil; an ASC Engineered Solution
 - 6) Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America
 - 7) Victaulic Company
 - b. Pressure Rating: 175 psig minimum.
 - c. Grooved-End Fittings for Steel Piping: Painted grooved-end fittings, ASTM A47/A47M, malleable-iron casting or ASTM A536, ductile-iron casting, with dimensions matching steel pipe.
 - d. Grooved-End-Pipe Couplings for Steel Piping: AWWA C606 and UL 213 rigid pattern, unless otherwise indicated, for steel-pipe dimensions. Include ferrous housing sections, EPDM-rubber gasket, and bolts and nuts.

2.4 FIRE-SUPPRESSION PIPING SPECIALTIES

- A. Branch Outlet Fittings:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Shurjoint; a part of Aalberts Integrated Piping Systems
 - b. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America
 - c. Victaulic Company
 - 2. Standard: UL 213.
 - 3. Pressure Rating: 175 psig minimum.
 - 4. Body Material: Ductile-iron housing with EPDM seals and bolts and nuts.
 - 5. Type: Mechanical-tee and -cross fittings.
 - 6. Configurations: Snap-on and strapless, ductile-iron housing with branch outlets.
 - 7. Size: Of dimension to fit onto sprinkler main and with outlet connections as required to match connected branch piping.
 - 8. Branch Outlets: Grooved, plain-end pipe, or threaded.
- B. Flow Detection and Test Assemblies:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. AGF Manufacturing, Inc.
 - b. Reliable Automatic Sprinkler Co., Inc. (The)
 - c. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America
 - d. Victaulic Company
 - 2. Standard: ULSE's "Fire Protection Equipment Directory" or FM Approvals' "Approval Guide."
 - 3. Pressure Rating: 175 psig minimum.
 - 4. Body Material: Cast- or ductile-iron housing with orifice, sight glass, and integral test valve.
 - 5. Size: Same as connected piping.
 - 6. Inlet and Outlet: Threaded or grooved.

- C. Branch Line Testers:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. AGF Manufacturing, Inc.
 - b. Croker; a Division of Morris Group International
 - c. Potter Roemer LLC; a Division of Morris Group International
 - 2. Standard: UL 199.
 - 3. Pressure Rating: 175 psig.
 - 4. Body Material: Brass.
 - 5. Size: Same as connected piping.
 - 6. Inlet: Threaded.
 - 7. Drain Outlet: Threaded and capped.
 - 8. Branch Outlet: Threaded, for sprinkler.
- D. Adjustable Drop Nipples:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Aegis Technologies, Inc.
 - 2. Standard: UL 1474.
 - 3. Pressure Rating: 250 psig minimum.
 - 4. Body Material: Steel pipe with EPDM-rubber O-ring seals.
 - 5. Size: Same as connected piping.
 - 6. Length: Adjustable.
 - 7. Inlet and Outlet: Threaded.
- E. Flexible Sprinkler Hose Fittings:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ALEUM USA
 - b. Easyflex, Inc.
 - c. Flexhead; an ASC Engineered Solution
 - d. Gateway Tubing, Inc.
 - e. Reliable Automatic Sprinkler Co., Inc. (The)
 - f. Victaulic Company
 - 2. Standards:
 - a. UL 2443.
 - b. FM 1637.
 - 3. Description: Flexible hose for connection to sprinkler, and with bracket for connection to ceiling grid.
 - 4. Pressure Rating: 175 psig minimum.
 - 5. Size: Same as connected piping, for sprinkler.
- F. Manual Air Vent/Valve:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. AGF Manufacturing, Inc.
 - 2. Description: Ball valve that requires human intervention to vent air.
 - 3. Body: Forged brass.
 - 4. Ends: Threaded.
 - 5. Minimize Size: 1/2 inch.
 - 6. Minimum Water Working Pressure Rating: 300 psig.
- G. Automatic Air Vent:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. AGF Manufacturing, Inc.
 - b. CLA-VAL
 - c. Engineered Corrosion Solutions
 - d. Metraflex Company (The)

- e. Reliable Automatic Sprinkler Co., Inc. (The)
 - 2. Description: Automatic air vent that automatically vents trapped air without human intervention. Approved for use in wet-pipe fire-suppression system.
 - 3. Vents oxygen continuously from system.
 - 4. Float valve to prevent water discharge.
 - 5. Minimum Water Working Pressure Rating: 175 psig.
- H. Automatic Air Vent Assembly:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. AGF Manufacturing, Inc.
 - b. Engineered Corrosion Solutions
 - c. South-Tek Systems, LLC
 - 2. Description: Automatic air vent assembly that automatically vents trapped air without human intervention, including Y-strainer and ball valve in a pre-piped assembly. Approved for use in wet-pipe fire-suppression system.
 - 3. Vents oxygen continuously from system.
 - 4. Float valve to prevent water discharge.
 - 5. Minimum Water Working Pressure Rating: 175 psig.

2.5 SPRINKLERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Reliable Automatic Sprinkler Co., Inc. (The)
 - 2. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America
 - 3. Victaulic Company
 - 4. Viking Group Inc.
- B. Standards:
 - 1. UL 199.
 - 2. UL 1626.
 - 3. UL 1767.
 - 4. FM 2000.
 - 5. FM 2008.
 - 6. FM 2030.
- C. Listed in ULSE's "Fire Protection Equipment Directory" or FM Approvals' "Approval Guide."
- D. Pressure Rating for Sprinklers:
 - 1. Standard Automatic Sprinklers: 175 psig minimum.
- E. Sprinklers, Automatic Wet with Heat-Responsive Element:
 - 1. Characteristics: Nominal 1/2-inch orifice with Discharge Coefficient K of 5.6, and for "Ordinary" temperature classification rating unless otherwise indicated or required by application.
 - 2. Standard Spray, Standard Response:
 - a. Upright.
 - b. Pendent.
 - c. Flat, concealed pendent.
 - d. Horizontal sidewall.
 - 3. Standard Spray, Quick Response:
 - a. Upright.
 - b. Pendent.
 - c. Flat, concealed pendent.
 - d. Horizontal sidewall.
 - e. Flat, concealed horizontal sidewall.
- F. Sprinkler Finishes: painted.

- G. Sprinkler Escutcheons: Materials, types, and finishes for the following sprinkler mounting applications. Escutcheons for concealed, flush, and recessed-type sprinklers are specified with sprinklers.
- H. Sprinkler Guards and Water Shields:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Reliable Automatic Sprinkler Co., Inc. (The)
 - b. Tyco Fire Products; brand of Johnson Controls International plc, Building Solutions North America
 - c. Victaulic Company
 - d. Viking Group Inc.
 - 2. Standard: UL 199.
 - 3. Description: Wire cage with fastening device for attaching to sprinkler.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Perform fire-hydrant flow test. Use results for system design calculations required in "Quality Assurance" Article.
 - 1. Flow test is to be performed to meet the criteria established by NFPA 13.
 - 2. Flow test is to be conducted in accordance with NFPA 291.
 - 3. Test is to be performed during a period of ordinary demand for the water system.
 - a. To obtain satisfactory test results of expected flow or rated capacities, sufficient discharge should be achieved to cause drop of at least 10 percent.
 - 4. Pitot readings are to be taken at the 2-1/2-inch orifice connection.
 - 5. The pitot reading is to range from 10 to 35 psig.
 - 6. Open additional hydrant outlets as needed to control pitot readings.
 - 7. The pitot pressure and corresponding residual pressure readings are to be taken consecutively as pressure fluctuates between a high number and low number.
- B. Flow Test Data Written Report:
 - 1. Flow data report is to be written in accordance with NFPA 291.
 - 2. Flow data report is to include a copy of all flow data recorded during the test, including a site plan showing the tested fire hydrants with respect to the fire water service to the building. Site plan is to indicate which hydrant was flowed and which hydrant was used for pressure reading. Provide date of test, name of testing agency, and name of individual performing test.
- C. Water Supply Curve: Provide water supply curve based on the lowest supply for a given set of test data. For a given residual pressure reading, the supply is to be graphed utilizing the corresponding pitot pressure/flow reading and static pressure reading.
- D. Documentation is to include calibration certifications for gauges used in the flow tests. The certifications are to be from within the previous six (6) months from a reputable agency recognized for certifying pressure gauges.
- E. Report flow test results promptly and in writing. A copy of the flow test data report is to be submitted with the hydraulic calculations.

3.2 INSTALLATION OF FIRE-SUPPRESSION PIPING

- A. Locations and Arrangements: Drawing plans, schematics, and diagrams indicate general location and arrangement of piping. Install piping as indicated on approved working plans.
 - 1. Deviations from approved working plans for piping require written approval from AHJs. File written approval with Architect before deviating from approved working plans.
 - 2. Coordinate layout and installation of sprinklers with other construction that penetrates ceilings, including light fixtures, HVAC equipment, and partition assemblies.
- B. Piping Standard: Comply with NFPA 13 and NFPA 14 requirements for installation of fire-suppression piping.

- C. Install listed fittings to make changes in direction, branch takeoffs from mains, and reductions in pipe sizes.
- D. Install unions adjacent to each valve in pipes NPS 2 and smaller.
- E. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 and larger end connections.
- F. Install fire-suppression system piping with drains for complete system drainage. Extend drain piping to exterior of building where possible.
- G. Install hangers and supports for fire-suppression piping in accordance with NFPA standards. Comply with requirements for hanger materials in NFPA standards.
- H. Fill wet-type fire-suppression system piping with water.
- I. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 210500 "Common Work Results for Fire-Suppression Piping."
- J. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 210500 "Common Work Results for Fire-Suppression Piping."
- K. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 210500 "Common Work Results for Fire-Suppression Piping."

3.3 INSTALLATION OF PIPING JOINTS

- A. Install couplings, flanges, flanged fittings, unions, nipples, and transition and special fittings that have finish and pressure ratings same as or higher than system's pressure rating for aboveground applications unless otherwise indicated.
- B. Install unions adjacent to each valve in pipes NPS 2 and smaller.
- C. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 and larger end connections.
- D. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- E. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.
- F. Flanged Joints: Select appropriate gasket material in size, type, and thickness suitable for water service. Join flanges with gasket and bolts in accordance with ASME B31.9.
- G. Threaded Joints: Thread pipe with tapered pipe threads in accordance with ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads.
 - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.
- H. Twist-Locked Joints: Insert plain end of steel pipe into plain-end-pipe fitting. Rotate retainer lugs one-quarter turn or tighten retainer pin.
- I. Steel-Piping, Pressure-Sealed Joints: Join steel pipe and steel pressure-seal fittings with tools recommended by fitting manufacturer.
- J. Welded Joints: Construct joints in accordance with AWS D10.12M/D10.12, using qualified processes and welding operators in accordance with "Quality Assurance" Article.
 - 1. Shop weld pipe joints where welded piping is indicated. Do not use welded joints for galvanized-steel pipe.
- K. Steel-Piping, Cut-Grooved Joints: Cut square-edge groove in end of pipe in accordance with AWWA C606. Assemble coupling with housing, gasket, lubricant, and bolts. Join steel pipe and grooved-end fittings in accordance with AWWA C606 for steel-pipe joints.

- L. Steel-Piping, Roll-Grooved Joints: Roll rounded-edge groove in end of pipe in accordance with AWWA C606. Assemble coupling with housing, gasket, lubricant, and bolts. Join steel pipe and grooved-end fittings in accordance with AWWA C606 for steel-pipe grooved joints.
- M. Brazed Joints: Join copper tube and fittings in accordance with Copper Development Association's "Copper Tube Handbook," "Brazed Joints" chapter.
- N. Copper-Tubing Grooved Joints: Roll rounded-edge groove in end of tube in accordance with AWWA C606. Assemble coupling with housing, gasket, lubricant, and bolts. Join copper tube and grooved-end fittings in accordance with AWWA C606 for steel-pipe grooved joints.
- O. Copper-Tubing, Pressure-Sealed Joints: Join copper tube and copper pressure-seal fittings with tools recommended by fitting manufacturer.
- P. Dissimilar-Material Piping Joints: Make joints using adapters compatible with materials of both piping systems.

3.4 INSTALLATION OF VALVES AND SPECIALTIES

- A. Install listed fire-suppression system control valves, trim and drain valves, specialty valves and trim, controls, and specialties in accordance with manufacturer's installation instructions, NFPA standards, and AHJ.
- B. Air Vent:
 - 1. Provide at least one air vent at high point in each wet-pipe fire-suppression system in accordance with NFPA standards. Connect vent into top of fire-suppression piping.
 - 2. Provide dielectric union for dissimilar metals, ball valve, and strainer upstream of automatic air vent.
 - 3. Pipe from outlet of air vent to drain.

3.5 INSTALLATION OF SPRINKLERS

- A. Install sprinklers in suspended ceilings symmetrically in center of acoustical ceiling panels within tolerance of 1/2 inch. Coordinate entire pattern of sprinkler locations with approved reflected ceiling plan.
- B. Install sprinklers into flexible, sprinkler hose fittings, and install hose into bracket on ceiling grid.

3.6 IDENTIFICATION

- A. Install labeling and pipe markers on equipment and piping in accordance with requirements for identification specified in Section 210553 "Identification for Fire-Suppression Piping and Equipment."
- B. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

3.7 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Perform the following tests and inspections :
 - 1. Leak Test: After installation, charge systems and test for leaks. Repair leaks and retest until no leaks exist.
 - 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
 - 3. Flush, test, and inspect fire-suppression systems in accordance with NFPA standards.
 - 4. Verify that sprinklers' original factory finish has not been contaminated with dirt, debris, or paint. Sprinklers containing other-than-original factory finish are to be considered defective and replaced with new products. Repair and/or cleaning is not acceptable.
- C. Fire-suppression piping system will be considered defective if it does not pass tests and inspections.
- D. Fire-suppression piping system components considered defective during testing will be replaced with new components. Repair of defective components is not acceptable.

- E. Prepare test and inspection reports.

3.8 CLEANING

- A. Clean dirt and debris from fire-suppression system piping, system control valves, sprinklers, and associated components.
- B. Only sprinklers with their original factory finish are acceptable. Remove and replace any sprinklers that are painted or have any other finish than their original factory finish.

3.9 PIPING SCHEDULE

- A. Standard-Pressure, Wet-Pipe Sprinkler System, NPS 2 (DN 50) and Smaller, to Be One of the Following:
 - 1. Schedule 40, black-steel pipe with threaded ends; uncoated, gray-iron threaded fittings; and threaded joints.
 - 2. Schedule 40, galvanized-steel pipe with threaded ends; galvanized, gray-iron threaded fittings; and threaded joints.
 - 3. Schedule 40, black-steel pipe with cut- or roll-grooved ends; uncoated, grooved-end fittings for steel piping; grooved-end-pipe couplings for steel piping; and grooved joints.
 - 4. Schedule 40, galvanized-steel pipe with cut-grooved ends; galvanized, grooved-end fittings for steel piping; grooved-end-pipe couplings for steel piping; and grooved joints.
 - 5. Schedule 40, black-steel pipe with plain ends; steel welding fittings; and welded joints.
 - 6. Schedule 10, steel pipe with roll-grooved ends; uncoated, grooved-end fittings for steel piping; grooved-end-pipe couplings for steel piping; and grooved joints.
 - 7. Schedule 10, steel pipe with plain ends; welding fittings; and welded joints.
- B. Standard-Pressure, Wet-Pipe Sprinkler System, NPS 2-1/2 to NPS 4 (DN 65 to DN 100), to Be One of the Following:
 - 1. Schedule 40, black-steel pipe with threaded ends; uncoated, gray-iron threaded fittings; and threaded joints.
 - 2. Schedule 40, galvanized-steel pipe with threaded ends; galvanized, gray-iron threaded fittings; and threaded joints.
 - 3. Schedule 40, black-steel pipe with cut- or roll-grooved ends; uncoated, grooved-end fittings for steel piping; grooved-end-pipe couplings for steel piping; and grooved joints.
 - 4. Schedule 40, galvanized-steel pipe with cut-grooved ends; galvanized, grooved-end fittings for steel piping; grooved-end-pipe couplings for steel piping; and grooved joints.
 - 5. Schedule 40, black-steel pipe with plain ends; steel welding fittings; and welded joints.
- C. Standard-Pressure, Wet-Pipe Sprinkler System, NPS 5 (DN 125) and Larger, to Be One of the Following:
 - 1. Schedule 40, black-steel pipe with threaded ends; uncoated, gray-iron threaded fittings; and threaded joints.
 - 2. Schedule 40, galvanized-steel pipe with threaded ends; galvanized, gray-iron threaded fittings; and threaded joints.
 - 3. Schedule 40, black-steel pipe with cut- or roll-grooved ends; uncoated, grooved-end fittings for steel piping; grooved-end-pipe couplings for steel piping; and grooved joints.
 - 4. Schedule 40, galvanized-steel pipe with cut-grooved ends; galvanized, grooved-end fittings for steel piping; grooved-end-pipe couplings for steel piping; and grooved joints.
 - 5. Schedule 40, black-steel pipe with plain ends; steel welding fittings; and welded joints.

3.10 SPRINKLER SCHEDULE

- A. Use sprinkler types in subparagraphs below for the following applications:
 - 1. Rooms without Ceilings: Upright sprinklers.
 - 2. Rooms with Suspended Ceilings: Flat concealed sprinklers.
 - 3. Wall Mounting: Flat concealed sidewall sprinklers.
- B. Provide sprinkler types in subparagraphs below with finishes indicated.
 - 1. Upright, Pendent, and Sidewall Sprinklers: White enamel in finished spaces exposed to view; rough bronze in unfinished spaces and locations not generally exposed to view.
 - 2. Recessed Sprinklers: White enamel, with factory-painted white escutcheon.
 - 3. Flat Concealed Sprinklers: Rough brass, with factory-painted white cover plate.

END OF SECTION 211000

This page intentionally left blank.

SECTION 220010 - PLUMBING DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY

- A. The Work of this Section Includes:
 - 1. Demolition and removal of selected portions of plumbing systems.
 - 2. Removal and salvage of existing items for delivery to Owner and removal of existing items for reinstallation.

1.2 DEFINITIONS

- A. Remove: Detach items from existing construction and legally dispose of off-site unless indicated to be removed and salvaged or removed and reinstalled.
- B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and deliver to Owner as indicated.
- C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage; prepare for reuse; clean, repair and reinstall where indicated.
- D. Existing to Remain: Existing items of construction that are not to be removed.

1.3 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.

1.4 COORDINATION

- A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

1.5 FIELD CONDITIONS

- A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.
- B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
- C. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.
- D. Hazardous Materials:
 - 1. It is not expected that hazardous materials will be encountered in the Work.
 - a. Hazardous materials will be removed by Owner before start of the Work.
 - b. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.
- E. On-site sale of removed items or materials is not permitted.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- B. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs or video, measured drawings.

1. Inventory and record the condition of items to be removed for salvage or reinstallation. Photograph or video conditions that might be misconstrued as damage caused by removal.
2. Photograph or video existing conditions of adjoining construction including finish surfaces, that might be misconstrued as damage caused by selective demolition operations or removal of items for salvage or reinstallation.

3.2 PREPARATION

- A. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
 1. Strengthen or add new supports when required during progress of selective demolition.
- B. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
 3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 4. Cover and protect furniture, furnishings, and equipment that have not been removed.
- C. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location and cleaned and reinstalled in their original locations after selective demolition operations are complete.

3.3 UTILITY SERVICES AND BUILDING SYSTEMS

- A. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utilities and building systems serving areas to be selectively demolished.
 1. Arrange to shut off utilities with utility companies.
 2. If disconnection of utilities and building systems will affect adjacent occupied parts of the building, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to those parts of the building.
 3. Demolish and remove existing building systems, equipment, and components indicated on Drawings to be removed.
 - a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
 - b. Equipment to Be Removed: Disconnect and cap services and remove equipment and components.
 4. Abandon existing building systems, equipment, and components indicated on Drawings to be abandoned in place.
 - a. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.
 5. Remove and reinstall/salvage existing building systems, equipment, and components indicated on drawings to be removed and reinstalled or removed and salvaged:
 - a. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment and components; when appropriate, reinstall, reconnect, and make equipment operational.
 - b. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and components and deliver to Owner.

3.4 SALVAGE/REINSTALL

- A. Removed and Salvaged Items:
 1. Clean salvaged items.

2. Pack or crate items after cleaning. Identify contents of containers with label indicating elements, date of removal, quantity, and location where removed.
3. Store items in a secure area until delivery to Owner.
4. Transport items to Owner's storage area designated by Owner.
5. Protect items from damage during transport and storage.

B. Removed and Reinstalled Items:

1. Clean and repair items to functional condition adequate for intended reuse.
2. Pack or crate items after cleaning and repairing. Identify contents of containers.
3. Protect items from damage during transport and storage.
4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.

3.5 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 2. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
 3. Maintain adequate ventilation when using cutting torches.
 4. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 5. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
- B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed trafficways if required by authorities having jurisdiction.
 2. Use water mist and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations. Do not use water when it may damage adjacent construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site
1. Do not allow demolished materials to accumulate on-site.
 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.

3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

3.8 SELECTIVE DEMOLITION SCHEDULE

- A. Remove piping systems throughout project area as required for new work.
1. Restore complete operation to items not being removed as part of the Work.
 2. Remove all abandoned piping and associated installation.

- B. Clean and repair items that are to remain to “like-new” condition.

END OF SECTION 220010

SECTION 220500 - COMMON WORK RESULTS FOR PLUMBING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Sleeves without waterstop.
 - 2. Sleeve-seal systems.
 - 3. Grout.
 - 4. Silicone sealants.
 - 5. Escutcheons.

1.2 DEFINITIONS

- A. Existing Piping to Remain: Existing piping that is not to be removed and that is not otherwise indicated to be removed, removed and salvaged, or removed and reinstalled.

1.3 ACTION SUBMITTALS

- A. Product Data:
 - 1. For each type of product, excluding motors which are included in Part 1 of the plumbing equipment Sections.
 - a. Include construction details, material descriptions, and dimensions of individual components, and finishes.
 - b. Include operating characteristics and furnished accessories.

1.4 INFORMATIONAL SUBMITTALS

- A. Welding certificates.
- B. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Welding Qualifications: Qualify procedures and personnel in accordance with AWS D1.1/D1.1M.
- B. Pipe and Pressure-Vessel Welding Qualifications: Qualify procedures and operators in accordance with 2021 ASME Boiler and Pressure Vessel Code, Section IX.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Domestic water expansion fittings and loops for plumbing piping intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act, with requirements of authorities having jurisdiction, and with NSF 61 and NSF 372, or be certified in compliance with NSF 61 and NSF 372 by an ANSI-accredited third-party certification body, in that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.
- B. Compatibility: Provide products suitable for piping service fluids, materials, working pressures, and temperatures.
- C. Capability: Provide products and installations to accommodate maximum axial movement as scheduled or indicated on Drawings.

2.2 SLEEVES AND SLEEVE SEALS

- A. Sleeves without Waterstop:
 - 1. Cast-Iron Pipe Sleeves: Cast or fabricated of cast or ductile iron, with plain ends.
 - 2. Steel Pipe Sleeves: ASTM A53/A53M, Type E, Grade B, Schedule 40, hot-dip galvanized, with plain ends.

3. Steel Sheet Sleeves: ASTM A653/A653M, 24 gauge minimum thickness; hot-dip galvanized, round tube closed with welded longitudinal joint.
 4. PVC Pipe Sleeves: ASTM D1785, Schedule 40.
 5. Molded-PVC Sleeves: With nailing flange.
 6. Molded-PE or -PP Sleeves: Removable, tapered-cup shaped, and smooth outer surface with nailing flange.
- B. Sleeve-Seal Systems:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Advance Products & Systems, LLC
 - b. American Polywater Corporation
 - c. GPT; a division of EnPRO Industries
 - d. Metraflex Company (The)
 - e. Proco Products, Inc
 2. Description: Modular sealing-element unit, designed for field assembly, for filling annular space between piping and sleeve.
 - a. Hydrostatic Seal: 20 psig minimum.
 - b. Sealing Elements: EPDM-rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
 - c. Pressure Plates: Carbon steel.
 - d. Connecting Bolts and Nuts: Carbon steel, with zinc coating, ASTM B633 of length required to secure pressure plates to sealing elements.
- C. Grout:
1. Description: Nonshrink, for interior and exterior sealing openings in non-fire-rated walls or floors.
 2. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
 3. Design Mix: 5000 psi, 28-day compressive strength.
 4. Packaging: Premixed and factory packaged.
- D. Silicone Sealants:
1. Silicone Sealant, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant.
 - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) GE Construction Sealants; Momentive Performance Materials Inc.
 - 2) ITW Polymers Sealants North America
 - 3) Polymeric Systems, Inc.; PPG Industries, Inc.
 - 4) Sherwin-Williams Company (The)
 - 5) Sika Corporation
 - 6) The Dow Chemical Company
 - 7) Tremco Incorporated
 - b. Standard: ASTM C920, Type S, Grade NS, Class 25, Use NT.
 2. Silicone Sealant, S, P, T, NT: Single-component, 100/50, pourable, plus 100 percent and minus 50 percent movement capability, traffic- and nontraffic-use, neutral-curing silicone joint sealant.
 - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Pecora Corporation
 - 2) Sika Corporation
 - 3) The Dow Chemical Company
 - 4) Tremco Incorporated
 - b. Standard: ASTM C920, Type S, Grade P, Class 100/50, Uses T and NT.
 3. Silicone Foam Sealant: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

- a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Smooth-On

2.3 ESCUTCHEONS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. BrassCraft Manufacturing Co.; a Masco company
 - 2. Dearborn Brass
 - 3. Jones Stephens Corp.
 - 4. Keeney Manufacturing Company (The)
 - 5. Mid-America Fittings, LLC; A Midland Industries Company
 - 6. ProFlo; a Ferguson Enterprises, Inc. brand
- B. Escutcheon Types:
 - 1. One-Piece, Steel Type: With polished, chrome-plated finish and setscrew fastener.
 - 2. One-Piece, Stainless Steel Type: With polished stainless steel finish.
 - 3. One-Piece, Cast-Brass Type: With polished, chrome-plated finish and setscrew fastener.
 - 4. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped steel with polished, chrome-plated finish and spring-clip fasteners.
 - 5. One-Piece, Stamped-Steel Type: With polished, chrome-plated finish and spring-clip fasteners.
 - 6. Split-Plate, Stamped-Steel Type: With polished, chrome-plated finish; concealed and exposed-rivet hinge; and spring-clip fasteners.
- C. Floor Plates:
 - 1. Split Floor Plates: Cast brass with concealed hinge.

PART 3 - EXECUTION

3.1 INSTALLATION OF SLEEVES - GENERAL

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.
 - 1. Sleeves are not required for core-drilled holes.
- C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
 - 1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
 - 2. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level.
 - 3. Using grout or silicone sealant, seal the space outside of sleeves in floors/slabs/walls without sleeve-seal system. Select to maintain fire resistance of floor/slab/wall.
- D. Install sleeves for pipes passing through interior partitions.
 - 1. Cut sleeves to length for mounting flush with both surfaces.
 - 2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
 - 3. Seal annular space between sleeve and piping or piping insulation; use joint sealants that joint sealant manufacturer's literature indicates is appropriate for size, depth, and location of joint.
- E. Fire-Resistance-Rated Penetrations, Horizontal Assembly Penetrations, and Smoke Barrier Penetrations: Maintain indicated fire or smoke rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with fire- and smoke-stop materials. Comply with requirements for firestopping and fill materials specified in Division 7.

3.2 INSTALLATION OF SLEEVE-SEAL SYSTEMS

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at service piping entries into building, and passing through exterior walls.
- B. Select type, size, and number of sealing elements required for piping material and size and for sleeve ID or hole size. Assemble sleeve-seal system components, and install in annular space between piping and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make a watertight seal.

3.3 INSTALLATION OF ESCUTCHEONS

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of insulated piping and with OD that completely covers opening.

3.4 FIELD QUALITY CONTROL

- A. Sleeves and Sleeve Seals:
 - 1. Perform the following tests and inspections:
 - a. Leak Test: After allowing for a full cure, test sleeves and sleeve seals for leaks. Repair leaks and retest until no leaks exist.
 - b. Sleeves and sleeve seals will be considered defective if they do not pass tests and inspections.
 - 2. Prepare test and inspection reports.
- B. Escutcheons:
 - 1. Using new materials, replace broken and damaged escutcheons and floor plates.

3.5 SLEEVES APPLICATION

- A. Use sleeves and sleeve seals for the following piping-penetration applications:
 - 1. Concrete Slabs-on-Grade:
 - a. Sleeves with waterstops.
 - 1) Select sleeve size to allow for 1-inch annular clear space between piping and sleeve for installing sleeve-seal system.
 - 2. Concrete Slabs above Grade:
 - a. Sleeves with waterstops or stack-sleeve fittings.
 - 3. Interior Wall and Partitions:
 - a. Sleeves without waterstops.

3.6 ESCUTCHEONS APPLICATION

- A. Escutcheons for New Piping and Relocated Existing Piping:
 - 1. Piping with Fitting or Sleeve Protruding from Wall: One piece, deep pattern.
 - 2. Chrome-Plated Piping: One piece, steel with polished, chrome-plated finish.
 - 3. Insulated Piping:
 - a. One piece, steel with polished, chrome-plated finish.
 - 4. Bare Piping at Wall and Floor Penetrations in Finished Spaces:
 - a. One piece, steel with polished, chrome-plated finish.
 - 5. Bare Piping at Ceiling Penetrations in Finished Spaces:
 - a. One piece, steel with polished, chrome-plated finish.
- B. Install floor plates for piping penetrations of equipment-room floors.
- C. Install floor plates with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
 - 1. New Piping and Relocated Existing Piping: One piece, floor plate.
 - 2. Existing Piping: Split floor plate.

END OF SECTION 220500

This page intentionally left blank.

SECTION 220523 - GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Ball valves.
 - 2. Butterfly valves.
 - 3. Check valves.
 - 4. Gate valves.
 - 5. Chainwheels.

1.2 DEFINITIONS

- A. CWP: Cold working pressure.
- B. EPDM: Ethylene propylene-diene terpolymer.
- C. FKM: Fluoroelastomer.
- D. NBR: Nitrile butadiene rubber (also known as Buna-N).
- E. NRS: Nonrising stem.
- F. OS&Y: Outside screw and yoke.
- G. PTFE: Polytetrafluoroethylene.
- H. RPTFE: Reinforced polytetrafluoroethylene.
- I. RS: Rising stem.

1.3 ACTION SUBMITTALS

- A. Product Data:
 - 1. For each type of product.
 - a. Include material descriptions and dimensions of individual components.
 - b. Include operating characteristics and furnished accessories.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads, flange faces, grooved ends, press ends, solder ends, and weld ends.
 - 3. Set ball valves open to minimize exposure of functional surfaces.
 - 4. Set butterfly valves closed or slightly open.
 - 5. Block check valves in either closed or open position.
 - 6. Set gate valves closed to prevent rattling.
- B. Use the following precautions during storage:
 - 1. Maintain valve end protection.
 - 2. Store valves indoors and maintain at higher-than-ambient-dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.
- C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use operating handles or stems or other components as lifting or rigging points unless specifically indicated for this purpose in manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain each type of valve from single source from single manufacturer.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
2. [American Valve, Inc]
3. [Apollo Valves; a part of Aalberts Integrated Piping Systems]
4. [Bonomi North America, Inc.]
5. [Crane Fluid Systems; Crane Co.]
6. [Hammond Valve]
7. [Jenkins Valves; a Crane Co. brand]
8. [Jomar Valve]
9. [KITZ Corporation]
10. [Lance Valves]
11. [Milwaukee Valve Company]
12. NIBCO
13. [Stockham; a Crane Co. brand]
14. [Viega LLC]
15. [WATTS; A Watts Water Technologies Company]

2.2 PERFORMANCE REQUIREMENTS

- A. Standards:
 1. Domestic-water piping valves intended to convey or dispense water for human consumption must comply with the U.S. Safe Drinking Water Act (SDWA), requirements of authorities having jurisdiction, and NSF 61/NSF 372; or to be certified in compliance with NSF 61/NSF 372 by an American National Standards Institute (ANSI)-accredited third-party certification body, that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.
- B. ASME Compliance:
 1. ASME B1.20.1 for threads for threaded-end valves.
 2. ASME B16.1 for flanges on iron valves.
 3. ASME B16.5 for flanges on steel valves.
 4. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.
 5. ASME B16.18 for cast-copper solder-joint connections.
 6. ASME B16.22 for wrought-copper solder-joint connections.
 7. ASME B16.34 for flanged- and threaded-end connections.
 8. ASME B16.51 for press joint connections.
 9. ASME B31.9 for building services piping valves.
- C. AWWA Compliance: Comply with AWWA C606 for grooved-end connections.
- D. Provide bronze valves made with dezincification-resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc are unacceptable.
- E. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.
- F. Valve Sizes: Same as upstream piping unless otherwise indicated.
- G. Valve Bypass and Drain Connections: MSS SP-45.
- H. Valve Actuator Type:
 1. Gear Actuator: For quarter-turn ball valves NPS 4 and larger.
 2. Hand Lever: For quarter-turn ball valves smaller than NPS 4.
- I. Valves in Insulated Piping:
 1. Provide 2-inch extended neck stems.
 2. Provide extended operating handles with nonthermal-conductive covering material and protective sleeves that allow operation of valves without breaking vapor seals or disturbing insulation.
 3. Provide memory stops that are fully adjustable after insulation is applied.

2.3 BALL VALVES, LEAD FREE

- A. Ball Valves, Lead Free, Threaded or Soldered Ends - Brass, Two Piece with Full Port and Brass Trim:

1. Standards: MSS SP-110 and MSS SP-145.
 2. CWP Rating: 600 psig.
 3. Body Design: Two piece.
 4. Body Material: Forged brass.
 5. Ends: Threaded or soldered. See Part 3 ball valve schedule articles.
 6. Seats: PTFE.
 7. Stem: Brass.
 8. Ball: Chrome-plated brass.
 9. Port: Full.
- B. Ball Valves, Lead Free, Press Ends - Brass, Two Piece with Full Port and Brass Trim:
1. Standards: MSS SP-110, MSS SP-145, IAPMO/ANSI Z1157.
 2. CWP Rating: Minimum 200 psig.
 3. Body Design: Two piece.
 4. Body Material: Forged brass.
 5. Ends: Press.
 6. Press-End Connections Rating: Minimum 200 psig.
 7. Seats: PTFE or RPTFE.
 8. Stem: Brass.
 9. Ball: Chrome-plated brass.
 10. Port: Full.
 11. O-Ring Seal: NBR or EPDM.
- C. Ball Valves, Lead Free, Threaded or Soldered Ends - Brass, Two Piece with Full Port and Stainless Steel Trim:
1. Standards: MSS SP-110 and MSS SP-145.
 2. CWP Rating: 600 psig.
 3. Body Design: Two piece.
 4. Body Material: Forged brass.
 5. Ends: Threaded or soldered. See Part 3 ball valve schedule articles.
 6. Seats: PTFE.
 7. Stem: Stainless steel.
 8. Ball: Stainless steel, vented.
 9. Port: Full.
- D. Ball Valves, Lead Free, Press Ends - Brass, Two Piece with Full Port and Stainless Steel Trim:
1. Standards: MSS SP-110, MSS SP-145, and IAPMO/ANSI Z1157.
 2. CWP Rating: Minimum 200 psig.
 3. Body Design: Two piece.
 4. Body Material: Forged brass.
 5. Ends: Press.
 6. Press-End Connections Rating: Minimum 200 psig.
 7. Seats: PTFE or RPTFE.
 8. Stem: Stainless steel.
 9. Ball: Stainless steel, vented.
 10. Port: Full.
 11. O-Ring Seal: NBR or EPDM.
- E. Ball Valves, Lead Free, Threaded or Soldered Ends - Bronze, Two Piece with Full Port and Bronze or Brass Trim:
1. Standards: MSS SP-110 and MSS SP-145.
 2. CWP Rating: 600 psig.
 3. Body Design: Two piece.
 4. Body Material: Bronze.
 5. Ends: Threaded or soldered. See Part 3 ball valve schedule articles.
 6. Seats: PTFE.
 7. Stem: Bronze or brass.
 8. Ball: Chrome-plated brass.
 9. Port: Full.

- F. Ball Valves, Lead Free, Press Ends - Bronze, Two Piece with Full Port and Bronze or Brass Trim:
 - 1. Standards: MSS SP-110, MSS SP-145, and IAPMO/ANSI Z1157.
 - 2. CWP Rating: Minimum 200 psig.
 - 3. Body Design: Two piece.
 - 4. Body Material: Bronze.
 - 5. Ends: Press.
 - 6. Press-End Connections Rating: Minimum 200 psig.
 - 7. Seats: PTFE or RTPFE.
 - 8. Stem: Bronze or brass.
 - 9. Ball: Chrome-plated brass.
 - 10. Port: Full.
 - 11. O-Ring Seal: EPDM or NBR.
- G. Ball Valves, Lead Free, Threaded or Soldered Ends - Bronze, Two Piece with Full Port and Stainless Steel Trim:
 - 1. Standards: MSS SP-110 and MSS SP-145.
 - 2. CWP Rating: 600 psig.
 - 3. Body Design: Two piece.
 - 4. Body Material: Bronze.
 - 5. Ends: Threaded or soldered. See Part 3 ball valve schedule articles.
 - 6. Seats: PTFE.
 - 7. Stem: Stainless steel.
 - 8. Ball: Stainless steel, vented.
 - 9. Port: Full.

2.4 BALL VALVES, GENERAL PURPOSE

- A. Ball Valves, Threaded or Soldered Ends - Brass, Two Piece with Full Port and Brass Trim:
 - 1. Standard: MSS SP-110.
 - 2. SWP Rating: 150 psig.
 - 3. CWP Rating: 600 psig.
 - 4. Body Design: Two piece.
 - 5. Body Material: Forged brass.
 - 6. Ends: Threaded or soldered. See Part 3 ball valve schedule articles.
 - 7. Seats: PTFE.
 - 8. Stem: Brass.
 - 9. Ball: Chrome-plated brass.
 - 10. Port: Full.
- B. Ball Valves, Threaded or Soldered Ends - Brass, Two Piece with Full Port and Stainless Steel Trim:
 - 1. Standard: MSS SP-110.
 - 2. SWP Rating: 150 psig.
 - 3. CWP Rating: 600 psig.
 - 4. Body Design: Two piece.
 - 5. Body Material: Forged brass.
 - 6. Ends: Threaded or soldered. See Part 3 ball valve schedule articles.
 - 7. Seats: PTFE.
 - 8. Stem: Stainless steel.
 - 9. Ball: Stainless steel, vented.
 - 10. Port: Full.
- C. Ball Valves, Threaded Ends - Bronze, Two Piece, Safety Exhaust:
 - 1. Standards: MSS SP-110 and MSS SP-145.
 - 2. CWP Rating: 200 psig or other pressure. See Part 3 ball valve schedule articles.
 - 3. Body Design: Two piece.
 - 4. Body Material: Bronze, ASTM B584, Alloy C844.
 - 5. Ends: Threaded.
 - 6. Seats: PTFE.
 - 7. Stem: Stainless steel.

8. Ball: Chrome-plated brass, with exhaust vent opening for pneumatic applications.
 9. Port: Full.
- D. Ball Valves, Threaded or Flanged Ends - Stainless Steel, Two Piece with Full Port:
1. Standard: MSS SP-110.
 2. CWP Rating: 200 psig.
 3. Body Design: Split body.
 4. Body Material: Type 316 stainless steel.
 5. Ends: Threaded or flanged. See Part 3 ball valve schedule articles.
 6. Seats: PTFE.
 7. Stem: Type 316 stainless steel.
 8. Ball: Type 316 stainless steel.
 9. Port: Full.

2.5 BUTTERFLY VALVES, LEAD FREE

- A. Butterfly Valves, Lead Free, Single Flange (Lug Type) - Iron, with Aluminum-Bronze Disc:
1. Standard: MSS SP-67, Type I.
 2. CWP Rating: 150 psig, or 200 psig. See Part 3 butterfly valve schedule articles.
 3. Body Design: Single flange (lug type), suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
 4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
 5. Seat: EPDM or NBR. See Part 3 butterfly valve schedule articles.
 6. Stem: One- or two-piece stainless steel.
 7. Disc: Aluminum bronze.
- B. Butterfly Valves, Lead Free, Single Flange (Lug Type) - Iron, with Ductile-Iron Disc:
1. Standard: MSS SP-67, Type I.
 2. CWP Rating: 150 psig, or 200 psig. See Part 3 butterfly valve schedule articles.
 3. Body Design: Single flange (lug type), suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
 4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
 5. Seat: EPDM or NBR. See Part 3 butterfly valve schedule articles.
 6. Stem: One- or two-piece stainless steel.
 7. Disc: Nickel-plated[**or -coated**] ductile iron.
- C. Butterfly Valves, Lead Free, Single Flange (Lug Type) - Iron, with Stainless Steel Disc:
1. Standard: MSS SP-67, Type I.
 2. CWP Rating, NPS 12 (DN 300) and Smaller: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
 3. Body Design: Single flange (lug type), suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
 4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
 5. Seat: EPDM or NBR. See Part 3 butterfly valve schedule articles.
 6. Stem: One- or two-piece stainless steel.
 7. Disc: Stainless steel.
- D. Butterfly Valves, Lead Free, Flangeless (Wafer Type) - Iron, with Aluminum-Bronze Disc:
1. Standard: MSS SP-67, Type I.
 2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
 3. Body Design: Flangeless (wafer type), suitable for bidirectional dead-end service at rated pressure.
 4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
 5. Seat: EPDM or NBR. See Part 3 butterfly valve schedule articles.
 6. Stem: One- or two-piece stainless steel.
 7. Disc: Aluminum bronze.
- E. Butterfly Valves, Lead Free, Flangeless (Wafer Type) - Iron, with Ductile-Iron Disc:
1. Standard: MSS SP-67, Type I.
 2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
 3. Body Design: Flangeless (wafer type), suitable for bidirectional dead-end service at rated pressure.

4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
5. Seat: EPDM or NBR. See Part 3 butterfly valve schedule articles.
6. Stem: One- or two-piece stainless steel.
7. Disc: Nickel-plated[**or -coated**] ductile iron.

F. Butterfly Valves, Lead Free, Flangeless (Wafer Type) - Iron, with Stainless Steel Disc:

1. Standard: MSS SP-67, Type I.
2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
3. Body Design: Flangeless (wafer type), suitable for bidirectional dead-end service at rated pressure.
4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
5. Seat: EPDM or NBR. See Part 3 butterfly valve schedule articles.
6. Stem: One- or two-piece stainless steel.
7. Disc: Stainless steel.

2.6 BUTTERFLY VALVES, GENERAL PURPOSE

A. Butterfly Valves, Single Flange (Lug Type) - Iron, with Aluminum-Bronze Disc:

1. Standard: MSS SP-67, Type I.
2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
3. Body Design: Single flange (lug type), suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
5. Seat: NBR.
6. Stem: One- or two-piece stainless steel.
7. Disc: Aluminum bronze.

B. Butterfly Valves, Single Flange (Lug Type) - Iron, with Ductile-Iron Disc:

1. Standard: MSS SP-67, Type I.
2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
3. Body Design: Single flange (lug type), suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
5. Seat: NBR.
6. Stem: One- or two-piece stainless steel.
7. Disc: Nickel-plated[**or -coated**] ductile iron.

C. Butterfly Valves, Single Flange (Lug Type) - Iron, with Stainless Steel Disc:

1. Standard: MSS SP-67, Type I.
2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
3. Body Design: Single flange (lug type), suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
5. Seat: NBR.
6. Stem: One- or two-piece stainless steel.
7. Disc: Stainless steel.

D. Butterfly Valves, Flangeless (Wafer Type) - Iron, with Aluminum-Bronze Disc:

1. Standard: MSS SP-67, Type I.
2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
3. Body Design: Flangeless (wafer type), suitable for bidirectional dead-end service at rated pressure.
4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
5. Seat: NBR.
6. Stem: One- or two-piece stainless steel.
7. Disc: Aluminum bronze.

E. Butterfly Valves, Flangeless (Wafer Type) - Iron, with Ductile-Iron Disc:

1. Standard: MSS SP-67, Type I.
2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
3. Body Design: Flangeless (wafer type), suitable for bidirectional dead-end service at rated pressure.
4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.

5. Seat: NBR.
6. Stem: One- or two-piece stainless steel.
7. Disc: Nickel-plated[**or -coated**] ductile iron.

- F. Butterfly Valves, Flangeless (Wafer Type) - Iron, with Stainless Steel Disc:
1. Standard: MSS SP-67, Type I.
 2. CWP Rating: 150 psig or 200 psig. See Part 3 butterfly valve schedule articles.
 3. Body Design: Flangeless (wafer type), suitable for bidirectional dead-end service at rated pressure.
 4. Body Material: ASTM A126, cast iron or ASTM A536, ductile iron.
 5. Seat: NBR.
 6. Stem: One- or two-piece stainless steel.
 7. Disc: Stainless steel.

2.7 CHECK VALVES, LEAD FREE

- A. Check Valves, Lead Free, Swing Type, Threaded or Soldered Ends - Bronze, with Bronze Disc, Class 125:
1. Standard: MSS SP-80, Type 3.
 2. CWP Rating: 200 psig.
 3. Body Design: Horizontal flow.
 4. Body Material: ASTM B62, bronze.
 5. Ends: Threaded or soldered. See Part 3 check valve schedule articles.
 6. Disc: Bronze.
- B. Check Valves, Lead Free, Swing Type, Threaded or Soldered Ends - Bronze, with Bronze Disc, Class 150:
1. Standard: MSS SP-80, Type 3.
 2. CWP Rating: 300 psig.
 3. Body Design: Horizontal flow.
 4. Body Material: ASTM B62, bronze.
 5. Ends: Threaded or soldered. See Part 3 check valve schedule articles.
 6. Disc: Bronze.
- C. Check Valves, Lead Free, Swing Type, Press Ends - Bronze:
1. Standards: MSS SP-80 and MSS SP-139.
 2. CWP Rating: Minimum 200 psig.
 3. Body Design: Horizontal flow.
 4. Body Material: ASTM B584, bronze.
 5. Ends: Press.
 6. Press-End Connections Rating: Minimum 200 psig.
 7. Disc: Brass or bronze.
- D. Check Valves, Lead Free, Swing Type, Flanged or Threaded Ends - Iron, with Metal Seats, Class 125:
1. Standard: MSS SP-71, Type I.
 2. CWP Rating: **200 psig.**
 3. Body Design: Clear or full waterway.
 4. Body Material: ASTM A126, gray iron with bolted bonnet.
 5. Ends: Flanged or threaded. See Part 3 check valve schedule articles.
 6. Trim: Bronze.
 7. Gasket: Asbestos free.

2.8 CHECK VALVES, GENERAL PURPOSE

- A. Check Valves, Lift Type, Threaded or Soldered Ends - Bronze, with Bronze Disc, Class 125:
1. Standard: MSS SP-80, Type 1.
 2. CWP Rating: 200 psig.
 3. Body Design: Vertical flow.
 4. Body Material: ASTM B61 or ASTM B62, bronze.
 5. Ends: Threaded or soldered ends. See Part 3 check valve schedule articles.
 6. Disc: Bronze.

- B. Check Valves, Swing Type, Threaded or Soldered Ends - Bronze, with Bronze Disc, Class 125:
 - 1. Standard: MSS SP-80, Type 3.
 - 2. CWP Rating: 200 psig.
 - 3. Body Design: Horizontal flow.
 - 4. Body Material: ASTM B62, bronze.
 - 5. Ends: Threaded or soldered ends. See Part 3 check valve schedule articles.
 - 6. Disc: Bronze.
- C. Check Valves, Swing Type, Threaded or Soldered Ends - Bronze, with Bronze Disc, Class 150:
 - 1. Standard: MSS SP-80, Type 3.
 - 2. CWP Rating: 300 psig.
 - 3. Body Design: Horizontal flow.
 - 4. Body Material: ASTM B62, bronze.
 - 5. Ends: Threaded or soldered ends. See Part 3 check valve schedule articles.
 - 6. Disc: Bronze.

2.9 GATE VALVES, LEAD FREE

- A. Gate Valves, Lead Free, Threaded or Soldered Ends - Bronze, NRS, Class 125:
 - 1. Standard: MSS SP-80, Type 1.
 - 2. CWP Rating: 200 psig.
 - 3. Body Material: Bronze with integral seat and screw-in bonnet.
 - 4. Ends: Threaded or solder joint. See Part 3 gate valve schedule articles.
 - 5. Stem: Bronze.
 - 6. Disc: Solid wedge, bronze.
 - 7. Packing: Asbestos free.
 - 8. Handwheel: Malleable iron[, **bronze, or aluminum**].
- B. Gate Valves, Lead Free, Threaded or Soldered Ends - Bronze, RS, Class 125:
 - 1. Standard: MSS SP-80, Type 2.
 - 2. CWP Rating: 200 psig.
 - 3. Body Material: Bronze with integral seat and screw-in bonnet.
 - 4. Ends: Threaded or solder joint. See Part 3 gate valve schedule articles.
 - 5. Stem: Bronze.
 - 6. Disc: Solid wedge, bronze.
 - 7. Packing: Asbestos free.
 - 8. Handwheel: Malleable iron, bronze, or aluminum.
- C. Gate Valves, Lead Free, Threaded Ends - Bronze, NRS, Class 150:
 - 1. Standard: MSS SP-80, Type 1.
 - 2. CWP Rating: 300 psig.
 - 3. Body Material: Bronze with integral seat and union-ring bonnet.
 - 4. Ends: Threaded.
 - 5. Stem: Bronze.
 - 6. Disc: Solid wedge, bronze.
 - 7. Packing: Asbestos free.
 - 8. Handwheel: Malleable iron[, **bronze, or aluminum**].
- D. Gate Valves, Lead Free, Threaded Ends - Bronze, RS, Class 150:
 - 1. Standard: MSS SP-80, Type 2.
 - 2. CWP Rating: 300 psig.
 - 3. Body Material: Bronze with integral seat and union-ring bonnet.
 - 4. Ends: Threaded.
 - 5. Stem: Bronze.
 - 6. Disc: Solid wedge, bronze.
 - 7. Packing: Asbestos free.
 - 8. Handwheel: Malleable iron[, **bronze, or aluminum**].
- E. Gate Valves, Lead Free, Press Ends - Bronze:
 - 1. Standards: MSS SP-80 and MSS SP-139.

2. CWP Rating: Minimum 200 psig.
 3. Body Material: Bronze with integral seat and union-ring bonnet.
 4. Ends: Press.
 5. Press Ends Connection Rating: Minimum 200 psig.
 6. Stem: Brass or bronze, RS or NRS. See Part 3 gate valve schedule articles.
 7. Disc: Solid wedge, bronze.
 8. Packing: Graphite.
 9. Port: Full.
 10. Handwheel: Malleable iron, bronze, or aluminum.
- F. Gate Valves, Lead Free, Flanged Ends - Iron, NRS, Class 125:
1. Standard: MSS SP-70, Type I.
 2. CWP Rating: 200 psig.
 3. Body Material: Gray iron with bolted bonnet.
 4. Ends: Flanged.
 5. Trim: Bronze.
 6. Disc: Solid wedge.
 7. Packing and Gasket: Asbestos free.
- G. Gate Valves, Lead Free, Flanged Ends - Iron, OS&Y, Class 125:
1. Standard: MSS SP-70, Type I.
 2. CWP Rating: 200 psig.
 3. Body Material: Gray iron with bolted bonnet.
 4. Ends: Flange.
 5. Trim: Bronze.
 6. Disc: Solid wedge.
 7. Packing and Gasket: Asbestos free.
- H. Gate Valves, Lead Free, Flanged Ends - Iron, NRS, Class 250:
1. Standard: MSS SP-70, Type I.
 2. CWP Rating: 500 psig.
 3. Body Material: Gray iron with bolted bonnet.
 4. Ends: Flange.
 5. Trim: Bronze.
 6. Disc: Solid wedge.
 7. Packing and Gasket: Asbestos free.

2.10 GATE VALVES, GENERAL PURPOSE

- A. Gate Valves, Threaded or Soldered Ends - Bronze, NRS, Class 125:
1. Standard: MSS SP-80, Type 1.
 2. CWP Rating: 200 psig.
 3. Body Material: ASTM B62, bronze with integral seat and screw-in bonnet.
 4. Ends: Threaded or soldered joint. See Part 3 gate valve schedule articles.
 5. Stem: Bronze.
 6. Disc: Solid wedge, bronze.
 7. Packing: Asbestos free.
 8. Handwheel: Malleable iron[, **bronze, or aluminum**].
- B. Gate Valves, Threaded or Soldered Ends - Bronze, RS, Class 125:
1. Standard: MSS SP-80, Type 2.
 2. CWP Rating: 200 psig.
 3. Body Material: ASTM B62, bronze with integral seat and screw-in bonnet.
 4. Ends: Threaded or soldered joint. See Part 3 gate valve schedule articles.
 5. Stem: Bronze.
 6. Disc: Solid wedge, bronze.
 7. Packing: Asbestos free.
 8. Handwheel: Malleable iron, bronze, or aluminum.
- C. Gate Valves, Threaded Ends - Bronze, NRS, Class 150:

1. Standard: MSS SP-80, Type 1.
 2. CWP Rating: 300 psig.
 3. Body Material: ASTM B62, bronze with integral seat and union-ring bonnet.
 4. Ends: Threaded.
 5. Stem: Bronze.
 6. Disc: Solid wedge, bronze.
 7. Packing: Asbestos free.
 8. Handwheel: Malleable iron[, **bronze, or aluminum**].
- D. Gate Valves, Threaded Ends - Bronze, RS, Class 150:
1. Standard: MSS SP-80, Type 2.
 2. CWP Rating: 300 psig.
 3. Body Material: ASTM B62, bronze with integral seat and union-ring bonnet.
 4. Ends: Threaded.
 5. Stem: Bronze.
 6. Disc: Solid wedge, bronze.
 7. Packing: Asbestos free.
 8. Handwheel: Malleable iron[, **bronze, or aluminum**].
- E. Gate Valves, Flanged Ends - Iron, NRS, Class 125:
1. Standard: MSS SP-70, Type I.
 2. CWP Rating, NPS 2-1/2 to NPS 12 (DN 65 to DN 300): 200 psig.
 3. CWP Rating, NPS 14 to NPS 24 (DN 350 to DN 600): 150 psig.
 4. Body Material: ASTM A126, gray iron with bolted bonnet.
 5. Ends: Flanged.
 6. Trim: Bronze.
 7. Disc: Solid wedge.
 8. Packing and Gasket: Asbestos free.
- F. Gate Valves, Flanged Ends - Iron, OS&Y, Class 125:
1. Standard: MSS SP-70, Type I.
 2. CWP Rating, NPS 2-1/2 to NPS 12 (DN 65 to DN 300): 200 psig.
 3. CWP Rating, NPS 14 to NPS 24 (DN 350 to DN 600): 150 psig.
 4. Body Material: ASTM A126, gray iron with bolted bonnet.
 5. Ends: Flanged.
 6. Trim: Bronze.
 7. Disc: Solid wedge.
 8. Packing and Gasket: Asbestos free.
- G. Gate Valves, Flanged Ends - Iron, NRS, Class 250:
1. Standard: MSS SP-70, Type I.
 2. CWP Rating, NPS 2-1/2 to NPS 12 (DN 65 to DN 300): 500 psig.
 3. CWP Rating, NPS 14 to NPS 24 (DN 350 to DN 600): 300 psig.
 4. Body Material: ASTM A126, gray iron with bolted bonnet.
 5. Ends: Flanged.
 6. Trim: Bronze.
 7. Disc: Solid wedge.
 8. Packing and Gasket: Asbestos free.
- H. Gate Valves, Flanged Ends - Iron, OS&Y, Class 250:
1. Standard: MSS SP-70, Type I.
 2. CWP Rating, NPS 2-1/2 to NPS 12 (DN 65 to DN 300): 500 psig.
 3. CWP Rating, NPS 14 to NPS 24 (DN 350 to DN 600): 300 psig.
 4. Body Material: ASTM A126, gray iron with bolted bonnet.
 5. Ends: Flanged.
 6. Trim: Bronze.
 7. Disc: Solid wedge.
 8. Packing and Gasket: Asbestos free.

2.11 CHAINWHEELS

- A. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1. **[Babbitt Steam Specialty Co]**
 - 2. **[Roto Hammer Industries; Rotork]**
 - 3. **[Trumbull Industries]**
 - 4. **<Insert manufacturer's name>**
- B. Description: Valve actuation assembly with sprocket rim, chain guides, chain[, **and attachment brackets for mounting chainwheels directly to handwheels**].
 - 1. Sprocket Rim with Chain Guides: **[Ductile iron][Ductile or cast iron][Cast iron][Aluminum][Bronze]**, of type and size required for valve. **[Include zinc or epoxy coating.]**
 - 2. Chain: **[Hot-dip, galvanized steel][Brass][Stainless steel]**, of size required to fit sprocket rim.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.
- E. Examine press fittings to verify they have been properly pressed.
- F. Do not attempt to repair defective valves; replace with new valves. Remove defective valves from site.

3.2 INSTALLATION OF VALVES

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Provide support of piping adjacent to valves such that no force is imposed upon valves.
- C. Locate valves for easy access and where not blocked by equipment, other piping, or building components.
- D. For valves in horizontal piping, install valves with stem at or above center of pipe.
- E. Install valves in position that does not project into aisles or block access to other equipment.
- F. Install valves in position to allow full stem and actuator or manual operator movement.
- G. Verify that joints of each valve have been properly installed and sealed to assure there is no leakage or damage.
- H. Chainwheels: Install chainwheels on manual operators for butterfly globe and gate valves Insert pipe size and larger and more than 96 inches above floor. Extend chains to 60 inches above finished floor.
- I. Install check valves for proper direction of flow and as follows:
 - 1. Check Valves: plate type, in horizontal or vertical position, between flanges.
 - 2. Check Valves, Swing Type: In horizontal position with hinge pin level.
- J. Valve Tags: Comply with requirements in Section 220553 "Identification for Plumbing Piping and Equipment" for valve tags and schedules.

- K. Adhere to manufacturer's written installation instructions. When soldering or brazing valves, do not heat valves above maximum permitted temperature. Do not use solder with melting point temperature above valve manufacturer's written recommended maximum.

3.3 ADJUSTING

- A. Adjust or replace valve packing after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves if persistent leaking occurs.

3.4 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

- A. If valves with specified CWP ratings are unavailable, the same types of valves with higher CWP ratings may be substituted.
- B. Select valves with the following end connections:
 - 1. For Copper Tubing, NPS 2 (DN 50) and Smaller: Threaded ends except where solder-joint valve-end option or press-end option is indicated in valve schedules below.
 - 2. For Copper Tubing, NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Flanged ends except where threaded valve-end option is indicated in valve schedules below.
 - 3. For Copper Tubing, NPS 5 (DN 125) and Larger: Flanged ends.
 - 4. For Steel Piping, NPS 2 (DN 50) and Smaller: Threaded ends.
 - 5. For Steel Piping, NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Flanged ends except where threaded valve-end option is indicated in valve schedules below.
 - 6. For Steel Piping, NPS 5 (DN 125) and Larger: Flanged ends.
 - 7. For Grooved-End Copper Tubing: Valve ends may be grooved.
 - 8. For Grooved-End Steel Piping: Valve ends may be grooved.
 - 9. Wafer-Type Valves: Flanged connections.

3.5 LOW-PRESSURE, COMPRESSED-AIR BALL VALVE SCHEDULE - 150 PSIG (1035 kPa) OR LESS

- A. Pipe NPS 2 (DN 50) and Smaller:
 - 1. Ball valves, threaded ends - bronze, two piece, safety exhaust; 200 psig.
- B. Pipe NPS 2-1/2 (DN 65) and Larger:
 - 1. Ball valves, flanged ends - steel, with full port and stainless steel trim, Class 300.
 - 2. Ball valves, flanged ends - iron, Class 125.
 - 3. Ball valves, threaded or flanged ends - stainless steel, two piece with full port; [threaded][flanged] ends.

3.6 DOMESTIC HOT- AND COLD-WATER BALL VALVE SCHEDULE

- A. Pipe NPS 2 (DN 50) and Smaller:
 - 1. Ball valves, lead free, threaded or soldered ends - bronze, two piece with full port and bronze or brass trim.
 - 2. Ball valves, lead free, press ends - brass, two piece with full port and brass trim.
- B. Pipe NPS 2-1/2 (DN 65) and Larger:
 - 1. Ball valves, lead free, flanged or threaded ends - iron, Class 125.

3.7 DOMESTIC HOT- AND COLD-WATER BUTTERFLY VALVE SCHEDULE

- A. Pipe NPS 2-1/2 (DN 65) and Larger:
 - 1. Butterfly valves, lead free, single flange (lug type) - iron, with aluminum-bronze disc; 150 CWP, EPDM seat.
 - 2. Butterfly valves, lead free, flangeless (wafer type) - iron, with aluminum-bronze disc; 150 CWP, EPDM seat.

3.8 DOMESTIC HOT- AND COLD-WATER CHECK VALVE SCHEDULE

- A. Pipe NPS 2 (DN 50) and Smaller:
 - 1. Check valves, lead free, swing type, threaded or soldered ends - bronze, with bronze disc, Class 125.

2. Check valves, lead free, swing type, press ends - bronze.

B. Pipe NPS 2-1/2 (DN 65) and Larger:

1. Check valves, lead free, swing type, flanged or threaded ends - iron, with metal seats, Class 125.
2. Check valves, lead free, center guided - iron, globe, with metal seat, Class 125.

3.9 PUMP-DISCHARGE CHECK VALVE SCHEDULE

A. Pipe NPS 2 (DN 50) and Smaller:

1. Check valves, lead free, swing type, threaded or soldered ends - bronze, with bronze disc, Class 125.

B. Pipe NPS 2-1/2 (DN 65) and Larger for Domestic Water Pumps:

1. Check valves, lead free, swing type, flanged or threaded ends - iron, with lever- and spring-closure control, Class 125.
2. Check valves, lead free, center guided - iron, globe, with metal seat, Class 125.

3.10 DOMESTIC HOT- AND COLD-WATER GATE VALVE SCHEDULE

A. Pipe NPS 2-1/2 (DN 65) and Larger:

1. Gate valves, lead free, flanged ends - iron, NRS, Class 125.
2. Gate valves, lead free, flanged ends - iron, OS&Y, Class 125.

END OF SECTION 220523

This page intentionally left blank.

SECTION 220529 - HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Pipe hangers and supports - metal.
 - 2. Pipe hangers - metal, trapeze type.
 - 3. Strut support system - metal, rod type.
 - 4. Strut support system - metal, cable type.
 - 5. Thermal hanger shield inserts.
 - 6. Fastener systems.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: Show fabrication and installation details and include calculations for the following:
 - 1. Trapeze pipe hangers.
 - 2. Metal strut support systems.
 - 3. Rooftop-mounted strut support systems.
 - 4. Pipe stands.
 - 5. Equipment supports.

1.3 INFORMATIONAL SUBMITTALS

- A. Welding certificates.

1.4 QUALITY ASSURANCE

- A. Structural-Steel Welding Qualifications: Qualify procedures and personnel in accordance with AWS D1.1/D1.1M.
- B. Pipe Welding Qualifications: Qualify procedures and operators in accordance with 2021 ASME Boiler and Pressure Vessel Code, Section IX.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Hangers and supports for plumbing piping and equipment are to withstand the effects of gravity loads and stresses within limits and under conditions indicated in accordance with ASCE/SEI 7.
 - 1. Design supports for multiple pipes, including pipe stands, capable of supporting combined weight of supported systems, system contents, and test water.
 - 2. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

2.2 PIPE HANGERS AND SUPPORTS - METAL

- A. Pipe Hangers and Supports - Carbon Steel:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Anvil; an ASC Engineered Solution
 - b. Cooper B-line; brand of Eaton, Electrical Sector
 - c. FNW; Ferguson Enterprises, Inc.
 - 2. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
 - 3. Galvanized Metallic Coatings: Pregalvanized, hot-dip galvanized, or electro-galvanized.
 - 4. Nonmetallic Coatings: Plastic coated or epoxy powder coated.
 - 5. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.

6. Hanger Rods: Continuous-thread rod, nuts, and washer made of stainless steel.

B. Pipe Hangers and Supports - Stainless Steel:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Anvil; an ASC Engineered Solution
 - b. Cooper B-line; brand of Eaton, Electrical Sector
 - c. FNW; Ferguson Enterprises, Inc.
 - d. Rocket Rack; Robroy Industries
2. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
3. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
4. Hanger Rods: Continuous-thread rod, nuts, and washer made of stainless steel.

C. Pipe/Tube Hangers and Supports - Copper:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Anvil; an ASC Engineered Solution
 - b. Cooper B-line; brand of Eaton, Electrical Sector
 - c. FNW; Ferguson Enterprises, Inc.
2. Description: MSS SP-58, Types 1 through 58, copper-plated-steel, factory-fabricated components.
3. Hanger Rods: Continuous-thread rod, nuts, and washer made of copper-plated steel.

2.3 PIPE HANGERS - METAL, TRAPEZE TYPE

- A. Description: MSS SP-58, Type 59, shop- or field-fabricated pipe-support assembly, made from structural carbon-steel shapes, with MSS SP-58 carbon-steel hanger rods, nuts, saddles, and U-bolts.

2.4 STRUT SUPPORT SYSTEMS - METAL

A. Strut Support System - Metal, Rod Type:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Anvil; an ASC Engineered Solution
 - c. Atkore Unistrut
 - d. CADDY; brand of nVent Electrical plc
 - e. Carpenter & Paterson, Inc
 - f. Cooper B-line; brand of Eaton, Electrical Sector
 - g. Empire Industries, Inc.
 - h. Flex-Strut Inc.
 - i. G-Strut
 - j. Haydon Corporation
 - k. PHD Manufacturing, Inc
 - l. Rocket Rack; Robroy Industries
 - m. Wesanco/ZSi-Foster; an Ideal Tridon Group Company
2. Description: Factory-fabricated pipe-support assembly, made of steel channels, vertical metal support rods, accessories, fittings, and other components for supporting multiple parallel pipes.
3. Standard: Comply with MFMA-4, factory-fabricated components for field assembly.
4. Struts: Continuous slotted carbon-steel channel with intumed lips.
5. Strut Width: Selected for applicable load criteria.
6. Strut Nuts: Formed or stamped nuts or other devices designed to fit into channel slot and, when tightened, prevent slipping along channel.
7. Hanger Rods: Continuous-thread rod, nuts, and washer made of stainless steel.
8. Metallic Coating: Gold (yellow zinc dichromate) galvanized.
9. Paint Coating: Green epoxy, acrylic, or urethane.

B. Strut Support System - Metal, Cable Type:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- a. Gripple Inc.
2. Description: Factory-fabricated pipe-support system, consisting of cable pipe clamps and associated vibration isolation rubber pads, slotted channel brackets, wire rope suspension components, and associated accessories for a complete piping suspension system; no tools required for manual assembly in the field to support multiple parallel pipe routing.
3. Standards:
 - a. ICC-ES PMG Product Certificate.
 - b. Brackets: Fire-rated, tested to F120 in accordance with BS EN 1363-1:2020.
4. Components:
 - a. Pipe Clamps: Size-adjustable standard clamps with rubber pad, 14 dBA noise reduction; with sleeve to prevent galvanic corrosion.
 - b. Brackets: Slotted channels furnished in pre-cut lengths to suit specific system application for Project.
 - c. Suspension Components: Hanging cables with adjustable fastener; can be pre-installed on the brackets using pre-fitted washer/nuts or retention clips.
 - 1) Wire Rope: High tensile steel wire rope, complying with ASTM A1023/A1023M, ASTM A641/A641M Class A zinc coating; 7 by 7 and 7 by 19 cross-sectional construction; having a tensile strength of 256,000 psi; lengths, diameters, and wire construction to accommodate design loads.
 - a) Locking screw/release button.
 - b) Foot attachment type to suit application.
 - c) End Fix Type: Loop , strap hook , eyelet or as required to suit application.
 - d. Adjustable Fastener: Mild steel (type EN1A), bright zinc plated, one-channel body; encasing a series of Type 302 stainless steel springs with serrated self-locking Grade 40 chrome steel balls, adjustable by means of an integrated mechanism, capable of accommodating load as required.

2.5 THERMAL HANGER SHIELD INSERTS

- A. Thermal Hanger Shield Inserts:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Aeroflex USA
 - b. Buckaroos, Inc.
 - c. Carpenter & Paterson, Inc
 - d. KB Enterprise
 - e. National Pipe Hanger Corporation
 - f. Pipe Shields Inc.
 - g. Piping Technology & Products, Inc
 - h. Rilco Manufacturing Co., Inc
 - i. Value Engineered Products, Inc
 2. Insulation-Insert Material for Cold Piping: ASTM C552, Type II cellular glass with 100 psig minimum compressive strength and vapor barrier.
 3. Insulation-Insert Material for Hot Piping: Water-repellent-treated, ASTM C533, Type I calcium silicate with 100 psig minimum compressive strength.
 4. For Trapeze or Clamped Systems: Insert and shield are to cover entire circumference of pipe.
 5. For Clevis or Band Hangers: Insert and shield are to cover bottom 180 degrees of pipe.
 6. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

2.6 FASTENER SYSTEMS

- A. Fastener System - Mechanical-Expansion Anchors: Insert-wedge-type anchors, for use in hardened portland cement concrete, with pull-out, tension, and shear capacities required for supported loads and building materials where used.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cooper B-line; brand of Eaton, Electrical Sector
 - b. Empire Industries, Inc.

- c. Hilti, Inc.
- d. ITW Ramset/Red Head; Illinois Tool Works, Inc.
- e. MKT Fastening, LLC
- 2. Indoor Applications: Zinc-plated or stainless steel.
- 3. Outdoor Applications: Stainless steel.

2.7 MATERIALS

- A. Aluminum: ASTM B221.
- B. Carbon Steel: ASTM A1011/A1011M.
- C. Structural Steel: ASTM A36/A36M carbon-steel plates, shapes, and bars; black and galvanized.
- D. Stainless Steel: ASTM A240/A240M.
- E. Grout: ASTM C1107/C1107M, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.
 - 1. Properties: Nonstaining, noncorrosive, and nongaseous.
 - 2. Design Mix: 5000 psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 APPLICATION

- A. Strength of Support Assemblies: Where not indicated, select sizes of components, so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination is to include weight of supported components plus 200 lb.

3.2 INSTALLATION OF HANGERS AND SUPPORTS

- A. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- B. Install lateral bracing with pipe hangers and supports to prevent swaying.
- C. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Coordinate location of concrete inserts before concrete is placed.
- D. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- E. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.
- F. Insulated Piping:
 - 1. Attach clamps and spacers to piping.
 - a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
 - b. Piping Operating below Ambient Air Temperature: Use thermal hanger shield insert with clamp sized to match OD of insert.
 - c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.
 - 2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.
 - a. Thermal hanger shield inserts may be used as an option. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
 - 3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields are to span an arc of 180 degrees.
 - a. Thermal hanger shield inserts may be used as an option. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
 - 4. Shield Dimensions for Pipe: Not less than the following:

- a. NPS 1/4 to NPS 3-1/2 (DN 8 to DN 90): 12 inches long and 0.048 inch thick.
 - b. NPS 4 (DN 100): 12 inches long and 0.06 inch thick.
 - c. NPS 5 and NPS 6 (DN 125 and DN 150): 18 inches long and 0.06 inch thick.
 - d. NPS 8 to NPS 14 (DN 200 to DN 350): 24 inches long and 0.075 inch thick.
 - e. NPS 16 to NPS 24 (DN 400 to DN 600): 24 inches long and 0.105 inch thick.
- 5. Pipes NPS 8 (DN 200) and Larger: Include calcium-silicate-insulation inserts of length at least as long as protective shield.
- G. Metal Pipe-Hanger Installation: Comply with MSS SP-58. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.
- H. Metal Trapeze Pipe-Hanger Installation: Comply with MSS SP-58. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.
 - 1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size, or install intermediate supports for smaller-diameter pipes as specified for individual pipe hangers.
 - 2. Field fabricate in accordance with ASTM A36/A36M carbon-steel shapes selected for loads being supported. Weld steel in accordance with AWS D1.1/D1.1M.
- I. Strut System Installation: Metal, rod type; arrange for grouping of parallel runs of piping, and support together on field-assembled strut systems. Install in accordance with manufacturer's written installation instructions.
- J. Thermal Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.
- K. Fastener System Installation:
 - 1. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners in accordance with manufacturer's written instructions.
 - 2. Install lag screw wood fasteners in accordance with manufacturer's written instructions.
 - 3. Install fasteners in accordance with manufacturer's written instructions.
- L. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.

3.3 METAL FABRICATIONS

- A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.
- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded.
- C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. Finish welds at exposed connections, so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.4 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.5 PAINTING

- A. Touchup:
 - 1. Clean field welds and abraded, shop-painted areas. Paint exposed areas immediately after erecting hangers and supports. Use same materials as those used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - a. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.

2. Comply with requirements in Painting Section(s) for cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal.
3. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas, and apply galvanizing-repair paint to comply with ASTM A780/A780M.

3.6 HANGER AND SUPPORT SCHEDULE

- A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-58 for pipe-hanger selections and applications that are not specified in piping system Sections.
- C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finishes.
- D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Use carbon-steel pipe hangers and supports metal trapeze pipe hangers and metal framing systems and attachments for general service applications.
- F. Use stainless steel pipe hangers and stainless steel or corrosion-resistant attachments for hostile environment applications.
- G. Use copper-plated pipe hangers and copper attachments for copper piping and tubing.
- H. Use padded hangers for piping that is subject to scratching.
- I. Use thermal hanger shield inserts for insulated piping and tubing.
- J. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30.
 2. Yoke-Type Pipe Clamps (MSS Type 2): For suspension of up to 1050 deg F pipes NPS 4 to NPS 24, requiring up to 4 inches of insulation.
 3. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes NPS 3/4 to NPS 36, requiring clamp flexibility and up to 4 inches of insulation.
 4. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes NPS 1/2 to NPS 24 if little or no insulation is required.
 5. Pipe Hangers (MSS Type 5): For suspension of pipes NPS 1/2 to NPS 4, to allow off-center closure for hanger installation before pipe erection.
 6. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated, stationary pipes NPS 3/4 to NPS 8.
 7. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
 8. Adjustable Band Hangers (MSS Type 9): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
 9. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
 10. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 8.
 11. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 3.
 12. U-Bolts (MSS Type 24): For support of heavy pipes NPS 1/2 to NPS 30.
 13. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.
 14. Pipe Saddle Supports (MSS Type 36): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate.
 15. Pipe Stanchion Saddles (MSS Type 37): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate, and with U-bolt to retain pipe.

16. Adjustable Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes NPS 2-1/2 to NPS 36 if vertical adjustment is required, with steel-pipe base stanchion support and cast-iron floor flange.
 17. Single-Pipe Rolls (MSS Type 41): For suspension of pipes NPS 1 to NPS 30, from two rods if longitudinal movement caused by expansion and contraction occurs.
 18. Adjustable Roller Hangers (MSS Type 43): For suspension of pipes NPS 2-1/2 to NPS 24, from single rod if horizontal movement caused by expansion and contraction occurs.
 19. Complete Pipe Rolls (MSS Type 44): For support of pipes NPS 2 to NPS 42 if longitudinal movement caused by expansion and contraction occurs but vertical adjustment is unnecessary.
 20. Pipe Roll and Plate Units (MSS Type 45): For support of pipes NPS 2 to NPS 24 if small horizontal movement caused by expansion and contraction occurs and vertical adjustment is unnecessary.
 21. Adjustable Pipe Roll and Base Units (MSS Type 46): For support of pipes NPS 2 to NPS 30 if vertical and lateral adjustment during installation, in addition to expansion and contraction, is required.
- K. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24.
 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers NPS 3/4 to NPS 24 if longer ends are required for riser clamps.
- L. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel Turnbuckles (MSS Type 13): For adjustment of up to 6 inches for heavy loads.
 2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
 3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11 split pipe rings.
 4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
 5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.
- M. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel or Malleable-Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
 2. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joist construction, to attach to top flange of structural shape.
 3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
 4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
 5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
 6. C-Clamps (MSS Type 23): For structural shapes.
 7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
 8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
 9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I-beams for heavy loads.
 10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I-beams for heavy loads, with link extensions.
 11. Malleable-Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
 12. Welded-Steel Brackets: For support of pipes from below or for suspending from above by using clip and rod. Use one of the following for indicated loads:
 - a. Light (MSS Type 31): 750 lb.
 - b. Medium (MSS Type 32): 1500 lb.
 - c. Heavy (MSS Type 33): 3000 lb.
 13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
 14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.

15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.
- N. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
 3. Thermal Hanger Shield Inserts: For supporting insulated pipe.
- O. Spring Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Restraint-Control Devices (MSS Type 47): Where indicated to control piping movement.
 2. Spring Cushions (MSS Type 48): For light loads if vertical movement does not exceed 1-1/4 inches.
 3. Spring-Cushion Roll Hangers (MSS Type 49): For equipping Type 41 roll hanger with springs.
 4. Spring Sway Braces (MSS Type 50): To retard sway, shock, vibration, or thermal expansion in piping systems.
 5. Variable-Spring Hangers (MSS Type 51): Preset to indicated load, and limit variability factor to 25 percent to allow expansion and contraction of piping system from hanger.
 6. Variable-Spring Base Supports (MSS Type 52): Preset to indicated load, and limit variability factor to 25 percent to allow expansion and contraction of piping system from base support.
 7. Variable-Spring Trapeze Hangers (MSS Type 53): Preset to indicated load, and limit variability factor to 25 percent to allow expansion and contraction of piping system from trapeze support.
 8. Constant Supports: For critical piping stress and if necessary to avoid transfer of stress from one support to another support, critical terminal, or connected equipment. Include auxiliary stops for erection, hydrostatic test, and load-adjustment capability. These supports include the following types:
 - a. Horizontal (MSS Type 54): Mounted horizontally.
 - b. Vertical (MSS Type 55): Mounted vertically.
 - c. Trapeze (MSS Type 56): Two vertical-type supports and one trapeze member.
- P. Comply with MSS SP-58 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.
- Q. Use mechanical-expansion anchors instead of building attachments where required in concrete construction.

END OF SECTION 220529

SECTION 220553 - IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Equipment labels.
 - 2. Pipe labels.
 - 3. Stencils.
 - 4. Valve tags.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For color, letter style, and graphic representation required for each identification material and device.
- C. Equipment-Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.
- D. Valve-numbering scheme.
- E. Valve Schedules: For each piping system. Include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

- A. Metal Labels for Equipment:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. Champion America
 - d. Craftmark Pipe Markers
 - e. emedco
 - f. Kolbi Pipe Marker Co.
 - g. LEM Products Inc.
 - h. Marking Services Inc.
 - i. Pipemarket.com; Brimar Industries, Inc.
 - j. Seton Identification Products; a Brady Corporation company
 - 2. Material and Thickness: Brass, 0.032-inch stainless steel, 0.025-inch aluminum, 0.032-inch anodized aluminum, 0.032-inch minimum thickness, with predrilled or stamped holes for attachment hardware.
 - 3. Letter and Background Color: As indicated for specific application under Part 3.
 - 4. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
 - 5. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances of up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
 - 6. Fasteners: Stainless steel rivets or self-tapping screws.
 - 7. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- B. Plastic Labels for Equipment:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. Champion America

- d. Craftmark Pipe Markers
 - e. emedco
 - f. Kolbi Pipe Marker Co.
 - g. LEM Products Inc.
 - h. Marking Services Inc.
 - i. Pipemarket.com; Brimar Industries, Inc.
 - j. Seton Identification Products; a Brady Corporation company
- 2. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8 inch thick, with predrilled holes for attachment hardware.
 - 3. Letter and Background Color: As indicated for specific application under Part 3.
 - 4. Maximum Temperature: Able to withstand temperatures of up to 160 deg F.
 - 5. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
 - 6. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances of up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
 - 7. Fasteners: Stainless steel rivets or self-tapping screws.
 - 8. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- C. Label Content: Include equipment's Drawing designation or unique equipment number. Coordinate with Owner prior to ordering.

2.2 PIPE LABELS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Actioncraft Products, Inc.; a division of Industrial Test Equipment Co., Inc.
 - 2. Brady Corporation
 - 3. Carlton Industries, LP
 - 4. Champion America
 - 5. Craftmark Pipe Markers
 - 6. emedco
 - 7. Kolbi Pipe Marker Co.
 - 8. LEM Products Inc.
 - 9. Marking Services Inc.
 - 10. Pipemarket.com; Brimar Industries, Inc.
 - 11. Seton Identification Products; a Brady Corporation company
- B. General Requirements for Manufactured Pipe Labels: Preprinted, color coded, with lettering indicating service and showing flow direction in accordance with ASME A13.1.
- C. Letter and Background Color: As indicated for specific application under Part 3.
- D. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- E. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- F. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings. Also include:
 - 1. Pipe size.
 - 2. Flow-Direction Arrows: Include flow-direction arrows on main distribution piping. Arrows may be either integral with label or applied separately.
 - 3. Lettering Size: At least 1/2 inch for viewing distances of up to 72 inches and proportionately larger lettering for greater viewing distances.

2.3 STENCILS

- A. Stencils for Piping:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- a. Craftmark Pipe Markers
 - b. Kolbi Pipe Marker Co.
 - c. Marking Services Inc.
 - d. Pipemarket.com; Brimar Industries, Inc.
2. Lettering Size: At least 1/2 inch for viewing distances of up to 72 inches and proportionately larger lettering for greater viewing distances.
3. Stencil Material: Aluminum, brass, or fiberboard.
4. Stencil Paint: Exterior, gloss, alkyd enamel in colors complying with recommendations in ASME A13.1 unless otherwise indicated. Paint may be in pressurized spray-can form.
5. Identification Paint: Exterior, alkyd enamel in colors in accordance with ASME A13.1 unless otherwise indicated. Paint may be in pressurized spray-can form.
6. Letter and Background Color: As indicated for specific application under Part 3.

2.4 VALVE TAGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 1. Actioncraft Products, Inc.; a division of Industrial Test Equipment Co., Inc.
 2. Brady Corporation
 3. Carlton Industries, LP
 4. Champion America
 5. Craftmark Pipe Markers
 6. emedco
 7. Kolbi Pipe Marker Co.
 8. LEM Products Inc.
 9. Marking Services Inc.
 10. Pipemarket.com; Brimar Industries, Inc.
 11. Seton Identification Products; a Brady Corporation company
- B. Description: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers.
 1. Tag Material: Brass, 0.04-inch stainless steel, 0.024-inch aluminum, 0.031-inch or anodized aluminum, 0.031-inch minimum thickness, with predrilled or stamped holes for attachment hardware.
 2. Fasteners: Brass link chain or S-hook.
- C. Letter and Background Color: As indicated for specific application under Part 3.
- D. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
 1. Include valve-tag schedule in operation and maintenance data.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean piping and equipment surfaces of incompatible primers, paints, and encapsulants, as well as dirt, oil, grease, release agents, and other substances that could impair bond of identification devices.

3.2 INSTALLATION, GENERAL REQUIREMENTS

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.
- D. Locate identifying devices so that they are readily visible from the point of normal approach.

3.3 INSTALLATION OF EQUIPMENT LABELS, WARNING SIGNS, AND LABELS

- A. Permanently fasten labels on each item of plumbing equipment.
- B. Sign and Label Colors.
 - 1. White letters on an ANSI Z535.1 safety-green background.
- C. Locate equipment labels where accessible and visible.

3.4 INSTALLATION OF PIPE LABELS

- A. Install pipe labels showing service and flow direction with permanent adhesive on pipes.
- B. Stenciled Pipe Label Option: Stenciled labels showing service and flow direction may be provided instead of manufactured pipe labels, at Installer's option. Install stenciled pipe labels, complying with ASME A13.1, with painted, color-coded bands or rectangles on each piping system.
 - 1. Identification Paint: Use for contrasting background.
 - 2. Stencil Paint: Use for pipe marking.
- C. Pipe-Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
 - 1. Within 3 ft. of each valve and control device.
 - 2. At access doors, manholes, and similar access points that permit view of concealed piping.
 - 3. Within 3 ft. of equipment items and other points of origination and termination.
 - 4. Spaced at maximum intervals of 25 ft. along each run. Reduce intervals to 10 ft. in areas of congested piping and equipment.
- D. Do not apply plastic pipe labels or plastic tapes directly to bare pipes conveying fluids at temperatures of 125 deg F or higher. Where these pipes are to remain uninsulated, use a short section of insulation or use stenciled labels.
- E. Flow-Direction Flow Arrows: Use arrows, in compliance with ASME A13.1, to indicate direction of flow in pipes, including pipes where flow is allowed in both directions.
- F. Pipe-Label Color Schedule:
 - 1. Low-Pressure Compressed-Air Piping: White letters on an ANSI Z535.1 safety-blue background.
 - 2. Domestic Cold-Water Piping: White letters on an ANSI Z535.1 safety-green background.
 - 3. Domestic Hot-Water Piping: White letters on an ANSI Z535.1 safety-green background
 - 4. Domestic Hot-Water Return Piping White letters on an ANSI Z535.1 safety-green background.
 - 5. Sanitary Waste and Storm Drainage Piping: White letters on a black background.

3.5 INSTALLATION OF VALVE TAGS

- A. Install tags on valves and control devices in piping systems, except check valves, valves within factory-fabricated equipment units, shutoff valves, faucets, convenience and lawn-watering hose connections, and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule in the operating and maintenance manual.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in "Valve-Tag Size and Shape" Subparagraph below:
 - 1. Valve-Tag Size and Shape:
 - a. Domestic Cold Water: 1-1/2 inches, round.
 - b. Domestic Hot Water: 1-1/2 inches, round.
 - c. Domestic Hot-Water Return: 1-1/2 inches, round.
 - d. Low-Pressure Compressed Air: 1-1/2 inches, round.
 - 2. Valve-Tag Colors:
 - a. For each piping system, use the same lettering and background coloring system on valve tags as used in the piping system labels and background.

END OF SECTION 220553

SECTION 220719 - PLUMBING PIPING INSULATION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes insulating the following plumbing piping services:
 - 1. Domestic cold-water piping.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory and field applied if any).
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
 - 1. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
 - 2. Detail attachment and covering of heat tracing inside insulation.
 - 3. Detail insulation application at pipe expansion joints for each type of insulation.
 - 4. Detail insulation application at elbows, fittings, flanges, valves, and specialties for each type of insulation.
 - 5. Detail removable insulation at piping specialties, equipment connections, and access panels.
 - 6. Detail application of field-applied jackets.
 - 7. Detail application at linkages of control devices.

1.3 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Material Test Reports: From a qualified testing agency acceptable to authorities having jurisdiction indicating, interpreting, and certifying test results for compliance of insulation materials, sealers, attachments, cements, and jackets, with requirements indicated. Include dates of tests and test methods employed.
- C. Field quality-control reports.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.
- B. Comply with the following applicable standards and other requirements specified for miscellaneous components:
 - 1. Supply and Drain Protective Shielding Guards: ICC A117.1.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation system materials are to be delivered to the Project site in unopened containers. The packaging is to include name of the manufacturer, fabricator, type, description, and size, as well as ASTM standard designation and maximum use temperature.

1.6 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
- B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.
- C. Coordinate installation and testing of heat tracing.

1.7 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.
 - 1. All Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
 - 2. All Insulation Installed Indoors; Outdoors-Installed Insulation in Contact with Airstream: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
 - 3. All Insulation Installed Indoors and Outdoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 INSULATION MATERIALS

- A. Comply with requirements in "Piping Insulation Schedule, General," "Indoor Piping Insulation Schedule," "Outdoor, Aboveground Piping Insulation Schedule," and "Outdoor, Underground Piping Insulation Schedule" articles for where insulating materials are applied.
- B. Products do not contain asbestos, lead, mercury, or mercury compounds.
- C. Products that come into contact with stainless steel have a leachable chloride content of less than 50 ppm when tested in accordance with ASTM C871.
- D. Insulation materials for use on austenitic stainless steel are qualified as acceptable in accordance with ASTM C795.
- E. Foam insulation materials do not use CFC or HCFC blowing agents in the manufacturing process.
- F. Glass-Fiber, Preformed Pipe: Glass fibers bonded with a thermosetting resin; suitable for maximum use temperature up to 850 deg F in accordance with ASTM C411. Comply with ASTM C547.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Johns Manville; a Berkshire Hathaway company
 - b. Knauf Insulation
 - c. Manson Insulation Inc.
 - d. Owens Corning
 - 2. Preformed Pipe Insulation: Type I, Grade A with factory-applied ASJ.
 - 3. Fabricated shapes in accordance with ASTM C450 and ASTM C585.
 - 4. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

2.3 INSULATING CEMENTS

- A. Glass-Fiber and Mineral Wool Insulating Cement: Comply with ASTM C195.
- B. Glass-Fiber and Mineral Wool Hydraulic-Setting Insulating and Finishing Cement: Comply with ASTM C449.

2.4 ADHESIVES

- A. Materials are compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.
- B. Glass-Fiber and Mineral Wool Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

- C. ASJ Adhesive and FSK Jacket Adhesive: Comply with MIL-A-3316C, Class 2, Grade A, for bonding insulation jacket lap seams and joints.
- D. PVC Jacket Adhesive: Compatible with PVC jacket.

2.5 SEALANTS

- A. Materials are as recommended by the insulation manufacturer and are compatible with insulation materials, jackets, and substrates.
- B. Joint Sealants:
 - 1. Permanently flexible, elastomeric sealant.
 - 2. Service Temperature Range: Minus 58 to plus 176 deg F.
 - 3. Color: White or gray.
- C. FSK and Metal Jacket Flashing Sealants:
 - 1. Fire- and water-resistant, flexible, elastomeric sealant.
 - 2. Service Temperature Range: Minus 40 to plus 250 deg F.
 - 3. Color: Aluminum.
- D. ASJ Flashing Sealants and PVC Jacket Flashing Sealants:
 - 1. Fire- and water-resistant, flexible, elastomeric sealant.
 - 2. Service Temperature Range: Minus 40 to plus 250 deg F.
 - 3. Color: White.

2.6 FACTORY-APPLIED JACKETS

- A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:
 - 1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C1136, Type I.
 - 2. ASJ-SSL: ASJ with self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip; complying with ASTM C1136, Type I.
 - 3. FSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with kraft-paper backing; complying with ASTM C1136, Type II.
 - 4. ASJ+: Aluminum foil reinforced with glass scrim bonded to a kraft paper interleaving with an outer film leaving no paper exposed; complying with ASTM C1136 Types I, II, III, IV, and VII.
 - 5. PSK Jacket: Aluminum foil fiberglass reinforced scrim with polyethylene backing, complying with ASTM C1136, Type II.

2.7 FIELD-APPLIED JACKETS

- A. Field-applied jackets comply with ASTM C1136, Type I, unless otherwise indicated.
- B. FSK Jacket: Aluminum-foil-face, fiberglass-reinforced scrim with kraft-paper backing.
- C. PVC Jacket: High-impact-resistant, UV-resistant PVC complying with ASTM D1784, Class 16354-C; thickness as scheduled; roll stock ready for shop or field cutting and forming. Thickness is indicated in field-applied jacket schedules.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Airex Manufacturing Inc.
 - b. Johns Manville; a Berkshire Hathaway company
 - c. P.I.C. Plastics, Inc.
 - d. Proto Corporation
 - e. Speedline Corporation
 - 2. Adhesive: As recommended by jacket material manufacturer.
 - 3. Color: White.
 - 4. Factory-fabricated fitting covers to match jacket if available; otherwise, field fabricate.
 - a. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, unions, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories.

- D. Metal Jacket:
1. Aluminum Jacket: Comply with ASTM B209, Alloy 3003, 3005, 3105, or 5005, Temper H-14.
 - a. Factory cut and rolled to size.
 - b. Finish and thickness are indicated in field-applied jacket schedules.
 - c. Moisture Barrier for Indoor Applications: 1-mil- thick, heat-bonded polyethylene and kraft paper.
 - d. Moisture Barrier for Outdoor Applications: 3-mil- thick, heat-bonded polyethylene and kraft paper.
 - e. Factory-Fabricated Fitting Covers:
 - 1) Same material, finish, and thickness as jacket.
 - 2) Preformed two-piece or gore, 45- and 90-degree, short- and long-radius elbows.
 - 3) Tee covers.
 - 4) Flange and union covers.
 - 5) End caps.
 - 6) Beveled collars.
 - 7) Valve covers.
 - 8) Field fabricate fitting covers only if factory-fabricated fitting covers are not available.
 2. Stainless Steel Jacket: ASTM A240/A240M.
 - a. Factory cut and rolled to size.
 - b. Material, finish, and thickness are indicated in field-applied jacket schedules.
 - c. Moisture Barrier for Indoor Applications: 1-mil- thick, heat-bonded polyethylene and kraft paper.
 - d. Moisture Barrier for Outdoor Applications: 3-mil- thick, heat-bonded polyethylene and kraft paper.
 - e. Factory-Fabricated Fitting Covers:
 - 1) Same material, finish, and thickness as jacket.
 - 2) Preformed two-piece or gore, 45- and 90-degree, short- and long-radius elbows.
 - 3) Tee covers.
 - 4) Flange and union covers.
 - 5) End caps.
 - 6) Beveled collars.
 - 7) Valve covers.
 - 8) Field fabricate fitting covers only if factory-fabricated fitting covers are not available.
- E. Self-Adhesive Indoor/Outdoor Jacket (Non-Asphaltic): Vapor barrier and waterproofing jacket for installation over insulation located aboveground outdoors or indoors. Specialized jacket with five layers of laminated aluminum and polyester film with low-temperature acrylic pressure-sensitive adhesive. Outer aluminum surface is coated with UV-resistant coating for protection from environmental contaminants.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. 3M
 - b. Foster Brand; H. B. Fuller
 - c. Ideal Tape Co., Inc., an American Biltrite Company
 2. Permeance: 0.00 perm as tested in accordance with ASTM F1249.
 3. Flamespread/Smoke Developed: 25/50 as tested in accordance with ASTM E84.
 4. Aluminum Finish: Embossed.

2.8 TAPES

- A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C1136.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. 3M Industrial Adhesives and Tapes Division
 - b. Aeroflex USA

- c. Avery Dennison Corporation, Specialty Tapes Division
 - d. Ideal Tape Co., Inc., an American Biltrite Company
 - e. Knauf Insulation
 - 2. Width: 3 inches.
 - 3. Thickness: 11.5 mils.
 - 4. Adhesion: 90 ounces force/inch in width.
 - 5. Elongation: 2 percent.
 - 6. Tensile Strength: 40 lbf/inch in width.
 - 7. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.
- B. FSK Tape: Foil-face, vapor-retarder tape matching factory-applied jacket with acrylic adhesive; complying with ASTM C1136.
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. 3M Industrial Adhesives and Tapes Division
 - b. Avery Dennison Corporation, Specialty Tapes Division
 - c. Ideal Tape Co., Inc., an American Biltrite Company
 - d. Knauf Insulation
 - 2. Width: 3 inches.
 - 3. Thickness: 6.5 mils.
 - 4. Adhesion: 90 ounces force/inch in width.
 - 5. Elongation: 2 percent.
 - 6. Tensile Strength: 40 lbf/inch in width.
 - 7. FSK Tape Disks and Squares: Precut disks or squares of FSK tape.
- C. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. 3M Industrial Adhesives and Tapes Division
 - b. Ideal Tape Co., Inc., an American Biltrite Company
 - 2. Width: 2 inches.
 - 3. Thickness: 6 mils.
 - 4. Adhesion: 64 ounces force/inch in width.
 - 5. Elongation: 500 percent.
 - 6. Tensile Strength: 18 lbf/inch in width.
- D. Aluminum-Foil Tape: Vapor-retarder tape with acrylic adhesive.
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. 3M Industrial Adhesives and Tapes Division
 - b. Avery Dennison Corporation, Specialty Tapes Division
 - c. Ideal Tape Co., Inc., an American Biltrite Company
 - d. Knauf Insulation
 - 2. Width: 2 inches.
 - 3. Thickness: 3.7 mils.
 - 4. Adhesion: 100 ounces force/inch in width.
 - 5. Elongation: 5 percent.
 - 6. Tensile Strength: 34 lbf/inch in width.

2.9 SECUREMENTS

- A. Bands:
 - 1. Stainless Steel: ASTM A240/A240M, Type 304 or Type 316; 0.015 inch thick, 1/2 inch wide with wing seal or closed seal.
 - 2. Aluminum: ASTM B209, Alloy 3003, 3005, 3105, or 5005; Temper H-14, 0.020 inch thick, 1/2 inch wide with wing seal or closed seal.
- B. Staples: Outward-clinching insulation staples, nominal 3/4-inch- wide, stainless steel or Monel.

- C. Wire: 0.062-inch soft-annealed, stainless steel.

2.10 PROTECTIVE SHIELDING GUARDS

- A. Protective Shielding Pipe Covers:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Plumberex Specialty Products, Inc.
 - b. ProFlo; a Ferguson Enterprises, Inc. brand
 - c. Truebro; IPS Corporation
 - 2. Description: Manufactured plastic wraps for covering plumbing fixture hot- and cold-water supplies and trap and drain piping. Comply with Americans with Disabilities Act (ADA) requirements.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
 - 1. Verify that systems to be insulated have been tested and are free of defects.
 - 2. Verify that surfaces to be insulated are clean and dry.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.
- B. Coordinate insulation installation with the tradesman installing heat tracing. Comply with requirements for heat tracing that apply to insulation.
- C. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless steel surfaces, use demineralized water.

3.3 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping, including fittings, valves, and specialties.
- B. Install insulation materials, forms, vapor barriers or retarders, jackets, and of thicknesses required for each item of pipe system, as specified in insulation system schedules.
- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket.
- D. Install insulation with longitudinal seams at top and bottom (12 o'clock and 6 o'clock positions) of horizontal runs.
- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- G. Keep insulation materials dry during storage, application, and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with Contract Documents.
- H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- I. Install insulation with least number of joints practical.

- J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.
 - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends attached to structure with vapor-barrier mastic.
 - 3. Install insert materials and insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
 - 4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.
- K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- L. Install insulation with factory-applied jackets as follows:
 - 1. Draw jacket tight and smooth, but not to the extent of creating wrinkles or areas of compression in the insulation.
 - 2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward-clinching staples along both edges of strip, spaced 4 inches o.c.
 - 3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward-clinching staples along edge at 4 inches o.c.
 - a. For below-ambient services, apply vapor-barrier mastic over staples.
 - 4. Cover joints and seams with tape, in accordance with insulation material manufacturer's written instructions, to maintain vapor seal.
 - 5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.
- M. Cut insulation in a manner to avoid compressing insulation.
- N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.
- O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches in similar fashion to butt joints.
- P. For above-ambient services, do not install insulation to the following:
 - 1. Vibration-control devices.
 - 2. Testing agency labels and stamps.
 - 3. Nameplates and data plates.
 - 4. Cleanouts.

3.4 PENETRATIONS

- A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.
 - 1. Seal penetrations with flashing sealant.
 - 2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 - 3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches below top of roof flashing.
 - 4. Seal jacket to roof flashing with flashing sealant.
- B. Insulation Installation at Underground Exterior Wall Penetrations: Terminate insulation flush with sleeve seal. Seal terminations with flashing sealant.
- C. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.
 - 1. Seal penetrations with flashing sealant.

2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches.
 4. Seal jacket to wall flashing with flashing sealant.
- D. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- E. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.
1. Comply with requirements in Division 7 for firestopping and fire-resistive joint sealers.
- F. Insulation Installation at Floor Penetrations:
1. Pipe: Install insulation continuously through floor penetrations.
 2. Seal penetrations through fire-rated assemblies. Comply with requirements in Division 7.

3.5 GENERAL PIPE INSULATION INSTALLATION

- A. Requirements in this article generally apply to all insulation materials, except where more specific requirements are specified in various pipe insulation material installation articles below.
- B. Insulation Installation on Fittings, Valves, Strainers, Flanges, Mechanical Couplings, and Unions:
1. Install insulation over fittings, valves, strainers, flanges, mechanical couplings, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
 2. Insulate pipe elbows using preformed fitting insulation made from same material and density as that of adjacent pipe insulation. Each piece is butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.
 3. Insulate tee fittings with preformed fitting insulation of same material and thickness as that used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
 4. Insulate valves using preformed fitting insulation of same material, density, and thickness as that used for adjacent pipe. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.
 5. Insulate strainers using preformed fitting insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers, so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
 6. Insulate flanges, mechanical couplings, and unions, using a section of oversized preformed pipe insulation. Overlap adjoining pipe insulation by not less than 2 times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Stencil or label the outside insulation jacket of each union with the word "union" matching size and color of pipe labels.
 7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with fabric-reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
 8. For services not specified to receive a field-applied jacket, except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing, using PVC tape.
- C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes. Shape insulation at these

connections by tapering it to and around the connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.

- D. Install removable insulation covers at locations where access is required. Installation conforms to the following:
1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as that of adjoining pipe insulation.
 2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union at least 2 times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless steel or aluminum bands. Select band material compatible with insulation and jacket.
 3. Construct removable valve insulation covers in same manner as for flanges, except divide the two-part section on the vertical center line of valve body.
 4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.
 5. Unless a PVC jacket is indicated in field-applied jacket schedules, finish exposed surfaces with a metal jacket.

3.6 INSTALLATION OF GLASS-FIBER AND MINERAL WOOL INSULATION

- A. Insulation Installation on Straight Pipes and Tubes:
1. Secure each layer of preformed pipe insulation to pipe with wire or bands, and tighten bands without deforming insulation materials.
 2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
 3. For insulation with jackets on above-ambient surfaces, secure laps with outward-clinched staples at 6 inches o.c.
 4. For insulation with jackets on below-ambient surfaces, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive, as recommended by insulation material manufacturer, and seal with vapor-barrier mastic and flashing sealant.
- B. Insulation Installation on Pipe Flanges:
1. Install prefabricated pipe insulation to outer diameter of pipe flange.
 2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
 3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with glass-fiber or mineral-wool blanket insulation.
 4. Install jacket material with manufacturer's recommended adhesive, overlap seams at least 1 inch, and seal joints with flashing sealant.
- C. Insulation Installation on Pipe Fittings and Elbows:
1. Install prefabricated sections of same material as that of straight segments of pipe insulation when available.
 2. When prefabricated insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.
- D. Insulation Installation on Valves and Pipe Specialties:
1. Install prefabricated sections of same material as that of straight segments of pipe insulation when available.
 2. When prefabricated sections are not available, install fabricated sections of pipe insulation to valve body.
 3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
 4. Install insulation to flanges as specified for flange insulation application.

3.7 INSTALLATION OF FIELD-APPLIED JACKETS

- A. Where glass-cloth jackets are indicated, install directly over bare insulation or insulation with factory-applied jackets.
 - 1. Draw jacket smooth and tight to surface with 2-inch overlap at seams and joints.
 - 2. Embed glass cloth between two 0.062-inch- thick coats of lagging adhesive.
 - 3. Completely encapsulate insulation with coating, leaving no exposed insulation.
- B. Where FSK jackets are indicated, install as follows:
 - 1. Draw jacket material smooth and tight.
 - 2. Install lap or joint strips with same material as jacket.
 - 3. Secure jacket to insulation with manufacturer's recommended adhesive.
 - 4. Install jacket with 1-1/2-inch laps at longitudinal seams and 3-inch- wide joint strips at end joints.
 - 5. Seal openings, punctures, and breaks in vapor-retarder jackets and exposed insulation with vapor-barrier mastic.
- C. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints. Seal with manufacturer's recommended adhesive.
 - 1. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.
- D. Where metal jackets are indicated, install with 2-inch overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof sealant recommended by insulation manufacturer. Secure jacket with stainless steel bands 12 inches o.c. and at end joints.

3.8 FINISHES

- A. Insulation with ASJ, Glass-Cloth, or Other Paintable Jacket Material: Paint jacket with paint system identified below and as specified in Section 09900 "Painting".
- B. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.
- C. Color: Final color as selected by Architect. Vary first and second coats to allow visual inspection of the completed Work.
- D. Do not field paint aluminum or stainless steel jackets.

3.9 PIPING INSULATION SCHEDULE, GENERAL

- A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.
- B. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:
 - 1. Drainage piping located in crawl spaces.
 - 2. Underground piping.
 - 3. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

3.10 INDOOR PIPING INSULATION SCHEDULE

- A. Domestic Cold Water:
 - 1. NPS 1-1/4 and Smaller: Insulation is the following:
 - a. Glass-Fiber, Preformed Pipe Insulation, Type I: 1/2 inch thick.
 - 2. NPS 1-1/2 and Larger: Insulation is the following:
 - a. Glass-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.

3.11 INDOOR, FIELD-APPLIED JACKET SCHEDULE

- A. Install jacket over insulation material. For insulation with factory-applied jacket, install the field-applied jacket over the factory-applied jacket.

- B. If more than one material is listed, selection from materials listed is Contractor's option.
- C. Piping, Concealed:
 - 1. None.
- D. Piping, Exposed:
 - 1. PVC: 20 mils thick.
 - 2. Aluminum, Smooth: 0.016 inch thick.
 - 3. Stainless Steel, Type 304 or Type 316, Smooth No. 2B Finish: 0.010 inch thick.

END OF SECTION 220719

This page intentionally left blank.

SECTION 221116 - DOMESTIC WATER PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Copper tube and fittings - domestic water.
 - 2. Piping joining materials - domestic water.
 - 3. Transition fittings - domestic water.
 - 4. Dielectric fittings - domestic water.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. Copper tube and fittings - domestic water.
 - 2. Ductile-iron pipe and fittings - domestic water.
 - 3. PEX tube and fittings - domestic water.
 - 4. Polypropylene (PP-R and PP-RCT) pipe and fittings - domestic water.
 - 5. Piping joining materials - domestic water.
 - 6. Transition fittings - domestic water.
 - 7. Dielectric fittings - domestic water.

1.3 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Piping layout, showing the items described in this Section, and coordinated with all building trades.
 - 1. Drawings shall clearly indicate piping material proposed for use at each location. Basis of design is copper unless noted otherwise in the Drawings. Where alternate materials are proposed, increase sizes as necessary to provide equivalent hydraulic diameter, and clearly indicate on Coordination Drawings.
- B. System purging and disinfecting activities report.
- C. Field quality-control reports.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Installers of pressure-sealed joints are to be certified by pressure-seal joint manufacturer as having been trained and qualified to join piping with pressure-seal pipe couplings and fittings.

1.5 FIELD CONDITIONS

- A. Interruption of Existing Water Service: Do not interrupt water service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary water service in accordance with requirements indicated:
 - 1. Notify Architect no fewer than two days in advance of proposed interruption of water service.
 - 2. Do not interrupt water service without Architect's written permission.

1.6 WARRANTY

- A. Polypropylene (PP-R and PP-RCT) Pipe and Fittings Manufacturer's Warranty: Manufacturer agrees to repair or replace PP-R and PP-RCT pipe and fittings that fail in materials or workmanship within 10 years from date of Substantial Completion.
 - 1. Warranty is to cover labor and material costs of repairing and/or replacing defective materials and repairing any incidental damage caused by failure of piping system due to defects in materials or manufacturing.
 - 2. Warranty is to be in effect only upon submission by Contractor to manufacturer of valid pressure/leak documentation indicating that the system was tested and passed manufacturer's pressure/leak test.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Domestic water piping, tubing, fittings, joints, and appurtenances intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act, with requirements of authorities having jurisdiction, and with NSF 61 and NSF 372, or be certified in compliance with NSF 61 and NSF 372 by an ANSI-accredited third-party certification body, in that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

2.2 COPPER TUBE AND FITTINGS - DOMESTIC WATER

- A. Drawn-Temper Copper Tube: ASTM B88, Type K ASTM B88, Type L.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cambridge-Lee Industries, LLC
 - b. Cerro Flow Products, LLC
 - c. Mueller Streamline Co.; a company of Mueller Industries
- B. Annealed-Temper Copper Tube: ASTM B88, Type K ASTM B88, Type L.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cambridge-Lee Industries, LLC
 - b. Cerro Flow Products, LLC
 - c. Mueller Streamline Co.; a company of Mueller Industries
- C. Cast-Copper, Solder-Joint Fittings: ASME B16.18, pressure fittings. Do not use solder joints on pipe sizes greater than NPS 4.
- D. Wrought-Copper, Solder-Joint Fittings: ASME B16.22, pressure fittings. Do not use solder joints on pipe sizes greater than NPS 4.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Elkhart Products Corporation; a part of Aalberts Integrated Piping Systems
 - b. Mueller Streamline Co.; a company of Mueller Industries
 - c. NIBCO INC.
- E. Bronze Flanges: ASME B16.24, Class 150, with solder-joint ends. Do not use solder joints on pipe sizes greater than NPS 4.
- F. Cast Copper Unions: MSS SP-123, cast-copper-alloy, hexagonal-stock body, with ball-and-socket, metal-to-metal seating surfaces and solder-joint or threaded ends. Do not use solder joints on pipe sizes greater than NPS 4.
- G. Wrought Copper Unions: ASME B16.22. Do not use solder joints on pipe sizes greater than NPS 4.
- H. Pressure-Seal-Joint Fittings, Copper or Bronze - Domestic Water:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - b. Conex Banninger - USA
 - c. Copper Press Brand; Merit Brass Company
 - d. Elkhart Brass Mfg. Co., Inc
 - e. FNW; Ferguson Enterprises, Inc.
 - f. Mueller Streamline Co.; a company of Mueller Industries
 - g. NIBCO INC.
 - h. Viega LLC
 - 2. Source Limitations: Obtain pressure-seal-joint fittings, copper or bronze, from single manufacturer.
 - 3. Housing: Copper.
 - 4. O-Rings and Pipe Stops: EPDM.

5. Tools: Manufacturer's special tools.
6. Minimum 200 psig working-pressure rating at 250 deg F.

2.3 PIPING JOINING MATERIALS - DOMESTIC WATER

- A. Pipe-Flange Gasket Materials:
 1. AWWA C110/A21.10, rubber, flat face, 1/8 inch thick or ASME B16.21, nonmetallic and asbestos free unless otherwise indicated.
 2. Full-face or ring type unless otherwise indicated.
- B. Metal, Pipe-Flange Bolts and Nuts: ASME B18.2.1, carbon steel unless otherwise indicated.
- C. Solder Filler Metals: ASTM B32, lead-free alloys.
- D. Flux: ASTM B813, water flushable.
- E. Brazing Filler Metals: AWS A5.8M/A5.8, BCuP Series, copper-phosphorus alloys for general-duty brazing unless otherwise indicated.

2.4 TRANSITION FITTINGS - DOMESTIC WATER

- A. General Requirements:
 1. Same size as pipes to be joined.
 2. Pressure rating at least equal to pipes to be joined.
 3. End connections compatible with pipes to be joined.
- B. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.
- C. Sleeve-Type Transition Couplings - Domestic Water: AWWA C219.
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cascade Waterworks Mfg. Co.
 - b. Dresser Pipeline Solutions
 - c. Ford Meter Box Company, Inc. (The)
 - d. Jay R. Smith Mfg Co; a division of Morris Group International
 - e. JCM Industries, Inc
 - f. Romac Industries, Inc.
 - g. Smith-Blair, a Xylem brand.
 - h. Viking Johnson
 2. Source Limitations: Obtain sleeve-type transition couplings from single manufacturer.
- D. Plastic-to-Metal Transition Unions - Domestic Water:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. aquatherm
 - b. Colonial Engineering, Inc.
 - c. NIBCO INC.
 - d. Spears Manufacturing Company
 2. Source Limitations: Obtain plastic-to-metal transition unions from single manufacturer.
 3. Description:
 - a. Brass threaded end.
 - b. Solvent-cement-joint or threaded plastic end.
 - c. Rubber O-ring.
 - d. Union nut.

2.5 DIELECTRIC FITTINGS - DOMESTIC WATER

- A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.
- B. Dielectric Unions - Domestic Water:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. A.Y. McDonald Mfg. Co.
 - b. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - c. HART Industrial Unions, LLC
 - d. Jomar Valve
 - e. Matco-Norca
 - f. WATTS; A Watts Water Technologies Company
 - g. Zurn Industries, LLC
 2. Source Limitations: Obtain dielectric unions from single manufacturer.
 3. Standard: ASSE 1079.
 4. Pressure Rating: 125 psig minimum at 180 deg F.
 5. End Connections: Solder-joint copper alloy and threaded ferrous.
- C. Dielectric Flanges - Domestic Water:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Capitol Manufacturing Company
 - b. GF Piping Systems: Georg Fischer LLC
 - c. Matco-Norca
 - d. WATTS; A Watts Water Technologies Company
 - e. Zurn Industries, LLC
 2. Source Limitations: Obtain dielectric flanges from single manufacturer.
 3. Standard: ASSE 1079.
 4. Factory-fabricated, bolted, companion-flange assembly.
 5. Pressure Rating: 125 psig minimum at 180 deg F.
 6. End Connections: Solder-joint copper alloy and threaded ferrous; threaded solder-joint copper alloy and threaded ferrous.
- D. Dielectric Nipples - Domestic Water:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Anvil; an ASC Engineered Solution
 - b. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - c. Matco-Norca
 - d. Sioux Chief Manufacturing Company, Inc.
 - e. Victaulic Company
 2. Source Limitations: Obtain dielectric nipples from single manufacturer.
 3. Standard: IAPMO PS 66.
 4. Electroplated steel nipple complying with ASTM F1545.
 5. Pressure Rating and Temperature: 300 psig at 225 deg F.
 6. End Connections: Male threaded or grooved.
 7. Lining: Inert and noncorrosive, propylene.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

- A. Transition and special fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
- B. Flanges and unions may be used for aboveground piping joints unless otherwise indicated.
- C. Aboveground domestic water piping, NPS 2 (DN 50) and smaller is to be the following:
 1. Drawn-temper copper tube, ASTM B88, Type L; cast- or wrought-copper, solder-joint fittings; and soldered joints.
 2. Drawn-temper copper tube, ASTM B88, Type L; copper pressure-seal-joint fittings; and pressure-sealed joints.
 3. Drawn-temper copper tube, ASTM B88, Type L; copper push-on joint fittings; and push-on joints.

4. Polypropylene (PP-R and PP-RCT), SDR 7.4 SDR 11 pipe and socket fusion, butt fusion, fusion outlet, or electrofusion fittings and joints.

3.2 INSTALLATION OF PIPING

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of domestic water piping. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.
- B. Install copper tubing under building slab in accordance with CDA's "Copper Tube Handbook."
- C. Install domestic water piping level without pitch and plumb.
- D. Install piping concealed from view and protected from physical contact by building occupants unless otherwise indicated and except in equipment rooms and service areas.
- E. Install piping at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- F. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal, and coordinate with other services occupying that space.
- G. Install piping to permit valve servicing.
- H. Install nipples, unions, special fittings, and valves with pressure ratings the same as or higher than the system pressure rating used in applications below unless otherwise indicated.
- I. Install piping free of sags and bends.
- J. Install fittings for changes in direction and branch connections.
- K. Install unions in copper tubing at final connection to each piece of equipment, machine, and specialty.
- L. All stubouts to fixtures are to be copper.
- M. Do not route piping above or below any electrical equipment (panelboards, transformers, disconnect switches, etc.)
- N. Unless noted otherwise, pipe sizes indicated on drawings are based on copper. Where alternate materials are used, sizes shall be increased to provide equivalent hydraulic diameter.
- O. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 220500 "Common Work Results for Plumbing."
- P. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 220500 "Common Work Results for Plumbing."
- Q. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 220500 "Common Work Results for Plumbing."

3.3 JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.
- C. Threaded Joints: Thread pipe with tapered pipe threads in accordance with ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 1. Apply appropriate tape or thread compound to external pipe threads.
 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.
- D. Brazed Joints for Copper Tubing: Comply with CDA's "Copper Tube Handbook," "Braze Joints" chapter.

- E. Soldered Joints for Copper Tubing: Apply ASTM B813, water-flushable flux to end of tube. Join copper tube and fittings in accordance with ASTM B828 or CDA's "Copper Tube Handbook."
- F. Pressure-Sealed Joints for Copper Tubing: Join copper tube and pressure-seal fittings with tools and procedure recommended by pressure-seal-fitting manufacturer. Leave insertion marks on pipe after assembly.
- G. Joint Construction for Grooved-End, Ductile-Iron Piping: Make joints in accordance with AWWA C606. Cut round-bottom grooves in ends of pipe at gasket-seat dimension required for specified (flexible or rigid) joint. Lubricate and install gasket over ends of pipes or pipe and fitting. Install coupling housing sections over gasket with keys seated in piping grooves. Install and tighten housing bolts.
- H. Joints for Dissimilar-Material Piping: Make joints using adapters compatible with materials of both piping systems.

3.4 INSTALLATION OF TRANSITION FITTINGS

- A. Install transition couplings at joints of dissimilar piping.
- B. Transition Fittings in Underground Domestic Water Piping:
 - 1. Fittings for NPS 1-1/2 (DN 40) and Smaller: Fitting-type coupling.
 - 2. Fittings for NPS 2 (DN 50) and Larger: Sleeve-type coupling.
- C. Transition Fittings in Aboveground Domestic Water Piping NPS 2 (DN 50) and Smaller: Plastic-to-metal transition fittings or unions.

3.5 INSTALLATION OF DIELECTRIC FITTINGS

- A. Install dielectric fittings in piping at connections of dissimilar metal piping and tubing.
- B. Dielectric Fittings for NPS 2 (DN 50) and Smaller: Use dielectric couplings or nipples.
- C. Dielectric Fittings for NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Use dielectric flanges.
- D. Dielectric Fittings for NPS 5 (DN 125) and Larger: Use dielectric flange kits.

3.6 INSTALLATION OF HANGERS AND SUPPORTS

- A. Comply with requirements for seismic-restraint devices specified in Section 220548 "Vibration and Seismic Controls for Plumbing Piping and Equipment."
- B. Comply with requirements for hangers, supports, and anchor devices in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
- C. Install hangers for copper ductile iron tube and pipe, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- D. Install vinyl-coated hangers for PP-R/PP-RCT pipe, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- E. Support horizontal piping within 12 inches of each fitting.
- F. Support vertical runs of copper tube and pipe to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- G. Support vertical runs of PP-R/PP-RCT pipe to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.7 PIPING CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. When installing piping adjacent to equipment and machines, allow space for service and maintenance.

- C. Connect domestic water piping to exterior water-service piping. Use transition fitting to join dissimilar piping materials.
- D. Connect domestic water piping to water-service piping with shutoff valve; extend and connect to the following:
 - 1. Domestic Water Booster Pumps: Cold-water suction and discharge piping.
 - 2. Water Heaters: Cold-water inlet and hot-water outlet piping in sizes indicated, but not smaller than sizes of water heater connections.
 - 3. Plumbing Fixtures: Cold- and hot-water-supply piping in sizes indicated, but not smaller than that required by plumbing code.
 - 4. Equipment: Cold- and hot-water-supply piping as indicated, but not smaller than equipment connections. Provide shutoff valve and union for each connection. Use flanges instead of unions for NPS 2-1/2 and larger.

3.8 IDENTIFICATION

- A. Identify system components. Comply with requirements for identification materials and installation in Section 220553 "Identification for Plumbing Piping and Equipment."

3.9 CLEANING

- A. Clean and disinfect potable domestic water piping as follows:
 - 1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
 - 2. Use purging and disinfecting procedures prescribed by authorities having jurisdiction; if methods are not prescribed, use procedures described in either AWWA C651 or AWWA C652 or follow procedures described below:
 - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
 - b. Fill and isolate system in accordance with either of the following:
 - 1) Fill system or part thereof with water/chlorine solution with at least 50 ppm of chlorine. Isolate with valves and allow to stand for 24 hours.
 - 2) Fill system or part thereof with water/chlorine solution with at least 200 ppm of chlorine. Isolate and allow to stand for three hours.
 - c. Flush system with clean, potable water until no chlorine is in water coming from system after the standing time.
 - d. Repeat procedures if biological examination shows contamination.
 - e. Submit water samples in sterile bottles to authorities having jurisdiction.
- B. Clean non-potable domestic water piping as follows:
 - 1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
 - 2. Use purging procedures prescribed by authorities having jurisdiction or; if methods are not prescribed, follow procedures described below:
 - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
 - b. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedures if biological examination shows contamination.
- C. Prepare and submit reports of purging and disinfecting activities. Include copies of water-sample approvals from authorities having jurisdiction.
- D. Clean interior of domestic water piping system. Remove dirt and debris as work progresses.

3.10 ADJUSTING

- A. Perform the following adjustments before operation:
 - 1. Close drain valves, hydrants, and hose bibbs.
 - 2. Open shutoff valves to fully open position.
 - 3. Open throttling valves to proper setting.
 - 4. Adjust balancing valves in hot-water-circulation return piping to provide adequate flow.
 - a. Manually adjust ball-type balancing valves in hot-water-circulation return piping to provide hot-water flow in each branch.

- b. Adjust calibrated balancing valves to flows indicated.
- 5. Remove plugs used during testing of piping and for temporary sealing of piping during installation.
- 6. Remove and clean strainer screens. Close drain valves and replace drain plugs.
- 7. Remove filter cartridges from housings and verify that cartridges are as specified for application where used and are clean and ready for use.
- 8. Check plumbing specialties and verify proper settings, adjustments, and operation.

3.11 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Piping Inspections:
 - a. Do not enclose, cover, or put piping into operation until it has been inspected and approved by authorities having jurisdiction.
 - b. During installation, notify authorities having jurisdiction at least one day before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction:
 - 1) Roughing-in Inspection: Arrange for inspection of piping before concealing or closing in after installation and before setting fixtures.
 - 2) Final Inspection: Arrange for authorities having jurisdiction to observe tests specified in "Piping Tests" Subparagraph below and to ensure compliance with requirements.
 - c. Reinspection: If authorities having jurisdiction find that piping will not pass tests or inspections, make required corrections and arrange for reinspection.
 - d. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
 - 2. Piping Tests:
 - a. Fill domestic water piping. Check components to determine that they are not air bound and that piping is full of water.
 - b. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit a separate report for each test, complete with diagram of portion of piping tested.
 - c. Leave new, altered, extended, or replaced domestic water piping uncovered and unconcealed until it has been tested and approved. Expose work that was covered or concealed before it was tested.
 - d. Cap and subject piping to static water pressure of 50 psig above operating pressure, without exceeding pressure rating of piping system materials. Isolate test source and allow it to stand for four hours. Leaks and loss in test pressure constitute defects that must be repaired.
 - e. Hydrostatic testing and documentation of test results for polypropylene (PP-R and PP-RCT) pipe to be in accordance with manufacturer's written instructions and submitted to manufacturer upon successful completion per warranty requirements.
 - f. Repair leaks and defects with new materials, and retest piping or portion thereof until satisfactory results are obtained.
 - g. Prepare reports for tests and for corrective action required.
- B. Domestic water piping will be considered defective if it does not pass tests and inspections.
- C. Prepare test and inspection reports.

END OF SECTION 221116

SECTION 221119 - DOMESTIC WATER PIPING SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Vacuum breakers.
 - 2. Backflow preventers.
 - 3. Water pressure-reducing valves.
 - 4. Balancing valves.
 - 5. Temperature-actuated, water mixing valves.
 - 6. Outlet boxes.
 - 7. Hose bibbs.
 - 8. Wall hydrants.
 - 9. Drain valves.
 - 10. Water-hammer arresters.
 - 11. Flexible connectors.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For domestic water piping specialties.
 - 1. Include diagrams for power, signal, and control wiring.

1.3 INFORMATIONAL SUBMITTALS

- A. Test and inspection reports.
- B. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For domestic water piping specialties to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR PIPING SPECIALTIES

- A. Domestic water piping specialties intended to convey or dispense water for human consumption are to comply with the SDWA, requirements of authorities having jurisdiction, and NSF 61 and NSF 372, or to be certified in compliance with NSF 61 and NSF 372 by an American National Standards Institute (ANSI)-accredited third-party certification body that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

2.2 PERFORMANCE REQUIREMENTS

- A. Minimum Working Pressure for Domestic Water Piping Specialties: 125 psig unless otherwise indicated.

2.3 VACUUM BREAKERS

- A. Pipe-Applied, Atmospheric-Type Vacuum Breakers:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - b. Cash Acme Plumbing Products; an RWC brand
 - c. FEBCO; A WATTS Brand
 - d. WATTS; A Watts Water Technologies Company
 - e. Zurn Industries, LLC
 - 2. Standard: ASSE 1001.

3. Size: NPS 1/4 to NPS 3, as required to match connected piping.
4. Body: Bronze.
5. Inlet and Outlet Connections: Threaded.
6. Finish: Chrome plated.

B. Hose-Connection Vacuum Breakers:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - b. Cash Acme Plumbing Products; an RWC brand
 - c. Champion-Arrowhead
 - d. Jay R. Smith Mfg Co; a division of Morris Group International
 - e. MIFAB, Inc
 - f. WATTS; A Watts Water Technologies Company
 - g. Woodford Manufacturing Company
 - h. Zurn Industries, LLC
2. Standard: ASSE 1011.
3. Body: Bronze, nonremovable, with manual drain.
4. Outlet Connection: Garden-hose threaded complying with ASME B1.20.7.
5. Finish: Chrome or nickel plated.

2.4 BACKFLOW PREVENTERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Ames Fire & Waterworks; A Watts Water Technologies Company
2. Apollo Valves; a part of Aalberts Integrated Piping Systems
3. Caleffi North America
4. FEBCO; A WATTS Brand
5. WATTS; A Watts Water Technologies Company
6. Zurn Industries, LLC

B. Intermediate Atmospheric-Vent Backflow Preventers:

1. Standard: ASSE 1012.
2. Operation: Continuous-pressure applications.
3. Size: NPS 1/2.
4. Body: Bronze.
5. End Connections: Union, solder joint.
6. Finish: Rough bronze.

C. Reduced-Pressure-Principle Backflow Preventers:

1. Standard: ASSE 1013.
2. Operation: Continuous-pressure applications.
3. Pressure Loss: 12 psig maximum, through middle third of flow range.
4. Size: As indicated on Drawings.
5. Body: Bronze or stainless steel for NPS 2 and smaller; ductile or cast iron with interior lining that complies with AWWA C550 or that is FDA approved or stainless steel for NPS 2-1/2 and larger.
6. End Connections: Threaded for NPS 2 and smaller; flanged for NPS 2-1/2 and larger.
7. Configuration: Designed for horizontal, straight-through flow.
8. Accessories:
 - a. Valves NPS 2 (DN 50) and Smaller: Ball type with threaded ends on inlet and outlet.
 - b. Valves NPS 2-1/2 (DN 65) and Larger: Outside-screw and yoke-gate type with flanged ends on inlet and outlet.
 - c. Air-Gap Fitting: ASME A112.1.2, matching backflow-preventer connection.

D. Double-Check, Backflow-Prevention Assemblies:

1. Standard: ASSE 1015.
2. Operation: Continuous-pressure applications unless otherwise indicated.
3. Pressure Loss: 5 psig maximum, through middle third of flow range.
4. Size: As indicated on Drawings.

5. Body: Bronze or stainless steel for NPS 2 and smaller; ductile or cast iron with interior lining that complies with AWWA C550 or that is FDA approved or stainless steel for NPS 2-1/2 and larger.
 6. End Connections: Threaded for NPS 2 and smaller; flanged for NPS 2-1/2 and larger.
 7. Configuration: Designed for horizontal, straight-through flow.
 8. Accessories:
 - a. Valves NPS 2 (DN 50) and Smaller: Ball type with threaded ends on inlet and outlet.
 - b. Valves NPS 2-1/2 (DN 65) and Larger: Outside-screw and yoke-gate type with flanged ends on inlet and outlet.
- E. Beverage-Dispensing-Equipment Backflow Preventers:
1. Standard: ASSE 1022.
 2. Operation: Continuous-pressure applications.
 3. Size: NPS 1/4 or NPS 3/8.
 4. Body: Stainless steel or non-metallic.
 5. End Connections: Threaded or flare.
- F. Carbonated-Beverage-Dispenser, Dual-Check-Valve Backflow Preventers:
1. Standard: ASSE 1032.
 2. Operation: Continuous-pressure applications.
 3. Size: NPS 1/4 or NPS 3/8.
 4. Body: Stainless steel.
 5. End Connections: Threaded or flare.
- G. Hose-Connection Backflow Preventers:
1. Standard: ASSE 1052.
 2. Operation: Up to 10-ft. head of water back pressure.
 3. Inlet Size: NPS 3/4.
 4. Outlet Size: Garden-hose thread complying with ASME B1.20.7.
 5. Capacity: At least 3-gpm flow.

2.5 WATER PRESSURE-REDUCING VALVES

- A. Water Regulators:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - b. Caleffi North America
 - c. Cash Acme Plumbing Products; an RWC brand
 - d. WATTS; A Watts Water Technologies Company
 - e. Zurn Industries, LLC
 2. Standard: ASSE 1003.
 3. Pressure Rating: Initial working pressure of 150 psig.
 4. Size: As indicated on Drawings.
 5. Design Inlet Pressure: As indicated on Drawings.
 6. Design Outlet Pressure Setting: Insert psigAs indicated on Drawings.
 7. Body: Bronze for NPS 2 and smaller; cast iron with interior lining that complies with AWWA C550 or that is FDA approved for NPS 2-1/2 and NPS 3.
 8. End Connections: Threaded or solder for NPS 2 and smaller; flanged or solder for NPS 2-1/2 and NPS 3.

2.6 Condensation Funnel for Clothes Washers Outlet Boxes

- A. Basis-of-Design Product: Subject to compliance with requirements, provide <Sioux Chief> or comparable product by one of the following:
1. Accor Technology, Inc.

2.7 BALANCING VALVES

- A. Copper-Alloy Calibrated Balancing Valves:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Bell & Gossett; a Xylem brand
 - b. IMI
 - c. Nexus Valve, Inc.; Aalberts Hydronic Flow Control
 - d. NIBCO INC.
 - e. WATTS; A Watts Water Technologies Company
 2. Type: Ball valve with two readout ports and memory-setting indicator.
 3. Body: Brass or bronze.
 4. Size: Same as connected piping, but not larger than NPS 2.
- B. Memory-Stop Balancing Valves:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - b. Caleffi North America
 - c. Crane Fluid Systems; Crane Co.
 - d. Hammond Valve
 - e. Jenkins Valves; a Crane Co. brand
 - f. Milwaukee Valve Company
 - g. NIBCO INC.
 - h. Red-White Valve Corp.
 - i. Stockham; a Crane Co. brand
 2. Standard: MSS SP-110 for two-piece, copper-alloy ball valves.
 3. Pressure Rating: 400-psig minimum CWP.
 4. Size: NPS 2 or smaller.
 5. Body: Copper alloy.
 6. Port: Standard or full port.
 7. Ball: Chrome-plated brass or stainless steel.
 8. Seats and Seals: Replaceable.
 9. End Connections: Solder joint or threaded.
 10. Handle: Vinyl-covered steel with memory-setting device.

2.8 TEMPERATURE-ACTUATED, WATER MIXING VALVES

- A. Individual-Fixture, Water Tempering Valves:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Acorn Controls; a Division of Morris Group International
 - b. Acorn Engineering Company; a Division of Morris Group International
 - c. Caleffi North America
 - d. Lawler Manufacturing Company, Inc
 - e. Leonard
 - f. POWERS; A Watts Water Technologies Company
 - g. Zurn Industries, LLC
 2. Standard: ASSE 1016, thermostatically controlled, water tempering valve.
 3. Pressure Rating: 125 psig minimum unless otherwise indicated.
 4. Material: Bronze body with corrosion-resistant interior components.
 5. Temperature Control: Adjustable.
 6. Connections: Threaded inlets and outlet.
 7. Finish: Chrome plated.
 8. Tempered-Water Setting: 110 deg F.

2.9 HOSE BIBBS

- A. Hose Bibbs:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Jay R. Smith Mfg Co; a division of Morris Group International

- b. Josam Company
- c. MIFAB, Inc
- d. Prier Products, Inc.
- e. WATTS; A Watts Water Technologies Company
- f. Woodford Manufacturing Company
- g. Zurn Industries, LLC
- 2. Standard: ASME A112.18.1 for sediment faucets.
- 3. Body Material: Bronze.
- 4. Seat: Bronze, replaceable.
- 5. Supply Connections: NPS 1/2 or NPS 3/4 threaded or solder-joint inlet.
- 6. Outlet Connection: Garden-hose thread complying with ASME B1.20.7.
- 7. Pressure Rating: 125 psig.
- 8. Vacuum Breaker: Integral nonremovable, drainable, hose-connection vacuum breaker complying with ASSE 1011.
- 9. Finish for Equipment Rooms: Rough bronze, or chrome or nickel plated.
- 10. Finish for Service Areas: Rough bronze.
- 11. Finish for Finished Rooms: Chrome or nickel plated.
- 12. Operation for Equipment Rooms: Wheel handle.
- 13. Operation for Service Areas: Wheel handle.
- 14. Operation for Finished Rooms: Operating key.
- 15. Include operating key with each operating-key hose bibb.
- 16. Include integral wall flange with each chrome- or nickel-plated hose bibb.

2.10 WALL HYDRANTS

A. Nonfreeze Wall Hydrants:

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Jay R. Smith Mfg Co; a division of Morris Group International
 - b. Josam Company
 - c. MIFAB, Inc
 - d. Murdock Manufacturing; A Division of Morris Group International
 - e. Prier Products, Inc.
 - f. WATTS; A Watts Water Technologies Company
 - g. Woodford Manufacturing Company
 - h. Zurn Industries, LLC
- 2. Standard: ASME A112.21.3M for exposed-outlet, self-draining wall hydrants.
- 3. Pressure Rating: 125 psig.
- 4. Operation: Loose key.
- 5. Casing and Operating Rod: Of length required to match wall thickness. Include wall clamp.
- 6. Inlet: NPS 3/4 or NPS 1.
- 7. Outlet, Concealed: With integral vacuum breaker and garden-hose thread complying with ASME B1.20.7.
- 8. Box: Deep, flush mounted with cover.
- 9. Box and Cover Finish: Polished nickel bronze.
- 10. Outlet, Exposed: With integral vacuum breaker and garden-hose thread complying with ASME B1.20.7.
- 11. Nozzle and Wall-Plate Finish: Rough bronze.
- 12. Operating Keys(s): One with each wall hydrant.

B. Nonfreeze, Hot- and Cold-Water Wall Hydrants:

- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Jay R. Smith Mfg Co; a division of Morris Group International
 - b. Josam Company
 - c. MIFAB, Inc
 - d. Murdock Manufacturing; A Division of Morris Group International
 - e. Prier Products, Inc.

- f. WATTS; A Watts Water Technologies Company
- g. Woodford Manufacturing Company
- h. Zurn Industries, LLC
- 2. Standard: ASME A112.21.3M for concealed -outlet, self-draining wall hydrants.
- 3. Pressure Rating: 125 psig.
- 4. Operation: Loose key.
- 5. Casing and Operating Rods: Of length required to match wall thickness. Include wall clamps.
- 6. Inlet: NPS 3/4 or NPS 1.
- 7. Outlet: Concealed.
- 8. Box: Deep, flush mounted with cover.
- 9. Box and Cover Finish: Polished nickel bronze.
- 10. Vacuum Breaker:
 - a. Nonremovable, manual-drain-type, hose-connection vacuum breaker complying with ASSE 1011 or backflow preventer complying with ASSE 1052.
 - b. Garden-hose thread complying with ASME B1.20.7 on outlet.
- 11. Operating Key(s): One with each wall hydrant.

2.11 WATER-HAMMER ARRESTERS

- A. Water-Hammer Arresters:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. AMTROL, Inc.
 - b. Jay R. Smith Mfg Co; a division of Morris Group International
 - c. Josam Company
 - d. MIFAB, Inc
 - e. Precision Plumbing Products
 - f. ProFlo; a Ferguson Enterprises, Inc. brand
 - g. Sioux Chief Manufacturing Company, Inc.
 - h. WATTS; A Watts Water Technologies Company
 - i. Zurn Industries, LLC
 - 2. Standard: ASSE 1010 or PDI-WH 201.
 - 3. Type: Piston.
 - 4. Size: ASSE 1010, Sizes AA and A through F, or PDI-WH 201, Sizes A through F.

2.12 TRAP-SEAL PRIMER DEVICE

- A. Supply-Type, Trap-Seal Primer Device:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Jay R. Smith Mfg Co; a division of Morris Group International
 - b. Josam Company
 - c. MIFAB, Inc
 - d. Precision Plumbing Products
 - e. ProFlo; a Ferguson Enterprises, Inc. brand
 - f. Sioux Chief Manufacturing Company, Inc.
 - g. WATTS; A Watts Water Technologies Company
 - h. Zurn Industries, LLC
 - 2. Standard: ASSE 1018.
 - 3. Pressure Rating: 125 psig minimum.
 - 4. Body: Bronze.
 - 5. Inlet and Outlet Connections: NPS 1/2 threaded, union, or solder joint.
 - 6. Gravity Drain Outlet Connection: NPS 1/2 threaded or solder joint.
 - 7. Finish: Chrome plated, or rough bronze for units used with pipe or tube that is not chrome finished.
- B. Drainage-Type, Trap-Seal Primer Device:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- a. Jay R. Smith Mfg Co; a division of Morris Group International
- b. MIFAB, Inc
- c. Precision Plumbing Products
- d. Zurn Industries, LLC
- 2. Standard: ASSE 1044, lavatory P-trap with NPS 3/8 minimum, trap makeup connection.
- 3. Size: NPS 1-1/4 minimum.
- 4. Material: Chrome-plated, cast brass.

2.13 FLEXIBLE CONNECTORS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Flex-Hose Co., Inc
 - 2. Mason Industries, Inc.
 - 3. Metraflex Company (The)
- B. Bronze-Hose Flexible Connectors: Corrugated-bronze tubing with bronze wire-braid covering and ends brazed to inner tubing.
 - 1. Working-Pressure Rating: Minimum 200 psig.
 - 2. End Connections NPS 2 (DN 50) and Smaller: Threaded copper pipe or plain-end copper tube.
 - 3. End Connections NPS 2-1/2 (DN 65) and Larger: Flanged copper alloy.
- C. Stainless Steel-Hose Flexible Connectors: Corrugated-stainless steel tubing with stainless steel wire-braid covering and ends welded to inner tubing.
 - 1. Working-Pressure Rating: Minimum 200 psig.
 - 2. End Connections NPS 2 (DN 50) and Smaller: Threaded steel-pipe nipple.
 - 3. End Connections NPS 2-1/2 (DN 65) and Larger: Flanged steel nipple.

PART 3 - EXECUTION

3.1 INSTALLATION OF PIPING SPECIALTIES

- A. Backflow Preventers: Install in each water supply to mechanical equipment and systems and to other equipment and water systems that may be sources of contamination. Comply with authorities having jurisdiction.
 - 1. Locate backflow preventers in same room as connected equipment or system.
 - 2. Install drain for backflow preventers with atmospheric-vent drain connection with air-gap fitting, fixed air-gap fitting, or equivalent positive pipe separation of at least two pipe diameters in drain piping and pipe-to-floor drain. Locate air-gap device attached to or under backflow preventer. Simple air breaks are unacceptable for this application.
 - 3. Do not install bypass piping around backflow preventers.
- B. Water Regulators: Install with inlet and outlet shutoff valves. Install pressure gauges on inlet and outlet.
- C. Balancing Valves: Install in locations where they can easily be adjusted. Set at indicated design flow rates.
- D. Temperature-Actuated, Water Mixing Valves: Install with check stops or shutoff valves on inlets and with shutoff valve on outlet.
 - 1. Install cabinet-type units recessed in or surface mounted on wall as specified.
- E. Y-Pattern Strainers: For water, install on supply side of each pump.
- F. Water-Hammer Arresters: Install in water piping in accordance with PDI-WH 201.

3.2 PIPING CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. When installing piping specialties adjacent to equipment and machines, allow space for service and maintenance.

3.3 ELECTRICAL CONNECTIONS

- A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."
- C. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

3.4 ADJUSTING

- A. Set field-adjustable pressure set points of water pressure-reducing valves.
- B. Set field-adjustable flow set points of balancing valves.
- C. Set field-adjustable temperature set points of temperature-actuated, water mixing valves.
- D. Adjust each reduced-pressure-principle backflow preventer double-check, backflow-prevention assembly in accordance with manufacturer's written instructions, authorities having jurisdiction and the device's reference standard.

END OF SECTION 221119

SECTION 221316 - SANITARY WASTE AND VENT PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Hubless, cast-iron soil pipe and fittings.
 - 2. PVC pipe and fittings.
 - 3. Specialty pipe fittings.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Plans and elevations, or Building Information Model (BIM) drawn to scale, showing items described in this Section and coordinated with all building trades.
- B. Installation photographs.
 - 1. After installation of underground piping and support, but prior to backfilling, submit photographs showing entirety of underground piping system.
- C. Field quality-control reports.

1.4 WARRANTY

- A. Listed manufacturers to provide labeling and warranty of their respective products.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Components and installation are capable of withstanding the following minimum working pressure unless otherwise indicated:
 - 1. Soil, Waste, and Vent Piping: 10 ft. head of water.

2.2 PIPING MATERIALS

- A. Piping materials to bear label, stamp, or other markings of specified testing agency.
- B. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.3 HUBLESS, CAST-IRON SOIL PIPE AND FITTINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. AB & I Foundry; a part of the McWane family of companies
 - 2. Charlotte Pipe and Foundry Company
 - 3. Tyler Pipe; a part of the McWane family of companies
- B. Pipe and Fittings:
 - 1. Marked with CISPI collective trademark.
 - 2. ASTM A888 or CISPI 301.
- C. CISPI, Hubless-Piping Couplings:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ANACO-Husky; a part of the McWane family of companies
 - b. Charlotte Pipe and Foundry Company
 - c. Dallas Specialty & Mfg. Co.
 - d. Fernco Inc

- e. Ideal Tridon Group
 - f. Matco-Norca
 - g. MIFAB, Inc
 - h. Mission Rubber Company, LLC
 - i. Tyler Pipe; a subsidiary of McWane Inc.
 - 2. Standards: ASTM C1277 and CISPI 310.
 - 3. Description: Stainless steel corrugated shield with stainless steel bands and tightening devices; and ASTM C564, rubber sleeve with integral, center pipe stop.
- D. Heavy-Duty, Hubless-Piping Couplings:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. AB & I Foundry; a part of the McWane family of companies
 - b. ANACO-Husky; a part of the McWane family of companies
 - c. Charlotte Pipe and Foundry Company
 - d. Clamp-All Corp
 - e. Dallas Specialty & Mfg. Co.
 - f. Ideal Tridon Group
 - g. MIFAB, Inc
 - h. Mission Rubber Company, LLC
 - i. Tyler Pipe; a subsidiary of McWane Inc.
 - 2. Standards: ASTM C1277 and ASTM C1540. **<Insert standard>.**
 - 3. Description: Stainless steel shield with stainless steel bands and tightening devices; and ASTM C564, rubber sleeve with integral, center pipe stop.

2.4 PVC PIPE AND FITTINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Apollo Valves; a part of Aalberts Integrated Piping Systems
 - 2. Charlotte Pipe and Foundry Company
 - 3. GF Piping Systems
 - 4. JM Eagle
 - 5. National Pipe and Plastic, Inc. (Oldcastle)
 - 6. North America Pipe Corporation
 - 7. Rocky Mountain Colby Pipe Company
 - 8. Silver-line Plastics
- B. Comply with NSF 14 for plastic piping components. Include "NSF-dwv" marking for plastic drain, waste, and vent piping and "NSF-sewer" marking for plastic sewer piping.
- C. Solid-Wall PVC Pipe: ASTM D2665 drain, waste, and vent.
- D. Cellular-Core PVC Pipe: ASTM F891, Schedule 40.
- E. PVC Socket Fittings: ASTM D2665, made in accordance with ASTM D3311, drain, waste, and vent patterns and to fit Schedule 40 pipe.
- F. Adhesive Primer: ASTM F656.
- G. Solvent Cement: ASTM D2564.

2.5 SPECIALTY PIPE FITTINGS

- A. Transition Couplings:
 - 1. General Requirements: Fitting or device for joining piping with small differences in ODs or of different materials. Include end connections of same size as and compatible with pipes to be joined.
 - 2. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.
 - 3. Unshielded, Nonpressure Transition Couplings:

- a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Dallas Specialty & Mfg. Co.
 - 2) Fernco Inc
 - 3) Mission Rubber Company, LLC
 - 4) Plastic Oddities
 - b. Standard: ASTM C1173.
 - c. Description: Elastomeric, sleeve-type, reducing or transition pattern. Include shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.
 - d. End Connections: Same size as and compatible with pipes to be joined.
 - e. Sleeve Materials:
 - 1) For Cast-Iron Soil Pipes: ASTM C564, rubber.
 - 2) For Plastic Pipes: ASTM F477, elastomeric seal or ASTM D5926 PVC.
 - 3) For Dissimilar Pipes: ASTM D5926 PVC or other material compatible with pipe materials being joined.
4. Shielded, Nonpressure Transition Couplings:
- a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Cascade Waterworks Mfg. Co.
 - 2) Mission Rubber Company, LLC
 - b. Standard: ASTM C1460.
 - c. Description: Elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield and corrosion-resistant-metal tension band and tightening mechanism on each end.
 - d. End Connections: Same size as and compatible with pipes to be joined.
5. Pressure Transition Couplings:
- a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Apollo Valves; a part of Aalberts Integrated Piping Systems
 - 2) Cascade Waterworks Mfg. Co.
 - 3) EBAA Iron Sales, Inc.
 - 4) Ford Meter Box Company, Inc. (The)
 - 5) JCM Industries, Inc
 - 6) Romac Industries, Inc.
 - b. Standard: AWWA C219.
 - c. Description: Metal sleeve-type same size as, with pressure rating at least equal to, and ends compatible with, pipes to be joined.
 - d. Center-Sleeve Material: Manufacturer's standard.
 - e. Gasket Material: Natural or synthetic rubber.
 - f. Metal Component Finish: Corrosion-resistant coating or material.

PART 3 - EXECUTION

3.1 RETURN AIR PLENUM MATERIAL RESTRICTION

- A. Plastic piping shall not be installed within spaces used as return air plenums. Materials prohibited within return air plenums include, but are not limited to, PVC, CPVC, ABS, PEX, polypropylene, polyethylene, and other combustible plastic piping materials.
- B. Application of insulation, fire-resistant wrap, or other coverings to plastic piping shall not be considered a method of complying with this requirement and shall not permit installation within return air plenums. Plastic piping shall not be installed in return air plenums regardless of insulation, fire wrapping, flame-spread rating claims, or manufacturer listing unless specifically approved in writing by the Engineer.
- C. Where piping is required to pass through a return air plenum space, piping materials shall be limited to noncombustible materials such as copper, cast iron, steel, or other materials approved for plenum installation by the Authority Having Jurisdiction.

- D. Contractor shall coordinate piping routing to avoid return air plenums where plastic piping systems are specified or proposed. Any rerouting required to comply with this requirement shall be included in the Contractor's base bid and shall not be considered grounds for additional compensation.

3.2 INSTALLATION OF PIPING

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems.
 - 1. Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations.
 - 2. Install piping as indicated unless deviations to layout are approved on coordination drawings.
- B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping to permit valve servicing.
- F. Install piping at indicated slopes.
- G. Install piping free of sags and bends.
- H. Install fittings for changes in direction and branch connections.
- I. Install piping to allow application of insulation where applicable.
- J. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends.
 - 1. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical.
 - 2. Use long-turn, double Y-branch, and 1/8-bend fittings if two fixtures are installed back to back or side by side with common drain pipe.
 - a. Straight tees, elbows, and crosses may be used on vent lines.
 - 3. Do not change direction of flow more than 90 degrees.
 - 4. Use proper size of standard increasers and reducers if pipes of different sizes are connected.
 - a. Reducing size of waste piping in direction of flow is prohibited.
- K. Lay buried building waste piping beginning at low point of each system.
 - 1. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream.
 - 2. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements.
 - 3. Maintain swab in piping and pull past each joint as completed.
- L. Install soil and waste and vent piping at the following minimum slopes unless otherwise indicated:
 - 1. Sanitary Drain: Two percent downward in direction of flow for piping NPS 3 and smaller; 1 percent downward in direction of flow for piping NPS 4 and larger.
 - 2. Vent Piping: One percent down toward vertical fixture vent or toward vent stack.
- M. Install cast-iron soil piping in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."
- N. Install aboveground PVC piping in accordance with ASTM D2665.
- O. Install underground PVC piping in accordance with ASTM D2321.
- P. Install engineered soil and waste and vent piping systems as follows:
 - 1. Combination Waste and Vent: Comply with standards of authorities having jurisdiction.
- Q. Plumbing Specialties:

1. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers in sanitary waste gravity-flow piping.
 - a. Comply with requirements for cleanouts specified in Section 221319 "Sanitary Waste Piping Specialties."
2. Install drains in sanitary waste gravity-flow piping.
 - a. Comply with requirements for drains specified in Section 221319 "Sanitary Waste Piping Specialties."
- R. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.
- S. Install sleeves for piping penetrations of walls, ceilings, and floors.
 1. Comply with requirements for sleeves specified in Section 220500 "Common Work Results for Plumbing."
- T. Install sleeve seals for piping penetrations of concrete walls and slabs.
 1. Comply with requirements for sleeve seals specified in Section 220500 "Common Work Results for Plumbing."
- U. Install escutcheons for piping penetrations of walls, ceilings, and floors.
 1. Comply with requirements for escutcheons specified in Section 220500 "Common Work Results for Plumbing."
- V. Trenching:
 1. Notify Architect of unexpected subsurface conditions and discontinue affected work in area until notified to resume work.
 2. Slope banks of excavations deeper than 4 feet to angle of repose or less until shored.
 3. Do not interfere with 45 degree bearing splay of foundations.
 4. Cut trenches wide enough to allow inspection of installed utilities.
 5. Hand trim excavations and remove loose material.
 6. Remove large stones and other hard matter that could damage piping or impede consistent backfilling or compaction.
 7. Remove excavated material that is unsuitable for re-use from site.
 8. Remove excess excavated material from site.
- W. Backfilling:
 1. Utilize sand for bedding of pipe, and for backfill to a minimum of 6" over the top of pipes.
 2. Hand tamp sand below all piping to ensure continuous support of entire piping system prior to backfilling.
 3. Fill to subgrade elevations unless otherwise indicated.
 4. Employ placement method that does not disturb or damage other work.
 5. Systematically fill to allow maximum time for natural settlement.
 - a. Do not fill over porous, wet, frozen or spongy subgrade;
 - b. Maintain optimum moisture content of fill materials to attain required compaction density.
 - c. Place materials in equal continuous layers not exceeding 6" compacted depth for each layer.

3.3 JOINT CONSTRUCTION

- A. Hubless, Cast-Iron Soil Piping Coupled Joints:
 1. Join hubless, cast-iron soil piping in accordance with CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-piping coupling joints.
- B. Plastic, Nonpressure-Piping, Solvent-Cement Joints: Clean and dry joining surfaces. Join pipe and fittings in accordance with the following:
 1. Comply with ASTM F402 for safe-handling practice of cleaners, primers, and solvent cements.
 2. PVC Piping: Join in accordance with ASTM D2855 and ASTM D2665 appendixes.

3.4 INSTALLATION OF SPECIALTY PIPE FITTINGS

- A. Transition Couplings:

1. Install transition couplings at joints of piping with small differences in ODs.
 2. In Waste Drainage Piping: Shielded, nonpressure transition couplings.
- B. Dielectric Fittings:
1. Install dielectric fittings in piping at connections of dissimilar metal piping and tubing.
 2. Dielectric Fittings for NPS 2 (DN 50) and Smaller: Use dielectric unions.
 3. Dielectric Fittings for NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Use dielectric flanges.
 4. Dielectric Fittings for NPS 5 (DN 125) and Larger: Use dielectric flange kits.

3.5 INSTALLATION OF VALVES

- A. General valve installation requirements for general-duty valve installation are specified in Section 220523 "General-Duty Valves for Plumbing Piping."
- B. Shutoff Valves:
1. Install shutoff valve on each sewage pump discharge.
 2. Install full-port ball valve for piping NPS 2 and smaller.
 3. Install gate valve for piping NPS 2-1/2 and larger.
- C. Check Valves: Install swing check valve, between pump and shutoff valve, on each sewage pump discharge.
- D. Backwater Valves: Install backwater valves in piping subject to backflow.
1. Horizontal Piping: Horizontal backwater valves. [**Use normally closed type unless otherwise indicated.**]
 2. Floor Drains: Drain outlet backwater valves unless drain has integral backwater valve.
 3. Install backwater valves in accessible locations.
 4. Comply with requirements for backwater valve specified in Section 221319 "Sanitary Waste Piping Specialties."

3.6 INSTALLATION OF HANGERS AND SUPPORTS

- A. Comply with requirements for pipe hanger and support devices and installation specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment".
1. Install carbon-steel pipe hangers for horizontal piping in noncorrosive environments.
 2. Install stainless steel pipe hangers for horizontal piping in corrosive environments.
 3. Install carbon-steel pipe support clamps for vertical piping in noncorrosive environments.
 4. Install stainless steel pipe support clamps for vertical piping in corrosive environments.
 5. Vertical Piping: MSS Type 8 or Type 42 clamps.
 6. Install individual, straight, horizontal piping runs:
 - a. 100 Ft. (30 m) and Less: MSS Type 1, adjustable, steel clevis hangers.
 - b. Longer Than 100 Ft. (30 m): MSS Type 43, adjustable roller hangers.
 - c. Longer Than 100 Ft. (30 m) if Indicated: MSS Type 49, spring cushion rolls.
 7. Multiple, Straight, Horizontal Piping Runs 100 Ft. (30 m) or Longer: MSS Type 44 pipe rolls. Support pipe rolls on trapeze.
 8. Base of Vertical Piping: MSS Type 52 spring hangers.
- B. Install hangers for cast-iron soil piping, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- C. Install hangers for PVC piping, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- D. Support horizontal piping and tubing within 12 inches of each fitting and coupling.
- E. Support vertical runs of cast-iron soil piping to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- F. Support vertical runs of PVC piping to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.7 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.
- C. Connect waste and vent piping to the following:
 - 1. Plumbing Fixtures: Connect waste piping in sizes indicated, but not smaller than required by plumbing code.
 - 2. Plumbing Fixtures and Equipment: Connect atmospheric vent piping in sizes indicated, but not smaller than required by authorities having jurisdiction.
 - 3. Plumbing Specialties: Connect waste and vent piping in sizes indicated, but not smaller than required by plumbing code.
 - 4. Install test tees (wall cleanouts) in conductors near floor and floor cleanouts with cover flush with floor.
 - 5. Equipment: Connect waste piping as indicated.
 - a. Provide shutoff valve if indicated and union for each connection.
 - b. Use flanges instead of unions for connections NPS 2-1/2 and larger.
- D. Where installing piping adjacent to equipment, allow space for service and maintenance of equipment.
- E. Make connections in accordance with the following unless otherwise indicated:
 - 1. Install unions, in piping NPS 2 and smaller, adjacent to each valve and at final connection to each piece of equipment.
 - 2. Install flanges, in piping NPS 2-1/2 and larger, adjacent to flanged valves and at final connection to each piece of equipment.

3.8 IDENTIFICATION

- A. Identify exposed sanitary waste and vent piping.
- B. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.9 FIELD QUALITY CONTROL

- A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.
 - 1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
 - 2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
- B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.
- C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
- D. Test sanitary waste and vent piping in accordance with procedures of authorities having jurisdiction or, in absence of published procedures, as follows:
 - 1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired.
 - a. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
 - 2. Leave uncovered and unconcealed new, altered, extended, or replaced waste and vent piping until it has been tested and approved.
 - a. Expose work that was covered or concealed before it was tested.
 - 3. Roughing-in Plumbing Test Procedure: Test waste and vent piping except outside leaders on completion of roughing-in.
 - a. Close openings in piping system and fill with water to point of overflow, but not less than 10 ft. head of water.

- b. From 15 minutes before inspection starts to completion of inspection, water level must not drop.
 - c. Inspect joints for leaks.
- 4. Finished Plumbing Test Procedure: After plumbing fixtures have been set and traps filled with water, test connections and prove they are gastight and watertight.
 - a. Plug vent-stack openings on roof and building drains where they leave building. Introduce air into piping system equal to pressure of 1 inch wg.
 - b. Use U-tube or manometer inserted in trap of water closet to measure this pressure.
 - c. Air pressure must remain constant without introducing additional air throughout period of inspection.
 - d. Inspect plumbing fixture connections for gas and water leaks.
- 5. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
- 6. Prepare reports for tests and required corrective action.

3.10 CLEANING AND PROTECTION

- A. Clean interior of piping. Remove dirt and debris as work progresses.
- B. Protect sanitary waste and vent piping during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- C. Place plugs in ends of uncompleted piping at end of day and when work stops.
- D. Repair damage to adjacent materials caused by waste and vent piping installation.

3.11 PIPING SCHEDULE

- A. Flanges and unions may be used on aboveground pressure piping unless otherwise indicated.
- B. The use of PVC, where allowed in paragraphs below, shall be limited to spaces not utilized as return air plenums.
- C. Aboveground, soil and waste piping NPS 4 (DN 100) and smaller are to be the following:
 - 1. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.
 - 2. Cellular-core PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- D. Aboveground, soil and waste piping NPS 5 (DN 125) and larger are to be the following:
 - 1. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.
 - 2. Cellular-core PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- E. Aboveground, vent piping NPS 4 (DN 100) is to be the following:
 - 1. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.
 - 2. Cellular-core PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- F. Aboveground, vent piping NPS 5 (DN 125) and larger is to be the following:
 - 1. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.
 - 2. Cellular-core PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- G. Underground, soil, waste, and vent piping NPS 4 (DN 100) and smaller are to be the following:
 - 1. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.
 - 2. Solid-wall PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- H. Underground, soil and waste piping NPS 5 (DN 125) and larger are to be the following:
 - 1. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; coupled joints.
 - 2. Solid-wall PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.

END OF SECTION 221316

This page intentionally left blank.

SECTION 221319 - SANITARY WASTE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Cleanouts.
 - 2. Miscellaneous sanitary drainage piping specialties.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 ASSEMBLY DESCRIPTIONS

- A. Sanitary waste piping specialties shall bear label, stamp, or other markings of specified testing agency.
- B. Comply with NSF 14 for plastic sanitary waste piping specialty components.

2.2 CLEANOUTS

- A. Cast-Iron Exposed Cleanouts:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Jay R. Smith Mfg Co; a division of Morris Group International
 - b. Josam Company
 - c. MIFAB, Inc
 - d. Tyler Pipe; a subsidiary of McWane Inc.
 - e. WATTS; A Watts Water Technologies Company
 - f. Zurn Industries, LLC
 - 2. Standard: ASME A112.36.2M.
 - 3. Size: Same as connected drainage piping
 - 4. Body Material: Hubless, cast-iron soil pipe test tee as required to match connected piping.
 - 5. Closure: Countersunk or raised-head, brass plug.
 - 6. Closure Plug Size: Same as or not more than one size smaller than cleanout size.
- B. Cast-Iron Exposed Floor Cleanouts:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Jay R. Smith Mfg Co; a division of Morris Group International
 - b. Josam Company
 - c. MIFAB, Inc
 - d. Sioux Chief Manufacturing Company, Inc.
 - e. WATTS; A Watts Water Technologies Company
 - f. Zurn Industries, LLC
 - 2. Standard: ASME A112.36.2M for heavy-duty, adjustable housing cleanout.
 - 3. Size: Same as connected branch.
 - 4. Type: Adjustable housing.
 - 5. Body or Ferrule: Cast iron.
 - 6. Outlet Connection: Threaded.
 - 7. Closure: Brass plug with tapered threads.
 - 8. Adjustable Housing Material: Plastic with setscrews or other device.
 - 9. Frame and Cover Material and Finish: Nickel-bronze, copper alloy.
 - 10. Frame and Cover Shape: Round.
 - 11. Top-Loading Classification: Heavy Duty.
 - 12. Riser: ASTM A74, Service Class, cast-iron drainage pipe fitting and riser to cleanout.
- C. Cast-Iron Wall Cleanouts:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Jay R. Smith Mfg Co; a division of Morris Group International
 - b. Josam Company
 - c. MIFAB, Inc
 - d. WATTS; A Watts Water Technologies Company
 - e. Zurn Industries, LLC
2. Standard: ASME A112.36.2M. Include wall access.
3. Size: Same as connected drainage piping.
4. Body: Hubless, cast-iron soil pipe test tee as required to match connected piping.
5. Closure Plug:
 - a. Brass.
 - b. Countersunk or raised head.
 - c. Drilled and threaded for cover attachment screw.
 - d. Size: Same as or not more than one size smaller than cleanout size.
6. Wall Access, Cover Plate: Round, flat, chrome-plated brass or stainless steel cover plate with screw.

D. Plastic Floor Cleanouts:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Endura; a brand of IPEX
 - b. IPS Corporation
 - c. NDS Inc
 - d. Plastic Oddities
 - e. Sioux Chief Manufacturing Company, Inc.
 - f. Zurn Industries, LLC
2. Size: Same as connected branch.
3. Body: PVC.
4. Closure Plug: PVC.
5. Riser: Drainage pipe fitting and riser to cleanout of same material as drainage piping.

2.3 MISCELLANEOUS SANITARY DRAINAGE PIPING SPECIALTIES

A. Open Drains Insert drawing designation, if any:

1. Description: Shop or field fabricate from ASTM A74, Service Class, hub-and-spigot, cast-iron soil-pipe fittings. Include P-trap, hub-and-spigot riser section; and where required, increaser fitting joined with ASTM C564 rubber gaskets.
2. Size: Same as connected waste piping with increaser fitting of a minimum of 2 pipe sizes or size indicated.

B. Deep-Seal Traps Insert drawing designation, if any:

1. Description: Cast-iron or bronze casting, with inlet and outlet matching connected piping and cleanout trap-seal primer valve connection.
2. Size: Same as connected waste piping.
 - a. NPS 2: 4-inch- minimum water seal.
 - b. NPS 2-1/2 and Larger: 5-inch- minimum water seal.

C. Floor-Drain, Trap-Seal Primer Fittings Insert drawing designation, if any:

1. Description: Cast iron, with threaded inlet and threaded or spigot outlet, and trap-seal primer valve connection.
2. Size: Same as floor drain outlet with NPS 1/2 side inlet.

D. Floor-Drain, Inline Trap Seal (Insert drawing designation, if any):

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Green Drain, Inc.
 - b. Jay R. Smith Mfg Co; a division of Morris Group International
 - c. Josam Company

- d. MIFAB, Inc
 - e. RectorSeal Plumbing; A CSW Industrials Company
 - f. Insert manufacturer's nameProset
- 2. Description: Inline floor drain trap seal, forming a physical barrier to slow trap evaporation while not impeding flow from drain.
- 3. Material: Polymer.
- 4. Standard: Tested and certified in accordance with ASSE 1072.
- 5. Listing: IAPMO listed.
- 6. Size: Same as floor drain outlet or strainer throat.
- E. Air-Gap Fittings Insert drawing designation, if any:
 - 1. Standard: ASME A112.1.2, for fitting designed to ensure fixed, positive air gap between installed inlet and outlet piping.
 - 2. Body: Bronze or cast iron.
 - 3. Inlet: Opening in top of body.
 - 4. Outlet: Larger than inlet.
 - 5. Size: Same as connected waste piping and with inlet large enough for associated indirect waste piping.
- F. Expansion Joints Insert drawing designation, if any:
 - 1. Standard: ASME A112.6.4.
 - 2. Body: Cast iron with bronze sleeve, packing, and gland.
 - 3. End Connections: Matching connected piping.
 - 4. Size: Same as connected soil, waste, or vent piping.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install cleanouts in aboveground piping and building drain piping according to the following, unless otherwise indicated:
 - 1. Size same as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
 - 2. Locate at each change in direction of piping greater than 45 degrees.
 - 3. Locate at minimum intervals of 50 feet for piping NPS 4 and smaller and 100 feet for larger piping.
 - 4. Locate 2-way cleanouts at main building drain, maximum 5' from building wall.
- B. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.
- C. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.
- D. Assemble open drain fittings and install with top of hub 2 inches above floor.
- E. Install deep-seal traps on floor drains and other waste outlets, if indicated.
- F. Install floor-drain, trap-seal primer fittings on inlet to floor drains that require trap-seal primer connection.
 - 1. Exception: Fitting may be omitted if trap has trap-seal primer connection.
 - 2. Size: Same as floor drain inlet.
- G. Install air-gap fittings on draining-type backflow preventers and on indirect-waste piping discharge into sanitary drainage system.
- H. Install wood-blocking reinforcement for wall-mounting-type specialties.
- I. Install traps on plumbing specialty drain outlets. Omit traps on indirect wastes unless trap is indicated.

3.2 PIPING CONNECTIONS

- A. Comply with requirements in Section 221316 "Sanitary Waste and Vent Piping" for piping installation requirements. Drawings indicate general arrangement of piping, fittings, and specialties.

- B. Install piping adjacent to equipment, to allow service and maintenance.

3.3 LABELING AND IDENTIFYING

- A. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit.
 - 1. Nameplates and signs are specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.
- B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319

SECTION 221319.13 - SANITARY DRAINS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Floor drains.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Sanitary drains are to bear label, stamp, or other markings of specified testing agency.
- B. Comply with NSF 14 for plastic sanitary piping specialty components.

2.2 FLOOR DRAINS

- A. Floor Drain - Cast Iron:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Jay R. Smith Mfg Co; a division of Morris Group International
 - b. Josam Company
 - c. MIFAB, Inc
 - d. Sioux Chief Manufacturing Company, Inc.
 - e. Wade; a subsidiary of McWane Inc.
 - f. WATTS; A Watts Water Technologies Company
 - g. Zurn Industries, LLC
 - 2. Source Limitations: Obtain cast-iron floor drains from single manufacturer.
 - 3. Standard: ASME A112.6.3 with backwater valve.
 - 4. Pattern: Floor drain.
 - 5. Body Material: Gray iron.
 - 6. Seepage Flange: as required.
 - 7. Anchor Flange: as required.
 - 8. Clamping Device: as required.
 - 9. Outlet: Bottom.
 - 10. Coating on Interior and Exposed Exterior Surfaces: Not required.
 - 11. Sediment Bucket: Not required.
 - 12. Top or Strainer Material: Stainless steel.
 - 13. Top of Body and Strainer Finish: Stainless steel.
 - 14. Top Shape: Round.
 - 15. Funnel: Provide where indicated on drawings.
 - 16. Inlet Fitting: Not required.
 - 17. Trap Material: Cast iron.
 - 18. Trap Pattern: Deep-seal P-trap.

PART 3 - EXECUTION

3.1 INSTALLATION OF SANITARY DRAINS

- A. Install floor drains at low points of surface areas to be drained. Set grates of drains flush with finished floor, unless otherwise indicated.
 - 1. Position floor drains for easy access and maintenance.
 - 2. Set floor drains below elevation of surrounding finished floor to allow floor drainage.

3. Install floor-drain flashing collar or flange, so no leakage occurs between drain and adjoining flooring.
 - a. Maintain integrity of waterproof membranes where penetrated.
 4. Install individual traps for floor drains connected to sanitary building drain, unless otherwise indicated.
- B. Install trench drains at low points of surface areas to be drained.
1. Set grates of drains flush with finished surface, unless otherwise indicated.

3.2 PIPING CONNECTIONS

- A. Comply with requirements in Section 221316 "Sanitary Waste and Vent Piping" for piping installation requirements. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to equipment to allow service and maintenance.

3.3 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.
- B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319.13

SECTION 22 14 14 - STORM DRAINAGE PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Hubless, cast-iron soil pipe and fittings.
 - 2. PVC pipe and fittings.
 - 3. Specialty pipe fittings.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. Hubless, cast-iron soil pipe and fittings.
 - 2. PVC pipe and fittings.
 - 3. Specialty pipe fittings.

1.3 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Plans and elevations, or Building Information Model (BIM) drawn to scale, showing items described in this Section and coordinated with all building trades.
- B. Installation photographs.
 - 1. After installation of underground piping and support, but prior to backfilling, submit photographs showing entirety of underground piping system.
- C. Field Quality-Control Reports: Inspection reports signed by authorities having jurisdiction.

1.4 QUALITY ASSURANCE

- A. Provide materials bearing label, stamp, or other markings of specified testing agency.

1.5 WARRANTY

- A. Listed manufacturers to provide labeling and warranty of their respective products

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Components and installation are to be capable of withstanding the following minimum working pressure unless otherwise indicated:
 - 1. Storm Drainage Piping: 10-foot head of water.

2.2 PIPING MATERIALS

- A. Piping materials to bear label, stamp, or other markings of specified testing agency.
- B. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.3 HUBLESS, CAST-IRON SOIL PIPE AND FITTINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. AB & I Foundry; a part of the McWane family of companies
 - 2. Charlotte Pipe and Foundry Company
 - 3. Tyler Pipe; a part of the McWane family of companies
- B. Pipe and Fittings:
 - 1. Marked with CISPI collective trademark and NSF certification mark.
 - 2. Standards: ASTM A888 and CISPI 301.

- C. Standard, Hubless-Piping Couplings:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ANACO-Husky; a part of the McWane family of companies
 - b. Charlotte Pipe and Foundry Company
 - c. Dallas Specialty & Mfg. Co.
 - d. Fernco Inc
 - e. Ideal Tridon Group
 - f. Matco-Norca
 - g. MIFAB, Inc
 - h. Mission Rubber Company, LLC
 - i. Tyler Pipe; a subsidiary of McWane Inc.
 2. Marked with CISPI collective trademark.
 3. Standards: ASTM C1277 and CISPI 310.
 4. Description: Stainless steel corrugated shield with stainless steel bands and tightening devices; and ASTM C564, rubber sleeve with integral, center pipe stop.
- D. Heavy-Duty, Hubless-Piping Couplings:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ANACO-Husky; a part of the McWane family of companies
 - b. Charlotte Pipe and Foundry Company
 - c. Dallas Specialty & Mfg. Co.
 - d. Fernco Inc
 - e. Ideal Tridon Group
 - f. Matco-Norca
 - g. MIFAB, Inc
 - h. Mission Rubber Company, LLC
 2. Standard: ASTM C1277 or ASTM C1540.
 3. Description: Stainless steel shield with stainless steel bands and tightening devices; and ASTM C564, rubber sleeve with integral, center pipe stop.

2.4 PVC PIPE AND FITTINGS

- A. PVC Pipe:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Charlotte Pipe and Foundry Company
 - b. JM Eagle
 - c. National Pipe and Plastic, Inc. (Oldcastle)
 - d. North America Pipe Corporation
 - e. Silver-line Plastics
 2. NSF Marking: Comply with NSF 14 for plastic piping components. Include marking with "NSF-dwv" for plastic storm drain and "NSF-sewer" for plastic storm sewer piping.
 3. Solid-Wall PVC Pipe: ASTM D2665 drain, waste, and vent.
 4. Cellular-Core PVC Pipe: ASTM F891, Schedule 40.
- B. PVC Socket Fittings:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Charlotte Pipe and Foundry Company
 - b. NIBCO INC.
 - c. North America Pipe Corporation
 2. Standard: ASTM D2665, made in accordance with ASTM D3311, drain, waste, and vent patterns and to fit Schedule 40 pipe.
 3. NSF Marking: Comply with NSF 14 for plastic piping components. Include marking with "NSF-dwv" for plastic storm drain and "NSF-sewer" for plastic storm sewer piping.
- C. Adhesive Primer: ASTM F656.

- D. Solvent Cement: ASTM D2564.

2.5 SPECIALTY PIPE FITTINGS

- A. Transition Couplings:
1. General Requirements: Fitting or device for joining piping with small differences in ODs or of different materials. Include end connections of same size as and compatible with pipes to be joined.
 2. Fitting-Type Transition Couplings: Manufactured piping coupling or specified-piping-system fitting.
 3. Unshielded, Nonpressure Transition Couplings:
 - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Dallas Specialty & Mfg. Co.
 - 2) Fernco Inc
 - 3) Mission Rubber Company, LLC
 - b. Standard: ASTM C1173.
 - c. Description: Elastomeric sleeve, reducing or transition pattern. Include shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.
 - d. Sleeve Materials:
 - 1) For Cast-Iron Soil Pipes: ASTM C564 rubber.
 - 2) For Plastic Pipes: ASTM F477, elastomeric seal or ASTM D5926 PVC.
 - 3) For Dissimilar Pipes: ASTM D5926 PVC or other material compatible with pipe materials being joined.
 4. Shielded, Nonpressure Transition Couplings:
 - a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Dallas Specialty & Mfg. Co.
 - 2) Fernco Inc
 - 3) Mission Rubber Company, LLC
 - b. Standard: ASTM C1460.
 - c. Description: Elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield and corrosion-resistant-metal tension band and tightening mechanism on each end.
 - d. End Connections: Same size as and compatible with pipes to be joined.

PART 3 - EXECUTION

3.1 RETURN AIR PLENUM MATERIAL RESTRICTION

- A. Plastic piping shall not be installed within spaces used as return air plenums. Materials prohibited within return air plenums include, but are not limited to, PVC, CPVC, ABS, PEX, polypropylene, polyethylene, and other combustible plastic piping materials.
- B. Application of insulation, fire-resistant wrap, or other coverings to plastic piping shall not be considered a method of complying with this requirement and shall not permit installation within return air plenums. Plastic piping shall not be installed in return air plenums regardless of insulation, fire wrapping, flame-spread rating claims, or manufacturer listing unless specifically approved in writing by the Engineer.
- C. Where piping is required to pass through a return air plenum space, piping materials shall be limited to noncombustible materials such as copper, cast iron, steel, or other materials approved for plenum installation by the Authority Having Jurisdiction.

3.2 Contractor shall coordinate piping routing to avoid return air plenums where plastic piping systems are specified or proposed. Any rerouting required to comply with this requirement shall be included in the Contractor's base bid and shall not be considered grounds for additional compensation.

3.3 INSTALLATION OF PIPING

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems.
- B. Install piping as indicated unless deviations from layout are approved on coordination drawings.
- C. Install piping in concealed locations.
 - 1. Piping installed in equipment rooms, service areas, and where indicated may be exposed.
- D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated.
- E. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- F. Install piping to permit valve servicing.
- G. Install piping at indicated slopes.
- H. Install piping free of sags and bends.
- I. Install fittings for changes in direction and branch connections.
- J. Install piping to allow application of insulation.
- K. Make changes in direction for piping using appropriate branches, bends, and long-sweep bends.
 - 1. Do not change direction of flow more than 90 degrees.
 - 2. Use proper size of standard increasers and reducers if pipes of different sizes are connected.
 - a. Reducing size of drainage piping in direction of flow is prohibited.
- L. Lay buried building piping beginning at low point of each system.
 - 1. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream.
 - 2. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements.
 - 3. Maintain swab in piping and pull past each joint as completed.
- M. Install piping at the following minimum slopes unless otherwise indicated.
 - 1. Horizontal Storm Drainage Piping: 1/4 inch per foot downward in direction of flow for piping NPS 3 and smaller; 1/8 inch per foot downward in direction of flow for piping NPS 4 and larger.
- N. Install aboveground PVC piping in accordance with ASTM D2665.
- O. Install underground PVC piping in accordance with ASTM D2321.
- P. Plumbing Specialties:
 - 1. Install cleanouts in storm drainage gravity-flow piping in accessible locations.
 - a. Comply with requirements for cleanouts specified in Section 22 14 23 "Storm Drainage Piping Specialties."
 - 2. Install drains in storm drainage gravity-flow piping.
 - a. Comply with requirements for drains specified in Section 22 14 23 "Storm Drainage Piping Specialties."
- Q. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.
- R. Install sleeves for piping penetrations of walls, ceilings, and floors.
 - 1. Comply with requirements for sleeves specified in Section 22 05 00 "Common Work Results for Plumbing."
- S. Install sleeve seals for piping penetrations of concrete walls and slabs.

1. Comply with requirements for sleeve seals specified in Section 22 05 00 "Common Work Results for Plumbing."
- T. Install escutcheons for piping penetrations of walls, ceilings, and floors.
1. Comply with requirements for escutcheons specified in Section 22 05 00 "Common Work Results for Plumbing."
- U. Trenching:
1. Notify Architect of unexpected subsurface conditions and discontinue affected work in area until notified to resume work.
 2. Slope banks of excavations deeper than 4 feet to angle of repose or less until shored.
 3. Do not interfere with 45 degree bearing splay of foundations.
 4. Cut trenches wide enough to allow inspection of installed utilities.
 5. Hand trim excavations and remove loose material.
 6. Remove large stones and other hard matter that could damage piping or impede consistent backfilling or compaction.
 7. Remove excavated material that is unsuitable for re-use from site.
 8. Remove excess excavated material from site.
- V. Backfilling:
1. Utilize sand for bedding of pipe, and for backfill to a minimum of 6" over the top of pipes.
 2. Hand tamp sand below all piping to ensure continuous support of entire piping system prior to backfilling.
 3. Fill to subgrade elevations unless otherwise indicated.
 4. Employ placement method that does not disturb or damage other work.
 5. Systematically fill to allow maximum time for natural settlement.
 - a. Do not fill over porous, wet, frozen or spongy subgrade;
 - b. Maintain optimum moisture content of fill materials to attain required compaction density.
 6. Place materials in equal continuous layers not exceeding 6" compacted depth for each layer.

3.4 JOINT CONSTRUCTION

- A. Hubless, Cast-Iron Soil Piping Coupled Joints: Join in accordance with CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-piping coupling joints.
- B. Plastic, Nonpressure-Piping, Solvent-Cemented Joints: Clean and dry joining surfaces. Join pipe and fittings in accordance with the following:
1. Comply with ASTM F402 for safe-handling practice of cleaners, primers, and solvent cements.
 2. PVC Piping: Join in accordance with ASTM D2855 and ASTM D2665 appendices.
- C. Joint Restraints and Sway Bracing:
1. Provide joint restraints and sway bracing for storm drainage piping joints to comply with the following conditions:
 - a. Provide axial restraint for pipe and fittings 5 inches and larger, upstream and downstream of all changes in direction, branches, and changes in diameter greater than two pipe sizes.
 - b. Provide rigid sway bracing for pipe and fittings 4 inches and larger, upstream and downstream of all changes in direction 45 degrees and greater.
 - c. Provide rigid sway bracing for pipe and fittings 5 inches and larger, upstream and downstream of all changes in direction and branch openings.

3.5 INSTALLATION OF SPECIALTY PIPE FITTINGS

- A. Transition Couplings:
1. Install transition couplings at joints of piping with small differences in ODs.
 2. In Drainage Piping: Shielded, nonpressure transition couplings.

3.6 INSTALLATION OF HANGERS AND SUPPORTS

- A. Comply with requirements for hangers, supports, and anchor devices specified in Section 22 05 29 "Hangers and Supports for Plumbing Piping and Equipment."
1. Install carbon-steel pipe hangers for horizontal piping in noncorrosive environments.

2. Install stainless steel pipe hangers for horizontal piping in corrosive environments.
 3. Install carbon-steel pipe support clamps for vertical piping in noncorrosive environments.
 4. Install stainless steel pipe support clamps for vertical piping in corrosive environments.
 5. Vertical Piping: MSS Type 8 or Type 42, clamps.
 6. Install individual, straight, horizontal piping runs:
 - a. 100 Feet (30 m) and Less: MSS Type 1, adjustable, steel clevis hangers.
 - b. Longer Than 100 Feet (30 m): MSS Type 43, adjustable roller hangers.
 - c. Longer Than 100 Feet (30 m) if Indicated: MSS Type 49, spring cushion rolls.
 7. Multiple, Straight, Horizontal Piping Runs 100 Feet (30 m) or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
 8. Base of Vertical Piping: MSS Type 52, spring hangers.
- B. Install hangers for cast-iron piping, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- C. Install hangers for PVC piping, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- D. Support horizontal piping and tubing within 12 inches of each fitting and coupling.
- E. Support vertical cast-iron piping to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent, but as a minimum at base and at each floor.
- F. Support vertical PVC piping with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.7 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect interior storm drainage piping to exterior storm drainage piping. Use transition fitting to join dissimilar piping materials.
- C. Connect storm drainage piping to roof drains and storm drainage specialties.
 1. Install test tees (wall cleanouts) in conductors near floor and floor cleanouts with cover flush with floor.
 2. Comply with requirements for cleanouts and drains specified in Section 22 14 23 "Storm Drainage Piping Specialties."
- D. Where installing piping adjacent to equipment, allow space for service and maintenance of equipment.

3.8 IDENTIFICATION

- A. Identify exposed storm drainage piping.
- B. Comply with requirements for identification specified in Section 22 05 53 "Identification for Plumbing Piping and Equipment."

3.9 FIELD QUALITY CONTROL

- A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.
 1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in.
 2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
- B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.

- C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
- D. Test storm drainage piping in accordance with procedures of authorities having jurisdiction or, in absence of published procedures, as follows:
 - 1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired.
 - a. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
 - 2. Leave uncovered and unconcealed new, altered, extended, or replaced storm drainage piping until it has been tested and approved.
 - a. Expose work that was covered or concealed before it was tested.
 - 3. Test Procedure:
 - a. Test storm drainage piping on completion of roughing-in.
 - b. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water.
 - c. From 15 minutes before inspection starts until completion of inspection, water level must not drop.
 - d. Inspect joints for leaks.
 - 4. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
 - 5. Prepare reports for tests and required corrective action.

3.10 CLEANING

- A. Clean interior of piping. Remove dirt and debris as work progresses.

3.11 PROTECTION

- A. Protect piping and drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- B. Place plugs in ends of uncompleted piping at end of day and when work stops.
- C. Repair damage to adjacent materials caused by storm drainage piping installation.

3.12 PIPING SCHEDULE

- A. Flanges and unions may be used on aboveground pressure piping unless otherwise indicated.
- B. Aboveground storm drainage piping NPS 6 and smaller is to be the following:
 - 1. Hubless, cast-iron soil pipe and fittings; **[CISPI],[heavy-duty,]** hubless-piping couplings; and coupled joints.
 - 2. Solid-wall PVC pipe, PVC socket fittings, and solvent-cemented joints.
- C. Underground storm drainage piping NPS 6 and smaller shall be any of the following:
 - 1. Hubless, cast-iron soil pipe and fittings; **[CISPI],[heavy-duty],[cast-iron,]** hubless-piping couplings; and coupled joints.
 - 2. Solid-wall PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 3. Dissimilar Pipe-Material Couplings: Unshielded, nonpressure transition couplings.
- D. Underground, storm drainage piping NPS 8 and larger is to be any of the following:
 - 1. Hubless, cast-iron soil pipe and fittings; cast-iron, hubless-piping couplings; and coupled joints.
 - 2. Solid-wall PVC pipe, PVC socket fittings, and solvent-cemented joints.
 - 3. Cellular-core, sewer and drain series, PVC pipe; PVC socket fittings; and solvent-cemented joints.
 - 4. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.

END OF SECTION 22 14 14

This page intentionally left blank.

SECTION 221423 - STORM DRAINAGE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
1. General-purpose roof drains.
 2. Promenade roof drains.
 3. Deck roof drains.
 4. Miscellaneous storm drainage piping specialties.
 5. Cleanouts.
 6. Backwater valves.
 7. Trench drains.
 8. Concrete trench drain-forming system.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 GENERAL-PURPOSE ROOF DRAINS

- A. Roof Drains, General Purpose - Cast Iron:
1. Roof Drain, General Purpose - Cast Iron, Large Sump:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Eric'sons]**
 - 2) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 3) **[Josam Company]**
 - 4) **[Marathon Roofing Products]**
 - 5) **[MIFAB, Inc]**
 - 6) **[Sioux Chief Manufacturing Company, Inc.]**
 - 7) **[Wade; a subsidiary of McWane Inc.]**
 - 8) **[WATTS; A Watts Water Technologies Company]**
 - 9) **[Zurn Industries, LLC]**
 - 10) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Dimension of Body: Nominal **[14-to 16-inch]<Insert dimension>** diameter.
 - f. Dome Material: **[Aluminum][Cast iron][PE][Bronze]<Insert material>**.
 - g. Combination flashing ring and gravel stop.
 - h. Outlet: **[Bottom][Side]<Insert location>**.
 - i. Outlet Type: **[No-hub][Inside caulk][Threaded]<Insert type>**.
 - j. Options:
 - 1) Flow-control weirs.
 - 2) Extension collars.
 - 3) Underdeck clamp.
 - 4) Expansion joint.
 - 5) Sump receiver plate.
 - 6) Perforated Gravel Guard: Stainless steel.
 - 7) Vandal-proof dome.
 - 8) Water Dam: **[2 inches high]<Insert height>**.
 - 9) **<Insert option>**.

2. Roof Drain, General Purpose - Cast Iron, Medium Sump:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[Marathon Roofing Products]**
 - 3) **[MIFAB, Inc]**
 - 4) **[Portals Plus; Duravent Group]**
 - 5) **[Sioux Chief Manufacturing Company, Inc.]**
 - 6) **[Wade; a subsidiary of McWane Inc.]**
 - 7) **[Zurn Industries, LLC]**
 - 8) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron, medium-sump, general-purpose roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Dimension of Body: **[8- to 12-inch]<Insert dimension>** diameter.
 - f. Dome Material: **[Aluminum][Cast iron][PE][Bronze]<Insert material>**.
 - g. Combination flashing ring and gravel stop.
 - h. Outlet: **[Bottom][Side]<Insert location>**.
 - i. Outlet Type: **[No-hub][Inside caulk][Threaded]<Insert type>**.
 - j. Options:
 - 1) Flow-control weirs.
 - 2) Extension collars.
 - 3) Underdeck clamp.
 - 4) Expansion joint.
 - 5) Sump receiver plate.
 - 6) Wire Mesh: Stainless steel or brass over dome.
 - 7) Perforated Gravel Guard: Stainless steel.
 - 8) Vandal-proof dome.
 - 9) Water Dam: **[2 inches high]<Insert height>**.
 - 10) **<Insert option>**.
3. Roof Drain, General Purpose - Cast Iron, Small Sump:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[Marathon Roofing Products]**
 - 3) **[MIFAB, Inc]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron, small-sump, general-purpose roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Dimension of Body: Nominal **[8-inch]<Insert dimension>** diameter.
 - f. Dome Material: **[Cast iron]<Insert material>**.
 - g. Combination flashing ring and gravel stop.
 - h. Outlet: **[Bottom][Side]<Insert location>**.
 - i. Outlet Type: **[No-hub][Inside caulk][Threaded]<Insert type>**.
 - j. Options:
 - 1) Extension collars.
 - 2) Underdeck clamp.
 - 3) Expansion joint.

- 4) Sump receiver plate.
 - 5) Wire Mesh: Stainless steel or brass over dome.
 - 6) Vandal-proof dome.
 - 7) **<Insert option>.**
4. Roof Drain, Cornice and Gutter Type - Cast Iron:
- a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[Marathon Roofing Products]**
 - 3) **[Wade; a subsidiary of McWane Inc.]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron cornice and gutter roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Dimension of Body: Nominal **6-inch** diameter.
 - f. Dome Material: **[Bronze]<Insert material and finish>.**
 - g. Outlet: **[Bottom][Side][45-degree angle].**
 - h. Outlet Type: **[Threaded]<Insert type>.**
 - i. Options:
 - 1) Wire Mesh: Stainless steel or brass over dome.
 - 2) Vandal-proof dome.
 - 3) **<Insert option>.**
5. Roof Drain, Parapet - Cast Iron:
- a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[MIFAB, Inc]**
 - 3) **[Wade; a subsidiary of McWane Inc.]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron parapet roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Grate Material: **[Bronze][Cast iron][Nickel-bronze alloy]<Insert material>.**
 - f. Outlet: **[Back][Angle]<Insert location>.**
 - g. Outlet Type: **[Threaded]<Insert type>.**
 - h. Options:
 - 1) Wire Mesh: Stainless steel or brass over grate.
 - 2) Vandal-proof grate.
 - 3) **<Insert option>.**
- B. Roof Drains, General Purpose - Copper:
1. Roof Drain, General Purpose - Copper, Medium Sump:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Marathon Roofing Products]**
 - 2) **[Menzies Metal Products]**

- 3) [OMG Roofing Products; a Division of OMG, Inc.]
- 4) [Thaler Metal Industries Ltd.]
- 5) [Thunderbird Products]
- 6) <Insert manufacturer's name>
- b. Source Limitations: Obtain copper, medium-sump, general-purpose roof drains from single manufacturer.
- c. Standard: ASME A112.6.4.
- d. Drain Body and Flange Material: Copper.
- e. Dimension of Body: [8- to 12-inch]<Insert dimension> diameter.
- f. Dome Material: [Aluminum]<Insert material>.
- g. Combination flashing ring and gravel stop.
- h. Outlet: [Bottom][Side]<Insert location>.
- i. Outlet Type: [Threaded]<Insert type>.
- j. Options:
 - 1) Extension collars.
 - 2) Underdeck clamp.
 - 3) Expansion joint.
 - 4) Sump receiver plate.
 - 5) Wire Mesh: Stainless steel or brass over dome.
 - 6) Perforated Gravel Guard: Stainless steel.
 - 7) Vandal-proof dome.
 - 8) Water Dam: [2 inches high]<Insert height>.
 - 9) <Insert option>.
2. Roof Drain, General Purpose - Copper, Small Sump:
 - a. Manufacturers: Subject to compliance with requirements, [provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:
 - 1) [Menzies Metal Products]
 - 2) <Insert manufacturer's name>
 - b. Source Limitations: Obtain copper, small-sump, general-purpose roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Copper.
 - e. Dimension of Body: Nominal [8-inch]<Insert dimension> diameter.
 - f. Dome Material: [Aluminum]<Insert material>.
 - g. Outlet: [Bottom]<Insert location>.
 - h. Outlet Type: [O-ring]<Insert type>.
 - i. Options:
 - 1) Vandal-proof dome.
 - 2) <Insert option>.
- C. Roof Drain, General Purpose - Aluminum:
 1. Roof Drain, General-Purpose - Aluminum:
 - a. Manufacturers: Subject to compliance with requirements, [provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:
 - 1) [Menzies Metal Products]
 - 2) [OMG Roofing Products; a Division of OMG, Inc.]
 - 3) <Insert manufacturer's name>
 - b. Source Limitations: Obtain aluminum, general-purpose roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Aluminum.
 - e. Dimension of Body: Nominal [6-inch]<Insert dimension> diameter.
 - f. Dome Material: Aluminum.

- g. Outlet: **[Bottom]**<Insert location>.
 - h. Outlet Type: **[O-ring or mechanical seal]**<Insert type>.
 - i. Options:
 - 1) Vandal-proof dome.
 - 2) **<Insert option>**.
- D. Roof Drain, General Purpose - Plastic:
- 1. Roof Drain, General-Purpose - Plastic:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[LSP Products Group]**
 - 2) **[Marathon Roofing Products]**
 - 3) **[Plastic Oddities]**
 - 4) **[Portals Plus; Duravent Group]**
 - 5) **[Sioux Chief Manufacturing Company, Inc.]**
 - 6) **[Town & Country Plastics, Inc]**
 - 7) **[Zurn Industries, LLC]**
 - 8) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain plastic general-purpose roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: **[ABS][or][PVC]**<Insert material>.
 - e. Sump Diameter: **<Insert nominal dimension>**.
 - f. Dome Material: **[Aluminum][Cast iron][Plastic]**<Insert material>.
 - g. Outlet: **[Bottom]**<Insert location>.
 - h. Outlet Type: **<Insert type>**.
 - i. Options:
 - 1) Combination flashing ring and gravel stop.
 - 2) Extension collars.
 - 3) Underdeck clamp.
 - 4) Expansion joint.
 - 5) Sump receiver plate.
 - 6) Vandal-proof dome.
 - 7) **<Insert option>**.

2.2 PROMENADE ROOF DRAINS

- A. Roof Drain, Promenade - Cast Iron:
 - 1. Roof Drain, Promenade Type - Cast Iron, Large Sump:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[MIFAB, Inc]**
 - 3) **[Wade; a subsidiary of McWane Inc.]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron, large-sump, promenade roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Dimension of Body: Nominal **[12- to 14-inch]**<Insert dimension> diameter.
 - f. Dimension of Frame and Grate: Nominal **[12 to 14 inches]**<Insert dimension> square.
 - g. Grate Material: **[Bronze][Cast iron][Nickel-bronze alloy]**<Insert material>.
 - h. Outlet: **[Bottom][Side]**.

- i. Outlet Type: [No-hub][Inside caulk][Threaded]<Insert type>.
 - j. Options:
 - 1) Extension collars.
 - 2) Underdeck clamp.
 - 3) Expansion joint.
 - 4) Sump receiver plate.
 - 5) Vandal-proof grate.
 - 6) <Insert option>.
- 2. Roof Drain, Promenade Type - Cast Iron, Medium Sump:
 - a. Manufacturers: Subject to compliance with requirements, [provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:
 - 1) [Jay R. Smith Mfg Co; a division of Morris Group International]
 - 2) [MIFAB, Inc]
 - 3) [Wade; a subsidiary of McWane Inc.]
 - 4) [Zurn Industries, LLC]
 - 5) <Insert manufacturer's name>
 - b. Source Limitations: Obtain cast-iron, medium-sump, promenade roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Dimension of Body: [11- to 12-inch]<Insert dimension> diameter.
 - f. Dimension of Frame and Grate: Nominal [12 inches]<Insert dimension> square.
 - g. Grate Material: [Bronze][Cast iron][Nickel-bronze alloy]<Insert material>.
 - h. Outlet: [Bottom][Side].
 - i. Outlet Type: [No-hub][Inside caulk][Threaded]<Insert type>.
 - j. Options:
 - 1) Extension collars.
 - 2) Underdeck clamp.
 - 3) Expansion joint.
 - 4) Sump receiver plate.
 - 5) Vandal-proof grate.
 - 6) <Insert option>.
- 3. Roof Drain, Promenade Type - Cast Iron, Small Sump:
 - a. Manufacturers: Subject to compliance with requirements, [provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:
 - 1) [Jay R. Smith Mfg Co; a division of Morris Group International]
 - 2) [MIFAB, Inc]
 - 3) [Wade; a subsidiary of McWane Inc.]
 - 4) [WATTS; A Watts Water Technologies Company]
 - 5) [Zurn Industries, LLC]
 - 6) <Insert manufacturer's name>
 - b. Source Limitations: Obtain cast-iron, small-sump, promenade roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Dimension of Body: Nominal [8-inch]<Insert dimension> diameter.
 - f. Dimension of Frame and Grate: Nominal [8 inches]<Insert dimension> square.
 - g. Grate Material: [Bronze][Cast iron][Nickel-bronze alloy]<Insert material>.
 - h. Outlet: Bottom.
 - i. Outlet Type: [No-hub][Inside caulk][Threaded]<Insert type>.
 - j. Options:
 - 1) Extension collars.
 - 2) Underdeck clamp.

- 3) Expansion joint.
- 4) Sump receiver plate.
- 5) Vandal-proof grate.
- 6) **<Insert option>.**

2.3 DECK ROOF DRAINS

A. Roof Drain, Deck - Cast Iron:

1. Roof Drain, Deck Type - Cast Iron, Medium Sump:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[MIFAB, Inc]**
 - 3) **[WATTS; A Watts Water Technologies Company]**
 - 4) **[Zurn Industries, LLC]**
 - 5) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron, medium-sump, deck roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: Cast iron.
 - e. Overall Dimension of Frame and Grate: Nominal **[12 to 14 inches]<Insert dimension>[round][square].**
 - f. Top-Loading Classification: **[Heavy Duty]<Insert duty>.**
 - g. Grate Material: **[Cast or ductile iron]<Insert material>.**
 - h. Flange: **[Anchor][Anchor with weep holes][Not required].**
 - i. Outlet: **[Bottom][Side]<Insert location>.**
 - j. Outlet Type: **[No-hub][Inside caulk][Threaded]<Insert type>.**
 - k. Options:
 - 1) Clamping device.
 - 2) Backwater valve.
 - 3) Grate Finish: **<Insert finish>.**
 - 4) Vandal-proof frame and grate.
 - 5) **<Insert option>.**
2. Roof Drain, Deck Type - Metal, Small Sump:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Menzies Metal Products]**
 - 2) **[MIFAB, Inc]**
 - 3) **[Thunderbird Products]**
 - 4) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain metal, small-sump, deck roof drains from single manufacturer.
 - c. Standard: ASME A112.6.4.
 - d. Body Material: **[Cast iron][or][Copper]**
 - e. Overall Dimension of Frame and Grate: Nominal **[8 inches]<Insert dimension>[round][square].**
 - f. Top-Loading Classification: **<Insert duty>.**
 - g. Grate Material: **[Cast or ductile iron]<Insert material>.**
 - h. Flange: **[Anchor][Anchor with weep holes][Not required].**
 - i. Outlet: **[Bottom][Side]<Insert location>.**
 - j. Outlet Type: **[No-hub][Inside caulk][Threaded]<Insert type>.**
 - k. Options:
 - 1) Clamping device.
 - 2) Grate Finish: **<Insert finish>.**
 - 3) Vandal-proof frame and grate.

4) <Insert option>.

2.4 MISCELLANEOUS STORM DRAINAGE PIPING SPECIALTIES

- A. Downspout Adapter :
1. Description: Manufactured, gray-iron casting, for attaching to horizontal-outlet, parapet roof drain and to exterior sheet metal downspout.
 2. Size: Inlet size to match parapet drain outlet.
- B. Downspout Boot:
1. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - a. **[J.R. Hoe & Sons Inc.]**
 - b. **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - c. **[Neenah Foundry Company]**
 - d. **[Wade; a subsidiary of McWane Inc.]**
 - e. **[WATTS; A Watts Water Technologies Company]**
 - f. **[Zurn Industries, LLC]**
 - g. **<Insert manufacturer's name>**
 2. Source Limitations: Obtain downspout boots from single manufacturer.
 3. Description: Manufactured, ASTM A48/A48M, gray-iron casting, with strap or ears for attaching to building; **NPS 4** outlet; and shop-applied bituminous coating.
 4. Size: Inlet size to match downspout and **NPS 4** outlet.
- C. Downspout Nozzle - Metal:
1. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - a. **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - b. **[Wade; a subsidiary of McWane Inc.]**
 - c. **[WATTS; A Watts Water Technologies Company]**
 - d. **[Zurn Industries, LLC]**
 - e. **<Insert manufacturer's name>**
 2. Source Limitations: Obtain metal downspout nozzles from single manufacturer.
 3. Description: Nozzle with wall flange and mounting holes to cover rough opening and serve as anchor.
 4. Size: Same as connected downspout.
 5. Material: Cast bronze or nickel bronze nozzle and flange.
 6. Piping Connection Type: **[Threaded][No-hub][or][slip on]**.
 7. Finish: **<Insert type>**.
 8. Opening Protection: **[Birdscreen][None]**.
- D. Downspout Nozzle - Metal, with PVC Insert:
1. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - a. **[RectorSeal Plumbing; A CSW Industrials Company]**
 - b. **<Insert manufacturer's name>**
 2. Source Limitations: Obtain metal downspout nozzles with PVC insert from single manufacturer.
 3. Description: Nozzle with wall flange and mounting holes to cover rough opening and serve as anchor.
 4. Size: Same as connected downspout.
 5. Material: Cast nickel brass, with integral PVC insert.
 6. Piping Connection Type: Solvent welded.
 7. Finish: Nickel brass.

8. Opening Protection: **[Birdscreen][None]**.
- E. Downspout Nozzle - Polymer:
1. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - a. **[RectorSeal Plumbing; A CSW Industrials Company]**
 - b. **<Insert manufacturer's name>**
 2. Source Limitations: Obtain polymer downspout nozzles from single manufacturer.
 3. Description: Nozzle with wall flange and mounting holes to cover rough opening and serve as anchor.
 4. Size: Same as connected downspout.
 5. Material: High-impact, marine-grade polymer.
 6. Piping Connection Type: Solvent welded.
 7. Finish: Simulated oil-rubbed bronze.

2.5 CLEANOUTS

- A. Cast-Iron Cleanouts:
1. Cleanout, Exposed Type - Cast Iron:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[MIFAB, Inc]**
 - 3) **[Wade; a subsidiary of McWane Inc.]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron exposed cleanouts from single manufacturer.
 - c. Standard: ASME A112.36.2M.
 - d. Size: Same as connected branch.
 - e. Body Material: **[Hub-and-spigot, cast-iron soil pipe T-branch][No-hub, cast-iron soil pipe test tee]** as required to match connected piping.
 - f. Closure: **[Countersunk][Countersunk or raised-head][Raised head]**, **[brass][cast-iron][plastic]** plug.
 - g. Closure Plug Size: Same as, or not more than, one size smaller than cleanout size.
 2. Cleanout, Exposed Floor Type - Cast Iron (Insert drawings designation):
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[Sioux Chief Manufacturing Company, Inc.]**
 - 3) **[Wade; a subsidiary of McWane Inc.]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron exposed floor cleanouts from single manufacturer.
 - c. Standard: ASME A112.36.2M.
 - d. Size: Same as connected branch.
 - e. Type: **[Adjustable housing][Cast-iron soil pipe with cast-iron ferrule][Heavy-duty, adjustable housing][Threaded, adjustable housing]**.
 - f. Body or Ferrule: Cast iron.
 - g. Outlet Connection: **[No-hub][Hub with inside caulk][Hub with gasket][Threaded]**.

- h. Closure: **[Brass plug with straight threads and gasket][Brass plug with tapered threads][Cast-iron plug][Plastic plug]**.
 - i. Adjustable Housing Material: **[Cast iron][Plastic]<Insert material>** with **[threads][setscrews or other device]**.
 - j. Frame and Cover Material and Finish: **[Nickel-bronze, copper alloy][Painted cast iron][Polished bronze][Rough bronze]<Insert material and finish>**.
 - k. Frame and Cover Shape: **[Round][Square]<Insert shape>**.
 - l. Top Loading Classification: **[Extra-Heavy][Heavy][Light][Medium]** Duty.
 - m. Riser: ASTM A74, **[Extra-Heavy][Service]** Class, cast-iron drainage pipe fitting and riser to cleanout.
 - n. Options:
 - 1) Clamping device.
 - 2) **<Insert option>**.
3. Cleanout, Wall Type - Cast Iron:
- a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[MIFAB, Inc]**
 - 3) **[Wade; a subsidiary of McWane Inc.]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron wall cleanouts from single manufacturer.
 - c. Standard: ASME A112.36.2M. Include wall access.
 - d. Size: Same as connected drainage piping.
 - e. Body: **[Hub-and-spigot, cast-iron soil pipe T-branch][No-hub, cast-iron soil pipe test tee]** as required to match connected piping.
 - f. Closure Plug:
 - 1) Material: **[Brass][Cast iron]**.
 - 2) Head: **[Countersunk][or][raised]**.
 - 3) Drilled and threaded for cover attachment screw.
 - 4) Size: Same as, or not more than, one size smaller than cleanout size.
 - g. Wall-Access Cover Plate: Round, **[deep, chrome-plated bronze][flat, chrome-plated brass or stainless steel]** cover plate with screw.
 - h. Wall-Access Frame and Cover: **[Round][Square]**, **[nickel-bronze, copper-alloy, or stainless steel]<Insert material>** wall-installation frame and cover.
4. Test Tee - Cast Iron:
- a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[MIFAB, Inc]**
 - 3) **[Tyler Pipe; a subsidiary of McWane Inc.]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron test tees from single manufacturer.
 - c. Standard: ASME A112.36.2M and ASTM A74, ASTM A888, or CISPI 301.
 - d. Size: Same as connected drainage piping.
 - e. Body Material: Hub-and-spigot, cast-iron soil-pipe T-branch or no-hub, cast-iron soil-pipe test tee as required to match connected piping.
 - f. Closure Plug: **[Countersunk][or][raised head]**, **[brass]<Insert material>**.
 - g. Closure Plug Size: Same as, or not more than, one size smaller than cleanout size.

- B. Cleanouts - Plastic:
1. Cleanout - Plastic:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[Canplas Industries Ltd.]**
 - 2) **[IPS Corporation]**
 - 3) **[Plastic Oddities]**
 - 4) **[Sioux Chief Manufacturing Company, Inc.]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain plastic cleanouts from single manufacturer.
 - c. Size: Same as connected branch.
 - d. Body Material: **[PVC][ABS]**.
 - e. Closure Plug: **[PVC][ABS]<Insert type>**.
 - f. Type: **[Wall][and][floor]**.
 - g. Frame and Cover Material and Finish: **[Nickel-bronze, copper alloy][Polished bronze][Rough bronze]<Insert material and finish>**.
 - h. Frame and Cover Shape: **[Round][Square]<Insert shape>**.
 - i. Riser: Drainage pipe fitting and riser to cleanout of same material as drainage piping.

2.6 BACKWATER VALVES

- A. Backwater Valves - Cast Iron:
1. Backwater Valve - Cast Iron, Horizontal:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[MIFAB, Inc]**
 - 3) **[Wade; a subsidiary of McWane Inc.]**
 - 4) **[WATTS; A Watts Water Technologies Company]**
 - 5) **[Zurn Industries, LLC]**
 - 6) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron, horizontal backwater valves from single manufacturer.
 - c. Standard: ASME A112.14.1.
 - d. Size: Same as connected piping.
 - e. Body Material: Cast iron.
 - f. Cover: Cast iron with **[bolted][or][threaded]** to access check valve.
 - g. End Connections: Hub and spigot or no-hub.
 - h. Check Valve: Removable, bronze, swing check, factory assembled or field modified to hang **[closed][open for airflow unless subject to backflow condition]**.
 - i. Extension: ASTM A74, Service Class; full-size, cast-iron soil-pipe extension to field-installed cleanout at floor; replaces backwater valve cover.
 2. Backwater Valve - Cast Iron, Drain Outlet:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]**:
 - 1) **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - 2) **[WATTS; A Watts Water Technologies Company]**
 - 3) **[Zurn Industries, LLC]**
 - 4) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain cast-iron, drain-outlet backwater valves from single manufacturer.

- c. Standard: ASME A112.14.1.
 - d. Size: Same as floor drain outlet.
 - e. Body Material: Cast iron or bronze made for vertical installation in bottom outlet of floor drain.
 - f. Check Valve: Removable ball float.
 - g. Inlet: Threaded or no-hub.
 - h. Outlet: Threaded, no-hub, or spigot.
- B. Backwater Valves - Plastic, Horizontal:
- 1. Backwater Valve - Plastic, Horizontal:
 - a. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - 1) **[Canplas Industries Ltd.]**
 - 2) **[IPS Corporation]**
 - 3) **[NDS Inc]**
 - 4) **[Oatey Co.]**
 - 5) **[Plastic Oddities]**
 - 6) **[RectorSeal Plumbing; A CSW Industrials Company]**
 - 7) **[Sioux Chief Manufacturing Company, Inc.]**
 - 8) **[Zurn Industries, LLC]**
 - 9) **<Insert manufacturer's name>**
 - b. Source Limitations: Obtain plastic, horizontal backwater valves from single manufacturer.
 - c. Standard: ASME A112.14.1.
 - d. Size: Same as connected piping.
 - e. Body Material: **[ABS][PVC]**.
 - f. Cover: Same material as body with threaded access to check valve.
 - g. Check Valve: Removable swing check.
 - h. End Connections: Socket type.

2.7 TRENCH DRAINS

- A. Trench Drain, Modular Channel System - Polymer Concrete, Narrow, Sloped Invert:
- 1. Manufacturers: Subject to compliance with requirements, **[provide products by the following][provide products by one of the following][available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - a. **[ABT, Inc.]**
 - b. **[ACO, Inc.]**
 - c. **[Eric'sons]**
 - d. **[Hubbell Utility Solutions; Hubbell Incorporated]**
 - e. **[Jay R. Smith Mfg Co; a division of Morris Group International]**
 - f. **[MultiDrain Systems, Inc.]**
 - g. **<Insert manufacturer's name>**
 - 2. Source Limitations: Obtain narrow, sloped-invert, polymer-concrete, channel drainage systems from single manufacturer.
 - 3. Description: Modular system of channel sections, grates, and appurtenances; designed so grates fit into channel recesses without rocking or rattling.
 - 4. Channel Sections: Narrow, interlocking-joint, sloped-invert, polymer-concrete modular units with end caps.
 - a. Include rounded bottom, with built-in invert slope of 0.6 percent and with outlets in number, sizes, and locations indicated.
 - b. Include extension sections necessary for required depth.
 - c. Dimensions: **[4-inch]<Insert dimension>** inside width. Include number of units required to form total lengths indicated.
 - d. Frame: **[Gray-iron, cast iron, or galvanized steel for grates][Not required]<Insert material>**.

5. Grates: Manufacturer's designation "[**Heavy**][**Medium**] Duty," with slots or perforations, and of width and thickness that fit recesses in channel sections.
 - a. Material: [**Ductile iron**][**Fiberglass**][**Galvanized steel**][**Cast iron**][**Stainless steel**]**<Insert material>**.
 - b. Locking Mechanism: [**Manufacturer's standard device for securing grates to channel sections**][**Not required**].
 6. Covers: Solid [**ductile or cast iron**]**<Insert material>**, of width and thickness that fit recesses in channel sections, and of lengths indicated.
 7. Supports, Anchors, and Setting Devices: Manufacturer's standard unless otherwise indicated.
 8. Channel-Section Joining and Fastening Materials: As recommended by system manufacturer.
- B. Trench Drain, Modular Channel System - Polymer Concrete, Narrow, Level Invert:
1. Manufacturers: Subject to compliance with requirements, [**provide products by the following**][**provide products by one of the following**][**available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following**]:
 - a. [**ABT, Inc.**]
 - b. [**ACO, Inc.**]
 - c. [**Eric'sons**]
 - d. [**Hubbell Utility Solutions; Hubbell Incorporated**]
 - e. [**Jay R. Smith Mfg Co; a division of Morris Group International**]
 - f. [**Josam Company**]
 - g. [**MultiDrain Systems, Inc.**]
 - h. **<Insert manufacturer's name>**
 2. Source Limitations: Obtain narrow, level-invert, polymer-concrete, channel drainage systems from single manufacturer.
 3. Description: Modular system of channel sections, grates, and appurtenances; designed so grates fit into channel recesses without rocking or rattling.
 4. Channel Sections: Narrow, interlocking-joint, precast, polymer-concrete modular units with end caps.
 - a. Include rounded bottom, with level invert and with outlets in number, sizes, and locations indicated.
 - b. Dimensions: [**5-inch**]**<Insert dimension>** inside width and [**9-3/4-inch**]**<Insert dimension>** inside depth. Include number of units required to form total lengths indicated.
 - c. Frame: [**Galvanized steel or cast iron for grates**][**Not required**]**<Insert material>**.
 5. Grates: Manufacturer's designation "[**Heavy**][**Medium**] Duty," with slots or perforations, and of width and thickness that fit recesses in channel sections.
 - a. Material: [**Ductile iron**][**Fiberglass**][**Galvanized steel**][**Cast iron or gray iron**][**Stainless steel**]**<Insert material>**.
 - b. Locking Mechanism: [**Manufacturer's standard device for securing grates to channel sections**][**Not required**].
 6. Covers: Solid [**ductile, cast, or gray iron**]**<Insert material>**, of width and thickness that fit recesses in channel sections, and of lengths indicated.
 7. Supports, Anchors, and Setting Devices: Manufacturer's standard unless otherwise indicated.
 8. Channel-Section Joining and Fastening Materials: As recommended by system manufacturer.
- C. Trench Drain, Modular Channel System - Polymer Concrete, Wide, Level Invert:
1. Manufacturers: Subject to compliance with requirements, [**provide products by the following**][**provide products by one of the following**][**available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following**]:
 - a. [**ABT, Inc.**]
 - b. [**ACO, Inc.**]
 - c. [**Eric'sons**]
 - d. [**Hubbell Utility Solutions; Hubbell Incorporated**]
 - e. [**Jay R. Smith Mfg Co; a division of Morris Group International**]
 - f. **<Insert manufacturer's name>**

2. Source Limitations: Obtain wide, level-invert, polymer-concrete, channel drainage systems from single manufacturer.
3. Description: Modular system of channel sections, grates, and appurtenances; designed so grates fit into channel recesses without rocking or rattling.
4. Channel Sections: Wide, interlocking-joint, precast, polymer-concrete modular units with end caps.
 - a. Include flat or rounded bottom, with level invert and with outlets in number, sizes, and locations indicated.
 - b. Dimensions: [**8-inch**]<Insert dimension> inside width and [**13-3/4-inch**]<Insert dimension> inside depth. Include number of units required to form total lengths indicated.
 - c. Frame: [**Galvanized steel, gray iron, or cast iron for grates**][**Not required**]<Insert material>.
5. Grates: Manufacturer's designation "[**Heavy**][**Medium**] Duty," with slots or perforations, and of width and thickness that fit recesses in channel sections.
 - a. Material: [**Ductile iron**][**Fiberglass**][**Galvanized steel**][**Cast iron**][**Stainless steel**]<Insert material>.
 - b. Locking Mechanism: [**Manufacturer's standard device for securing grates to channel sections**][**Not required**].
6. Covers: Solid [**ductile or cast iron**]<Insert material>, of width and thickness that fit recesses in channel sections, and of lengths indicated.
7. Supports, Anchors, and Setting Devices: Manufacturer's standard unless otherwise indicated.
8. Channel-Section Joining and Fastening Materials: As recommended by system manufacturer.

2.8 CONCRETE TRENCH DRAIN-FORMING SYSTEM

A. Concrete Trench Drain-Forming System:

1. Manufacturers: Subject to compliance with requirements, [**provide products by the following**][**provide products by one of the following**][**available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following**]:
 - a. [**ABT, Inc.**]
 - b. [**ACO, Inc.**]
 - c. [**Eric'sons**]
 - d. [**MultiDrain Systems, Inc.**]
 - e. <Insert manufacturer's name>
2. Source Limitations: Obtain concrete trench drain-forming system from single manufacturer.
3. Description: Radius trench drain-forming system including a removable form that is customizable for width, depth, length, shape, slope, frame material, and grate material.
4. Form Bottom: [**Smooth radius**][**Vee**][**Flat**]<Insert option>.
5. Form Use: [**Single use**][**or**][**reusable**].
6. Form Covers: Plywood or metal to keep concrete out of trench form during installation.
7. Width: [**8-inch**][**10-inch**][**12-inch**][**18-inch**][**24-inch**]<Insert width> inside dimension.
8. Depth: [**See Drawings**]<Insert dimension>.
9. Length: [**See Drawings**]<Insert dimension>.
10. Bottom Shape: [**Smooth radius**][**Vee**]<Insert shape>.
11. Slope: [**Level - no slope**][**0.5 percent**][**0.6 percent**][**1.0 percent**]<Insert slope>.
12. Frame/Grate Seat:
 - a. Load Bearing, <Insert loading requirement>.
 - b. Material: [**Powder-coated steel**][**Galvanized steel**][**Iron**][**Aluminum**][**Plastic**][**FRP**][**Stainless steel**]<Insert material>.
13. Concrete Anchors: [**18 inches o.c.**]<Insert spacing>.
14. Grate:
 - a. Manufacturer's Load Bearing Designation: "[**Heavy**][**Medium**] Duty."
 - b. Material: [**Ductile iron**][**FRP**][**Galvanized steel**][**Cast iron**][**Stainless steel**]<Insert material>.
 - c. Grate Type: [**ADA**][**Heel-proof**][**slotted**][**perforated**][**bar**]<Insert grate type>.

PART 3 - EXECUTION

3.1 INSTALLATION OF GENERAL-PURPOSE ROOF DRAINS

- A. Install general-purpose roof drains in accordance with roof membrane manufacturer's written installation instructions at low points of roof areas.
 - 1. Install flashing collar or flange of roof drain to maintain integrity of waterproof membranes where penetrated.
 - 2. Install expansion joints, if indicated, in roof drain outlets.
 - 3. Position roof drains for easy access and maintenance.
- B. Fabricate flashing from single piece of metal unless large pans, sumps, or other drainage shapes are required.
- C. Install sheet flashing on pipes, sleeves, and specialties passing through or embedded in floors and roofs with waterproof membrane.
- D. Set flashing on roofs in solid coating of bituminous cement.
- E. Secure flashing into sleeve and specialty clamping ring or device.
- F. Install through-penetration firestop assemblies for penetrations of fire- and smoke-rated assemblies.
 - 1. Comply with requirements in Section 078413 "Penetration Firestopping."

3.2 INSTALLATION OF PROMENADE ROOF DRAINS

- A. Install promenade roof drains in accordance with roof membrane manufacturer's written installation instructions at low points of roof areas.
 - 1. Install flashing collar or flange of roof drain to maintain integrity of waterproof membranes where penetrated.
 - 2. Install expansion joints, if indicated, in roof drain outlets.
 - 3. Position roof drains for easy access and maintenance.
- B. Fabricate flashing from single piece of metal unless large pans, sumps, or other drainage shapes are required.
- C. Install sheet flashing on pipes, sleeves, and specialties passing through or embedded in floors and roofs with waterproof membrane.
- D. Set flashing on roofs in solid coating of bituminous cement.
- E. Secure flashing into sleeve and specialty clamping ring or device.
- F. Install through-penetration firestop assemblies for penetrations of fire- and smoke-rated assemblies.
 - 1. Comply with requirements in Section 078413 "Penetration Firestopping."

3.3 INSTALLATION OF DECK ROOF DRAINS

- A. Install deck roof drains in accordance with roof membrane manufacturer's written installation instructions at low points of roof areas.
 - 1. Install flashing collar or flange of roof drain to maintain integrity of waterproof membranes where penetrated.
 - 2. Install expansion joints, if indicated, in roof drain outlets.
 - 3. Position roof drains for easy access and maintenance.
- B. Fabricate flashing from single piece of metal unless large pans, sumps, or other drainage shapes are required.
- C. Install sheet flashing on pipes, sleeves, and specialties passing through or embedded in floors and roofs with waterproof membrane.
- D. Set flashing on roofs in solid coating of bituminous cement.
- E. Secure flashing into sleeve and specialty clamping ring or device.

- F. Install through-penetration firestop assemblies for penetrations of fire- and smoke-rated assemblies.
 - 1. Comply with requirements in Section 078413 "Penetration Firestopping."

3.4 INSTALLATION OF MISCELLANEOUS STORM DRAINAGE PIPING SPECIALTIES

- A. Install downspout adapters on outlet of back-outlet parapet roof drains and connect to sheet metal downspouts.
- B. Install downspout boots at grade with top [**6 inches**][**12 inches**][**18 inches**]<Insert dimension> above grade. Secure to building wall.
- C. Install downspout nozzles at exposed bottom of conductors where they spill onto grade.

3.5 INSTALLATION OF CLEANOUTS

- A. Install cleanouts in aboveground piping and building drain piping in accordance with the following instructions unless otherwise indicated:
 - 1. Use cleanouts the same size as drainage piping up to **NPS 4**. Use **NPS 4** for larger drainage piping unless larger cleanout is indicated.
 - 2. Locate cleanouts at each change in direction of piping greater than 45 degrees.
 - 3. Locate cleanouts at minimum intervals of [**50 ft.**]<Insert dimension> for piping **NPS 4** and smaller and **100 ft.** for larger piping.
 - 4. Locate cleanouts at base of each vertical storm piping conductor.
- B. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.
- C. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.
- D. Install wall cleanouts in vertical conductors. Install access door in wall if indicated.
- E. Install test tees in vertical conductors and near floor.

3.6 INSTALLATION OF BACKWATER VALVES

- A. Install horizontal backwater valves in floor with cover flush with floor.
- B. Install drain-outlet backwater valves in outlet of drains.

3.7 INSTALLATION OF TRENCH DRAINS

- A. Install trench drains at low points of surface areas to be drained. Set grates of drains flush with finished surface unless otherwise indicated.
- B. Assemble channel drainage system components in accordance with manufacturer's written instructions. Install on support devices so that top will be flush with adjacent surface.

3.8 INSTALLATION OF CONCRETE TRENCH DRAIN-FORMING SYSTEM

- A. Install in accordance with manufacturer's written installation instructions.

3.9 PIPING CONNECTIONS

- A. Comply with requirements for piping specified in Section 221414 "Storm Drainage Piping." Drawings indicate general arrangement of piping, fittings, and specialties.

3.10 CLEANING

- A. Clean piping specialties of dirt and superfluous materials.[**Flush with potable water.**]

3.11 PROTECTION

- A. Protect piping specialties during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic and construction work.
- B. Place plugs in ends of uncompleted piping at end of each day and when work stops.

END OF SECTION 221423

This page intentionally left blank.

SECTION 230010 - MECHANICAL DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY

- A. The Work of this Section Includes:
 - 1. Demolition and removal of selected portions of mechanical systems.
 - 2. Removal and salvage of existing items for delivery to Owner and removal of existing items for reinstallation.

1.2 DEFINITIONS

- A. Remove: Detach items from existing construction and legally dispose of off-site unless indicated to be removed and salvaged or removed and reinstalled.
- B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and deliver to Owner as indicated.
- C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage; prepare for reuse; clean, repair and reinstall where indicated.
- D. Existing to Remain: Existing items of construction that are not to be removed.

1.3 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.

1.4 COORDINATION

- A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

1.5 FIELD CONDITIONS

- A. Owner will [**not**] occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.
- B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
- C. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.
- D. Hazardous Materials:
 - 1. It is not expected that hazardous materials will be encountered in the Work.
 - a. Hazardous materials will be removed by Owner before start of the Work.
 - b. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.
- E. On-site sale of removed items or materials is not permitted.

1.6 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials and using approved contractors so as not to void existing warranties. Notify warrantor before proceeding. Existing warranties include the following:
 - 1. Roof.
- B. Notify warrantor on completion of selective demolition, and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- B. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs or video, measured drawings.
 - 1. Inventory and record the condition of items to be removed for salvage or reinstallation. Photograph or video conditions that might be misconstrued as damage caused by removal.
 - 2. Photograph or video existing conditions of adjoining construction including finish surfaces, that might be misconstrued as damage caused by selective demolition operations or removal of items for salvage or reinstallation.

3.2 PREPARATION

- A. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
 - 1. Strengthen or add new supports when required during progress of selective demolition.
- B. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 - 1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 - 2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
 - 3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 - 4. Cover and protect furniture, furnishings, and equipment that have not been removed.
- C. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location and cleaned and reinstalled in their original locations after selective demolition operations are complete.
- D. Refrigerant: Before starting demolition, remove refrigerant from mechanical equipment in accordance with 40 CFR 82 and regulations of authorities having jurisdiction.

3.3 UTILITY SERVICES AND BUILDING SYSTEMS

- A. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utilities and building systems serving areas to be selectively demolished.
 - 1. Arrange to shut off utilities with utility companies.
 - 2. If disconnection of utilities and building systems will affect adjacent occupied parts of the building, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to those parts of the building.
 - 3. Demolish and remove existing building systems, equipment, and components indicated on Drawings to be removed.
 - a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
 - b. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
 - c. Equipment to Be Removed: Disconnect and cap services and remove equipment and components.

4. Abandon existing building systems, equipment, and components indicated on Drawings to be abandoned in place.
 - a. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.
 - b. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material and leave in place.
5. Remove and reinstall/salvage existing building systems, equipment, and components indicated on drawings to be removed and reinstalled or removed and salvaged:
 - a. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment and components; when appropriate, reinstall, reconnect, and make equipment operational.
 - b. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and components and deliver to Owner.

3.4 SALVAGE/REINSTALL

- A. Removed and Salvaged Items:
 1. Clean salvaged items.
 2. Pack or crate items after cleaning. Identify contents of containers with label indicating elements, date of removal, quantity, and location where removed.
 3. Store items in a secure area until delivery to Owner.
 4. Transport items to Owner's storage area designated by Owner.
 5. Protect items from damage during transport and storage.
- B. Removed and Reinstalled Items:
 1. Clean and repair items to functional condition adequate for intended reuse.
 2. Pack or crate items after cleaning and repairing. Identify contents of containers.
 3. Protect items from damage during transport and storage.
 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.

3.5 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
 1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 2. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
 3. Maintain adequate ventilation when using cutting torches.
 4. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 5. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
- B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
 1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed trafficways if required by authorities having jurisdiction.
 2. Use water mist and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations. Do not use water when it may damage adjacent construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 - 3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
 - 4. Comply with requirements specified in Section 017419 "Construction Waste Management and Disposal."

3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

3.8 SELECTIVE DEMOLITION SCHEDULE

- A. Remove mechanical systems throughout project area as required for new work.
 - 1. Restore complete operation to items not being removed as part of the Work.
 - 2. Remove all abandoned piping and associated installation.
- B. Clean and repair items that are to remain to "like-new" condition.

END OF SECTION 230010

SECTION 230593 - TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 SUMMARY

- A. The Work of this Section Includes:
 - 1. TAB of Air Systems:
 - a. Constant-volume air systems.
 - 2. TAB of equipment.

1.2 DEFINITIONS

- A. AABC: Associated Air Balance Council.
- B. NC: Noise criteria.
- C. NEBB: National Environmental Balancing Bureau.
- D. TAB: Testing, adjusting, and balancing.
- E. TABB: Testing, Adjusting, and Balancing Bureau.
- F. TAB Specialist: An independent entity meeting qualifications to perform TAB work.

1.3 INFORMATIONAL SUBMITTALS

- A. Qualification Data: Within 30 days of Contractor's Notice to Proceed, submit documentation that the TAB specialist and this Project's TAB team members meet the qualifications specified in "Quality Assurance" Article.
- B. Contract Documents Examination Report: Within 30 days of Contractor's Notice to Proceed, provide a summary report of the examination review required in "Examination" Article, if issues are discovered that may preclude the proper testing and balancing of the systems. Submit a summary report of the examination review required in "Examination" Article.
- C. Strategies and Procedures Plan: Within 30 days of Contractor's Notice to Proceed, submit TAB strategies and step-by-step procedures, as specified in "Preparation" Article.
- D. System Readiness Checklists: Within 30 days of Contractor's Notice to Proceed, submit system readiness checklists, as specified in "Preparation" Article, to be used and filled out by systems installers verifying that systems are ready for TAB.
- E. Certified TAB Reports: Within 14 days of completion of testing and balancing work.
- F. Instrument calibration reports, to include the following:
 - 1. Instrument type and make.
 - 2. Serial number.
 - 3. Application.
 - 4. Dates of use.
 - 5. Dates of calibration and calibration interval.

1.4 QUALITY ASSURANCE

- A. TAB Specialist Firm's Qualifications: Certified by NEBB or TABB.
 - 1. TAB Certified Professional: Employee of the TAB specialist firm and certified by NEBB or TABB.
 - 2. TAB Technician: Employee of the TAB specialist firm and certified by NEBB or TABB.
- B. Instrumentation Type, Quantity, Accuracy, and Calibration: Comply with requirements in ASHRAE 111, Section 4, "Instrumentation."

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in system designs that may preclude proper TAB of systems and equipment. Submit Contract Documents Examination Report summary of findings.
- B. Examine installed systems for balancing devices, such as test ports, gauge cocks, thermometer wells, flow-control devices, balancing valves and fittings, and manual volume dampers. Note the locations of devices that are not accessible for TAB.
- C. Examine the approved submittals for HVAC systems and equipment.
- D. Examine system and equipment installations and verify that field quality-control testing, cleaning, and adjusting specified in individual Sections have been performed.
- E. Examine HVAC equipment and verify that bearings are greased, belts are aligned and tight, clean and permanent filters are installed, and equipment with functioning controls is ready for operation.
- F. Examine terminal units, such as variable-air-volume boxes, and verify that they are accessible and their controls are connected and functioning as indicated on Drawings or in the Specifications.
- G. Observe demonstration of operating safety interlocks and controls on HVAC equipment.
- H. Examine control dampers for proper installation for their intended function of isolating, throttling, diverting, or mixing air flows.

3.2 PREPARATION

- A. Prepare a TAB plan that includes the following:
 - 1. Equipment and systems to be tested.
 - 2. Strategies and step-by-step procedures for balancing the systems.
 - 3. Instrumentation to be used.
 - 4. Sample forms with specific identification for all equipment.
- B. Prepare system-readiness checklists of HVAC systems and equipment to verify system readiness for TAB work. Include, at a minimum, the following:
 - 1. Airside:
 - a. Verify that leakage and pressure tests on air distribution systems have been satisfactorily completed.
 - b. Duct systems are complete with terminals installed.
 - c. Volume, smoke, and fire dampers are open and functional.
 - d. Clean filters are installed.
 - e. Fans are operating, free of vibration, and rotating in correct direction.
 - f. Variable-frequency controllers' startup is complete and safeties are verified.
 - g. Automatic temperature-control systems are operational.
 - h. Ceilings are installed.
 - i. Windows and doors are installed and are in normal operating positions.
 - j. Note location of balancing devices that are inaccessible.

3.3 GENERAL PROCEDURES FOR TESTING AND BALANCING

- A. Cut insulation, ducts, pipes, and equipment casings for installation of test probes to the minimum extent necessary for TAB procedures.
 - 1. Installing Contractor to Perform the Following:
 - a. After testing and balancing, patch probe holes in ducts with same material and thickness as used to construct ducts.
 - b. After testing and balancing, install test ports and duct access doors that comply with requirements in Section 233300 "Air Duct Accessories."

- c. Where holes for probes are required in piping or hydronic equipment, install pressure and temperature test plugs to seal systems.
- B. Mark equipment and balancing devices, including damper-control positions, valve position indicators, fan-speed-control levers, and similar controls and devices, with paint or other suitable, permanent identification material to show final settings.
- C. Take and report testing and balancing measurements in inch-pound (IP) units.
- D. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.4 TESTING, ADJUSTING, AND BALANCING OF HVAC EQUIPMENT

- A. Test, adjust, and balance HVAC equipment indicated on Drawings, including, but not limited to, the following:
 - 1. Motors.
 - 2. Fans and ventilators.
 - 3. Unit heaters.
 - 4. Energy-recovery units.
 - 5. Dedicated outdoor-air units.
 - 6. Split-system air conditioners.
 - 7. Variable-refrigerant-flow systems.

3.5 GENERAL PROCEDURES FOR BALANCING AIR SYSTEMS

- A. Prepare test reports for both fans and outlets. Obtain approved submittals and recommended testing procedures. Cross-check the summation of required outlet volumes with required fan volumes.
- B. Prepare single-line schematic diagram of systems or color-coded HVAC drawings for the purpose of identifying HVAC components, including each air terminal unit and each air diffuser, register, and grille.
- C. For variable-air-volume systems, develop a plan to simulate diversity and include in TAB plan.
- D. Determine suitable locations in main and branch ducts for accurate duct-airflow measurements.
- E. Locate start-stop and disconnect switches, electrical interlocks, and motor controllers.
- F. Verify that motor controllers are equipped with properly sized thermal protection.

3.6 PROCEDURES FOR CONSTANT-VOLUME AIR SYSTEMS

- A. Adjust fans to deliver total indicated airflows within the maximum allowable fan speed listed by fan manufacturer.
 - 1. Measure total airflow.
 - a. Set outside-air, return-air, and relief-air dampers for proper position that simulates minimum outdoor-air conditions.
 - b. Where duct conditions allow, measure airflow by main Pitot-tube traverse. If necessary, perform multiple Pitot-tube traverses close to the fan and prior to any outlets, to obtain total airflow.
 - 2. Measure fan static pressures as follows:
 - a. Measure static pressure directly at the fan outlet.
 - b. Measure static pressure directly at the fan inlet.
 - c. Measure static pressure differential across each component that makes up the air-handling system.
 - d. Apply artificial loading of filters to simulate a dirty filter pressure drop condition at the time static pressures are measured.
 - 3. Obtain approval from Architect for adjustment of fan speed higher or lower than indicated speed. Comply with requirements in HVAC Sections for air-handling units for adjustment of fans, belts, and pulley sizes to achieve indicated air-handling-unit performance.
 - 4. Do not make fan-speed adjustments that result in motor overload. Consult equipment manufacturers about fan-speed safety factors. Modulate dampers and measure fan-motor amperage

to ensure that no overload occurs. Measure amperage in full-cooling, full-heating, economizer, and any other operating mode to determine the maximum required brake horsepower.

- B. Adjust volume dampers for main duct, submain ducts, and major branch ducts to indicated airflows.
 - 1. Measure airflow of submain and branch ducts.
 - 2. Adjust submain and branch duct volume dampers for specified airflow.
 - 3. Re-measure each submain and branch duct after all volume dampers have been adjusted.
- C. Adjust air inlets and outlets for each space to indicated airflows.
 - 1. Set airflow patterns of adjustable outlets for proper distribution without drafts.
 - 2. Measure inlets' and outlets' airflow. Apply correction factors as applicable for each size and style of air device.
 - 3. Adjust each inlet and outlet for specified airflow.
 - 4. Re-measure each inlet and outlet after they have been adjusted.
- D. Verify final system conditions.
 - 1. Re-measure and confirm that minimum outdoor, return, and relief airflows are within design range. Readjust to within design tolerance if necessary.
 - 2. Re-measure and confirm that total airflow is within design.
 - 3. Re-measure all final fan operating data, speed, volts, amps, and static profile.
 - 4. Traverse the supply airflow in full airside economizer mode. Observe the mixed air plenum pressure as compared to normal operation: return air dampers open and minimum outside air varying to 100 percent outside air dampers fully open and return air dampers fully closed. Mixed air pressure is to remain constant plus/minus 20 percent or, otherwise, damper/fan adjustments will be required.
 - 5. Mark all final settings.
 - 6. Measure and record all operating data.
 - 7. Record final fan-performance data.

3.7 PROCEDURES FOR MOTORS

- A. Motors: 1/2 hp and larger; test at final balanced conditions and record the following data:
 - 1. Manufacturer's name, model number, and serial number.
 - 2. Motor horsepower rating.
 - 3. Motor rpm.
 - 4. Phase and hertz.
 - 5. Nameplate and measured voltage, each phase.
 - 6. Nameplate and measured amperage, each phase.
 - 7. Service factor and frame size.
- B. Motors Driven by Variable-Frequency Controllers: Test manual bypass of controller to prove proper operation. Verify and report Hz at maximum and minimum flows.

3.8 TOLERANCES

- A. Set HVAC system's airflow rates and water-flow rates within the following tolerances:
 - 1. Supply, Return, and Exhaust Fans and Equipment with Fans: Plus or minus 10 percent. If design value is less than 100 cfm, flow rate is within 10 cfm.
 - 2. Air Outlets and Inlets: Plus or minus 10 percent. If design value is less than 100 cfm, flow rate is within 10 cfm.
- B. Maintaining pressure relationships as designed is to have priority over the tolerances specified above. If the above tolerances change the relative positive or negative airflow from/into the space, tolerances are to be adjusted so as to keep the relative positive cfm or negative cfm from/into the space a constant cfm differential.

3.9 PROGRESS REPORTING

- A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for system-balancing devices. Recommend changes and additions to system-balancing devices, to facilitate proper performance

measuring and balancing. Recommend changes and additions to HVAC systems and general construction to allow access for performance-measuring and -balancing devices.

3.10 FINAL TESTING AND BALANCING REPORT

- A. General: Prepare a certified written report; tabulate and divide the report into separate sections for tested systems and balanced systems.
 - 1. Include a certification sheet at the front of the report's binder, signed and sealed by the certified testing and balancing engineer.
 - 2. Include a list of instruments used for procedures, along with proof of calibration.
 - 3. Certify validity and accuracy of field data.
- B. Final Report Contents: In addition to certified field-report data, include the following:
 - 1. Fan curves.
 - 2. Manufacturers' test data.
 - 3. Field test reports prepared by system and equipment installers.
 - 4. Other information relative to equipment performance; do not include Shop Drawings and product data.
- C. General Report Data: In addition to form titles and entries, include the following data:
 - 1. Title page.
 - 2. Name and address of the TAB specialist firm and technician.
 - 3. Project name.
 - 4. Project location.
 - 5. Project Architect's name, firm, and address.
 - 6. Project engineer's name, firm, and address.
 - 7. Project Contractor's name, firm, and address.
 - 8. Report date.
 - 9. Signature of TAB supervisor who certifies the report.
 - 10. Table of Contents with the total number of pages defined for each section of the report. Number each page in the report.
 - 11. Summary of contents, including the following:
 - a. Indicated versus final performance.
 - b. Notable characteristics of systems.
 - c. Description of system operation sequence if it varies from the Contract Documents.
 - 12. Nomenclature sheets for each item of equipment.
 - 13. Data for terminal units, including manufacturer's name, type, size, and fittings.
 - 14. Notes to explain why certain final data in the body of reports vary from indicated values.
 - 15. Test conditions for fan performance forms, including the following:
 - a. Settings for outdoor-, return-, and exhaust-air dampers.
 - b. Conditions of filters.
 - c. Cooling coil, wet- and dry-bulb conditions.
 - d. Heating coil, dry-bulb conditions.
 - e. Face and bypass damper settings at coils.
 - f. Fan drive settings, including settings and percentage of maximum pitch diameter.
 - g. Other system operating conditions that affect performance.
- D. System Diagrams: Include schematic layouts of air and hydronic distribution systems. Present each system with single-line diagram and include the following:
 - 1. Quantities of outdoor, supply, return, and exhaust airflows.
 - 2. Duct, outlet, and inlet sizes.
- E. Air-Terminal-Device Reports:
 - 1. Unit Data:
 - a. System and air-handling unit identification.
 - b. Location and zone.
 - c. Apparatus used for test.
 - d. Area served.
 - e. Make.

- f. Number from system diagram.
 - g. Type and model number.
 - h. Size.
- 2. Test Data (Indicated and Actual Values):
 - a. Airflow rate in cfm.
 - b. Air velocity in fpm.
 - c. Preliminary airflow rate as needed in cfm.
 - d. Preliminary velocity as needed in fpm.
 - e. Final airflow rate in cfm.
 - f. Final velocity in fpm.
 - g. Space temperature in deg F.

END OF SECTION 230593

SECTION 230713 - DUCT INSULATION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes insulating the following duct services:
 - 1. Indoor, concealed supply and outdoor air.
 - 2. Indoor, exposed supply and outdoor air.
- B. Related Requirements:
 - 1. Section 233113 "Metal Ducts" for duct liners.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory- and field-applied if any).
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
 - 1. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
 - 2. Detail insulation application at elbows, fittings, dampers, specialties and flanges for each type of insulation.
 - 3. Detail application of field-applied jackets.
 - 4. Detail application at linkages of control devices.

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers are to be marked with the manufacturer's name, appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.4 COORDINATION

- A. Coordinate clearance requirements with duct Installer for duct insulation application. Before preparing ductwork Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.
- B. Coordinate installation and testing of heat tracing.

1.5 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.
 - 1. All Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 INSULATION MATERIALS

- A. Comply with requirements in "Duct Insulation Schedule, General," "Indoor Duct and Plenum Insulation Schedule" article for where insulating materials are to be applied.
- B. Products do not contain asbestos, lead, mercury, or mercury compounds.
- C. Glass-Fiber Blanket: Glass fibers bonded with a thermosetting resin; suitable for maximum use temperature up to 450 deg F in accordance with ASTM C411. Comply with ASTM C553, Type II, and

ASTM C1290, Type III with factory-applied FSK jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. CertainTeed; SAINT-GOBAIN
 - b. Johns Manville; a Berkshire Hathaway company
 - c. Knauf Insulation
 - d. Manson Insulation Inc.
 - e. Owens Corning

2.3 ADHESIVES

- A. Materials are compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.
- B. Glass-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Childers Brand; H. B. Fuller Construction Products
 - b. Eagle Bridges - Marathon Industries
 - c. Foster Brand; H. B. Fuller
 - d. Mon-Eco Industries, Inc.
- C. ASJ Adhesive, and FSK Jacket Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Childers Brand; H. B. Fuller Construction Products
 - b. Eagle Bridges - Marathon Industries
 - c. Foster Brand; H. B. Fuller
 - d. Mon-Eco Industries, Inc.

2.4 MASTICS AND COATINGS

- A. Materials are compatible with insulation materials, jackets, and substrates.
- B. Vapor-Retarder Mastic, Water Based, Interior Use: Suitable for indoor use on below ambient services.
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Aeroflex USA
 - b. Childers Brand; H. B. Fuller Construction Products
 - c. Foster Brand; H. B. Fuller
 - d. Knauf Insulation
 2. Water-Vapor Permeance: Comply with ASTM C755, Section 7.2.2, Table 2, for insulation type and service conditions.
 3. Service Temperature Range: Minus 20 to plus 180 deg F.
 4. Color: White.
- C. Vapor-Retarder Mastic, Solvent Based, Exterior Use: Suitable for outdoor use on below ambient services.
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Aeroflex USA
 - b. Childers Brand; H. B. Fuller Construction Products
 - c. Eagle Bridges - Marathon Industries
 - d. Foster Brand; H. B. Fuller
 2. Water-Vapor Permeance: Comply with ASTM C755, Section 7.2.2, Table 2, for insulation type and service conditions.
 3. Service Temperature Range: Minus 50 to plus 220 deg F.
 4. Color: White.

- D. Breather Mastic: Water based; suitable for indoor and outdoor use on above ambient services.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Childers Brand; H. B. Fuller Construction Products
 - b. Eagle Bridges - Marathon Industries
 - c. Foster Brand; H. B. Fuller
 - d. Knauf Insulation
 - e. Mon-Eco Industries, Inc.
 - 2. Water-Vapor Permeance: ASTM E96/E96M, greater than 1.0 perm at manufacturer's recommended dry film thickness.
 - 3. Service Temperature Range: Minus 20 to plus 180 deg F.
 - 4. Color: White.

2.5 SEALANTS

- A. FSK and Metal Jacket Flashing Sealants:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Childers Brand; H. B. Fuller Construction Products
 - b. Eagle Bridges - Marathon Industries
 - c. Foster Brand; H. B. Fuller
 - d. Mon-Eco Industries, Inc.
 - 2. Materials are compatible with insulation materials, jackets, and substrates.
 - 3. Fire- and water-resistant, flexible, elastomeric sealant.
 - 4. Service Temperature Range: Minus 40 to plus 250 deg F.
 - 5. Color: Aluminum.
- B. ASJ Flashing Sealants:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Childers Brand; H. B. Fuller Construction Products
 - b. Foster Brand; H. B. Fuller
 - 2. Materials are compatible with insulation materials, jackets, and substrates.
 - 3. Fire- and water-resistant, flexible, elastomeric sealant.
 - 4. Service Temperature Range: Minus 40 to plus 250 deg F.
 - 5. Color: White.

2.6 FACTORY-APPLIED JACKETS

- A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:
 - 1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C1136, Type I.
 - 2. ASJ-SSL: ASJ with self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip; complying with ASTM C1136, Type I.
 - 3. FSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with kraft-paper backing; complying with ASTM C1136, Type II.

2.7 TAPES

- A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C1136.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. 3M Industrial Adhesives and Tapes Division
 - b. Aeroflex USA
 - c. Avery Dennison Corporation, Specialty Tapes Division
 - d. Ideal Tape Co., Inc., an American Biltrite Company
 - e. Knauf Insulation
 - 2. Width: 3 inches.

3. Thickness: 11.5 mils.
 4. Adhesion: 90 ounces force/inch in width.
 5. Elongation: 2 percent.
 6. Tensile Strength: 40 lbf/inch in width.
 7. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.
- B. FSK Tape: Foil-face, vapor-retarder tape matching factory-applied jacket with acrylic adhesive; complying with ASTM C1136.
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. 3M Industrial Adhesives and Tapes Division
 - b. Avery Dennison Corporation, Specialty Tapes Division
 - c. Ideal Tape Co., Inc., an American Biltrite Company
 - d. Knauf Insulation
 2. Width: 3 inches.
 3. Thickness: 6.5 mils.
 4. Adhesion: 90 ounces force/inch in width.
 5. Elongation: 2 percent.
 6. Tensile Strength: 40 lbf/inch in width.
 7. FSK Tape Disks and Squares: Precut disks or squares of FSK tape.

2.8 SECUREMENTS

- A. Bands:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Johns Manville; a Berkshire Hathaway company
 - b. RPR Products, Inc.
 2. Stainless Steel: ASTM A240/A240M, Type 304 or Type 316; 0.015 inch thick, 1/2 inch wide with wing seal or closed seal.
 3. Aluminum: ASTM B209, Alloy 3003, 3005, 3105, or 5005; Temper H-14, 0.020 inch thick, 1/2 inch wide with wing seal or closed seal.
 4. Springs: Twin spring set constructed of stainless steel with ends flat and slotted to accept metal bands. Spring size determined by manufacturer for application.
- B. Staples: Outward-clinching insulation staples, nominal 3/4-inch- wide, stainless steel or Monel.
- C. Wire: 0.080-inch nickel-copper alloy.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
1. Verify that systems to be insulated have been tested and are free of defects.
 2. Verify that surfaces to be insulated are clean and dry.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

3.3 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of ducts and fittings.
- B. Install insulation materials, vapor barriers or retarders, jackets, and thicknesses required for each item of duct system as specified in insulation system schedules.

- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket.
- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.
- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Keep insulation materials dry during application and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with Contract Documents, unless otherwise approved by the engineer-of-record.
- G. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- H. Install insulation with least number of joints practical.
- I. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.
 - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
 - 3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
- J. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- K. Install insulation with factory-applied jackets as follows:
 - 1. Draw jacket tight and smooth, but not to the extent of creating wrinkles or areas of compression in the insulation.
 - 2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
 - 3. Overlap jacket longitudinal seams at least 1-1/2 inches. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches o.c.
 - a. For below ambient services, apply vapor-barrier mastic over staples.
 - 4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
 - 5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to duct flanges and fittings.
- L. Cut insulation in a manner to avoid compressing insulation.
- M. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.
- N. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.

3.4 PENETRATIONS

- A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.
 - 1. Seal penetrations with flashing sealant.
 - 2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 - 3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches below top of roof flashing.
 - 4. Seal jacket to roof flashing with flashing sealant.
- B. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.

- C. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Terminate insulation at fire damper sleeves for fire-rated wall and partition penetrations. Externally insulate damper sleeves to match adjacent insulation and overlap duct insulation at least 2 inches.
 - 1. Comply with requirements in Division 7
- D. Insulation Installation at Floor Penetrations:
 - 1. Duct: For penetrations through fire-rated assemblies, terminate insulation at fire damper sleeves and externally insulate damper sleeve beyond floor to match adjacent duct insulation. Overlap damper sleeve and duct insulation at least 2 inches.
 - 2. Seal penetrations through fire-rated assemblies. Comply with requirements in Division 7

3.5 INSTALLATION OF FLEXIBLE ELASTOMERIC INSULATION

- A. Comply with manufacturer's written installation instructions and ASTM C1710.
- B. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
- C. Square and Rectangular Ducts and Plenums:
 - 1. Provide 1/4 inch more per side for a tight, compression fit.
 - 2. Cut sheet insulation with the following dimensions:
 - a. Width of duct plus 1/4 inch, one piece.
 - b. Height of duct plus 1/4 inch, plus thickness of insulation, two pieces.
 - c. Width of duct plus 1/4 inch, plus two times the thickness of insulation, one piece.
 - 3. Insulate the bottom of the duct with the sheet from (a) above, then the sides with the two sheets from (b) above, and finally the top of the duct with the sheet from (c) above.
 - 4. Insulation without self-adhering backing:
 - a. Apply 100 percent coverage of manufacturer adhesive on the metal surface, then the insulation, except for the last 1/4 inch where sheets will butt together.
 - b. Roll sheet down into position.
 - c. Press two sheets together under compression and apply adhesive at the butt joint to seal the two sheets together.
 - 5. Insulation with self-adhering backing:
 - a. Peel back release paper in 6- to 8-inch increments and line up sheet.
 - b. Press firmly to activate adhesive.
 - c. Align material and continue to line up correctly, pressing firmly while slowly removing release paper.
 - d. Allow 1/4-inch overlap for compression at butt joints.
 - e. Apply adhesive at the butt joint to seal the two sheets together.
 - 6. Insulate duct brackets following manufacturer's written installation instructions.
- D. Circular Ducts:
 - 1. Determine the circumference of the duct, using a strip of insulation the same thickness as to be used.
 - 2. Cut the sheet to the required size.
 - 3. Apply 100 percent coverage of manufacturer adhesive on the metal surface then the insulation.
 - 4. Apply manufacturer adhesive to the cut surfaces along 100 percent of the longitudinal seam. Press together the seam at the ends and then the middle. Close the entire seam starting from the middle.

3.6 INSTALLATION OF GLASS-FIBER INSULATION

- A. Comply with manufacturer's written installation instructions.
 - 1. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.
 - a. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.

- b. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-foot intervals. Vapor stops consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.
- 2. Overlap unfaced blankets a minimum of 2 inches on longitudinal seams and end joints. At end joints, secure with steel bands spaced a maximum of 18 inches o.c.
- 3. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
- 4. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

3.7 FIELD-APPLIED JACKET INSTALLATION

- A. Where glass-cloth jackets are indicated, install directly over bare insulation or insulation with factory-applied jackets.
 - 1. Draw jacket smooth and tight to surface with 2-inch overlap at seams and joints.
 - 2. Embed glass cloth between two 0.062-inch- thick coats of lagging adhesive.
 - 3. Completely encapsulate insulation with coating, leaving no exposed insulation.
- B. Where FSK jackets are indicated, install as follows:
 - 1. Draw jacket material smooth and tight.
 - 2. Install lap or joint strips with same material as jacket.
 - 3. Secure jacket to insulation with manufacturer's recommended adhesive.
 - 4. Install jacket with 1-1/2-inch laps at longitudinal seams and 3-inch- wide joint strips at end joints.
 - 5. Seal openings, punctures, and breaks in vapor-retarder jackets and exposed insulation with vapor-barrier mastic.

3.8 DUCT INSULATION SCHEDULE, GENERAL

- A. Definitions:
 - 1. Supply air ducts shall be ducts conveying air that has been heated or cooled for space conditioning purposes. Discharge ducts from dedicated outside air units shall be considered supply air ducts.
 - 2. Outdoor air ducts shall be ducts conveying untreated outside air.
 - 3. Return air ducts shall be ducts conveying room temperature air from conditioned spaces to the return side of air handling equipment, to be recirculated.
 - 4. Exhaust ducts shall be ducts conveying room temperature air from conditioned spaces to be discharged to the exterior.
- B. Plenums and Ducts Requiring Insulation:
 - 1. Indoor, concealed supply and outdoor air.
 - 2. Indoor, exposed supply and outdoor air.
 - 3. Indoor, concealed return located in unconditioned space.
 - 4. Indoor, exposed return located in unconditioned space.
- C. Items Not Insulated:
 - 1. Phenolic ducts.
 - 2. Double wall spiral formed duct with internal insulation
 - 3. Factory-insulated flexible ducts.
 - 4. Factory-insulated plenums and casings.
 - 5. Flexible connectors.
 - 6. Vibration-control devices.
 - 7. Factory-insulated access panels and doors.

3.9 INDOOR DUCT AND PLENUM INSULATION SCHEDULE

- A. Concealed, round and flat-oval, supply-air duct insulation is the following:
 - 1. Glass-Fiber Blanket: 1-1/2 inches thick and 0.75 lb/cu. ft. 1.5 lb/cu. ft. nominal density.
- B. Concealed, rectangular, supply-air duct insulation is the following:

1. Glass-Fiber Blanket: 1-1/2 inches thick and 0.75 lb/cu. ft. nominal density.
- C. Concealed, rectangular, return-air duct insulation in unconditioned space is the following:
 1. Glass-Fiber Blanket: 3 inches thick and 0.75 lb/cu. ft. nominal density.
- D. Exposed, single wall round and flat-oval, supply-air duct insulation is the following:
 1. Glass-Fiber Blanket: 1-1/2 inches thick and 0.75 lb/cu. ft. nominal density.
- E. Exposed, rectangular, supply-air duct insulation is the following:
 1. Glass-Fiber Blanket: 1-1/2 inches thick and 0.75 lb/cu. ft. nominal density.
- F. Supply and return air duct within ten feet of air moving equipment shall be insulated with the following:
 1. Flexible Elastomeric liner, 1/2" thick.

END OF SECTION 230713

SECTION 231123 - FACILITY NATURAL-GAS PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Pipes, tubes, and fittings.
 - 2. Manual gas shutoff valves.
 - 3. Pressure regulators.
 - 4. Dielectric fittings.

1.2 DEFINITIONS

- A. CWP: Cold working pressure.
- B. Exposed, Exterior Installations: Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. An example includes rooftop locations.
- C. Exposed, Interior Installations: Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.
- D. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct shafts, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.

1.3 ACTION SUBMITTALS

- A. Product Data:
 - 1. Piping specialties.
 - 2. Valves. Include pressure rating, capacity, settings, and electrical connection data of selected models.
 - 3. Pressure regulators. Indicate pressure ratings and capacities.
 - 4. Dielectric fittings.

1.4 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Plans and details, drawn to scale, on which natural-gas piping is shown and coordinated with other installations, using input from installers of the items involved.
- B. Welding certificates.
- C. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Steel Support Welding Qualifications: Qualify procedures and personnel in accordance with AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- B. Pipe Welding Qualifications: Qualify procedures and operators in accordance with the ASME Boiler and Pressure Vessel Code.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.
- B. Store and handle pipes and tubes having factory-applied protective coatings to avoid damaging coating, and protect from direct sunlight.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain each product type from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Comply with NFPA 54 and the International Fuel Gas Code.
- B. Minimum Operating-Pressure Ratings:
 - 1. Piping and Valves: 100 psig minimum unless otherwise indicated.

2.3 PIPES, TUBES, AND FITTINGS

- A. Steel Pipe: ASTM A53/A53M, black steel, Schedule 40, Type E or S, Grade B.
 - 1. Malleable-Iron Threaded Fittings: ASME B16.3, Class 150, standard pattern.
 - 2. Wrought-Steel Welding Fittings: ASTM A234/A234M for butt welding and socket welding.
 - 3. Unions: ASME B16.39, Class 150, malleable iron with brass-to-iron seat, ground joint, and threaded ends.
 - 4. Forged-Steel Flanges and Flanged Fittings: ASME B16.5, minimum Class 150, including bolts, nuts, and gaskets of the following material group, end connections, and facings:
 - a. Material Group: 1.1.
 - b. End Connections: Threaded or butt welding to match pipe.
 - c. Lapped Face: Not permitted underground.
 - d. Gasket Materials: ASME B16.20, metallic, flat, asbestos free, aluminum O-rings, and spiral-wound metal gaskets.
 - e. Bolts and Nuts: ASME B18.2.1, carbon steel aboveground and stainless steel underground.
 - 5. Protective Coating for Underground Piping: Factory-applied, three-layer coating of epoxy, adhesive, and PE.
 - a. Joint Cover Kits: Epoxy paint, adhesive, and heat-shrink PE sleeves.
- B. PE Pipe: ASTM D2513, SDR 11.
 - 1. PE Fittings: ASTM D2683, socket-fusion type or ASTM D3261, butt-fusion type with dimensions matching PE pipe.
 - 2. PE Transition Fittings: Factory-fabricated fittings with PE pipe complying with ASTM D2513, SDR 11; and steel pipe complying with ASTM A53/A53M, black steel, Schedule 40, Type E or S, Grade B.
 - 3. Anodeless Service-Line Risers: Factory fabricated and leak tested.
 - a. Underground Portion: PE pipe complying with ASTM D2513, SDR 11 inlet.
 - b. Casing: Steel pipe complying with ASTM A53/A53M, Schedule 40, black steel, Type E or S, Grade B, with corrosion-protective coating covering. Vent casing aboveground.
 - c. Aboveground Portion: PE transition fitting.
 - d. Outlet is threaded or flanged or suitable for welded connection.
 - e. Tracer wire connection.
 - f. UV shield.
 - g. Stake supports with factory finish to match steel pipe casing or carrier pipe.
 - 4. Transition Service-Line Risers: Factory fabricated and leak tested.
 - a. Underground Portion: PE pipe complying with ASTM D2513, SDR 11 inlet connected to steel pipe complying with ASTM A53/A53M, Schedule 40, Type E or S, Grade B, with corrosion-protective coating for aboveground outlet.
 - b. Outlet is threaded or flanged or suitable for welded connection.
 - c. Bridging sleeve over mechanical coupling.
 - d. Factory-connected anode.
 - e. Tracer wire connection.
 - f. UV shield.
 - g. Stake supports with factory finish to match steel pipe casing or carrier pipe.
 - 5. Plastic Mechanical Couplings, NPS 1-1/2 (DN 40) and Smaller: Suitable for joining PE pipe to PE pipe.

- a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Mueller Co. LLC; Mueller Water Products, Inc.
 - 2) Perfection Corporation
 - 3) R.W. Lyall; brand of Hubbell Utility Solutions; Hubbell Incorporated
 - b. PE body with molded-in, stainless steel support ring.
 - c. Seals: NBR.
 - d. Acetal collets.
 - e. Electro-zinc-plated steel stiffener.
- 6. Plastic Mechanical Couplings, NPS 2 (DN 50) and Larger: Suitable for joining PE pipe to PE pipe, steel pipe to PE pipe, or steel pipe to steel pipe.
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Mueller Co. LLC; Mueller Water Products, Inc.
 - 2) Perfection Corporation
 - 3) R.W. Lyall; brand of Hubbell Utility Solutions; Hubbell Incorporated
 - b. Fiber-reinforced plastic body.
 - c. PE body tube.
 - d. Seals: NBR.
 - e. Acetal collets.
 - f. Stainless steel bolts, nuts, and washers.
- 7. Steel Mechanical Couplings: Suitable for joining plain-end PE pipe to PE pipe, steel pipe to PE pipe, or steel pipe to steel pipe.
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Baker Hughes Company
 - 2) Smith-Blair, a Xylem brand.
 - b. Steel flanges and tube with epoxy finish.
 - c. Seals: NBR.
 - d. Steel bolts, washers, and nuts.
 - e. Factory-installed anode for steel-body couplings installed underground.

2.4 PIPING SPECIALTIES

- A. Appliance Flexible Connectors:
 - 1. Indoor, Fixed-Appliance Flexible Connectors: Comply with ANSI Z21.24.
 - 2. Indoor, Movable-Appliance Flexible Connectors: Comply with ANSI Z21.69.
 - 3. Outdoor, Appliance Flexible Connectors: Comply with ANSI Z21.75.
 - 4. Corrugated, stainless steel tubing with polymer coating.
 - 5. Operating-Pressure Rating: 0.5 psig.
 - 6. End Fittings: Zinc-coated steel.
 - 7. Threaded Ends: Comply with ASME B1.20.1.
 - 8. Maximum Length: 24 inches.

2.5 JOINING MATERIALS

- A. Joint Compound and Tape: Suitable for natural gas.
- B. Welding Filler Metals: Comply with AWS D10.12/D10.12M for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.

2.6 MANUAL GAS SHUTOFF VALVES

- A. General Requirements for Metallic Valves, NPS 2 (DN 50) and Smaller: Comply with ASME B16.33.
 - 1. CWP Rating: 125 psig.
 - 2. Threaded Ends: Comply with ASME B1.20.1.
 - 3. Dryseal Threads on Flare Ends: Comply with ASME B1.20.3.
 - 4. Tamperproof Feature: Locking feature for valves indicated in "Underground, Manual Gas Shutoff Valve Schedule" and "Aboveground, Manual Gas Shutoff Valve Schedule" articles.

5. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for valves 1 inch and smaller.
6. Service Mark: Valves NPS 1-1/4 to NPS 2 having initials "WOG" permanently marked on valve body.

B. Bronze Plug Valves: MSS SP-78.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. A.Y. McDonald Mfg. Co.
 - b. Lee Brass Company
2. Body: Bronze, complying with ASTM B584.
3. Plug: Bronze.
4. Ends: Threaded, socket, or flanged as indicated in "Aboveground, Manual Gas Shutoff Valve Schedule" articles.
5. Operator: Square head or lug type with tamperproof feature where indicated.
6. Pressure Class: 125 psig.
7. Listing: Valves NPS 1 and smaller are to be listed and labeled by an NRTL acceptable to authorities having jurisdiction.
8. Service: Suitable for natural-gas service with "WOG" indicated on valve body.

2.7 PRESSURE REGULATORS

A. General Requirements:

1. Single stage and suitable for natural gas.
2. Steel jacket and corrosion-resistant components.
3. Elevation compensator.
4. End Connections: Threaded for regulators NPS 2 and smaller; flanged for regulators NPS 2-1/2 and larger.

B. Appliance Pressure Regulators: Comply with ANSI Z21.18.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Dormont; A Watts Water Technologies Company
 - b. Eaton
 - c. Harper Wyman Co
 - d. Maxitrol Company
 - e. SCP, Inc
2. Body and Diaphragm Case: Die-cast aluminum.
3. Springs: Zinc-plated steel; interchangeable.
4. Diaphragm Plate: Zinc-plated steel.
5. Seat Disc: NBR.
6. Seal Plug: UV-stabilized, mineral-filled nylon.
7. Factory-Applied Finish: Minimum three-layer polyester and polyurethane paint finish.
8. Regulator may include vent limiting device, instead of vent connection, if approved by authorities having jurisdiction.
9. Maximum Inlet Pressure: 2 psig.

2.8 DIELECTRIC FITTINGS

A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.

B. Dielectric Unions:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. A.Y. McDonald Mfg. Co.
 - b. Capitol Manufacturing Company
 - c. GF Piping Systems: Georg Fischer LLC
 - d. HART Industrial Unions, LLC
 - e. Jomar Valve

- f. Matco-Norca
 - g. WATTS; A Watts Water Technologies Company
 - h. Wilkins
 - i. Zurn Industries, LLC
- 2. Description:
 - a. Standard: ASSE 1079.
 - b. Pressure Rating: 125 psig minimum at 180 deg F.
 - c. End Connections: Solder-joint copper alloy and threaded ferrous.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in for natural-gas piping system to verify actual locations of piping connections before equipment installation.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Close equipment shutoff valves before turning off natural gas to premises or piping section.
- B. Inspect natural-gas piping in accordance with the International Fuel Gas Code to determine that natural-gas utilization devices are turned off in piping section affected.
- C. Comply with the International Fuel Gas Code requirements for preventing accidental ignition.

3.3 INSTALLATION OF OUTDOOR PIPING

- A. Comply with the International Fuel Gas Code for installation and purging of natural-gas piping.
- B. Install fittings for changes in direction and branch connections.

3.4 INSTALLATION OF INDOOR PIPING

- A. Comply with the International Fuel Gas Code for installation and purging of natural-gas piping.
- B. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on Coordination Drawings.
- C. Arrange for pipe spaces, chases, slots, sleeves, and openings in building structure during progress of construction, to allow for mechanical installations.
- D. Do not install piping in concealed locations unless sleeved with the sleeve open at both ends.
- E. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- F. Where installing piping above accessible ceilings, allow sufficient space for ceiling panel removal.
- G. Locate valves for easy access. Do not locate valves within return air plenums.
- H. Install piping free of sags and bends.
- I. Install fittings for changes in direction and branch connections.
- J. Verify final equipment locations for roughing-in.
- K. Comply with requirements in Sections specifying gas-fired appliances and equipment for roughing-in requirements.
- L. Conceal pipe installations in walls, pipe spaces, utility spaces, above ceilings, below grade or floors, and in floor channels unless indicated to be exposed to view.

- M. Concealed Location Installations: Except as specified below, install concealed natural-gas piping and piping installed under the building in containment conduit constructed of steel pipe with welded joints as described in Part 2. Install a vent pipe from containment conduit to outdoors and terminate with weatherproof vent cap.
1. Above Accessible Ceilings: Natural-gas piping, fittings, valves, and regulators may be installed in accessible spaces without containment conduit.
 2. In Floors: Install natural-gas piping with welded or brazed joints and protective coating in cast-in-place concrete floors. Cover piping to be cast in concrete slabs with minimum of 1-1/2 inches of concrete. Piping may not be in physical contact with other metallic structures such as reinforcing rods or electrically neutral conductors. Do not embed piping in concrete slabs containing quick-set additives or cinder aggregate.
 3. In Floor Channels: Install natural-gas piping in floor channels. Channels must have cover and be open to space above cover for ventilation.
 4. In Walls or Partitions: Protect tubing installed inside partitions or hollow walls from physical damage using steel striker barriers at rigid supports.
 - a. Exception: Tubing passing through partitions or walls does not require striker barriers.
 5. Prohibited Locations:
 - a. Do not install natural-gas piping in or through circulating air ducts, clothes or trash chutes, chimneys or gas vents (flues), ventilating ducts, or dumbwaiter or elevator shafts.
 - b. Do not install natural-gas piping in solid walls or partitions.
- N. Use eccentric reducer fittings to make reductions in pipe sizes. Install fittings with level side down.
- O. Connect branch piping from top or side of horizontal piping.
- P. Install unions in pipes NPS 2 and smaller, adjacent to each valve, at final connection to each piece of equipment. Unions are not required at flanged connections.
- Q. Do not use natural-gas piping as grounding electrode.
- R. Install strainer on inlet of each line-pressure regulator and automatic or electrically operated valve.

3.5 INSTALLATION OF VALVES

- A. Install manual gas shutoff valve for each gas appliance ahead of corrugated stainless steel tubing, aluminum, or copper connector.
- B. Do not install valves in return-air plenums.

3.6 PIPING JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- C. Threaded Joints:
 1. Thread pipe with tapered pipe threads complying with ASME B1.20.1.
 2. Cut threads full and clean using sharp dies.
 3. Ream threaded pipe ends to remove burrs and restore full inside diameter of pipe.
 4. Apply appropriate tape or thread compound to external pipe threads unless dryseal threading is specified.
 5. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.
- D. Welded Joints:
 1. Construct joints in accordance with AWS D10.12/D10.12M, using qualified processes and welding operators.
 2. Bevel plain ends of steel pipe.
 3. Patch factory-applied protective coating as recommended by manufacturer at field welds and where damage to coating occurs during construction.

3.7 INSTALLATION OF HANGERS AND SUPPORTS

- A. Install hangers for steel piping, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- B. Install hangers for corrugated stainless steel tubing, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- C. Support horizontal piping within 12 inches of each fitting.
- D. Support vertical runs of steel piping to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- E. Support vertical runs of corrugated stainless steel tubing to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.8 PIPING CONNECTIONS

- A. Connect to utility's gas meter and pressure regulator according to utility's procedures and requirements.
- B. Install natural-gas piping electrically continuous, and bonded to gas-appliance equipment grounding conductor of the circuit powering the appliance in accordance with NFPA 70.
- C. Where installing piping adjacent to appliances, allow space for service and maintenance of appliances.
- D. Connect piping to appliances using manual gas shutoff valves and unions. Install valve within 72 inches of each gas-fired appliance and equipment. Install union between valve and appliances or equipment.

3.9 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Test, inspect, and purge natural gas in accordance with the International Fuel Gas Code and authorities having jurisdiction.
 - 2. Natural-gas piping will be considered defective if it does not pass tests and inspections.
- B. Prepare test and inspection reports.

3.10 OUTDOOR PIPING SCHEDULE

- A. Underground natural-gas piping is to be one of the following:
 - 1. PE pipe and fittings joined by heat fusion, or mechanical couplings; service-line risers with tracer wire terminated in an accessible location.
 - 2. Steel pipe with wrought-steel fittings and welded joints, or mechanical couplings. Coat pipe and fittings with protective coating for steel piping.
- B. Aboveground natural-gas piping is to be one of the following:
 - 1. Steel pipe with malleable-iron fittings and threaded joints.
 - 2. Steel pipe with wrought-steel fittings and welded joints.

3.11 INDOOR PIPING SCHEDULE FOR SYSTEM PRESSURES LESS THAN 0.5 PSIG (3.45 kPa)

- A. Aboveground, branch piping NPS 1 and smaller is to be the following:
 - 1. Steel pipe with malleable-iron fittings and threaded joints.
- B. Aboveground, distribution piping NPS 1 ¼ and larger is to be the following:
 - 1. Steel pipe with wrought-steel fittings and welded joints.

3.12 ABOVEGROUND, MANUAL GAS SHUTOFF VALVE SCHEDULE

- A. Distribution piping valves for pipe sizes NPS 2 and smaller are to be the following:
 - 1. Bronze plug valve.

- B. Valves in branch piping for single appliance are to be the following:
 - 1. Bronze plug valve.

END OF SECTION 231123

SECTION 23 23 00 - REFRIGERANT PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Copper tube and fittings.
 - 2. Refrigerants.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Submit data for each type of refrigerant piping, fitting, valve, piping specialty, and refrigerant.

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Store piping with end caps in place to ensure that piping interior and exterior are clean when installed.
- B. Prepare valves and specialties for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads and other end connections.
- C. Use the following precautions during storage:
 - 1. Maintain valve and specialty end protection.
 - 2. Store valves and specialties indoors and maintain at higher-than-ambient-dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Comply with ASHRAE 15 and ASHRAE 34.
- B. Comply with ASME B31.5.
- C. Test Pressure for Refrigerant R-410A:
 - 1. As required by VRF system manufacturer.

2.2 COPPER TUBE AND FITTINGS

- A. Copper Tube: ASTM B280, Type ACR.
- B. Wrought-Copper Fittings, Brazed Joint: ASME B16.50.
- C. Brazing Filler Metals: AWS A5.8M/A5.8.

2.3 REFRIGERANTS

- A. R-454B, ASHRAE 34: R-32 (68.9 percent by mass) and R-1234yf (31.1 percent by mass).

PART 3 - EXECUTION

3.1 PIPING APPLICATION SCHEDULES

- A. Refrigerant: R-454B.
- B. Suction, Hot-Gas, and Liquid Tubing for Conventional Air-Conditioning (Cooling-Only) Applications, NPS 1-1/2 (DN 40) and Smaller: Copper, Type ACR, annealed-temper tubing and wrought-copper fittings with brazed joints.

3.2 VALVE AND SPECIALTY APPLICATIONS

- A. Provide refrigerant specialties as recommended by split system equipment manufacturer.

3.3 INSTALLATION OF PIPING, GENERAL

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems; indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations. Install piping as indicated unless deviations to layout are approved on Shop Drawings.
- B. Install refrigerant piping in accordance with ASHRAE 15.
- C. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- E. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- F. Install piping adjacent to machines to allow service and maintenance.
- G. Install piping free of sags and bends.
- H. Install fittings for changes in direction and branch connections.
- I. Install piping as short and direct as possible, with a minimum number of joints, elbows, and fittings.
- J. Arrange piping to allow inspection and service of refrigeration equipment. Install valves and specialties in accessible locations to allow for service and inspection. Install access doors or panels as required if valves or equipment requiring maintenance is concealed behind finished surfaces.
- K. When brazing or soldering, remove solenoid-valve coils and sight glasses; also remove valve stems, seats, packing, and accessible internal parts of refrigerant specialties. Do not apply heat near expansion-valve bulb.
- L. Install piping with adequate clearance between pipe and adjacent walls and hangers or between pipes for insulation installation.
- M. Identify refrigerant piping and valves in accordance with Section 23 05 53 "Identification for HVAC Piping and Equipment."
- N. Install wall penetration assemblies for penetrations of exterior walls. Comply with requirements specified in Section 23 05 00 "Common Work Results for HVAC."
- O. Install sleeves for piping penetrations of interior walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 23 05 00 "Common Work Results for HVAC."
- P. Install sleeve seals for piping penetrations of concrete slabs. Comply with requirements for sleeve seals specified in Section 23 05 00 "Common Work Results for HVAC."
- Q. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 23 05 00 "Common Work Results for HVAC."

3.4 PIPE JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.
- C. Fill pipe and fittings with an inert gas (nitrogen or carbon dioxide), during brazing or welding, to prevent scale formation.
- D. Brazed Joints: Construct joints in accordance with AWS BRH, "Brazing Handbook," Ch. 35, "Pipe and Tubing."
 - 1. Use Type BCuP (copper-phosphorus) alloy for joining copper socket fittings with copper pipe.
 - 2. Use Type BAg (cadmium-free silver) alloy for joining copper with bronze or steel.

3.5 INSTALLATION OF HANGERS AND SUPPORTS

- A. Comply with Section 23 05 29 "Hangers and Supports for HVAC Piping and Equipment" for hangers, supports, and anchor devices.
- B. Install the following pipe attachments:
 - 1. Adjustable steel clevis hangers for individual horizontal runs less than 20 ft. long.
 - 2. Roller hangers and spring hangers for individual horizontal runs 20 ft. or longer.
 - 3. Pipe Roller: MSS SP-58, Type 44 for multiple horizontal piping 20 ft. or longer, supported on a trapeze.
 - 4. Copper-clad hangers and supports for hangers and supports in direct contact with copper pipe.
- C. Install hangers for copper tubing, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.
- D. Support horizontal piping within 12 inches of each fitting.
- E. Support vertical runs of copper tubing to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.6 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Comply with ASME B31.5, Chapter VI.
 - 2. Test refrigerant piping, specialties, and receivers. Isolate compressor, condenser, evaporator, and safety devices from test pressure if they are not rated above the test pressure.
- B. Prepare test and inspection reports.

3.7 SYSTEM CHARGING

- A. Charge system using procedures as required by equipment manufacturer. If manufacturer has no charging recommendations, the following procedure shall apply:
 - 1. Install core in filter dryers after leak test but before evacuation.
 - 2. Evacuate entire refrigerant system with a vacuum pump to 500 micrometers. If vacuum holds for 12 hours, system is ready for charging.
 - 3. Break vacuum with refrigerant gas, allowing pressure to build up to 2 psig.
 - 4. Charge system with a new filter-dryer core in charging line.

END OF SECTION 23 23 00

This page intentionally left blank.

SECTION 233113 - METAL DUCTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Rectangular ducts and fittings - single wall.
 - 2. Round ducts and fittings - single wall.
 - 3. Round ducts and fittings - double wall.
 - 4. Sheet metal materials.
 - 5. Duct liner.
 - 6. Hangers and supports.
 - 7. Strut support system for ductwork - metal, cable type.
- B. Related Requirements:
 - 1. Section 230593 "Testing, Adjusting, and Balancing for HVAC" for testing, adjusting, and balancing requirements for metal ducts.
 - 2. Section 233300 "Air Duct Accessories" for dampers, sound-control devices, duct-mounting access doors and panels, turning vanes, and flexible ducts.

1.2 DEFINITIONS

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of the following products:
 - 1. Liners and adhesives.
- B. Shop Drawings:
 - 1. Fabrication, assembly, and installation, including plans, elevations, sections, components, and attachments to other work.
 - 2. Factory- and shop-fabricated ducts and fittings.
 - 3. Duct layout indicating sizes, configuration, liner material, and static-pressure classes.
 - 4. Elevation of top and bottom of ducts.
 - 5. Dimensions of all duct runs from building grid lines.
 - 6. Fittings.
 - 7. Reinforcement and spacing.
 - 8. Seam and joint construction.
 - 9. Penetrations through fire-rated and other partitions.
 - 10. Equipment installation based on equipment being used on Project.
 - 11. Locations for duct accessories, including dampers, turning vanes, and access doors and panels.
 - 12. Hangers and supports, including methods for duct and building attachment and vibration isolation.

1.4 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: A single set of plans or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Delegated Duct Design: Duct construction, including sheet metal thicknesses, seam and joint construction, reinforcements, and hangers and supports, comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" and with performance requirements and design criteria indicated in "Duct Schedule" Article.
- B. Structural Performance: Duct hangers and supports are to withstand the effects of gravity loads and stresses within limits and under conditions described in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible".

- C. Airstream Surfaces: Surfaces in contact with airstream comply with requirements in ASHRAE 62.1.
- D. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment," and Section 7 - "Construction and System Startup."
- E. ASHRAE/IES Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.4.4 - "HVAC System Construction and Insulation."
- F. Duct Dimensions: Unless otherwise indicated, all duct dimensions indicated on Drawings are inside clear dimensions and do not include insulation or duct wall thickness.

2.2 RECTANGULAR DUCTS AND FITTINGS

- A. Rectangular Ducts and Fittings - Single Wall:
 - 1. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" based on static-pressure class indicated on the Drawings.
 - a. Construct ducts of galvanized sheet steel.
 - 2. Transverse Joints: Fabricate joints in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-1, "Rectangular Duct/Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - a. For ducts with longest side less than 36 inches, select joint types in accordance with Figure 2-1.
 - b. For ducts with longest side 36 inches or greater, use flange joint connector Type T-22, T-24, T-24A, T-25a, or T-25b. Factory-fabricated flanged duct connection system may be used if submitted and approved by engineer of record.
 - 3. Longitudinal Seams: Select seam types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Duct/Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - 4. Elbows, Transitions, Offsets, Branch Connections, and Other Duct Construction: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 4, "Fittings and Other Construction," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.3 ROUND DUCTS AND FITTINGS

- A. Round Ducts and Fittings - Single Wall:
 - 1. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 3, "Round, Oval, and Flexible Duct," based on static-pressure class indicated on the Drawings.
 - a. Construct ducts of galvanized sheet steel.
 - 2. Transverse Joints: Select joint types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-1, "Round Duct Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - 3. Longitudinal Seams: Select seam types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-2, "Round Duct Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - 4. Tees and Laterals: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- B. Round Ducts and Fittings - Double Wall:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Wesco
 - b. Wichita Sheet Metal
2. Source Limitations: Obtain double-wall, round ducts and fittings from single manufacturer.
3. Outer Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 3, "Round, Oval, and Flexible Duct," based on static-pressure class indicated on the Drawings.
 - a. Construct ducts of galvanized sheet steel.
 - b. Tees and Laterals: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
4. Inner Duct: Minimum 24-gauge perforated galvanized sheet steel having 3/32-inch- diameter perforations, with overall open area of 23 percent.
5. Interstitial Insulation, Fibrous Glass: Duct liner complying with ASTM C1071, NFPA 90A, or NFPA 90B; and with NAIMA AH124, "Fibrous Glass Duct Liner Standard."
 - a. Maximum Thermal Conductivity: 0.27 Btu x in./h x sq. ft. x deg F at 75 deg F mean temperature.
 - b. Install spacers that position the inner duct at uniform distance from outer duct without compressing insulation.
 - c. Coat insulation with antimicrobial coating.
 - d. Cover insulation with polyester film complying with UL 181, Class 1.

2.4 FLAT-OVAL DUCTS AND FITTINGS

- A. Flat-Oval Ducts and Fittings - Double Wall:
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. WESCO
 - b. Wichita Sheet Metal
 2. Source Limitations: Obtain double-wall, flat-oval ducts and fittings from single manufacturer.
 3. Outer Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 3, "Round, Oval, and Flexible Duct," based on static-pressure class indicated on the Drawings.
 - a. Construct ducts of galvanized sheet steel.
 - b. Transverse Joints: Select joint types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-1, "Round Duct Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - c. Longitudinal Seams: Select seam types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-2, "Round Duct Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 - d. Tees and Laterals: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
 4. Inner Duct: Minimum **24-gauge** perforated galvanized sheet steel having 3/32-inch- diameter perforations, with overall open area of 23 percent.
 5. Interstitial Insulation, Fibrous Glass: Duct liner complying with ASTM C1071, NFPA 90A, or NFPA 90B; and with NAIMA AH124, "Fibrous Glass Duct Liner Standard."
 - a. Maximum Thermal Conductivity: 0.27 Btu x in./h x sq. ft. x deg F at **75 deg F** mean temperature.

- b. Install spacers that position the inner duct at uniform distance from outer duct without compressing insulation.
- c. Coat insulation with antimicrobial coating.
- d. Cover insulation with polyester film complying with UL 181, Class 1.

2.5 SHEET METAL MATERIALS

- A. General Material Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods. Sheet metal materials are to be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.
- B. Galvanized Sheet Steel: Comply with ASTM A653/A653M.
 - 1. Galvanized Coating Designation: G60.
 - 2. Finishes for Surfaces Exposed to View: Mill phosphatized.
 - 3. Lockforming Quality: Sheet steel and galvanized coating is to be able to be formed with back-to-back bends in seams such as the Pittsburgh lock at high speed without cracking or flaking of the coating on the outside of the bend.
- C. Reinforcement Shapes and Plates: ASTM A36/A36M, steel plates, shapes, and bars; black and galvanized.
- D. Tie Rods: Galvanized steel, 1/4-inch- minimum diameter for lengths 36 inches or less; 3/8-inch- minimum diameter for lengths longer than 36 inches.

2.6 DUCT LINER

- A. Flexible Elastomeric Duct Liner: Preformed, cellular, closed-cell, sheet materials complying with ASTM C534/C534M, Type II, Grade 1; and with NFPA 90A or NFPA 90B.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Aeroflex USA
 - b. Armacell LLC
 - c. K-Flex USA
 - 2. Source Limitations: Obtain flexible elastomeric duct liner from single manufacturer.
 - 3. Surface-Burning Characteristics: Maximum flame-spread index of 25 and maximum smoke-developed index of 50 when tested in accordance with UL 723; certified by an NRTL.
 - 4. Liner Adhesive: As recommended by insulation manufacturer and complying with NFPA 90A or NFPA 90B.
- B. Insulation Pins and Washers:
 - 1. Cupped-Head, Capacitor-Discharge-Weld Pins: Copper- or zinc-coated steel pin, fully annealed for capacitor-discharge welding, 0.106-inch- diameter shank, length to suit depth of insulation indicated with integral 1-1/2-inch galvanized carbon-steel washer.
 - 2. Insulation-Retaining Washers: Self-locking washers formed from 0.016-inch- thick galvanized steel; with beveled edge sized as required to hold insulation securely in place, but not less than 1-1/2 inches in diameter.
- C. Shop Application of Duct Liner: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 7-11, "Flexible Duct Liner Installation."
 - 1. Adhere a single layer of indicated thickness of duct liner with at least 90 percent adhesive coverage at liner contact surface area. Attaining indicated thickness with multiple layers of duct liner is prohibited.
 - 2. Apply adhesive to transverse edges of liner facing upstream that do not receive metal nosing.
 - 3. Butt transverse joints without gaps, and coat joint with adhesive.
 - 4. Fold and compress liner in corners of rectangular ducts or cut and fit to ensure butted-edge overlapping.
 - 5. Do not apply liner in rectangular ducts with longitudinal joints, except at corners of ducts, unless duct size and dimensions of standard liner make longitudinal joints necessary.

6. Secure liner with mechanical fasteners 4 inches from corners and at intervals not exceeding 12 inches transversely; at 3 inches from transverse joints and at intervals not exceeding 18 inches longitudinally.
7. Secure transversely oriented liner edges facing the airstream with metal nosings that have either channel or "Z" profiles or are integrally formed from duct wall. Fabricate edge facings at the following locations:
 - a. Fan discharges.
 - b. Intervals of lined duct preceding unlined duct.
8. Secure insulation between perforated sheet metal inner duct of same thickness as specified for outer shell. Use mechanical fasteners that maintain inner duct at uniform distance from outer shell without compressing insulation.
 - a. Sheet Metal Inner Duct Perforations: **3/32-inch** diameter, with an overall open area of 23 percent.
9. Terminate inner ducts with buildouts attached to fire-damper sleeves, dampers, turning vane assemblies, or other devices. Fabricated buildouts (metal hat sections) or other buildout means are optional; when used, secure buildouts to duct walls with bolts, screws, rivets, or welds.

2.7 SEALANTS AND GASKETS

- A. General Sealant and Gasket Requirements: Surface-burning characteristics for sealants and gaskets are to be a maximum flame-spread index of 25 and a maximum smoke-developed index of 50 when tested in accordance with UL 723; certified by an NRTL.
- B. Water-Based Joint and Seam Sealant:
 1. Application Method: Brush on.
 2. Solids Content: Minimum 65 percent.
 3. Shore A Hardness: Minimum 20.
 4. Water resistant.
 5. Mold and mildew resistant.
 6. VOC: Maximum 75 g/L (less water).
 7. Maximum Static-Pressure Class: 10-inch wg, positive and negative.
 8. Service: Indoor or outdoor.
 9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.
- C. Flanged Joint Sealant: Comply with ASTM C920.
 1. General: Single component, acid curing, silicone, elastomeric.
 2. Type: S.
 3. Grade: NS.
 4. Class: 25.
 5. Use: O.
- D. Flange Gaskets: Butyl rubber, neoprene, or EPDM polymer with polyisobutylene plasticizer.
- E. Round Duct Joint O-Ring Seals:
 1. Seal is to provide maximum leakage class of 3 cfm/100 sq. ft. at 1-inch wg and is to be rated for 10-inch wg static-pressure class, positive or negative.
 2. EPDM O-ring to seal in concave bead in coupling or fitting spigot.
 3. Double-lipped, EPDM O-ring seal, mechanically fastened to factory-fabricated couplings and fitting spigots.

2.8 HANGERS AND SUPPORTS

- A. Hanger Rods for Noncorrosive Environments: Galvanized-steel rods and nuts.
- B. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct."
- C. Steel Cables for Galvanized-Steel Ducts: Galvanized steel complying with ASTM A603.

- D. Steel Cable End Connections: Galvanized-steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.
- E. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.
- F. Trapeze and Riser Supports:
 - 1. Supports for Galvanized-Steel Ducts: Galvanized-steel shapes and plates.
 - 2. Supports for Stainless Steel Ducts: Stainless steel shapes and plates.
 - 3. Supports for Aluminum Ducts: Aluminum or galvanized steel coated with zinc chromate.
- G. Strut Support System for Ductwork - Metal, Cable Type:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. CADDY; brand of nVent Electrical plc
 - b. Gripple Inc.
 - 2. Source Limitations: Obtain metal cable type strut support system for ductwork from single manufacturer.
 - 3. Description: Factory-fabricated ductwork support system consisting of cable clamps, slotted channel brackets, wire-rope suspension components, and associated accessories for a complete ductwork suspension system. No tools required for manual assembly in the field to support ductwork routing.
 - 4. Components:
 - a. Brackets: Slotted steel channels furnished in pre-cut lengths to suit specific system application for Project.
 - b. Suspension Components: Hanging cables with adjustable fasteners.
 - 1) Wire Rope: High-tensile-steel wire rope, complying with ASTM A1023; lengths, diameters, and wire construction to accommodate design loads.
 - a) Foot attachment type to suit application.
 - b) End Fix Type: as required to suit application.

PART 3 - EXECUTION

3.1 INSTALLATION OF DUCTS

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of duct system. Indicated duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for air-handling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved on Shop Drawings and coordination drawings.
- B. Install ducts in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- C. Install ducts in maximum practical lengths with fewest possible joints.
- D. Install factory- or shop-fabricated fittings for changes in direction, size, and shape and for branch connections.
- E. Unless otherwise indicated, install ducts vertically and horizontally, and parallel and perpendicular to building lines.
- F. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building.
- G. Install ducts with a clearance of 1 inch, plus allowance for insulation thickness.
- H. Route ducts to avoid passing through computer server rooms, electrical equipment rooms and enclosures.
- I. Where ducts pass through non-fire-rated interior partitions and exterior walls and are exposed to view, cover the opening between the partition and duct or duct insulation with sheet metal flanges of same metal thickness as the duct. Overlap openings on four sides by at least 1-1/2 inches.

- J. Install fire, combination fire/smoke, and smoke dampers where indicated on Drawings and as required by code, and by local authorities having jurisdiction. Comply with requirements in Section 233300 "Air Duct Accessories" for fire and smoke dampers and specific installation requirements of the damper UL listing.
- K. Install heating coils, cooling coils, air filters, dampers, and all other duct-mounted accessories in air ducts where indicated on Drawings.
- L. Protect duct interiors from moisture, construction debris and dust, and other foreign materials both before and after installation. Comply with SMACNA's "IAQ Guidelines for Occupied Buildings Under Construction," Appendix G, "Duct Cleanliness for New Construction Guidelines."
- M. Elbows: Use long-radius elbows wherever they fit.
 - 1. Fabricate 90-degree rectangular mitered elbows to include turning vanes.
 - 2. Fabricate 90-degree round elbows with a minimum of three segments for 12 inches and smaller and a minimum of five segments for 14 inches and larger.
- N. Branch Connections: Use lateral or conical branch connections.
- O. Installation of Metal, Cable-Type Strut Support System for Ductwork: Install in accordance with manufacturer's written installation instructions.

3.2 INSTALLATION OF EXPOSED DUCTWORK

- A. Protect ducts exposed in finished spaces from being dented, scratched, or damaged.
- B. Trim duct sealants flush with metal. Create a smooth and uniform exposed bead. Do not use two-part tape sealing system.
- C. Grind welds to provide smooth surface free of burrs, sharp edges, and weld splatter. When welding stainless steel with a No. 3 or 4 finish, grind the welds flush, polish the exposed welds, and treat the welds to remove discoloration caused by welding.
- D. Maintain consistency, symmetry, and uniformity in arrangement and fabrication of fittings, hangers and supports, duct accessories, and air outlets.
- E. Repair or replace damaged sections and finished work that does not comply with these requirements.

3.3 DUCT SEALING

- A. Seal ducts for duct static-pressure, seal classes, and leakage classes specified in "Duct Schedule" Article in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

3.4 INSTALLATION OF HANGERS AND SUPPORTS

- A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 5, "Hangers and Supports."
- B. Building Attachments: Concrete expansion anchors, fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.
 - 1. Do not use powder-actuated concrete fasteners.
- C. Hanger Spacing: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct," for maximum hanger spacing; install hangers and supports within 24 inches of each elbow and within 48 inches of each branch intersection.
- D. Hangers Exposed to View: Threaded rod and angle or channel supports.
- E. Support vertical ducts with steel angles or channel secured to the sides of the duct with welds, bolts, sheet metal screws, or blind rivets; support at each floor and at a maximum intervals of 16 ft..
- F. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.5 DUCTWORK CONNECTIONS

- A. Make connections to equipment with flexible connectors complying with Section 233300 "Air Duct Accessories."
- B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for branch, outlet and inlet, and terminal unit connections.

3.6 PAINTING

- A. Paint interior of metal ducts that are visible through registers and grilles and that do not have duct liner. Apply one coat of flat, black, latex paint over a compatible galvanized-steel primer. Paint materials and application requirements are specified in Section 09900 "Painting".

3.7 DUCT CLEANING

- A. Clean new duct system(s) before testing, adjusting, and balancing.
- B. Use service openings for entry and inspection.
 - 1. Provide openings with access panels appropriate for duct static-pressure and leakage class at dampers, coils, and any other locations where required for inspection and cleaning access. Provide insulated panels for insulated or lined duct. Patch insulation and liner as recommended by duct liner manufacturer. Comply with Section 233300 "Air Duct Accessories" for access panels and doors.
 - 2. Disconnect and reconnect flexible ducts as needed for cleaning and inspection.
 - 3. Remove and reinstall ceiling to gain access during the cleaning process.
- C. Particulate Collection and Odor Control:
 - 1. When venting vacuuming system inside the building, use HEPA filtration with 99.97 percent collection efficiency for 0.3-micron-size (or larger) particles.
 - 2. When venting vacuuming system to outdoors, use filter to collect debris removed from HVAC system, and locate exhaust downwind and away from air intakes and other points of entry into building.
- D. Clean the following components by removing surface contaminants and deposits:
 - 1. Air outlets and inlets (registers, grilles, and diffusers).
 - 2. Supply, return, and exhaust fans including fan housings, plenums (except ceiling supply and return plenums), scrolls, blades or vanes, shafts, baffles, dampers, and drive assemblies.
 - 3. Air-handling unit internal surfaces and components including mixing box, coil section, air wash systems, spray eliminators, condensate drain pans, humidifiers and dehumidifiers, filters and filter sections, and condensate collectors and drains.
 - 4. Coils and related components.
 - 5. Return-air ducts, dampers, actuators, and turning vanes except in ceiling plenums and mechanical equipment rooms.
 - 6. Supply-air ducts, dampers, actuators, and turning vanes.
 - 7. Dedicated exhaust and ventilation components and makeup air systems.
- E. Mechanical Cleaning Methodology:
 - 1. Clean metal duct systems using mechanical cleaning methods that extract contaminants from within duct systems and remove contaminants from building.
 - 2. Use vacuum-collection devices that are operated continuously during cleaning. Connect vacuum device to downstream end of duct sections so areas being cleaned are under negative pressure.
 - 3. Use mechanical agitation to dislodge debris adhered to interior duct surfaces without damaging integrity of metal ducts, duct liner, or duct accessories.
 - 4. Clean coils and coil drain pans in accordance with NADCA ACR. Keep drain pan operational. Rinse coils with clean water to remove latent residues and cleaning materials; comb and straighten fins.
 - 5. Provide drainage and cleanup for wash-down procedures.

3.8 STARTUP

- A. Air Balance: Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

3.9 DUCT SCHEDULE

- A. Fabricate ducts with galvanized sheet steel except as otherwise indicated and as follows:
 - 1. Fabricate all ducts to achieve SMACNA pressure class, seal class, and leakage class as indicated below.
- B. Supply Ducts:
 - 1. Ducts Connected to Fan Coil Units, Furnaces, Heat Pumps, and Terminal Units:
 - a. Pressure Class: Positive 1-inch wg.
- C. Return Ducts:
 - 1. Ducts Connected to Fan Coil Units, Furnaces, Heat Pumps, and Terminal Units:
 - a. Pressure Class: Positive or negative 1-inch wg.
- D. Exhaust Ducts:
 - 1. Ducts Connected to Fans Exhausting (ASHRAE 62.1, Class 1 and 2) Air:
 - a. Pressure Class: Negative 1-inch wg.
- E. Outdoor-Air (Not Filtered, Heated, or Cooled) Ducts:
 - 1. Ducts Connected to Fan Coil Units, Furnaces, Heat Pumps, and Terminal Units:
 - a. Pressure Class: Positive or negative 1-inch wg.
- F. Intermediate Reinforcement:
 - 1. Galvanized-Steel Ducts: Galvanized steel.
- G. Liner:
 - 1. ½" thick elastomeric duct liner shall be applied to all supply and return ducts within 10' of fan coil units. Where equipment uses supply and return plenums, plenums shall be lined and round branch runouts shall be unlined.
 - 2. ½" thick elastomeric duct liner shall be applied to all supply and exhaust (intake) ducts within 10' of dedicated outside air units. Where equipment uses supply and return plenums, plenums shall be lined and round branch runouts shall be unlined.
 - 3. ½" thick elastomeric duct liner shall be applied to all transfer ducts.
- H. Elbow Configuration:
 - 1. Rectangular Duct - Requirements for Different Velocities: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-2, "Rectangular Elbows."
 - a. Velocity 1000 fpm (5 m/s) or Lower:
 - 1) Radius Type RE 1 with minimum 0.5 radius-to-diameter ratio.
 - 2) Mitered Type RE 4 without vanes.
 - b. Velocity 1000 to 1500 fpm (5 to 7.6 m/s):
 - 1) Radius Type RE 1 with minimum 1.0 radius-to-diameter ratio.
 - 2) Radius Type RE 3 with minimum 0.5 radius-to-diameter ratio and two vanes.
 - 3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."
 - c. Velocity 1500 fpm (7.6 m/s) or Higher:
 - 1) Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
 - 2) Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
 - 3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."
 - 2. Rectangular Duct - Requirements for All Velocities: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-2, "Rectangular Elbows."
 - a. Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
 - b. Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.

- c. Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."
 - 3. Round Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-4, "Round Duct Elbows."
 - a. Minimum Radius-to-Diameter Ratio and Elbow Segments: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 3-1, "Mitered Elbows." Elbows with less than 90-degree change of direction have proportionately fewer segments.
 - 1) Velocity 1000 fpm (5 m/s) or Lower: 0.5 radius-to-diameter ratio and three segments for 90-degree elbow.
 - 2) Velocity 1000 to 1500 fpm (5 to 7.6 m/s): 1.0 radius-to-diameter ratio and four segments for 90-degree elbow.
 - 3) Velocity 1500 fpm (7.6 m/s) or Higher: 1.5 radius-to-diameter ratio and five segments for 90-degree elbow.
 - 4) Radius-to-Diameter Ratio: 1.5.
 - b. Round Elbows:
 - 1) Stamped or pleated for 12 inches and smaller diameters.
 - 2) Standing seam for 14 inches and larger diameter.
- I. Branch Configuration:
 - 1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-6, "Branch Connection."
 - a. Rectangular Main to Rectangular Branch: 45-degree entry.
 - b. Rectangular Main to Round Branch: Conical spin in.
 - 2. Round and Flat Oval: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees." Saddle taps are permitted in existing duct.
 - a. Velocity 1000 fpm (5 m/s) or Lower: 90-degree tap.
 - b. Velocity 1000 to 1500 fpm (5 to 7.6 m/s): Conical tap.
 - c. Velocity 1500 fpm (7.6 m/s) or Higher: 45-degree lateral.

END OF SECTION 233113

SECTION 233116 - NONMETAL DUCTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Phenolic-foam ducts and fittings.
- B. Related Requirements:
 - 1. Section 233113 "Metal Ducts" for single- and double-wall, rectangular and round ducts.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of the following products:
 - 1. Phenolic-foam duct materials.
- B. Shop Drawings:
 - 1. Fabrication, assembly, and installation, including plans, elevations, sections, components, and attachments to other work.
 - 2. Duct layout indicating sizes and pressure classes.
 - 3. Elevation of top of ducts.
 - 4. Fittings.
 - 5. Reinforcement and spacing.
 - 6. Seam and joint construction.
 - 7. Equipment installation based on equipment being used on Project.
 - 8. Hangers and supports, including methods for duct and building attachment and vibration isolation.

1.3 QUALITY ASSURANCE

- A. Hanger and Support Welding Qualifications: Qualify procedures and personnel according to the following:
 - 1. AWS D1.1/D1.1M, "Structural Welding Code - Steel," for steel hangers and supports.
 - 2. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum," for aluminum hangers and supports.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1, Section 5.4 - "Airstream Surfaces."
- B. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and System Start-up."
- C. ASHRAE/IES Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.4.4 - "HVAC System Construction and Insulation."
- D. NFPA Compliance:
 - 1. NFPA 90A, "Installation of Air Conditioning and Ventilating Systems."
 - 2. NFPA 90B, "Installation of Warm Air Heating and Air Conditioning Systems."

2.2 PHENOLIC-FOAM DUCTS AND FITTINGS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Kingspan Insulation LLC
 - 2. Therma duct
- B. Duct Panel: CFC-free phenolic-foam bonded on both sides with factory-applied, 0.001-inch- thick, aluminum foil reinforced with fiberglass scrim. For exterior applications, an added UV stable, IR reflective 1000-micron high impact resistant titanium infused vinyl is factory bonded using a full lamination process. The lamination process shall permanently bond the vinyl clad to the outer surfaces of the phenolic foam panel to provide a zero-permeability water tight barrier and to form a structurally

insulated panel (SIP) in which to form duct segments. Processes that do not employ a full lamination process are not acceptable. Self-applied adhesives such as tapes, caulks or cladding that incorporate pressure sensitive or spray adhesives are not acceptable.

1. Temperature Limits:
 - a. Maximum 185 deg F.
 - b. Minimum: Minus 4 deg F.
2. Maximum Thermal Conductivity: 0.146 Btu x in./h x sq. ft. x deg F at 75 deg F mean temperature.
3. Permeability: 0.00 perm maximum when tested according to ASTM E96/E96M, Procedure A.
4. Antimicrobial Agent: Additive for antimicrobial shall not be used but instead, raw product must pass UL bacteria growth testing.
5. Fire/Smoke Resistance: Duct material shall comply with UL 181, Class 1, maximum flame-spread index of 25 and maximum smoke-developed index of 50 when tested by an NRTL according to ASTM E84.
6. Required Markings: UL label and other markings required by UL 181 on each full sheet of duct panel; UL ratings for closure materials.

C. Closure Materials:

1. V-Groove Adhesive: Silicone.
2. Pressure-Sensitive Tape: Comply with UL 181A; imprinted by manufacturer with coding "181A-P," manufacturer's name, and a date code. Tape shall be used for indoor applications only.
 - a. Tape: Aluminum foil tape imprinted with listing information.
 - b. Minimum Tape Width: **3 inches**.
 - c. Water resistant.
 - d. Mold and mildew resistant.
3. Polymeric Sealing System:
 - a. Structural Membrane: Woven glass fiber.
 - b. Minimum Tape Width: 3 inches.
 - c. Sealant: Water based.
 - d. Color: White.
 - e. Water resistant.
 - f. Mold and mildew resistant.

D. Fabrication:

1. Fabricate joints, seams, transitions, reinforcement, elbows, branch connections, access doors and panels, and damage repairs according manufacturer's written instructions.
2. Fabricate 90-degree mitered elbows to include turning vanes.

2.3 HANGERS AND SUPPORTS

- A. Hanger Rods for Noncorrosive Environments: Zinc-plated steel rods and nuts.
- B. Hanger Rods for Corrosive Environments: Electrogalvanized, all-thread rods or galvanized rods with threads painted with zinc-chromate primer after installation.
- C. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct."
- D. Steel Cables: ASTM A492, stainless-steel cables with end connections made of stainless-steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.
- E. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.
- F. Trapeze and Riser Supports: Steel shapes complying with ASTM A36/A36M.

PART 3 - EXECUTION

3.1 DUCT INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of duct system. Indicated duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for air-handling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved on Shop Drawings and Coordination Drawings.
- B. Install duct sections in maximum practical lengths with fewest possible joints.
- C. Install factory- or shop-fabricated fittings for changes in direction, size, and shape and for branch connections.
- D. Unless otherwise indicated, install ducts vertically and horizontally, and parallel and perpendicular to building lines.
- E. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building.
- F. Install ducts with a minimum clearance of 1 inch, plus allowance for insulation thickness.
- G. Route ducts to avoid passing through transformer vaults and electrical equipment rooms and enclosures.
- H. Protect duct interiors from moisture, construction debris and dust, and other foreign materials both before and after installation.
- I. Elbows: Use long-radius elbows wherever they fit.
 - 1. Fabricate 90-degree rectangular mitered elbows to include turning vanes, and 90-degree round elbows with a minimum of three segments for 12 inches and smaller and a minimum of five segments for 14 inches and larger.
- J. Branch Connections: Use lateral or conical branch connections.
- K. Install phenolic-foam ducts and fittings to comply with SMACNA's "Phenolic Duct Construction Standards."

3.2 HANGER AND SUPPORT INSTALLATION

- A. Install hangers and supports for phenolic-foam ducts and fittings to comply with SMACNA's "Phenolic Duct Construction Standards" Ch. 6, "Hangers and Supports" and with manufacturer's written instructions.
- B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.
 - 1. Install concrete inserts before placing concrete.
 - 2. Do not use powder-actuated concrete.
- C. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.3 DUCT SCHEDULE

- A. Indoor Ducts and Fittings:
 - 1. Phenolic-Foam Rectangular Ducts and Fittings:
 - a. Minimum Panel Thickness: 7/8 inch.
 - b. Joints: Secure joints with adhesive or clips according to duct manufacturer's written instructions, then tape joints with aluminum vapor tape.
 - c. Sealing: All joints shall be sealed with a generous and continuous bead of silicone sealant and pressed into corners using a smooth radius tool.
- B. Outdoor Ducts and Fittings:
 - 1. Phenolic-Foam Rectangular Ducts and Fittings:
 - a. Minimum Panel Thickness: 1-3/32 inches.

END OF SECTION 233116

SECTION 233300 - AIR DUCT ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Manual volume dampers.
 - 2. Flange connectors.
 - 3. Turning vanes.
 - 4. Remote damper operators.
 - 5. Flexible connectors.
 - 6. Duct accessory hardware.
 - 7. Flexible ducts, insulated.
 - 8. Flexible duct connectors.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Construction details, material descriptions, and dimensions of individual components.
 - 2. For dampers, include housings, linkages, and operators.
 - 3. For damper operators, include electrical or pneumatic pressure rating and damper size rating.
- B. Shop Drawings: For air duct accessories.
 - 1. Plans showing locations, elevations, sections, and attachment details.
 - 2. Duct accessories' fabrication and installation in ducts and other construction. Include dimensions, weights, loads, and required clearances; and method of field assembly into duct systems and other construction. Include the following:
 - a. Special fittings.
 - b. Manual volume damper installations.

1.3 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Reflected ceiling plans, or BIM model, drawn to scale, on which ceiling-mounted access panels and access doors required for access to duct accessories are shown and coordinated with each other, using input from installers of the items involved.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For air duct accessories.

PART 2 - PRODUCTS

2.1 MANUAL VOLUME DAMPERS

- A. Standard, Steel, Manual Volume Dampers:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Ruskin; Air Distribution Technologies, Inc.
 - b. Air Balance; MESTEK, Inc.
 - c. Aire Technologies, Inc.; DMI Companies
 - d. American Warming and Ventilating (AWV); Mestek, Inc.
 - e. Arrow United Industries; Mestek, Inc.
 - f. Cesco Products; MESTEK, Inc.
 - g. Greenheck Fan Corporation
 - h. Lloyd Industries, Inc.
 - i. McGill AirFlow LLC
 - j. Nailor Industries Inc
 - k. NCA Manufacturing, Inc.; Metal Industries, Inc.
 - l. Pottorff
 - m. Safe Air - Dowco

- n. United Enertech Corp.
 - o. Vent Products Co., Inc
- 2. Performance:
 - a. Leakage Rating Class III: Leakage not exceeding 40 cfm/sq. ft. against 1 inch wg differential static pressure.
- 3. Construction:
 - a. Linkage out of airstream.
 - b. Suitable for horizontal or vertical airflow applications.
- 4. Frames:
 - a. Hat-shaped, 16-gauge- thick, galvanized sheet steel.
 - b. Mitered and welded corners.
 - c. Flanges for attaching to walls and flangeless frames for installing in ducts.
- 5. Blades:
 - a. Multiple or single blade.
 - b. Parallel- or opposed-blade design.
 - c. Stiffen damper blades for stability.
 - d. Galvanized steel; 16 gauge thick.
- 6. Blade Axles: Nonferrous metal.
- 7. Bearings: Oil-impregnated bronze.
 - a. Dampers mounted with vertical blades to have thrust bearing at each end of every blade.
- 8. Tie Bars and Brackets: Galvanized steel.
- 9. Locking device to hold damper blades in a fixed position without vibration.
- B. Jackshaft:
 - 1. Size: diameter.
 - 2. Material: Galvanized-steel pipe rotating within pipe-bearing assembly mounted on supports at each mullion and at each end of multiple-damper assemblies.
 - 3. Length and Number of Mountings: As required to connect linkage of each damper in multiple-damper assembly.
- C. Damper Hardware:
 - 1. Zinc-plated, die-cast core with dial and handle, made of 3/32-inch- thick zinc-plated steel, and a 3/4-inch hexagon locking nut.
 - 2. Include center hole to suit damper operating-rod size.
 - 3. Include elevated platform for insulated duct mounting.

2.2 FLANGE CONNECTORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. CL WARD & Family Inc.
 - 2. Ductmate Industries, Inc; a DMI company
 - 3. DynAir; a Carlisle Company
 - 4. Elgen Manufacturing
 - 5. Ward Industries; a brand of Hart & Cooley, LLC
- B. Description: Add-on or roll-formed, factory-fabricated, slide-on transverse flange connectors, gaskets, and components.
- C. Material: Galvanized steel.
- D. Gauge and Shape: Match connecting ductwork.

2.3 TURNING VANES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Aero-Dyne Sound Control Co.
 - 2. CL WARD & Family Inc.
 - 3. Ductmate Industries, Inc; a DMI company
 - 4. Duro Dyne Inc.
 - 5. DynAir; a Carlisle Company

6. Elgen Manufacturing
 7. Ward Industries; a brand of Hart & Cooley, LLC
- B. Manufactured Turning Vanes for Metal Ducts: Fabricate curved blades of galvanized sheet steel; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.
1. Turning Vanes: Fabricate single -wall curved blades of galvanized steel.
- C. General Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."
- D. Vane Construction:
1. Wall: Single.

2.4 REMOTE DAMPER OPERATORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. DynAir; a Carlisle Company
 2. METALAIRE, Inc
 3. United Enertech Corp.
 4. Young Regulator Company
- B. Description: Cable system designed for remote manual damper adjustment.
- C. Tubing: Brass.
- D. Cable: Stainless steel.
- E. Wall-Box Mounting: Recessed.
- F. Wall-Box Cover-Plate Material: Stainless steel.

2.5 DUCT FLEXIBLE CONNECTORS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. CL WARD & Family Inc.
 2. Ductmate Industries, Inc; a DMI company
 3. Duro Dyne Inc.
 4. DynAir; a Carlisle Company
 5. Elgen Manufacturing
 6. Ventfabrics, Inc
 7. Ward Industries; a brand of Hart & Cooley, LLC
- B. Fire-Performance Characteristics: Adhesives, sealants, fabric materials, and accessory materials are to have flame-spread index not exceeding 25 and smoke-developed index not exceeding 50 when tested in accordance with ASTM E84.
- C. Airstream Surfaces: Surfaces in contact with the airstream are to comply with requirements in ASHRAE 62.1.
- D. Materials: Flame-retardant or noncombustible fabrics.
- E. Coatings and Adhesives: Comply with UL 181, Class 1.
- F. Metal-Edged Connectors: Factory fabricated with a fabric strip 3-1/2 inches wide attached to two strips of 2-3/4-inch- wide, 0.028-inch- thick, galvanized sheet steel or 0.032-inch- thick aluminum sheets. Provide metal compatible with connected ducts.
- G. Indoor System, Duct Flexible Connector Fabric: Glass fabric double coated with neoprene.
1. Minimum Weight: 26 oz./sq. yd..
 2. Tensile Strength: 480 lbf/inch in the warp and 360 lbf/inch in the filling.
 3. Service Temperature: Minus 40 to plus 200 deg F.

2.6 DUCT ACCESSORY HARDWARE

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. CL WARD & Family Inc.
 - 2. Ductmate Industries, Inc; a DMI company
 - 3. Duro Dyne Inc.
 - 4. DynAir; a Carlisle Company
 - 5. Elgen Manufacturing
 - 6. Hardcast; Carlisle Construction Materials
 - 7. United Enertech Corp.
 - 8. Ventfabrics, Inc
 - 9. Ward Industries; a brand of Hart & Cooley, LLC
- B. Instrument Test Holes: Cast iron or cast aluminum to suit duct material, including screw cap and gasket. Size to allow insertion of pitot tube and other testing instruments and of length to suit duct-insulation thickness.
- C. Adhesives: High strength, quick setting, neoprene based, waterproof, and resistant to gasoline and grease.

2.7 MATERIALS

- A. Galvanized Sheet Steel: Comply with ASTM A653/A653M.
 - 1. Galvanized Coating Designation: G60.
 - 2. Exposed-Surface Finish: Mill phosphatized.
- B. Extruded Aluminum: Comply with ASTM B221, Alloy 6063, Temper T6.
- C. Reinforcement Shapes and Plates: Galvanized-steel reinforcement where installed on galvanized sheet metal ducts; compatible materials for aluminum and stainless steel ducts.
- D. Tie Rods: Galvanized steel, 1/4-inch minimum diameter for lengths 36 inches or less; 3/8-inch minimum diameter for lengths longer than 36 inches.

2.8 FLEXIBLE DUCTS, INSULATED

- A. Standard: Product is to be UL 181 listed and bearing the UL label.
- B. Flexible Ducts, Insulated - Class 1, Two-Ply Vinyl Film Supported by Helically Wound, Spring-Steel Wire; Fibrous-Glass Insulation:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ATCO Rubber Products, Inc.
 - b. Flexmaster U.S.A., Inc
 - c. JP Lamborn Co.
 - 2. Pressure Rating: 10 inch wg positive and 1.0 inch wg negative.
 - 3. Maximum Air Velocity: 4000 fpm.
 - 4. Temperature Range: Minus 10 to plus 160 deg F.
 - 5. Insulation R-Value: R4.2.
 - 6. Vapor-Barrier Film: Polyethylene, ASTM E96/E96M.
- C. Flexible Ducts, Insulated - Class 1, Black Polymer Film Supported by Helically Wound, Spring-Steel Wire; Fibrous-Glass Insulation:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CASCO C.A. Schroeder, Inc.
 - b. Flexmaster U.S.A., Inc
 - c. JP Lamborn Co.
 - d. Thermaflex; a Flex-Tek Group company
 - 2. Pressure Rating: 4 inch wg positive and 0.5 inch wg negative.
 - 3. Maximum Air Velocity: 4000 fpm.
 - 4. Temperature Range: Minus 20 to plus 175 deg F.

5. Insulation R-Value: R4.2.
6. Vapor-Barrier Film: Polyethylene, ASTM E96/E96M.

2.9 FLEXIBLE DUCT CONNECTORS

- A. Clamps: Nylon strap in sizes 3 through 18 inches, to suit duct size.
- B. Non-Clamp Connectors: Adhesive plus sheet metal screws.

PART 3 - EXECUTION

3.1 INSTALLATION OF AIR DUCT ACCESSORIES

- A. Install duct accessories in accordance with applicable details in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts and in NAIMA AH116 for fibrous-glass ducts.
- B. Install duct accessories of materials suited to duct materials; use galvanized-steel accessories in galvanized-steel and fibrous-glass ducts, stainless steel accessories in stainless steel ducts, and aluminum accessories in aluminum ducts.
- C. Install volume dampers at points on supply, return, and exhaust systems where branches extend from larger ducts. Where dampers are installed in ducts having a duct liner, install dampers with hat channels of same depth as liner, and terminate liner with nosing at hat channel. Dampers may not be indicated on drawings but shall be provided regardless, unless specifically noted to be omitted.
 1. Install steel volume dampers in steel ducts.
- D. Set dampers to fully open position before testing, adjusting, and balancing.
- E. Install test holes at fan inlets and outlets and elsewhere as indicated and as needed for testing and balancing.
- F. Install flexible connectors to connect ducts to equipment.
- G. Install duct test holes where required for testing and balancing purposes.
- H. Install flexible ducts in accordance with applicable details in the following publications:
 1. ADC's "Flexible Duct Performance & Installation Standards" for flexible ducts.
 2. NAIMA AH116.
 3. SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts.
 4. SMACNA's "Fibrous Glass Duct Construction Standards" for fibrous-glass ducts.
- I. Connect diffusers to ducts directly or with maximum 60-inch lengths of flexible duct clamped or strapped in place.
- J. Connect flexible ducts to metal ducts with draw bands, adhesive plus sheet metal screws.
- K. Installation of Flexible Ducts:
 1. Install ducts fully extended.
 2. Do not bend ducts across sharp corners.
 3. Bends of flexible ducting must not exceed a minimum of one-duct diameter.
 4. Avoid contact with metal fixtures, water lines, pipes, or conduits.
 5. Install flexible ducts in a direct line, without sags, twists, or turns.
 6. Install in accordance with ADC instructions.
 7. Do not install above inaccessible ceilings.
 8. Do not install where exposed.
- L. Supporting Flexible Ducts:
 1. Support flexible duct at manufacturer's recommended intervals, but at no greater distance than 4 ft.. Provide sufficient support so that maximum centerline sag is 1/2 inch per ft. between supports. A connection to rigid duct or equipment may be considered a support joint.
 2. Install extra supports at bends placed approximately one-duct diameter from center line of the bend.
 3. Ducts may not rest on ceilings.

3.2 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Operate dampers to verify full range of movement.
 - 2. Inspect turning vanes for proper and secure installation, and verify that vanes do not move or rattle.
 - 3. Operate remote damper operators to verify full range of movement of operator and damper.

END OF SECTION 233300

SECTION 233713.13 - AIR DIFFUSERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Diffusers - louver face.
 - 2. Diffusers - ceiling-integral plenum slot.
- B. Related Requirements:
 - 1. Section 233300 "Air Duct Accessories" for volume-control dampers not integral to diffusers.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. For each type of product.
 - a. Data Sheet: Indicate materials of construction, finish, and mounting details; and performance data including throw and drop, static-pressure drop, and noise ratings.
 - b. Diffuser Schedule: Indicate drawing designation, room location, quantity, model number, size, and accessories furnished.

PART 2 - PRODUCTS

2.1 CEILING DIFFUSERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Carnes Company
 - 2. Krueger-HVAC
 - 3. Nailor Industries
 - 4. Price Industries
 - 5. Titus
- B. Source Limitations: Obtain from single source from single manufacturer.
- C. Finish: Baked enamel, white unless indicated otherwise.
- D. Mounting: Ceiling, surface, or direct. Provide accessories and frame styles required for installation at each location.
- E. See schedule on drawings.

2.2 SOURCE QUALITY CONTROL

- A. Verification of Performance: Rate diffusers in accordance with ASHRAE 70.

PART 3 - EXECUTION

3.1 INSTALLATION OF AIR DIFFUSERS

- A. Install diffusers level and plumb.
- B. Ceiling-Mounted Outlets and Inlets: For units installed in lay-in ceiling panels, locate units in the center of panel. Where architectural features or other items conflict with installation, notify Architect for a determination of final location.
- C. Install diffusers with airtight connections to ducts and to allow service and maintenance of dampers, air extractors, and fire dampers.

3.2 ADJUSTING

- A. After installation, adjust diffusers to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION 233713.13

SECTION 233713.23 - REGISTERS AND GRILLES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Registers
 - 2. Grilles
- B. Related Requirements:
 - 1. Section 233300 "Air Duct Accessories" for volume-control dampers not integral to registers and grilles.
 - 2. Section 233713.13 "Air Diffusers" for various types of air diffusers.

1.2 ACTION SUBMITTALS

- A. Product Data:
 - 1. For each type of product.
 - a. Data Sheet: Indicate materials of construction, finish, and mounting details; and performance data including throw and drop, static-pressure drop, and noise ratings.
 - b. Register and Grille Schedule: Indicate drawing designation, room location, quantity, model number, size, and accessories furnished.

PART 2 - PRODUCTS

2.1 REGISTERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Carnes Company
 - 2. Krueger-HVAC
 - 3. Nailor Industries
 - 4. Price Industries
 - 5. Titus
- B. Source Limitations: Obtain from single source from single manufacturer.
- C. Finish: Baked enamel, white unless indicated otherwise.
- D. Mounting: Ceiling, surface, or direct. Provide accessories and frame styles required for installation at each location.
- E. See schedule on drawings.

2.2 GRILLES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Carnes Company
 - 2. Krueger-HVAC
 - 3. Nailor Industries
 - 4. Price Industries
 - 5. Titus
- B. Source Limitations: Obtain from single source from single manufacturer.
- C. Finish: Baked enamel, white unless indicated otherwise.
- D. Mounting: Ceiling, surface, or direct. Provide accessories and frame styles required for installation at each location.
- E. See schedule on drawings.

2.3 SOURCE QUALITY CONTROL

- A. Verification of Performance: Rate registers and grilles in accordance with ASHRAE 70.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas where registers and grilles are installed for compliance with requirements for installation tolerances and other conditions affecting performance of equipment.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF REGISTERS AND GRILLES

- A. Install registers and grilles level and plumb.
- B. Outlets and Inlets Locations: Drawings indicate general arrangement of ducts, fittings, and accessories. Air outlet and inlet locations have been indicated to achieve design requirements for air volume, noise criteria, airflow pattern, throw, and pressure drop. Make final locations where indicated. For units installed in lay-in ceiling panels, locate units in the center of panel. Where architectural features or other items conflict with installation, notify Architect for a determination of final location.
- C. Install registers and grilles with airtight connections to ducts and to allow service and maintenance of dampers and air extractors.

3.3 ADJUSTING

- A. After installation, adjust registers and grilles to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION 233713.23

SECTION 237416.11 - PACKAGED ROOFTOP AIR-CONDITIONING UNITS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Packaged rooftop air-conditioning units.

1.2 DEFINITIONS

- A. RTU: Rooftop unit. As used in this Section, this abbreviation means packaged rooftop air-conditioning units. This abbreviation is used regardless of whether the unit is mounted on the roof or on a concrete base on ground.

1.3 ACTION SUBMITTALS

- A. Product Data: For each RTU.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 2. Include rated capacities, dimensions, required clearances, characteristics, and furnished specialties and accessories.
 - 3. Include unit dimensions and weight.
 - 4. Include cabinet material, metal thickness, finishes, insulation, and accessories.
 - 5. Fans:
 - a. Include certified fan-performance curves with system operating conditions indicated.
 - b. Include certified fan-sound power ratings.
 - c. Include fan construction and accessories.
 - d. Include motor ratings, electrical characteristics, and motor accessories.
 - 6. Include certified coil-performance ratings with system operating conditions indicated.
 - 7. Include filters with performance characteristics.
 - 8. Include gas furnaces with performance characteristics.
 - 9. Include dampers, including housings, linkages, and operators.
- B. Shop Drawings: For each packaged rooftop air-conditioning unit.
 - 1. Include plans, elevations, sections, and mounting details.
 - 2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 3. Include diagrams for power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Floor plans and other details, or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.
- B. Source quality control reports.
- C. System startup reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For RTUs.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Extra Stock Material: Furnish extra materials to Owner that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Filters: One set(s) of filters for each unit.
 - 2. Gaskets: One set(s) for each access door.

1.7 WARRANTY

- A. Warranty: Manufacturer agrees to repair or replace components of packaged rooftop air-conditioning unit that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: Three year(s) from date of Substantial Completion.
 - 2. Warranty Period for Compressors: Manufacturer's standard, but not less than five years from date of Substantial Completion.
 - 3. Warranty Period for Heat Exchangers: Manufacturer's standard, but not less than years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.
- B. NFPA Compliance: Comply with NFPA 90A for design, fabrication, and installation of RTUs and components.
- C. ASHRAE 15 Compliance: For refrigeration system safety.

2.2 CAPACITIES AND CHARACTERISTICS

- A. See schedule on drawings.

2.3 PACKAGED ROOFTOP AIR-CONDITIONING UNITS

- A. **BASIS OF DESIGN AND ALTERNATE MANUFACTURERS:**
 - 1. Equipment scheduled and specified is based on Trane products and establishes the required performance, configuration, dimensions, weights, service clearances, utility connections, roof openings, curb requirements, and other physical characteristics. Products by other manufacturers will be considered only when submitted to and approved by the Engineer **prior to bid**. Requests for approval shall include complete equipment selections, certified dimensional drawings, operating weights, center-of-gravity information where applicable, roof curb dimensions and required roof openings, service and maintenance clearances, electrical characteristics, gas and condensate connection locations, duct connection sizes and locations, performance data, and identification of all deviations from the Basis-of-Design equipment. Approval of an alternate manufacturer does not relieve the Contractor of responsibility for coordination with the building structure, roof framing, roofing system, ductwork, piping, electrical systems, controls, access, or other Work. Costs associated with modifications required to accommodate approved alternate equipment, including changes to roof openings, curbs, structural framing, ductwork, piping, electrical service, controls, or other systems, shall be included in the Contractor's Bid with no additional cost to the Owner.
- B. Source Limitations: Obtain packaged rooftop air-conditioning units from single manufacturer.
- C. Unit Casings:
 - 1. Unit casing shall be zinc coated, heavy gauge, galvanized steel.
 - a. Weather resistant painted metal with galvanized substrate.
 - b. Meets ASTM B117 672 hour salt spray test.
 - 2. Airstream Surfaces: Exposed vertical panels and top covers in the indoor air section insulated with a cleanable foil-faced, fire-retardant permanent, odorless glass fiber material.
 - 3. Panels and Doors:
 - a. Doors:
 - 1) Hinges: A minimum of two ball-bearing hinges or stainless steel piano hinges and two wedge-lever-type latches, operable from inside and outside. Arrange doors to be opened against air-pressure differential.
 - 2) Gasket: Neoprene, applied around entire perimeters of panel frames.
 - 3) Size: Large enough to allow inspection and maintenance of air-handling unit's internal components.

- 4) Locate doors to allow access to and maintenance of all components.
4. Condensate Drain Pans:
 - a. Location: Each type of cooling coil.
 - b. Construction:
 - 1) Single-wall, stainless steel sheet.
 - c. Drain Connection:
 - 1) Located at lowest point of pan and sized to prevent overflow. Terminate with threaded nipple on one end of pan.
 - 2) Minimum Connection Size: 3/4".
 - d. Width: Entire width of water-producing device.
- D. Fans, Drives, and Motors:
 1. Fan and Drive Assemblies: Statically and dynamically balanced and designed for continuous operation at maximum-rated fan speed and motor horsepower.
 2. Supply-Air Fans: Centrifugal, rated in accordance with AMCA 210/ASHRAE 51; galvanized or painted steel; mounted on solid-steel shaft.
 - a. Mounting: For internal vibration isolation. Factory-mount fans with manufacturer's standard vibration isolation mounting devices.
 3. Outdoor-Air-Refrigerant Coil Fan: Propeller fan mounted on shaft of permanently lubricated direct drive motor.
- E. Coils:
 1. General Requirements for Coils:
 - a. Fabricate coils section to allow for removal and replacement of coil for maintenance and to allow in-place access for service and maintenance of coil(s).
 - b. Coils are to not act as structural component of unit.
 2. Supply-Air Refrigerant Coil:
 - a. Tubes: Aluminum.
 - b. Fins:
 - 1) Material: Aluminum.
 3. Outdoor-Air Refrigerant Coil:
 - a. Tubes: Aluminium.
 - b. Fins:
 - 1) Material: Aluminum.
 - c. Fin and Tube Joints: Mechanical bond.
 - d. Coatings: Corrosion-resistant coating.
 - e. Ratings: Designed, tested, and rated in accordance with ASHRAE 33 and AHRI 410.
 - 1) Working Pressure: Minimum **300 psig**.
 4. Hot-Gas Reheat Refrigerant Coil:
 - a. Tubes: Aluminum.
 - b. Fins:
 - 1) Material: Aluminum.
 - c. Fin and Tube Joints: Mechanical bond.
 - d. Suction-discharge bypass valve.
- F. Refrigerant Circuit Components:
 1. Number of Refrigerant Circuits: Two.
 2. Compressor: Hermetic, scroll, mounted on vibration isolators; with internal overcurrent and high-temperature protection, internal pressure relief, and crankcase heater.
 3. Refrigeration Specialties:
 - a. Refrigerant: R-454B.
 - b. Expansion valve with replaceable thermostatic element.
 - c. Refrigerant filter/dryer.
 - d. Manual-reset high-pressure safety switch.
 - e. Automatic-reset low-pressure safety switch.
 - f. Minimum off-time relay.
 - g. Automatic-reset compressor motor thermal overload.
 - h. Brass service valves installed in compressor suction and liquid lines.

- i. Low-ambient kit high-pressure sensor.
 - j. Hot-gas reheat solenoid valve modulating with a replaceable magnetic coil.
- G. Air Filtration:
 - 1. Panel Filters:
 - a. Description: Pleated, factory-fabricated, self-supported, disposable air filters with holding frames.
 - b. Filter Unit Class: UL 900.
 - c. Media: Interlaced glass, synthetic or cotton fibers coated with nonflammable adhesive and antimicrobial coating.
 - d. Filter-Media Frame: Beverage board with perforated metal retainer, or metal grid, on outlet side.
- H. Gas Furnaces:
 - 1. Description: Factory assembled, piped, and wired; complying with ANSI Z21.47/CSA 2.3 and NFPA 54.
 - 2. CSA Approval: Designed and certified by and bearing label of CSA.
 - 3. Burners: Aluminized steel.
 - a. Ignition: Electronically controlled electric spark or hot-surface igniter with flame sensor.
 - b. Gas Control Valve: Two stage.
 - c. Gas Train: Single-body, regulated, redundant, 24 V ac gas valve assembly containing pilot solenoid valve, pilot filter, pressure regulator, pilot shutoff, and manual shutoff.
 - 4. Safety Controls:
 - a. Gas Manifold: Safety switches and controls complying with ANSI standards.
- I. Dampers:
 - 1. Outdoor- and Return-Air Dampers: Low-leakage, double-skin, airfoil-blade, galvanized-steel dampers with compressible jamb seals and extruded-vinyl blade edge seals in opposed -blade arrangement with zinc-plated steel operating rods rotating in sintered bronze or nylon bearings mounted in a single galvanized-steel frame, and with operating rods connected with a common linkage. Leakage rate must not exceed 4 cfm/sq. ft. at 1-inch wg and 8 cfm/sq. ft. at 4-inch wg rated in accordance with AMCA 500-D.
 - 2. Barometric relief dampers.
 - 3. Electronic Damper Operators:
 - a. Direct-coupled type designed for minimum 60,000 full-stroke cycles at rated torque.
 - b. Electronic damper position indicator to have visual scale indicating percent of travel and 2 to 10 V dc, feedback signal.
 - c. Operator Motors:
 - 1) Size to operate with sufficient reserve power to provide smooth modulating action or two-position action.
 - 2) Permanent Split-Capacitor or Shaded-Pole Type: Gear trains are completely oil immersed and sealed. Equip spring-return motors with integral spiral-spring mechanism in housings designed for easy removal for service or adjustment of limit switches, auxiliary switches, or feedback potentiometer.
 - d. Fail-Safe Operation: Mechanical, spring-return mechanism with external, manual gear release on nonspring-return actuators.
- J. Electrical Power Connections:
 - 1. RTU is to have a single connection of power to unit with unit-mounted disconnect switch accessible from outside unit and control-circuit transformer with built-in overcurrent protection.
- K. Controls:
 - 1. Unit Controls:
 - a. Control-voltage transformer.
 - b. Wall-mounted thermostat or sensor with the following features:
 - 1) Heat-cool-off switch.
 - 2) Fan on-auto switch.
 - 3) Fan-speed switch.
 - 4) Automatic changeover.

- 5) Adjustable deadband.
 - 6) Exposed set point.
 - 7) Exposed indication.
 - 8) Degree F indication for the following:
 - a) Space temperature.
 - b) Supply-air temperature.
 - c) Outdoor-air temperature.
 - d) Space set point.
 - 9) Unoccupied-period-override push button.
 - c. Duct-mounted humidistat or sensor for control of HGRH.
- L. Mounting Curbs:
 - 1. Materials: Galvanized steel with corrosion-protection coating, watertight gaskets, and factory-installed wood nailer; complying with NRCA standards.
 - 2. Curb Dimensions: Height of 14 inches.
- M. Accessories:
 - 1. Filter differential pressure switch with sensor tubing on either side of filter. Set for final filter pressure loss.
 - 2. Remote potentiometer to adjust minimum economizer damper position.
 - 3. Return-air bypass damper.
 - 4. Factory- or field-installed, demand-controlled ventilation.
 - 5. Safeties:
 - a. Smoke detector.
 - b. Condensate overflow switch.
 - c. Phase-loss reversal protection.
 - d. High and low pressure control.
 - e. Gas furnace airflow-proving switch.
 - 6. Hail guards of galvanized steel, painted to match casing.

2.4 SOURCE QUALITY CONTROL

- A. AHRI Compliance:
 - 1. Comply with AHRI 210/240 for testing and rating energy efficiencies for 3-5 ton RTUs.
 - 2. Comply with AHRI 340/360 for testing and rating energy efficiencies for 6-25 ton RTUs.
 - 3. Comply with AHRI 270 for testing and rating sound performance for RTUs.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of RTUs.
- B. Examine roughing-in for RTUs to verify actual locations of piping and duct connections before equipment installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF PACKAGED AIR-CONDITIONING UNITS

- A. Unit Support: Install unit level on structural curbs. Coordinate wall penetrations and flashing with wall construction. Secure RTUs to structural support with anchor bolts.

3.3 PIPING CONNECTIONS

- A. Piping installation requirements are specified in other Sections. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Where installing piping adjacent to RTU, allow space for service and maintenance.

- C. Gas Piping: Comply with applicable requirements in Section 231123 "Facility Natural-Gas Piping." Connect gas piping to burner, full size of gas train inlet, and connect with union and shutoff valve with sufficient clearance for burner removal and service.

3.4 DUCT CONNECTIONS

- A. Comply with duct installation requirements specified in other HVAC Sections. Drawings indicate general arrangement of ducts. The following are specific connection requirements:
 - 1. Install ducts to termination at horizontal unit connections.
 - 2. Connect supply ducts to RTUs with flexible duct connectors specified in Section 233300 "Air Duct Accessories."

3.5 ELECTRICAL CONNECTIONS

- A. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."
- B. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.
- C. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.
 - 1. Nameplate is to be laminated acrylic or melamine plastic signs as specified in Section 260553 "Identification for Electrical Systems."
 - 2. Locate nameplate where easily visible.

3.6 CONTROL CONNECTIONS

- A. Install control and electrical power wiring to field-mounted control devices.

3.7 CLEANING

- A. After completing system installation and testing, adjusting, and balancing RTUs and air-distribution systems, clean RTUs internally to remove foreign material and construction dirt and dust. Clean fan wheels, cabinets, dampers, coils, and filter housings, and install new, clean filters.

3.8 STARTUP SERVICE

- A. Perform startup service.
 - 1. Complete installation and startup checks in accordance with manufacturer's written instructions.
 - 2. Inspect for visible damage to unit casing.
 - 3. Inspect for visible damage to furnace combustion chamber.
 - 4. Inspect for visible damage to compressor, coils, and fans.
 - 5. Inspect internal insulation.
 - 6. Verify that labels are clearly visible.
 - 7. Verify that clearances have been provided for servicing.
 - 8. Verify that controls are connected and operable.
 - 9. Verify that filters are installed.
 - 10. Clean all coils and inspect for construction debris.
 - 11. Clean furnace flue and inspect for construction debris.
 - 12. Connect and purge gas line.
 - 13. Remove packing from vibration isolators.
 - 14. Inspect operation of barometric relief dampers.
 - 15. Verify lubrication on fan and motor bearings.
 - 16. Inspect fan-wheel rotation for movement in correct direction without vibration and binding.
 - 17. Adjust fan belts to proper alignment and tension.
 - 18. Start unit in accordance with manufacturer's written instructions.
 - a. Start refrigeration system.
 - b. Do not operate below recommended low-ambient temperature.
 - c. Complete startup sheets and attach copy with Contractor's startup report.
 - 19. Inspect and record performance of interlocks and protective devices; verify sequences of operation.
 - 20. Operate unit for an initial period as recommended or required by manufacturer.

21. Perform the following operations for both minimum and maximum firing. Adjust burner for peak efficiency:
 - a. Measure gas pressure on manifold.
 - b. Inspect operation of power vents.
 - c. Measure combustion-air temperature at inlet to combustion chamber.
 - d. Measure flue-gas temperature at furnace discharge.
 - e. Perform flue-gas analysis. Measure and record flue-gas carbon dioxide and oxygen concentration.
 - f. Measure supply-air temperature and volume when burner is at maximum firing rate and when burner is off. Calculate useful heat to supply air.
22. Calibrate thermostats.
23. Adjust and inspect high-temperature limits.
24. Inspect outdoor-air dampers for proper stroke and interlock with return-air dampers.
25. Start refrigeration system and measure and record the following when ambient is a minimum of 15 deg F above return-air temperature:
 - a. Coil leaving-air, dry- and wet-bulb temperatures.
 - b. Coil entering-air, dry- and wet-bulb temperatures.
 - c. Outdoor-air, dry-bulb temperature.
 - d. Outdoor-air-coil, discharge-air, dry-bulb temperature.
26. Inspect controls for correct sequencing of heating, mixing dampers, refrigeration, and normal and emergency shutdown.
27. Measure and record the following minimum and maximum airflows. Plot fan volumes on fan curve.
 - a. Supply-air volume.
 - b. Return-air volume.
 - c. Relief-air volume.
 - d. Outdoor-air intake volume.
28. Simulate maximum cooling demand and inspect the following:
 - a. Compressor refrigerant suction and hot-gas pressures.
 - b. Short circuiting of air through condenser coil or from condenser fans to outdoor-air intake.
29. Verify operation of remote panel including pilot-light operation and failure modes. Inspect the following:
 - a. High-temperature limit on gas-fired heat exchanger.
 - b. Low-temperature safety operation.
 - c. Filter high-pressure differential alarm.
 - d. Economizer to minimum outdoor-air changeover.
 - e. Relief-air fan operation.
 - f. Smoke and firestat alarms.
30. After startup and performance testing and prior to Substantial Completion, replace existing filters with new filters.

3.9 ADJUSTING

- A. Adjust damper linkages for proper damper operation.
- B. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC" for air-handling system testing, adjusting, and balancing.
- C. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.10 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections.
 1. After installing RTUs and after electrical circuitry has been energized, test units for compliance with requirements.
 2. Inspect for and remove shipping bolts, blocks, and tie-down straps.

3. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
5. RTU will be considered defective if it does not pass tests and inspections.

B. Prepare test and inspection reports.

3.11 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain RTUs.

END OF SECTION 237416.11

SECTION 260001 - ELECTRICAL DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY

- A. The Work of this Section Includes:
 - 1. Demolition and removal of selected portions of electrical systems.
 - 2. Removal and salvage of existing items for delivery to Owner and removal of existing items for reinstallation.

1.2 DEFINITIONS

- A. Remove: Detach items from existing construction and legally dispose of off-site unless indicated to be removed and salvaged or removed and reinstalled.
- B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and deliver to Owner as indicated.
- C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage; prepare for reuse; clean, repair and reinstall where indicated.
- D. Existing to Remain: Existing items of construction that are not to be removed.

1.3 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.

1.4 COORDINATION

- A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

1.5 FIELD CONDITIONS

- A. Owner will not occupy portions of building immediately adjacent to selective demolition area. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
- B. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.
- C. Hazardous Materials:
 - 1. It is not expected that hazardous materials will be encountered in the Work.
 - a. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.
- D. On-site sale of removed items or materials is not permitted.

1.6 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials and using approved contractors so as not to void existing warranties. Notify warrantor before proceeding. Existing warranties include the following:
 - 1. Roof.
- B. Notify warrantor on completion of selective demolition, and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- B. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs or video, measured drawings.
 - 1. Inventory and record the condition of items to be removed for salvage or reinstallation. Photograph or video conditions that might be misconstrued as damage caused by removal.
 - 2. Photograph or video existing conditions of adjoining construction including finish surfaces, that might be misconstrued as damage caused by selective demolition operations or removal of items for salvage or reinstallation.

3.2 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
 - 1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 - 2. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
 - 3. Maintain adequate ventilation when using cutting torches.
 - 4. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 - 5. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.

3.3 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 - 3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.

3.4 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

3.5 SELECTIVE DEMOLITION SCHEDULE

- A. Remove electrical systems throughout project area as required for new work.
 - 1. Restore complete operation to items not being removed as part of the Work.
 - 2. Remove all abandoned piping and associated installation.
- B. Clean and repair items that are to remain to “like-new” condition.

END OF SECTION 260001

SECTION 260010 - SUPPLEMENTAL REQUIREMENTS FOR ELECTRICAL

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes requirements generally applicable to all electrical Work on the Project, including but not limited to Work specified in Divisions 26, 27, and 28.

1.2 REFERENCES

- A. Abbreviations and Acronyms for Electrical Terms and Units of Measure:
 - 1. 8P8C: An 8-position 8-contact modular jack.
 - 2. A: Ampere, unit of electrical current.
 - 3. AC or ac: Alternating current.
 - 4. AFCI: Arc-fault circuit interrupter.
 - 5. AGC: Automatic gain control.
 - 6. AIC: Ampere interrupting capacity.
 - 7. AL, Al, or ALUM: Aluminum.
 - 8. ASD: Adjustable-speed drive.
 - 9. ATP: Acceptance test procedure.
 - 10. ATS: Automatic transfer switch.
 - 11. A/V: Audio/visual.
 - 12. AWG: American wire gauge; see ASTM B258.
 - 13. BAS: Building automation system.
 - 14. BDA: Bi-directional amplifier.
 - 15. BIL: Basic impulse insulation level.
 - 16. BIM: Building information modeling.
 - 17. BMS: Building management system.
 - 18. BNC: Bayonet Neill-Concelman - type of connector.
 - 19. B/W: Black and white.
 - 20. CAD: Computer-aided design or drafting.
 - 21. CATV: Community antenna television.
 - 22. CB: Circuit breaker.
 - 23. CCD: Charge-coupled device.
 - 24. CCTV: Closed-circuit television.
 - 25. cd: Candela, the SI fundamental unit of luminous intensity.
 - 26. CO/ALR: Copper-aluminum, revised.
 - 27. COPS: Critical operations power system.
 - 28. CU or Cu: Copper.
 - 29. CU-AL or AL-CU: Copper-aluminum.
 - 30. DACR: Digital alarm communicator receiver.
 - 31. DACT: Digital alarm communicator transmitter.
 - 32. DAS: Distributed antenna system.
 - 33. dB: Decibel, a unitless logarithmic ratio of two electrical, acoustical, or optical power values.
 - 34. dB(A-weighted) or dB(A): Decibel acoustical sound pressure level with A-weighting applied in accordance with IEC 61672-1.
 - 35. dB(adjusted) or dBa: Decibel weighted absolute noise power with respect to 3.16 pW (minus 85 dBm).
 - 36. dBm: Decibel absolute power with respect to 1 mW.
 - 37. dBmV: Decibel absolute voltage with respect to 1 mV across identical impedance.
 - 38. DC or dc: Direct current.
 - 39. DCOA: Designated critical operations area.
 - 40. DDC: Direct digital control (HVAC).
 - 41. DGP: Data gathering panel.
 - 42. DHCP: Dynamic host configuration protocol.
 - 43. EGC: Equipment grounding conductor.
 - 44. ELV: Extra-low voltage.

45. EMF: Electromotive force.
46. EMI: Electromagnetic interference.
47. EMP: Electrical maintenance program (operation and maintenance); electromagnetic pulse (transient analysis).
48. EPS: Emergency power supply.
49. EPSS: Emergency power supply system.
50. ERCES: Emergency responder communications enhancement system.
51. ESS: Energy storage system.
52. EV: Electric vehicle.
53. EVPE: Electric vehicle power export equipment.
54. EVSE: Electric vehicle supply equipment.
55. FACU: Fire-alarm control unit.
56. FAS: Fire-alarm system.
57. fc: Footcandle, an internationally recognized unit of illuminance equal to one lumen per square foot or 10.76 lx. The simplified conversion 1 fc = 10 lx in the Specifications is common practice and considered adequate precision for building construction activities. When there are conflicts, lux is the primary unit; footcandle is specified for convenience.
58. FCC: Federal Communications Commission; fire command center.
59. FLC: Full-load current.
60. ft: Foot.
61. ft-cd: Foot-candle, the antiquated U.S. standard unit of illuminance, equal to one international candle measured at a distance of one foot, that was superseded in 1948 by the unit "footcandle" when the SI unit candela (cd) replaced the international candle; see "fc."
62. FTP: File transfer protocol.
63. FXO: Foreign exchange office.
64. GEC: Grounding electrode conductor.
65. GFCI: Ground-fault circuit interrupter.
66. GFPE: Ground-fault protection of equipment.
67. GND: Ground.
68. GROL: General Radiotelephone Operator License (FCC).
69. H.323: Audio and video protocol.
70. HACR: Heating, air conditioning, and refrigeration.
71. HDPE: High-density polyethylene.
72. HID: High-intensity discharge.
73. HP or hp: Horsepower.
74. HVAC: Heating, ventilating, and air conditioning.
75. Hz: Hertz.
76. I&TFAS: Inspection and testing of fire-alarm system.
77. IB-PSC: In-building public safety communications.
78. IBT: Intersystem bonding termination.
79. ICT: Information and communications technology.
80. IDC: Initiating device circuit.
81. inch: Inch. To avoid confusion, the abbreviation "in." is not used.
82. I/O: Input/output.
83. IP: Ingress protection rating (enclosures); Internet protocol (communications).
84. IR: Infrared.
85. IS: Intrinsically safe.
86. IT&R: Inspecting, testing, and repair.
87. ITE: Information technology equipment.
88. kAIC: Kiloampere interrupting capacity.
89. kcmil or MCM: One thousand circular mils.
90. kV: Kilovolt.
91. kVA: Kilovolt-ampere.
92. kvar: Kilovolt-ampere reactive.
93. kW: Kilowatt.
94. kWh: Kilowatt-hour.
95. LAN: Local area network.

- 96. lb: Pound (weight).
- 97. lbf: Pound (force).
- 98. LCD: Liquid-crystal display.
- 99. LCDI: Leakage-current detector-interrupter.
- 100. LED: Light-emitting diode.
- 101. Li-ion: Lithium-ion.
- 102. lm: Lumen, the SI-derived unit of luminous flux.
- 103. LNG: Liquefied natural gas.
- 104. LP-Gas: Liquefied petroleum gas.
- 105. LRC: Locked-rotor current.
- 106. LTE: Long-term evolution (mobile device technology standard).
- 107. LV: Low voltage.
- 108. lx: Lux, the SI-derived unit of illuminance equal to one lumen per square meter.
- 109. m: Meter.
- 110. MATV: Master antenna television.
- 111. MCC: Motor-control center.
- 112. MDC: Modular data center.
- 113. MG set: Motor-generator set.
- 114. MIDI: Musical instrument digital interface.
- 115. MLO: Main lugs only.
- 116. MPEG: Moving Picture Experts Group.
- 117. MPEG-2: Abbreviation for the ISO/IEC Moving Picture Experts Group's standard for generic coding of moving pictures and associated audio information (ISO/IEC 13818) released in 1995 and used for most over-the-air and satellite broadcast digital television.
- 118. MPEG-4: Abbreviation for the ISO/IEC Moving Picture Experts Group's standard framework for coding of audio-visual objects (ISO/IEC 14496) released in 1999, with digital rights management and more advanced compression algorithms than MPEG-2.
- 119. MOV: Metal-oxide varistor.
- 120. MV: Medium voltage.
- 121. MVA: Megavolt-ampere.
- 122. mW: Milliwatt.
- 123. MW: Megawatt.
- 124. MWh: Megawatt-hour.
- 125. NAC: Notification appliance circuit.
- 126. N.C.: Normally closed.
- 127. NFC: Near field communications.
- 128. Ni-Cd: Nickel-cadmium.
- 129. NICET: National Institute for Certification in Engineering Technologies, a division of the National Society of Professional Engineers.
- 130. Ni-MH: Nickel-metal hydride.
- 131. NIU: Network interface unit.
- 132. N.O.: Normally open.
- 133. NPT: National (American) standard pipe taper.
- 134. NTSC: National Television System Committee.
- 135. OCPD: Overcurrent protective device.
- 136. ONT: Optical network terminal.
- 137. PC: Personal computer.
- 138. PCS: Power conversion system.
- 139. PCU: Power-conditioning unit.
- 140. Percent obs/ft (percent obs/m): Percent obscuration per unit distance; unit of measure for sensitivity of smoke detectors.
- 141. PF or pf: Power factor.
- 142. PHEV: Plug-in hybrid electric vehicle.
- 143. PIR: Passive infrared.
- 144. PLC: Programmable logic controller.
- 145. PLFA: Power-limited fire alarm.
- 146. PoE: Power over Ethernet.

147. POTS: Plain old telephone service. See "public switched telephone network" definition.
148. PSTN: Public switched telephone network.
149. PTZ: Pan-tilt-zoom.
150. PV: Photovoltaic.
151. PVC: Polyvinyl chloride.
152. pW: Picowatt.
153. RAID: Redundant array of inexpensive disks; redundant array of independent disks.
154. RAM: Random-access memory.
155. RAT: Radio alarm transmitter.
156. REX: Request-to-exit.
157. RF: Radio frequency.
158. RFI: (electrical) Radio-frequency interference; (contract) Request for interpretation.
159. RMS or rms: Root-mean-square.
160. RPM or rpm: Revolutions per minute.
161. SCADA: Supervisory control and data acquisition.
162. SCCR: Short-circuit current rating.
163. SCR: Silicon-controlled rectifier.
164. SIP: Session initiation protocol.
165. SLC: Signaling-line circuit.
166. SPD: Surge protective device.
167. SPDT: Single pole, double throw.
168. sq.: Square.
169. SWD: Switching duty.
170. TCP/IP: Transmission Control Protocol/Internet Protocol.
171. TEFC: Totally enclosed fan-cooled.
172. TR: Tamper resistant.
173. TVSS: Transient voltage surge suppressor.
174. UHF: Ultra-high frequency.
175. UL: (standards) UL Standards & Engagement Inc.; (product categories) UL, LLC.
176. UL CCN: UL Category Control Number.
177. UPS: Uninterruptible power supply.
178. USB: Universal serial bus.
179. UTC: Coordinated universal time.
180. UV: Ultraviolet.
181. V: Volt, unit of electromotive force.
182. V(ac): Volt, alternating current.
183. V(dc): Volt, direct current.
184. VA: Volt-ampere, unit of complex electrical power.
185. VAR: Volt-ampere reactive, unit of reactive electrical power.
186. VFC: Variable-frequency controller.
187. VOM: Volt-ohm-multimeter.
188. VoIP: Voice over Internet Protocol.
189. VPN: Virtual private network.
190. VRLA: Valve regulated lead acid; also called "sealed lead acid (SLA)" or "valve regulated sealed lead acid."
191. VU: Volume unit.
192. W: Watt, unit of real electrical power.
193. WAN: Wide area network.
194. Wh: Watt-hour, unit of electrical energy usage.
195. WPT: Wireless power transfer.
196. WPTE: Wireless power transfer equipment.
197. WR: Weather resistant.

B. Abbreviations and Acronyms for Electrical Raceway Types:

1. EMT: Electrical metallic tubing.
2. EMT-A: Aluminum electrical metallic tubing.
3. EMT-S: Steel electrical metallic tubing.

4. EMT-SS: Stainless steel electrical metallic tubing.
5. ENT: Electrical nonmetallic tubing.
6. EPEC: Electrical HDPE underground conduit (thin wall).
7. EPEC-A: Type A electrical HDPE underground conduit.
8. EPEC-B: Type B electrical HDPE underground conduit.
9. ERM-C: Electrical rigid metal conduit.
10. ERM-C-A: Aluminum electrical rigid metal conduit.
11. ERM-C-S: Steel electrical rigid metal conduit.
12. ERM-C-S-G: Galvanized-steel electrical rigid metal conduit.
13. ERM-C-S-PVC: PVC-coated-steel electrical rigid metal conduit.
14. ERM-C-SS: Stainless steel electrical rigid metal conduit.
15. FMC: Flexible metal conduit.
16. FMC-A: Aluminum flexible metal conduit.
17. FMC-S: Steel flexible metal conduit.
18. FMT: Steel flexible metallic tubing.
19. FNMC: Flexible nonmetallic conduit. See "LFNC."
20. HDPE: HDPE underground conduit (thick wall).
21. HDPE-40: Schedule 40 HDPE underground conduit.
22. HDPE-80: Schedule 80 HDPE underground conduit.
23. IMC: Steel electrical intermediate metal conduit.
24. LFMC: Liquidtight flexible metal conduit.
25. LFMC-A: Aluminum liquidtight flexible metal conduit.
26. LFMC-S: Steel liquidtight flexible metal conduit.
27. LFMC-SS: Stainless steel liquidtight flexible metal conduit.
28. LFNC: Liquidtight flexible nonmetallic conduit.
29. LFNC-A: Layered (Type A) liquidtight flexible nonmetallic conduit.
30. LFNC-B: Integral (Type B) liquidtight flexible nonmetallic conduit.
31. LFNC-C: Corrugated (Type C) liquidtight flexible nonmetallic conduit.
32. PVC: Rigid PVC conduit.
33. PVC-40: Schedule 40 rigid PVC conduit.
34. PVC-80: Schedule 80 rigid PVC Conduit.
35. PVC-A: Type A rigid PVC concrete-encased conduit.
36. PVC-EB: Type EB rigid PVC concrete-encased underground conduit.
37. RGS: See ERM-C-S-G.
38. RMC: See ERM-C.
39. RTRC: Reinforced thermosetting resin conduit.
40. RTRC-AG: Low-halogen, aboveground reinforced thermosetting resin conduit.
41. RTRC-AG-HW: Heavy wall, low-halogen, aboveground reinforced thermosetting resin conduit.
42. RTRC-AG-SW: Standard wall, low-halogen, aboveground reinforced thermosetting resin conduit.
43. RTRC-AG-XW: Extra heavy wall, low-halogen, aboveground reinforced thermosetting resin conduit.
44. RTRC-BG: Low-halogen, belowground reinforced thermosetting resin conduit.

C. Abbreviations and Acronyms for Electrical Single-Conductor and Multiple-Conductor Cable Types:

1. AC: Armored cable.
2. CATV: Coaxial general-purpose cable.
3. CATVP: Coaxial plenum cable.
4. CATVR: Coaxial riser cable.
5. CI: Circuit integrity cable.
6. CL2: Class 2 cable.
7. CL2P: Class 2 plenum cable.
8. CL2R: Class 2 riser cable.
9. CL2X: Class 2 cable, limited use.
10. CL3: Class 3 cable.
11. CL3P: Class 3 plenum cable.
12. CL3R: Class 3 riser cable.
13. CL3X: Class 3 cable, limited use.

14. CM: Communications general-purpose cable.
15. CMG: Communications general-purpose cable.
16. CMP: Communications plenum cable.
17. CMR: Communications riser cable.
18. CMUC: Under-carpet communications wire and cable.
19. CMX: Communications cable, limited use.
20. DG: Distributed generation cable.
21. FC: Flat cable.
22. FCC: Flat conductor cable.
23. FPL: Power-limited fire-alarm cable.
24. FPLP: Power-limited fire-alarm plenum cable.
25. FPLR: Power-limited fire-alarm riser cable.
26. IGS: Integrated gas spacer cable.
27. ITC: Instrumentation tray cable.
28. ITC-ER: Instrumentation tray cable, exposed run.
29. MC: Metal-clad cable.
30. MC-FPL/FPLR/FPLP: Metal-clad cable containing FPL, FPLR, or FPLP.
31. MC-HL: Metal-clad cable, hazardous location.
32. MI: Mineral-insulated, metal-sheathed cable.
33. MTW: (machine tool wiring) Moisture-, heat-, and oil-resistant thermoplastic cable.
34. MV: Medium-voltage cable.
35. NM: Nonmetallic sheathed cable.
36. NMC: Nonmetallic sheathed cable with corrosion-resistant nonmetallic jacket.
37. NMS: Nonmetallic sheathed cable with signaling, data, and communications conductors, plus power or control conductors.
38. NPLF: Non-power-limited fire-alarm circuit cable.
39. NPLFP: Non-power-limited fire-alarm circuit cable for environmental air spaces.
40. NPLFR: Non-power-limited fire-alarm circuit riser cable.
41. NUCC: Nonmetallic underground HDPE conduit with conductors.
42. OFC: Conductive optical fiber general-purpose cable.
43. OFCG: Conductive optical fiber general-purpose cable.
44. OFCP: Conductive optical fiber plenum cable.
45. OFCR: Conductive optical fiber riser cable.
46. OFN: Nonconductive optical fiber general-purpose cable.
47. OFNG: Nonconductive optical fiber general-purpose cable.
48. OFNP: Nonconductive optical fiber plenum cable.
49. OFNR: Nonconductive optical fiber riser cable.
50. P: Marine shipboard cable.
51. PLTC: Power-limited tray cable.
52. PLTC-ER: Power-limited tray cable, exposed run.
53. PV: Photovoltaic cable.
54. RHH: (high heat) Thermoset rubber, heat-resistant cable.
55. RHW: Thermoset rubber, moisture-resistant cable.
56. SA: Silicone rubber cable.
57. SE: Service-entrance cable.
58. SER: Service-entrance cable, round.
59. SEU: Service-entrance cable, flat.
60. SIS: Thermoset cable for switchboard and switchgear wiring.
61. TBS: Thermoplastic cable with outer braid.
62. TC: Tray cable.
63. TC-ER: Tray cable, exposed run.
64. TC-ER-HL: Tray cable, exposed run, hazardous location.
65. THW: Thermoplastic, heat- and moisture-resistant cable.
66. THHN: Thermoplastic, heat-resistant cable with nylon jacket outer sheath.
67. THHW: Thermoplastic, heat- and moisture-resistant cable.
68. THWN: Thermoplastic, moisture- and heat-resistant cable with nylon jacket outer sheath.
69. TW: Thermoplastic, moisture-resistant cable.

70. UF: Underground feeder and branch-circuit cable.
71. USE: Underground service-entrance cable.
72. XHH: Cross-linked polyethylene, heat-resistant cable.
73. XHHW: Cross-linked polyethylene, heat- and moisture-resistant cable.

D. Abbreviations and Acronyms for Electrical Flexible Cord Types:

1. SEO: 600 V extra-hard-usage, hard-service cord with thermoplastic elastomer insulation and oil-resistant thermoplastic elastomer outer covering for damp locations.
2. SEOW: 600 V extra-hard-usage, hard-service cord with thermoplastic elastomer insulation and oil-resistant thermoplastic elastomer outer covering for damp or wet locations.
3. SEOO: 600 V extra-hard-usage, hard-service cord with oil-resistant thermoplastic elastomer insulation and oil-resistant thermoplastic elastomer outer covering for damp locations.
4. SEOOW: 600 V extra-hard-usage, hard-service cord with oil-resistant thermoplastic elastomer insulation and oil-resistant thermoplastic elastomer outer covering for damp or wet locations.
5. SJEO: 300 V hard-usage, junior hard-service cord with thermoplastic elastomer insulation and oil-resistant thermoplastic elastomer outer cover for damp locations.
6. SJEOW: 300 V hard-usage, junior hard-service cord with thermoplastic elastomer insulation and oil-resistant thermoplastic elastomer outer cover for damp or wet locations.
7. SJEOO: 300 V hard-usage, junior hard-service cord with oil-resistant thermoplastic elastomer insulation and oil-resistant thermoplastic elastomer outer cover for damp locations.
8. SJEOOW: 300 V hard-usage, junior hard-service cord with oil-resistant thermoplastic elastomer insulation and oil-resistant thermoplastic elastomer outer cover for damp or wet locations.
9. SJO: 300 V hard-usage, junior hard-service cord with thermoset insulation and oil-resistant thermoset outer cover for damp locations.
10. SJOW: 300 V hard-usage, junior hard-service cord with thermoset insulation and oil-resistant thermoset outer cover for damp or wet locations.
11. SJOO: 300 V hard-usage, junior hard-service cord with oil-resistant thermoset insulation and oil-resistant thermoset outer cover for damp locations.
12. SJOOW: 300 V hard-usage, junior hard-service cord with oil-resistant thermoset insulation and oil-resistant thermoset outer cover for damp or wet locations.
13. SJTO: 300 V hard-usage, junior hard-service cord with thermoplastic insulation and oil-resistant thermoplastic outer cover for damp locations.
14. SJTOW: 300 V hard-usage, junior hard-service cord with thermoplastic insulation and oil-resistant thermoplastic outer cover for damp or wet locations.
15. SJTOO: 300 V hard-usage, junior hard-service cord with oil-resistant thermoplastic insulation and oil-resistant thermoplastic outer cover for damp locations.
16. SJTOOW: 300 V hard-usage, junior hard-service cord with oil-resistant thermoplastic insulation and oil-resistant thermoplastic outer cover for damp or wet locations.
17. SO: 600 V extra-hard-usage, hard-service cord with thermoset insulation and oil-resistant thermoset outer covering for damp locations.
18. SOW: 600 V extra-hard-usage, hard-service cord with thermoset insulation and oil-resistant thermoset outer covering for damp or wet locations.
19. SOO: 600 V extra-hard-usage, hard-service cord with oil-resistant thermoset insulation and oil-resistant thermoset outer covering for damp locations.
20. SOOW: 600 V extra-hard-usage, hard-service cord with oil-resistant thermoset insulation and oil-resistant thermoset outer covering for damp or wet locations.
21. STO: 600 V extra-hard-usage, hard-service cord with thermoplastic insulation and oil-resistant thermoplastic outer covering for damp locations.
22. STOW: 600 V extra-hard-usage, hard-service cord with thermoplastic insulation and oil-resistant thermoplastic outer covering for damp or wet locations.
23. STOO: 600 V extra-hard-usage, hard-service cord with oil-resistant thermoplastic insulation and oil-resistant thermoplastic outer covering for damp locations.
24. STOOW: 600 V extra-hard-usage, hard-service cord with oil-resistant thermoplastic insulation and oil-resistant thermoplastic outer covering for damp or wet locations.

E. Abbreviations for Grounding and Bonding:

1. BBC: Backbone bonding conductor, for connecting multiple TBBs serving the same floor.

2. PBB: Primary bonding busbar; located in main distribution frame room, ideally near electrical service entrance.
3. RBB: Rack bonding busbar; located in equipment cabinets and racks.
4. SBB: Secondary bonding busbar; located in intermediate distribution frame rooms.
5. TBB: Telecommunications bonding backbone, for connecting SBBs to PBB.
6. TBC: Telecommunications bonding conductor, for connecting PBB to intersystem bonding termination device or busbar at electrical service entrance.
7. TEBC: Telecommunications equipment bonding conductor, for connecting RBBs to SBBs or PBB.
8. UBC: Unit bonding conductor, for connecting individual communications equipment to RBBs or SBBs.

F. Definitions:

1. Cable: In accordance with NIST NBS Circular 37 and IEEE standards, in the United States for the purpose of interstate commerce, the definition of "cable" is (1) a conductor with insulation, or a stranded conductor with or without insulation (single-conductor cable); or (2) a combination of conductors insulated from one another (multiple-conductor cable).
2. Conductive Cable: Cable containing non-current-carrying electrically conductive members such as metallic strength members and metallic vapor barriers.
3. Conductor: In accordance with NIST NBS Circular 37 and IEEE standards, in the United States for the purpose of interstate commerce, the definition of "conductor" is (1) a wire or combination of wires not insulated from one another, suitable for carrying an electric current; (2) (National Electrical Safety Code) a material, usually in the form of wire, cable, or bar, suitable for carrying an electric current; or (3) (general) a substance or body that allows a current of electricity to pass continuously along it.
4. Conduit: A structure containing one or more duct raceways.
5. Direct Buried: Installed underground without encasement in concrete or other protective material.
6. Electrical Service: The conductors and equipment for delivering electric energy from the serving utility to the wiring system of the premises served.
7. Emergency Systems: Those systems legally required and classed as emergency by municipal, state, federal, or other codes, or by any governmental agency having jurisdiction that is designed to ensure continuity of lighting, electrical power, or both, to designated areas and equipment in the event of failure of the normal supply for safety of human life.
8. Enclosure: The case or housing of an apparatus, or the fence or wall(s) surrounding an installation, to prevent personnel from accidentally contacting energized parts or to protect the equipment from physical damage. Types of enclosures and enclosure covers include the following:
 - a. Cabinet: An enclosure that is designed for either surface mounting or flush mounting and is provided with a frame, mat, or trim in which a swinging door or doors are or can be hung.
 - b. Concrete Box: A box intended for use in poured concrete.
 - c. Conduit Body: A means for providing access to the interior of a conduit or tubing system through one or more removable covers at a junction or terminal point. In the United States, conduit bodies are listed in accordance with outlet box requirements.
 - d. Conduit Box: A box having threaded openings or knockouts for conduit, EMT, or fittings.
 - e. Cover Plate: A cover designed for protecting wiring devices installed in flush-mounted device boxes while permitting their safe operation; also called a faceplate or wallplate.
 - f. Cutout Box: An enclosure designed for surface mounting that has swinging doors or covers secured directly to and telescoping with the walls of the enclosure.
 - g. Device Box: A box with provisions for mounting a wiring device directly to the box.
 - h. Extension Ring: A ring intended to extend the sides of an outlet box or device box to increase the box depth, volume, or both.
 - i. Floor Box: A box mounted in the floor intended for use with a floor box cover and other components to complete the floor box enclosure.
 - j. Floor-Mounted Enclosure: A floor box and floor box cover assembly with means to mount in the floor that is sealed against the entrance of scrub water at the floor level.
 - k. Junction Box: A box with a blank cover that joins different runs of raceway or cable and provides space for connection and branching of the enclosed conductors.

- l. Outlet Box: A box that provides access to a wiring system having pryout openings, knockouts, threaded entries, or hubs in either the sides or the back, or both, for the entrance of conduit, conduit or cable fittings, or cables, with provisions for mounting an outlet box cover, but without provisions for mounting a wiring device directly to the box.
 - m. Pull Box: A box with a blank cover that joins different runs of raceway and provides access for pulling or replacing the enclosed cables or conductors.
 - n. Ring: A sleeve, which is not necessarily round, used for positioning a recessed wiring device flush with the plaster, concrete, drywall, or other wall surface.
 - o. Ring Cover: A box cover, with raised center portion to accommodate a specific wall or ceiling thickness, for mounting wiring devices or luminaires flush with the surface.
 - p. Termination Box: An enclosure designed for installation of termination base assemblies consisting of bus bars, terminal strips, or terminal blocks with provision for wire connectors to accommodate incoming or outgoing conductors, or both.
9. Jacket: A continuous nonmetallic outer covering for conductors or cables.
 10. Local Operator Console (LOC): Equipment used by authorized personnel and emergency responders to activate and operate a mass notification system (MNS).
 11. Luminaire: A complete lighting unit consisting of a light source such as a lamp, together with the parts designed to position the light source and connect it to the power supply. It may also include parts to protect the light source or the ballast or to distribute the light.
 12. Monitoring: Acquisition, processing, communication, and display of system and equipment status data and event and alarm signals.
 13. Monitoring Station: Facility that receives signals and has personnel in attendance at all times to respond to signals. A central station is a monitoring station that is listed.
 14. Multi-Outlet Assembly: A type of surface, flush, or freestanding raceway designed to hold conductors, receptacles, and switches, assembled in the field or at the factory.
 15. Nonsecure: Unlocked or open. (For doors and gates.)
 16. One-Line Diagram: A diagram that shows, by means of single lines and graphic symbols, the course of an electric circuit or system of circuits and the component devices or parts used therein. Also called "single-line diagram."
 17. Plenum: A compartment or chamber to which one or more air ducts are connected and that forms part of the air distribution system.
 18. Plug: Also commonly called a "connector," it is the removable, male telecommunications connector.
 19. Protected Zone: A protected premises or an area within a protected premises that is provided with means to prevent an unwanted event.
 20. Protective Device: A device that senses when an abnormal current flow, abnormal voltage potential, or other abnormal electrical waveform exists and then disconnects the affected portion of the circuit from the system. Common protective devices include fuses, circuit breakers, relays, ground-fault circuit interrupters, and arc-fault circuit interrupters.
 21. Receptacle: A fixed connecting device arranged for insertion of a power cord plug. Also called a power jack.
 22. Receptacle Outlet: One or more receptacles mounted in a box with a suitable protective cover.
 23. Screen: A metallic layer, either a foil or braid, placed around a pair or group of conductors.
 24. Secure: Closed and locked and with no unlock or open commands pending. (For doors and gates.)
 25. Sheath: A continuous metallic covering for conductors or cables.
 26. Shield: A metallic layer, either a foil or braid, placed around a pair or group of conductors.
 27. Systems Integration: The bringing together of components of several systems containing interacting components to achieve indicated functional operation of combined systems.
 28. UL Category Control Number (CCN): An alphabetic or alphanumeric code used to identify product categories covered by UL's Listing, Classification, and Recognition Services.
 29. Voice over Internet Protocol (VoIP): Digital telephone packet technology that uses the internet for its transmission medium.
 30. Voltage Class: For specified circuits and equipment, voltage classes are defined as follows:
 - a. Control Voltage: Having electromotive force between any two conductors, or between a single conductor and ground, that is supplied from a battery or other Class 2 or Class 3 power-limited source.

- b. Line Voltage: (1) (controls) Designed to operate using the supplied low-voltage power without transformation. (2) (transmission lines, transformers, SPDs) The line-to-line voltage of the supplying power system.
 - c. Extra-Low Voltage (ELV): Not having electromotive force between any two conductors, or between a single conductor and ground, exceeding 30 V(ac rms), 42 V(ac peak), or 60 V(dc).
 - d. Low Voltage (LV): Having electromotive force between any two conductors, or between a single conductor and ground, that is rated above 30 V but not exceeding 1000 V.
 - e. Medium Voltage (MV): Having electromotive force between any two conductors, or between a single conductor and ground, that is rated about 1 kV but not exceeding 69 kV.
 - f. High Voltage: (1) (circuits) Having electromotive force between any two conductors, or between a single conductor and ground, that is rated above 69 kV but not exceeding 230 kV. (2) (safety) Having sufficient electromotive force to inflict bodily harm or injury.
31. Wire: In accordance with NIST NBS Circular 37 and IEEE standards, in the United States for the purpose of interstate commerce, the definition of "wire" is a slender rod or filament of drawn metal. A group of small wires used as a single wire is properly called a "stranded wire." A wire or stranded wire covered with insulation is properly called an "insulated wire" or a "single-conductor cable." Nevertheless, when the context indicates that the wire is insulated, the term "wire" will be understood to include the insulation.

1.3 COORDINATION

- A. Interruption of Existing Electrical Service: Do not interrupt electrical service to facilities occupied by Owner or others unless permitted under the following conditions:
 - 1. Notify Architect no fewer than seven days in advance of proposed interruption of electrical service.
 - 2. Do not proceed with interruption of electrical service without Architect's written permission.
 - 3. Coordinate interruption with systems impacted by outage including, but not limited to, the following:
 - a. Emergency lighting.
 - b. Elevators.
 - c. Fire-alarm systems.
- B. Interruption of Existing Fire-Alarm System: Do not interrupt fire-alarm system to facilities occupied by Owner or others unless permitted under the following conditions:
 - 1. Notify Architect no fewer than seven days in advance of proposed interruption of fire-alarm system.
 - 2. Do not proceed with interruption of fire-alarm system without Architect's written permission.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1 INSTALLATION OF ELECTRICAL WORK

- A. Unless more stringent requirements are specified in the Contract Documents or manufacturers' written instructions, comply with NFPA 70 and NECA NEIS 1 for installation of electrical Work on the Project. Consult Architect for resolution of conflicting requirements.

END OF SECTION 260010

SECTION 260519 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Thermoplastic-insulated wire.
 - 2. Metallic sheathed cable.
 - 3. Connectors and splices.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional requirements applicable to coordinating, scheduling, and sequencing of the Work specified in this Section.
 - 2. Section 260526 "Grounding and Bonding for Electrical Systems" specifies grounding and bonding referenced by this Section.
 - 3. Section 260529 "Hangers and Supports for Electrical Systems" specifies hangers, supports, and concrete bases referenced by this Section.
 - 4. Section 260533.13 "Conduits for Electrical Systems" specifies installation of raceways referenced by this Section.
 - 5. Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling" specifies installation of sleeves and sleeve seals referenced by this Section.
 - 6. Section 260553 "Identification for Electrical Systems" specifies electrical equipment labels and warning signs referenced by this Section.

1.2 ACTION SUBMITTALS

- A. Product Schedule: Indicate type, use, location, and termination locations.
- B. Product Data: For each type of product.
- C. Field quality-control reports.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Products or components listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.

2.2 THERMOPLASTIC-INSULATED WIRE

- A. Description: Thermoplastic-insulated wire for use in accordance with Article 310 of NFPA 70.
- B. UL ZLGR - Type THHN Insulated Wire:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cerro Wire LLC
 - b. Southwire Company, LLC
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Thermoplastic-Insulated Wire: UL CCN ZLGR, including UL 83.
 - 3. Standard Features:
 - a. Referenced Standard: Article 310 of NFPA 70.
 - b. Insulation Voltage Rating: 600 V.
 - c. Insulation Temperature Rating: 90 deg C.
 - d. Conductor Material: Copper.
 - e. Conductor Size: As indicated on the Drawings.
 - 1) Minimum Conductor Size: 12 AWG.

- C. UL ZLGR - Type THHW Insulated Wire:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Alpha Wire; brand of Belden, Inc.
 - b. Southwire Company, LLC
 - c. Cerro Wire LLC
 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Thermoplastic-Insulated Wire: UL CCN ZLGR, including UL 83.
 3. Standard Features:
 - a. Referenced Standard: Article 310 of NFPA 70.
 - b. Insulation Voltage Rating: 600 V.
 - c. Insulation Temperature Rating: 90 deg C.
 - d. Conductor Material: Copper.
 - e. Conductor Size: As indicated on the Drawings.
 - 1) Minimum Conductor Size: 12 AWG.
- D. UL ZLGR - Type THWN Insulated Wire:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Alpha Wire; brand of Belden, Inc.
 - b. Cerro Wire LLC
 - c. Southwire Company, LLC
 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Thermoplastic-Insulated Wire: UL CCN ZLGR, including UL 83.
 3. Standard Features:
 - a. Referenced Standard: Article 310 of NFPA 70.
 - b. Insulation Voltage Rating: 600 V.
 - c. Insulation Temperature Rating: 75 deg C.
 - d. Conductor Material: Copper.
 - e. Conductor Size: As indicated on the Drawings.
 - 1) Minimum Conductor Size: 12 AWG.
- E. UL ZLGR - Type THWN-2 Insulated Wire:
1. Manufacturers: Subject to compliance with requirements, **[provide products by the following] [provide products by one of the following] [available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following]:**
 - a. Alpha Wire; brand of Belden, Inc.
 - b. Cerro Wire LLC
 - c. Southwire Company, LLC
 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Thermoplastic-Insulated Wire: UL CCN ZLGR, including UL 83.
 3. Standard Features:
 - a. Referenced Standard: Article 310 of NFPA 70.
 - b. Insulation Voltage Rating: 600 V.
 - c. Insulation Temperature Rating: 90 deg C.
 - d. Conductor Material: Copper.
 - e. Conductor Size: As indicated on the Drawings.
 - 1) Minimum Conductor Size: 12 AWG.

2.3 METALLIC SHEATHED CABLE

- A. UL PJAZ - Metal-Clad Cable, Type MC:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Alpha Wire; brand of Belden, Inc.
 - b. Cerro Wire LLC
 - c. Southwire Company, LLC
2. Description: A factory assembly of one or more current-carrying insulated conductors in an overall metallic sheath.
3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Metal-Clad Cable: UL CCN PJAZ, including UL 1569.
4. Standard Features:
 - a. Referenced Standard: Article 330 of NFPA 70.
 - b. Circuits: Single circuit.
 - c. Conductors: Copper, complying with ASTM B3 for bare annealed copper.
 - d. Ground Conductor: Bare.
 - e. Conductor Insulation:
 - 1) Type TFN/THHN/THWN-2. Comply with UL 83.
 - 2) Type XHHW-2. Comply with UL 44.
 - f. Armor: Steel, interlocked.

2.4 CONNECTORS AND SPLICES

A. UL PJOX - Armored and Metal-Clad Cable Fittings:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB, Installation Products
 - b. Adalet; division of Scott Fetzer Co.
 - c. American Fittings Corp. (AMFICO)
 - d. Arlington Industries, Inc.
 - e. Bridgeport Fittings Inc.
 - f. Crouse-Hinds; brand of Eaton, Electrical Sector
 - g. Halex; division of Scott Fetzer Co.
 - h. Killark; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - i. O-Z/Gedney; brand of Appleton Group
 - j. Service Wire Co.
 - k. SIGMA Engineered Solutions
2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Type AC and Type MC Cable Connectors: UL CCN PJOX, including UL 514B.
3. Standard Features: For steel and aluminum sheathed cables, designed to connect conductors specified in this Section.

B. UL ZMVV - Wire Connectors and Soldering Lugs:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB, Installation Products
 - b. Amphenol TPC Wire & Cable
 - c. Burndy; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - d. Eaton
 - e. Fastenal Co.
 - f. Gardner Bender; brand of ECM Industries LLC; division of nVent Electric plc
 - g. Hillsdale Terminal
 - h. Ideal Industries, Inc.
 - i. ILSCO; brand of ECM Industries LLC; division of nVent Electric plc
 - j. Marinco Power Products
 - k. Morris Products Inc.

- l. Newark; an Avnet Company
 - m. Panduit Corp
 - n. Penn-Union Corp.; subsidiary of Nesco, Inc.
 - o. TE Connectivity Ltd.
- 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Wire Connectors and Soldering Lugs: UL CCN ZMVV, including UL 486A-486B or UL 486C.
- 3. Standard Features:
 - a. One piece, seamless, designed to terminate conductors specified in this Section.
 - b. Material: Copper.
 - c. Type: One hole with standard barrels.
 - d. Termination: Crimp.
- 4.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

- A. Feeders:
 - 1. Copper; solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.
- B. Branch Circuits:
 - 1. Material: Copper.
 - a. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.
 - b. Solid for No. 12 AWG and smaller; stranded for No. 10 AWG and larger.

3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

- A. Exposed Feeders: Type THHN/THWN-2, single conductors in raceway.
- B. Feeders Concealed in Ceilings, Walls, Partitions, and Crawlspace: Type THHN/THWN-2, single conductors in raceway.
- C. Feeders Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN/THWN-2, single conductors in raceway.
- D. Exposed Branch Circuits, Including in Crawlspace: Type THHN/THWN-2, single conductors in raceway.
- E. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN/THWN-2, single conductors in raceway.
- F. Branch Circuits Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN/THWN-2, single conductors in raceway.

3.3 INSTALLATION OF LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

- A. Comply with manufacturer's published instructions.
- B. Reference Standards for Installation: Unless more stringent installation requirements are specified in the Contract Documents or manufacturer's published instructions, comply with the following:
 - 1. Electrical Construction: ICC IBC, ICC IFB, NFPA 1, NFPA 70, and NECA NEIS 1.
 - 2. Electrical Maintenance: NFPA 70B.
 - 3. Electrical Safety: NFPA 70E.
 - 4. Temporary Electric Power Work: NECA NEIS 200.
 - 5. Grounding and Bonding: NECA NEIS 331 and Article 250 of NFPA 70.
 - 6. Work in Confined Spaces: NFPA 350.
 - 7. Work in Basements and Other Developed Subterranean Spaces: NFPA 520.
 - 8. Installation of Type AC and Type MC Cables: NECA NEIS 120.

9. Consult Architect for resolution of conflicting requirements.
- C. Special Installation Techniques:
1. Conceal cables in finished walls, ceilings, and floors unless otherwise indicated.
 2. Complete raceway installation between conductor and cable termination points prior to pulling conductors and cables.
 3. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
 4. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.
 5. Install exposed cables parallel and perpendicular to surfaces of exposed structural members, and follow surface contours where possible.
 6. Provide support for cables.
 7. Connections:
 - a. Tighten electrical connectors and terminals in accordance with manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.
 - b. Make splices, terminations, and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.
 - 1) Utilize twist-on insulated spring connectors for conductor sizes 8 AWG and smaller. Do not use push-in wire connectors.
 - 2) Utilize mechanical connectors or compression connectors for conductor sizes 6 AWG and larger.
 8. Wiring at Outlets: Install conductor at each outlet, with at least of slack.
- D. Interfaces with Other Work:
1. Identification:
 - a. Identify and color-code conductors and cables.
 - b. Identify each spare conductor at each end with identity number and location of other end of conductor, and identify as spare conductor.
 2. Sleeves and Sleeve Seals: Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies.
 3. Firestopping: Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly.

3.4 FIELD QUALITY CONTROL

- A. Adminstrant for Electrical Power Tests and Inspections:
1. Administer and perform tests and inspections.
- B. Tests and Inspections:
1. Perform manufacturer's recommended tests and inspections.
 2. After installing conductors and cables and before electrical circuitry has been energized, test service entrance and feeder conductors for compliance with requirements.
 3. Perform each of the following visual and electrical tests:
 - a. Inspect exposed sections of conductor and cable for physical damage and correct connection in accordance with the single-line diagram.
 - b. Test bolted connections for high resistance using one or more of the following:
 - 1) A low-resistance ohmmeter.
 - 2) Calibrated torque wrench.
 - 3) Thermographic survey.
 - c. Inspect compression-applied connectors for correct cable match and indentation.
 - d. Inspect for correct identification.
 - e. Inspect cable jacket and condition.
 - f. Insulation-resistance test on each conductor for ground and adjacent conductors. Apply a potential of 500 V(dc) for 300 V rated cable and 1000 V(dc) for 600 V rated cable for a one-minute duration.

- g. Continuity test on each conductor and cable.
 - h. Uniform resistance of parallel conductors.
- C. Nonconforming Work:
 - 1. Wire or cable assembly will be considered defective if it does not pass tests and inspections.
 - 2. Remove and replace defective units and retest.
- D. Field Quality-Control Reports: Collect, assemble, and submit test and inspection reports.

END OF SECTION 260519

SECTION 260526 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Grounding and bonding conductors.
 - 2. Grounding and bonding clamps.
 - 3. Grounding and bonding bushings.
 - 4. Grounding and bonding hubs.
 - 5. Grounding and bonding connectors.
 - 6. Intersystem bonding bridge grounding connectors.
 - 7. Grounding and bonding busbars.
 - 8. Grounding (earthing) electrodes.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional requirements applicable to coordinating, scheduling, and sequencing of the Work specified in this Section.
 - 2. Section 260553 "Identification for Electrical Systems" specifies electrical equipment labels and warning signs installed by this Section.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Product Listing: Include copy of unexpired approval letter, on letterhead of qualified electrical testing agency, certifying product's compliance with specified listing criteria.
 - a. If listed manufacturer differs from selling manufacturer, indicate relationship between entities on submittal. Clearly indicate which entity warrants product performance and fitness for purpose.
 - b. Listing criteria identified in approval letter must match specified listing criteria. UL label indicating approval of equipment's enclosure is not considered approval of equipment for intended application.
 - c. Product identification in approval letter must match product branding and model numbers in submittal. Approval letters for discontinued or superseded products are unacceptable for submitted product.
- B. Shop Drawings: Prepare and submit the following:
 - 1. Plans showing dimensioned locations of grounding features described in "Field Quality Control for Grounding and Bonding" Article, including the following:
 - a. Grounding electrodes.
 - b. Grounding arrangements and connections for separately derived systems.
- C. Sustainable Design Submittals:
 - 1. Product data for sustainable design features for each type of product.
- D. Field quality-control reports.

1.3 INFORMATIONAL SUBMITTALS

- A. Manufacturer's published instructions.

1.4 SERVICE CONDITIONS FOR ELECTRICAL EQUIPMENT

- A. Electrical and ICT Equipment Grounding (Earthing): Do not exceed 5 Ω resistance to ground (earth).
 - 1. Contact Architect for resolution if 5 Ω specified resistance to ground (earth) is not attained after second attempt to increase effectiveness of grounding (earthing) electrode.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Products or components listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.

2.2 GROUNDING AND BONDING CONDUCTORS

- A. Equipment Grounding Conductor:
 - 1. Standard Features: 600 V, THHN/THWN-2 or THWN-2, copper wire or cable, green color, in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- B. ASTM - Bare Copper Grounding and Bonding Conductor:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ERICO; brand of nVent Electrical plc
 - b. Harger Lightning & Grounding; business of Harger, Inc.
 - 2. Standard Features: Complying with one or more of the following:
 - a. Soft or Annealed Copper Wire: ASTM B3.
 - b. Concentric-Lay Stranded Copper Conductor: ASTM B8.
 - c. Tin-Coated Soft or Annealed Copper Wire: ASTM B33.
 - d. 19-Wire Combination Unilay-Stranded Copper Conductor: ASTM B787/B787M.

2.3 GROUNDING AND BONDING CLAMPS

- A. Description: Clamps suitable for attachment of grounding and bonding conductors to grounding electrodes, pipes, tubing, and rebar. Grounding and bonding clamps specified in this article are also suitable for use with communications applications.
- B. UL KDER and KDSH - Hex-Fitting-Type Pipe and Rod Grounding and Bonding Clamp:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. America Fujikura Ltd. (AFL); Fujikura Ltd.
 - c. Arlington Industries, Inc.
 - d. Cooper B-line; brand of Eaton, Electrical Sector
 - e. Crouse-Hinds; brand of Eaton, Electrical Sector
 - f. ERICO; brand of nVent Electrical plc
 - g. Galvan Industries, Inc.; Electrical Products Division, LLC
 - h. Greaves Corp.; Essex Products Group, Inc.
 - i. Harger Lightning & Grounding; business of Harger, Inc.
 - j. ILSCO; brand of ECM Industries LLC; division of nVent Electric plc
 - k. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - l. Panduit Corp
 - m. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 - 4. Standard Features:
 - a. Two pieces with zinc-plated bolts.
 - b. Clamp Material: Die-cast zinc alloy.
 - c. Listed for outdoor use.
- C. UL KDER and KDSH - U-Bolt-Type Pipe and Rod Grounding and Bonding Clamp:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. America Fujikura Ltd. (AFL); Fujikura Ltd.
 - c. Arlington Industries, Inc.
 - d. Cooper B-line; brand of Eaton, Electrical Sector
 - e. Crouse-Hinds; brand of Eaton, Electrical Sector
 - f. ERICO; brand of nVent Electrical plc
 - g. Galvan Industries, Inc.; Electrical Products Division, LLC
 - h. Greaves Corp.; Essex Products Group, Inc.
 - i. Harger Lightning & Grounding; business of Harger, Inc.
 - j. ILSCO; brand of ECM Industries LLC; division of nVent Electric plc
 - k. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - l. Panduit Corp
 - m. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 4. Standard Features:
 - a. Clamp Material: Tinned brass.
 - b. Listed for outdoor use.
- D. UL KDER and KDSH - Strap-Type Pipe and Rod Grounding and Bonding Clamp:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Burndy; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - b. Crouse-Hinds; brand of Eaton, Electrical Sector
 - c. ERICO; brand of nVent Electrical plc
 - d. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - e. Panduit Corp
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 4. Standard Features:
 - a. Clamp Material: Tinned copper.
 - b. Listed for outdoor use.
- E. UL KDER - Beam Grounding and Bonding Clamp:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Anderson; brand of Hubbell Utility Solutions; Hubbell Incorporated
 - c. Panduit Corp
 - d. Penn-Union Corp.; subsidiary of Nesco, Inc.
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.

- b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 - 4. Standard Features: Mechanical-type, terminal, ground wire access from four directions; with dual, tin-plated or silicon bronze bolts.
- F. UL KDER - Exothermically Welded Connection:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. ALLTEC LLC
 - c. Continental Industries; brand of Hubbell Utility Solutions; Hubbell Incorporated
 - d. Crouse-Hinds; brand of Eaton, Electrical Sector
 - e. ERICO; brand of nVent Electrical plc
 - f. Harger Lightning & Grounding; business of Harger, Inc.
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 - 4. Standard Features: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

2.4 GROUNDING AND BONDING BUSHINGS

- A. Description: Bonding bushings connect conduit fittings, tubing fittings, threaded metal conduit, and unthreaded metal conduit to metal boxes and equipment enclosures, and have one or more bonding screws intended to provide electrical continuity between bushing and enclosure. Grounding bushings have provision for connection of bonding or grounding conductor and may or may not also have bonding screws.
- B. UL KDER - Bonding Bushing:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Arlington Industries, Inc.
 - c. Crouse-Hinds; brand of Eaton, Electrical Sector
 - d. Killark; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - e. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - f. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - 4. Standard Features: Threaded bushing with insulated throat.
- C. UL KDER - Grounding Bushing:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Arlington Industries, Inc.
 - c. Crouse-Hinds; brand of Eaton, Electrical Sector
 - d. Killark; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - e. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - f. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - 2. Source Limitations: Obtain products from single manufacturer.

3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
4. Standard Features: Threaded bushing with insulated throat and mechanical-type wire terminal.

2.5 GROUNDING AND BONDING HUBS

- A. UL KDER - Grounding and Bonding Hub:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Arlington Industries, Inc.
 - c. Burndy; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - d. Crouse-Hinds; brand of Eaton, Electrical Sector
 - e. Greaves Corp.; Essex Products Group, Inc.
 - f. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - g. Penn-Union Corp.; subsidiary of Nesco, Inc.
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 4. Standard Features: Insulated, gasketed, watertight hub with mechanical-type wire terminal.

2.6 GROUNDING AND BONDING CONNECTORS

- A. UL KDER - Pressure-Type Grounding and Bonding Busbar Cable Connector:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Burndy; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 4. Standard Features: Copper or copper alloy, for compression bonding of one or more conductor directly to copper busbar. Listed for direct burial.
- B. UL KDER - Lay-In Lug Mechanical-Type Grounding and Bonding Busbar Terminal:
 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Chatsworth Products, Inc.
 - c. Greaves Corp.; Essex Products Group, Inc.
 - d. ILSCO; brand of ECM Industries LLC; division of nVent Electric plc
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 4. Standard Features: Mechanical-type, copper rated for direct burial terminal with set screw.
- C. UL KDER - Crimped Lug Pressure-Type Grounding and Bonding Busbar Terminal:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Harger Lightning & Grounding; business of Harger, Inc.
 - c. ILSCO; brand of ECM Industries LLC; division of nVent Electric plc
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 4. Standard Features: Cast silicon bronze, solderless compression-type wire terminals; with long barrel and two holes spaced on 5/8 or 1 inch centers for two-bolt connection to busbar.
- D. UL KDER - Split-Bolt Service-Post Pressure-Type Grounding and Bonding Busbar Terminal:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Panduit Corp
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 4. Standard Features: Bolts that surround cable and bond to cable under compression when nut is tightened after assembly is screwed into busbar opening.
- E. UL KDER - Crimped Pressure-Type Grounding and Bonding Cable Connector:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. allG Fabrication (formerly ALT)
 - c. Burndy; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - d. ILSCO; brand of ECM Industries LLC; division of nVent Electric plc
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
 4. Standard Features: Crimp-and-compress connectors that bond to conductor when connector is compressed around conductor.
 - a. Tinned copper, C and H shaped.
- F. UL KDER - Split-Bolt Pressure-Type Grounding and Bonding Cable Connector:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. allG Fabrication (formerly ALT)
 - c. ERICO; brand of nVent Electrical plc
 - d. Greaves Corp.; Essex Products Group, Inc.
 2. Source Limitations: Obtain products from single manufacturer.
 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:

- a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - b. Grounding and Bonding Equipment for Communications: UL CCN KDSH; including UL 467.
- 4. Standard Features: Bolts that surround cable and bond to cable under compression when nut is tightened.
 - a. Tinned copper.

2.7 GROUNDING AND BONDING BUSBARS

- A. Description: Miscellaneous grounding and bonding devices that serve as common connection for multiple grounding and bonding conductors.
- B. UL KDER - Equipment Room Grounding and Bonding Busbar:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. allG Fabrication (formerly ALT)
 - b. Chatsworth Products, Inc.
 - c. Continental Industries; brand of Hubbell Utility Solutions; Hubbell Incorporated
 - d. Cooper B-line; brand of Eaton, Electrical Sector
 - e. ERICO; brand of nVent Electrical plc
 - f. Harger Lightning & Grounding; business of Harger, Inc.
 - g. Hoffman; brand of nVent Electrical plc
 - h. ILSCO; brand of ECM Industries LLC; division of nVent Electric plc
 - i. Panduit Corp
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - 4. Standard Features:
 - a. Bus: Rectangular bar of annealed copper.
 - b. Mounting Stand-Off Insulators: Lexan or PVC.
 - 1) Comply with UL 891 for use in 600 V switchboards, impulse tested at 5000 V.
 - 5. Other Available Features Required by the Project:
 - a. Dimensions: 1/4 by 4 inch in cross section; length as indicated on the Drawings.
 - b. Predrilled Hole Pattern: 9/32 inch holes spaced 1-1/8 inch apart.
 - c. Mounting Hardware: Stand-off brackets that provide 2 inch clearance to access rear of bus. Brackets and bolts must be stainless steel.

2.8 GROUNDING (EARTHING) ELECTRODES

- A. UL KDER - Rod Electrode:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. allG Fabrication (formerly ALT)
 - c. Continental Industries; brand of Hubbell Utility Solutions; Hubbell Incorporated
 - d. ERICO; brand of nVent Electrical plc
 - e. Galvan Industries, Inc.; Electrical Products Division, LLC
 - f. Harger Lightning & Grounding; business of Harger, Inc.
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
 - 4. Standard Features: [**Copper-clad**] [**Zinc-coated**] [**Stainless**] steel[, **sectional type**]; 3/4 inch by 10 ft.
- B. UL KDER - Plate Electrode:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ALLTEC LLC
 - b. Galvan Industries, Inc.; Electrical Products Division, LLC
2. Source Limitations: Obtain products from single manufacturer.
3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Grounding and Bonding Equipment: UL CCN KDER; including UL 467.
4. Standard Features: 1/4 inch thick, hot-dip galvanized.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine facility's grounding electrode system and equipment grounding for compliance with requirements for maximum ground-resistance level and other conditions affecting performance of grounding and bonding of electrical system.
- B. Inspect test results of grounding system measured at point of electrical service equipment connection.
- C. Prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.
- D. Proceed with connection of electrical service equipment only after unsatisfactory conditions have been corrected.

3.2 SELECTION OF GROUNDING AND BONDING PRODUCTS

- A. Grounding and Bonding Conductors:
 1. Provide solid conductor for 8 AWG and smaller, and stranded conductors for 6 AWG and larger unless otherwise indicated.
 2. Custom-Length Insulated Equipment Bonding Jumpers: 6 AWG, 19-strand, Type THHN.
 3. Bonding Cable: 28 kcmil, 14 strands of 17 AWG conductor, 1/4 inch in diameter.
 4. Bonding Conductor: 4 AWG or 6 AWG, stranded conductor.
 5. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inch wide and 1/16 inch thick.
 6. Tinned Bonding Jumper: Tinned-copper tape, braided conductors terminated with copper ferrules; 1-5/8 inch wide and 1/16 inch thick.
 7. Underground Grounding Conductors: Install bare tinned-copper conductor, 2/0 AWG minimum.
- B. Grounding and Bonding Connectors:
 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
 2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
 3. Connections to Ground Rods at Test Wells: Bolted connectors.
 4. Connections to Structural Steel: Welded connectors.
- C. Grounding and Bonding Busbars: Provide in electrical equipment rooms, in rooms housing service equipment, and elsewhere as indicated on the Drawings.

3.3 INSTALLATION OF GROUNDING AND BONDING

- A. Comply with manufacturer's published instructions.
- B. Reference Standards:
 1. Electrical Construction: ICC IBC, ICC IFC, NFPA 1, NFPA 70, and NECA NEIS 1.
 2. Electrical Maintenance: NFPA 70B.
 3. Electrical Safety: NFPA 70E.
 4. Grounding and Bonding: NECA NEIS 331 and Article 250 of NFPA 70.
 5. Consult Architect for resolution of conflicting requirements.
- C. Special Techniques:
 1. Grounding and Bonding Conductors:

- a. Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.
 - b. Underground Grounding Conductors:
 - 1) Bury at least 30 inch below grade.
 - 2) Duct-Bank Grounding Conductor: Bury 12 inch above duct bank when indicated as part of duct-bank installation.
- 2. Grounding and Bonding Connectors: Make connections so possibility of galvanic action or electrolysis is minimized. Select connectors, connection hardware, conductors, and connection methods so metals in direct contact are galvanically compatible.
 - a. Use electroplated or hot-tin-coated materials to ensure high conductivity and to make contact points closer in order of galvanic series.
 - b. Make connections with clean, bare metal at points of contact.
 - c. Make aluminum-to-steel connections with stainless steel separators and mechanical clamps.
 - d. Make aluminum-to-galvanized-steel connections with tin-plated copper jumpers and mechanical clamps.
 - e. Coat and seal connections having dissimilar metals with inert material to prevent future penetration of moisture to contact surfaces.
 - f. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.
 - 1) Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate adjacent parts.
 - 2) Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
 - 3) Use exothermic-welded connectors for outdoor locations; if disconnect-type connection is required, use bolted clamp.
 - g. Grounding and Bonding for Piping:
 - 1) Metal Water Service Pipe: Install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to main metal water service pipes; use bolted clamp connector or bolt lug-type connector to pipe flange by using one of lug bolts of flange. Where dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.
 - 2) Water Meter Piping: Use braided-type bonding jumpers to electrically bypass water meters. Connect to pipe with bolted connector.
 - 3) Bond each aboveground portion of gas piping system downstream from equipment shutoff valve.
 - h. Grounding for Steel Building Structure: Install driven ground rod at base of each corner column and at intermediate exterior columns at distances not more than 60 ft apart.
- 3. Grounding and Bonding Busbars:
 - a. Install busbar horizontally, on insulated spacers 2 inch minimum from wall, 6 inch above finished floor unless otherwise indicated.
 - b. Where busbars are indicated on both sides of doorways, route bonding conductor up to top of door frame, across top of doorway, and down; connect to continuation of horizontal busbar.
- 4. Electrodes:
 - a. Ground Rods: Drive rods until tops are 2 inch below finished floor or final grade unless otherwise indicated.
 - 1) Interconnect ground rods with grounding electrode conductor below grade and as otherwise indicated. Make connections without exposing steel or damaging coating if any.
 - 2) Use exothermic welds for below-grade connections.
 - b. Concrete-Encased Electrode (Ufer Ground):
 - 1) Fabricate in accordance with NFPA 70; use minimum of 20 ft of bare copper conductor not smaller than 4 AWG.

- a) If concrete foundation is less than 20 ft long, coil excess conductor within base of foundation.
 - b) Bond grounding conductor to reinforcing steel in at least four locations and to anchor bolts. Extend grounding conductor below grade and connect to building's grounding grid or to grounding electrode external to concrete.
- 5. Grounding at Service:
 - a. Equipment grounding conductors and grounding electrode conductors must be connected to ground busbar. Install main bonding jumper between neutral and ground buses.
- 6. Grounding Separately Derived Systems:
 - a. Permanent Generators: Install grounding electrode(s) at location of permanent generators having switched neutral connections. Electrode must be connected to equipment grounding conductor and to frame of generator.
- 7. Equipment Grounding and Bonding:
 - a. Install insulated equipment grounding conductors with feeders and branch circuits.
 - b. Install insulated equipment grounding conductors with the following items, in addition to those required by NFPA 70:
 - 1) Feeders and branch circuits.
 - 2) Lighting circuits.
 - 3) Receptacle circuits.
 - 4) Single-phase motor and appliance branch circuits.
 - 5) Three-phase motor and appliance branch circuits.
 - 6) Flexible raceway runs.
 - 7) Armored and metal-clad cable runs.
 - 8) Busway Supply Circuits: Install insulated equipment grounding conductor from grounding bus in switchgear, switchboard, or distribution panel to equipment grounding bar terminal on busway.
 - c. Air-Duct Equipment Circuits: Install insulated equipment grounding conductor to duct-mounted electrical devices operating at 120 V and more, including air cleaners, heaters, dampers, humidifiers, and other duct electrical equipment. Bond conductor to each unit and to air duct and connected metallic piping.
 - d. Water Heater: Install separate insulated equipment grounding conductor to each electric water heater and heat-tracing cable. Bond conductor to heater units, piping, connected equipment, and components.
 - e. Poles Supporting Outdoor Lighting Fixtures: Bond insulated equipment grounding conductor to equipment grounding terminal inside pole base.

3.4 FIELD QUALITY CONTROL FOR GROUNDING AND BONDING

- A. Tests and Inspections:
 - 1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
 - 2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with calibrated torque wrench in accordance with manufacturer's published instructions.
 - 3. Test completed grounding system at each location where maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal, and at individual ground rods. Make tests at ground rods before conductors are connected.
 - a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
 - b. Perform tests by fall-of-potential method in accordance with IEEE Std 81.
 - c. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.
- B. Nonconforming Work:
 - 1. Grounding system will be considered defective if it does not pass tests and inspections.
 - 2. Remove and replace defective components and retest.
- C. Collect, assemble, and submit test and inspection reports.

3.5 PROTECTION

- A. After installation, protect grounding and bonding cables and equipment from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

END OF SECTION 260526

This page intentionally left blank.

SECTION 260529 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Support systems.
 - 2. Mounting, anchoring, and attachment components.
 - 3. Installation of fabricated metal supports.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional requirements applicable to coordinating, scheduling, and sequencing of the Work specified in this Section.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for the following:
 - a. Slotted support systems, hardware, and accessories.
 - b. Clamps.
 - c. Hangers.
 - d. Sockets.
 - e. Eye nuts.
 - f. Fasteners.
 - g. Anchors.
 - h. Saddles.
 - i. Brackets.
 - 2. Include rated capacities and furnished specialties and accessories.
- B. Shop Drawings: For fabrication and installation details for electrical hangers and support systems.
 - 1. Hangers. Include product data for components.
 - 2. Slotted support systems.
 - 3. Equipment supports.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame Rating: Class 1.
 - 2. Self-extinguishing according to ASTM D635.

2.2 SUPPORT SYSTEMS

- A. Steel Slotted Support Systems:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Allied Tube & Conduit; Atkore International
 - c. Atkore Unistrut
 - d. CADDY; brand of nVent Electrical plc
 - e. Cooper B-line; brand of Eaton, Electrical Sector
 - f. Flex-Strut Inc.
 - g. G-Strut
 - h. Gripple Inc.
 - i. Haydon Corporation
 - j. Metal Ties Innovation

- k. MIRO Industries Inc.
 - l. Rocket Rack; Robroy Industries
 - m. Wesanco/ZSi-Foster; an Ideal Tridon Group Company
 - 2. Standard Features: Preformed steel channels and angles with minimum 13/32 inch diameter holes at a maximum of 8 inch on center in at least one surface.
 - a. Referenced Standard: MFMA-4 factory-fabricated components for field assembly.
 - b. Material for Channel, Fittings, and Accessories: Galvanized steel.
 - c. Channel Width: Selected for applicable load criteria.
 - d. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.
 - e. Nonmetallic Coatings: Manufacturer's standard PVC, polyurethane, or polyester coating applied according to MFMA-4.
 - f. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-4.
 - B. Aluminum Slotted Support Systems:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Atkore Unistrut
 - c. Eaton
 - d. Flex-Strut Inc.
 - e. Haydon Corporation
 - f. MKT Metal Manufacturing
 - 2. Standard Features: Extruded-aluminum channels and angles with minimum 13/32 inch diameter holes at a maximum of 8 inch on center in at least one surface.
 - a. Referenced Standard: MFMA-4 factory-fabricated components for field assembly.
 - b. Channel Material: 6063-T5 aluminum alloy.
 - c. Fittings and Accessories Material: 5052-H32 aluminum alloy.
 - d. Channel Width: Selected for applicable load criteria.
 - e. Nonmetallic Coatings: Manufacturer's standard PVC, polyurethane, or polyester coating applied according to MFMA-4.
 - f. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-4.
 - C. Conduit and Cable Support Devices:
 - 1. Standard Features: hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.
 - D. Support for Conductors in Vertical Conduit:
 - 1. Standard Features: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for nonarmored electrical conductors or cables in riser conduits. Plugs must have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body must be made of malleable iron.
 - E. Structural Steel for Fabricated Supports and Restraints:
 - 1. Standard Features: ASTM A36/A36M steel plates, shapes, and bars; black and galvanized.
- 2.3 MOUNTING, ANCHORING, AND ATTACHMENT COMPONENTS**
- A. Mechanical-Expansion Anchors:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cooper B-line; brand of Eaton, Electrical Sector
 - b. Empire Industries, Inc.
 - c. Hilti, Inc.
 - d. ITW Ramset/Red Head; Illinois Tool Works, Inc.
 - e. MKT Fastening, LLC
 - 2. Standard Features: Insert-wedge-type, zinc-coated steel, for use in hardened portland cement concrete, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
 - B. Clamps for Attachment to Steel Structural Elements:

1. Standard Features: MSS SP-58 units are suitable for attached structural element.
- C. Through Bolts:
 1. Standard Features: Structural type, hex head, and high strength. Comply with ASTM F3125/F3125M, Grade A325.
- D. Toggle Bolts:
 1. Standard Features: All steel springhead type.
- E. Hanger Rods:
 1. Standard Features: Threaded steel.

PART 3 - EXECUTION

3.1 SELECTION OF HANGERS AND SUPPORTS

- A. Maximum Support Spacing and Minimum Hanger Rod Size for Raceways: Space supports for EMT, IMC, and ERMC as scheduled in NECA NEIS 1, where its Table 1 lists maximum spacings that are less than those stated in NFPA 70. Minimum rod size must be 1/4 inch in diameter.
- B. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
 1. Secure raceways and cables to these supports with single-bolt conduit clamps or single-bolt conduit clamps using spring friction action for retention in support channel.
- C. Spring-steel clamps designed for supporting single conduits without bolts may be used for 1-1/2 inch and smaller raceways serving branch circuits and communication systems above suspended ceilings, and for fastening raceways to trapeze supports.

3.2 INSTALLATION OF HANGERS AND SUPPORTS

- A. Comply with manufacturer's published instructions.
- B. Reference Standards for Installation: Unless more stringent installation requirements are specified in the Contract Documents or manufacturer's published instructions, comply with the following:
 1. Electrical Construction: ICC IBC, ICC IFC, NFPA 1, NFPA 70, and NECA NEIS 1.
 2. Hot Work: NFPA 51B.
 3. Work in Confined Spaces: NFPA 350.
 4. Installation of Steel Conduit: NECA NEIS 101.
 5. Consult Architect for resolution of conflicting requirements.
- C. Special Installation Techniques:
 1. Raceway Support Methods: In addition to methods described in NECA NEIS 1, EMT IMC and ERMC may be supported by openings through structure members, in accordance with NFPA 70.
 2. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination must be weight of supported components plus 200 lb.
 3. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:
 - a. To Wood: Fasten with lag screws or through bolts.
 - b. To New Concrete: Bolt to concrete inserts.
 - c. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
 - d. To Existing Concrete: Expansion anchor fasteners.
 - e. To Steel: Beam clamps (MSS SP-58, Type 19, 21, 23, 25, or 27), complying with MSS SP-69.
 - f. To Light Steel: Sheet metal screws.
 - g. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes,

- transformers, and other devices on slotted-channel racks attached to substrate by means that comply with seismic-restraint strength and anchorage requirements.
4. Drill holes for expansion anchors in concrete at locations and to depths that avoid the need for reinforcing bars.
- D. Interfaces with Other Work:
1. Provide vibration controls with hangers and supports.
 2. Touchup Finishes:
 - a. Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - 1) Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.
 - b. Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal.
 - c. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A780.
 3. Installation of Fabricated Metal Supports:
 - a. Provide site-fabricated metal supports.
 - b. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.
 - c. Field Welding: Comply with AWS D1.1/D1.1M. Submit welding certificates.

END OF SECTION 260529

SECTION 260533.13 - CONDUITS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Type EMT duct raceways and elbows.
 - 2. Type ERMC duct raceways, elbows, couplings, and nipples.
 - 3. Type FMC duct raceways.
 - 4. Type IMC duct raceways.
 - 5. Type LFMC duct raceways.
 - 6. Type PVC duct raceways and fittings.
 - 7. Fittings for conduit, tubing, and cable.
 - 8. Joint compounds.
 - 9. Solvent cements.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional coordination, scheduling, sequencing, submittal, and installation requirements applicable to the Work for electrical, communications, and electronic safety and security systems on the Project, including wiring methods.
 - 2. Section 260519 "Low-Voltage Electrical Power Conductors and Cables" specifies nonmetallic underground conduit with conductors (Type NUCC).
 - 3. Section 260529 "Hangers and Supports for Electrical Systems" specifies conduit hangers and supports referenced by this Section.
 - 4. Section 260553 "Identification for Electrical Systems" specifies electrical equipment labels.

1.2 REFERENCES

- A. Abbreviations and Acronyms for Electrical Raceway Types:
 - 1. EMT: Electrical metallic tubing.
 - 2. EMT-A: Aluminum electrical metallic tubing.
 - 3. EMT-S: Steel electrical metallic tubing.
 - 4. EMT-SS: Stainless steel electrical metallic tubing.
 - 5. ERMC: Electrical rigid metal conduit.
 - 6. ERMC-A: Aluminum electrical rigid metal conduit.
 - 7. ERMC-S: Steel electrical rigid metal conduit.
 - 8. ERMC-S-G: Galvanized-steel electrical rigid metal conduit.
 - 9. ERMC-S-PVC: PVC-coated-steel electrical rigid metal conduit.
 - 10. ERMC-SS: Stainless steel electrical rigid metal conduit.
 - 11. FMC: Flexible metal conduit.
 - 12. FMC-A: Aluminum flexible metal conduit.
 - 13. FMC-S: Steel flexible metal conduit.
 - 14. IMC: Steel electrical intermediate metal conduit.
 - 15. LFMC: Liquidtight flexible metal conduit.
 - 16. LFMC-A: Aluminum liquidtight flexible metal conduit.
 - 17. LFMC-S: Steel liquidtight flexible metal conduit.
 - 18. LFMC-SS: Stainless steel liquidtight flexible metal conduit.
 - 19. LFNC: Liquidtight flexible nonmetallic conduit.
 - 20. LFNC-A: Layered (Type A) liquidtight flexible nonmetallic conduit.
 - 21. LFNC-B: Integral (Type B) liquidtight flexible nonmetallic conduit.
 - 22. LFNC-C: Corrugated (Type C) liquidtight flexible nonmetallic conduit.
 - 23. PVC: Rigid PVC conduit.
 - 24. PVC-40: Schedule 40 rigid PVC conduit.
 - 25. PVC-80: Schedule 80 rigid PVC Conduit.
 - 26. PVC-A: Type A rigid PVC concrete-encased conduit.
 - 27. PVC-EB: Type EB rigid PVC concrete-encased underground conduit.
 - 28. RGS: See ERMC-S-G.

29. RMC: See ERMCM.

B. Definitions:

1. Conduit: A structure containing one or more duct raceways.
2. Direct Buried: Installed underground without encasement in concrete or other protective material.
3. Duct Bank: An arrangement of conduit providing one or more continuous duct raceways between two points.
4. Duct Raceway: A single enclosed raceway for conductors or cable.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

- A. Manufacturer's published instructions.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Products or components listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
- B. Unless indicated otherwise on drawings, minimum conduit sizes shall be as listed for each conduit type.

2.2 TYPE EMT DUCT RACEWAYS AND ELBOWS

- A. UL FJMX - Steel Electrical Metal Tubing (EMT-S) and Elbows:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Allied Tube & Conduit; Atkore International
 - b. Calconduit; Atkore International
 - c. Emerson Electric Co., Automation Solutions
 - d. Picoma; Zekelman Industries
 - e. Republic Conduit; Nucor Corporation, Nucor Tubular Products
 - f. Topaz Lighting & Electric
 - g. Western Tube; Zekelman Industries
 - h. Wheatland Tube; Zekelman Industries
 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN FJMX; including UL 797.
 3. Standard Features:
 - a. Material: Steel.
 - b. Exterior Coating: Zinc.
 - c. Interior Coating: Zinc.
 - d. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.3 TYPE ERMCM DUCT RACEWAYS, ELBOWS, COUPLINGS, AND NIPPLES

- A. UL DYIX - Galvanized-Steel Electrical Rigid Metal Conduit (ERMCM-S-G), Elbows, Couplings, and Nipples:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Allied Tube & Conduit; Atkore International
 - b. Calconduit; Atkore International
 - c. Crouse-Hinds; brand of Eaton, Electrical Sector
 - d. Killark; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - e. Patriot Aluminum Products, LLC

- f. Republic Conduit; Nucor Corporation, Nucor Tubular Products
 - g. Rymco USA brand; manufactured and listed by subsidiary Conduit S.A. de C.V
 - h. Topaz Lighting & Electric
 - i. Western Tube; Zekelman Industries
 - j. Wheatland Tube; Zekelman Industries
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DYIX; including UL 6.
 - 3. Standard Features:
 - a. Exterior Coating: Zinc.
 - b. Interior Coating: Zinc.
 - c. Minimum Trade Size: Metric designator 21 (trade size 3/4).
- B. UL DYIX - PVC-Coated-Steel Electrical Rigid Metal Conduit (ERMC-S-PVC), Elbows, Couplings, and Nipples:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Bluesteel Services LLC
 - c. Calbond; Atkore International
 - d. KorKap; Robroy Industries
 - e. Perma-Cote; Robroy Industries
 - f. Plasti-Bond; Robroy Industries
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DYIX; including UL 6.
 - 3. Standard Features:
 - a. Exterior Coating: PVC complying with NEMA RN 1.
 - b. Interior Coating: Zinc.
 - c. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.4 TYPE FMC DUCT RACEWAYS

- A. UL DXUZ - Steel Flexible Metal Conduit (FMC-S):
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Anaconda Sealite; Anamet Electrical, Inc
 - c. Electri-Flex Company
 - d. International Metal Hose Co.
 - e. Penn Aluminum Conduit & EMT; Penn Aluminum International LLC; Berkshire Hathaway
 - f. Topaz Lighting & Electric
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DXUZ; including UL 1.
 - 3. Standard Features:
 - a. Material: Steel.
 - b. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.5 TYPE IMC DUCT RACEWAYS

- A. UL DYBY - Steel Intermediate Metal Conduit (IMC):
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products

- b. Allied Tube & Conduit; Atkore International
 - c. Calconduit; Atkore International
 - d. Republic Conduit; Nucor Corporation, Nucor Tubular Products
 - e. Rymco USA brand; manufactured and listed by subsidiary Conduit S.A. de C.V
 - f. Topaz Lighting & Electric
 - g. Western Tube; Zekelman Industries
 - h. Wheatland Tube; Zekelman Industries
- 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DYBY; including UL 1242.
- 3. Standard Features:
 - a. Exterior Coating: Zinc.
 - b. Interior Coating: Zinc.
 - c. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.6 TYPE LFMC DUCT RACEWAYS

- A. UL DXHR - Steel Liquidtight Flexible Metal Conduit (LFMC-S):
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Anaconda Sealtite; Anamet Electrical, Inc
 - c. Electri-Flex Company
 - d. International Metal Hose Co
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DXHR; including UL 360.
 - 3. Standard Features:
 - a. Material: Steel.
 - b. Minimum Trade Size: Metric designator 21 (trade size 3/4).

2.7 TYPE PVC DUCT RACEWAYS AND FITTINGS

- A. UL DZYR - Schedule 40 Rigid PVC Conduit (PVC-40) and Fittings:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Calconduit; Atkore International
 - c. JM Eagle
 - d. NAPCO; Westlake Chemical Corp.
 - e. National Pipe and Plastic, Inc. (Oldcastle)
 - f. Opti-Com Manufacturing Network, Inc (OMNI)
 - g. Topaz Lighting & Electric
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DZYR; including UL 651.
 - 3. Standard Features:
 - a. Dimensional Specifications: Schedule 40.
 - b. Minimum Trade Size: Metric designator 21 (trade size 3/4).
 - c. Markings: For use with maximum 90 deg C wire.
- B. UL DZYR - Schedule 80 Rigid PVC Conduit (PVC-80) and Fittings:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Calconduit; Atkore International

- c. JM Eagle
 - d. National Pipe and Plastic, Inc. (Oldcastle)
 - e. Opti-Com Manufacturing Network, Inc (OMNI)
 - f. Topaz Lighting & Electric
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DZYR; including UL 651.
 - 3. Standard Features:
 - a. Dimensional Specifications: Schedule 80.
 - b. Minimum Trade Size: Metric designator 21 (trade size 3/4).
 - c. Markings: For use with maximum 90 deg C wire.
- C. UL DZYR - Type A Rigid PVC Concrete-Encased Conduit (PVC-A) and Fittings:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Southern Pipe, Inc.
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DZYR; including UL 651.
 - 3. Standard Features:
 - a. Dimensional Specifications: Type A.
 - b. Minimum Trade Size: Metric designator 21 (trade size 3/4).
- D. UL DZYR - Type EB Rigid PVC Concrete-Encased Underground Conduit (PVC-EB) and Fittings:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. JM Eagle
 - b. Southern Pipe, Inc.
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DZYR; including UL 651.
 - 3. Standard Features:
 - a. Dimensional Specifications: Type EB.
 - b. Minimum Trade Size: Metric designator 53 (trade size 2).

2.8 FITTINGS FOR CONDUIT, TUBING, AND CABLE

- A. UL DWTT - Fittings for Type ERM, Type IMC, and Type PVC Duct Raceways:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Crouse-Hinds; brand of Eaton, Electrical Sector
 - d. Konkore Fittings; Atkore International
 - e. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - f. Penn Aluminum Conduit & EMT; Penn Aluminum International LLC; Berkshire Hathaway
 - g. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - h. Southwire Company, LLC
 - i. Topaz Lighting & Electric
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DWTT; including UL 514B.
 - 3. Standard Features:
 - a. Type ERM and IMC

- 1) Material: Steel.
 - 2) Coupling Method: Use threaded fittings only.
 - b. Type PVC
 - 1) Material: PVC
- B. UL FKA V - Fittings for Type EMT Duct Raceways:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Allied Tube & Conduit; Atkore International
 - c. Appleton; Emerson Electric Co., Automation Solutions
 - d. Calconduit; Atkore International
 - e. Crouse-Hinds; brand of Eaton, Electrical Sector
 - f. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - g. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - h. Southwire Company, LLC
 - i. Topaz Lighting & Electric
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN FKA V; including UL 514B.
 - 3. Standard Features:
 - a. Material: Steel.
 - b. Coupling Method: Compression coupling or setscrew coupling. Setscrew couplings with only single screw per conduit are unacceptable.
 - c. Expansion and Deflection Fittings: UL 651 with flexible bonding jumper.
- C. UL ILNR - Fittings for Type FMC Duct Raceways:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Fittings Corp. (AMFICO)
 - b. Liquid Tight Connector Co.
 - c. Southwire Company, LLC
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN ILNR; including UL 514B.
- D. UL DXAS - Fittings for Type LFMC Duct Raceways:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Arlington Industries, Inc.
 - b. Liquid Tight Connector Co.
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN DXAS; including UL 514B.

2.9 JOINT COMPOUNDS

- A. UL FOIZ - Electrically Conductive Corrosion-Resistant Compound for Threaded Conduit:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN FOIZ; including UL Subject 2419.

2.10 SOLVENT CEMENTS

- A. UL VBEW - Solvent Cements for Nonmetallic Duct Raceways and Fittings:
 - 1. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Solvent Cements: UL CCN VBEW; including UL 340.
 - b. Solvent Cement Compatibility with PVC Conduit Fittings: UL CCN DWTT; including UL 514B. Follow solvent manufacturer's published instructions.
 - c. Solvent Cement Compatibility with Rigid PVC Conduit: UL CCN DZYR; including UL 651. Follow solvent manufacturer's published instructions.

PART 3 - EXECUTION

3.1 SELECTION OF CONDUITS FOR ELECTRICAL SYSTEMS

- A. Unless more stringent requirements are specified in the Contract Documents or manufacturer's published instructions, comply with NFPA 70 for selection of duct raceways. Consult Architect for resolution of conflicting requirements.
- B. Outdoors:
 - 1. Exposed and Subject to Severe Physical Damage: ERM C.
 - 2. Exposed and Subject to Physical Damage: ERM C or IM C.
 - 3. Exposed and Not Subject to Physical Damage: ERM C, IM C, or PVC-80.
 - 4. Concealed Aboveground: ERM C, IM C, EMT, PVC-80, or PVC-40.
 - 5. Direct Buried: PVC-80.
 - 6. Concrete Encased: PVC-80 or PVC-40.
 - 7. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
- C. Indoors:
 - 1. Exposed and Subject to Severe Physical Damage: ERM C.
 - 2. Exposed and Subject to Physical Damage: ERM C or IM C.
 - 3. Exposed and Not Subject to Physical Damage: ERM C, IM C, or .
 - 4. Concealed in Ceilings and Interior Walls and Partitions: EMT.
 - 5. Damp or Wet Locations: Corrosion-resistant EMT.
 - 6. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
- D. Duct Fittings: Select fittings in accordance with NEMA FB 2.10 guidelines.
 - 1. ERM C and IM C: Provide threaded-type fittings unless otherwise indicated.

3.2 INSTALLATION OF CONDUITS FOR ELECTRICAL SYSTEMS

- A. Comply with manufacturer's published instructions.
- B. Reference Standards for Installation: Unless more stringent installation requirements are specified in the Contract Documents or manufacturer's published instructions, comply with the following:
 - 1. Electrical Construction: ICC IBC, ICC IF C, NFPA 1, NFPA 70, and NECA NEIS 1.
 - 2. Electrical Safety: NFPA 70E.
 - 3. Commissioning of Active and Passive Fire Protection Features: NFPA 3 and NFPA 4.
 - 4. Grounding and Bonding: NECA NEIS 331 and Article 250 of NFPA 70.
 - 5. Communications Work: BICSI N1.
 - 6. Life Safety and Means of Egress Work: NFPA 101.
 - 7. Emergency and Standby Power Work: NFPA 110, NFPA 111, and NECA NEIS 416.
 - 8. Work in Confined Spaces: NFPA 350.
 - 9. Work in Basements and Other Developed Subterranean Spaces: NFPA 520.
 - 10. Type EMT-S: Article 358 of NFPA 70 and NECA NEIS 101.
 - 11. Type ERM C-S: Article 344 of NFPA 70 and NECA NEIS 101.
 - 12. Type FM C-S: Article 348 of NFPA 70 and NECA NEIS 101.

13. Type IMC: Article 342 of NFPA 70 and NECA NEIS 101.
14. Type LFMC: Article 350 of NFPA 70 and NECA NEIS 101.
15. Type PVC: Article 356 of NFPA 70 and NECA NEIS 111.
16. Expansion Fittings: NEMA FB 2.40.
17. Consult Architect for resolution of conflicting requirements.

C. Special Installation Techniques:

1. General Requirements for Installation of Duct Raceways:
 - a. Complete duct raceway installation before starting conductor installation.
 - b. Provide stub-ups through floors with coupling threaded inside for plugs, set flush with finished floor. Plug coupling until conduit is extended above floor to final destination or a minimum of 2 ft above finished floor.
 - c. Install no more than equivalent of three 90-degree bends in conduit run. Support within 12 inch of changes in direction.
 - d. Make bends in duct raceway using large-radius preformed ells except for parallel bends. Field bending must be in accordance with NFPA 70 minimum radii requirements. Provide only equipment specifically designed for material and size involved.
 - e. Conceal conduit within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
 - f. Support conduit within 12 inch of enclosures to which attached.
 - g. Install duct sealing fittings at accessible locations in accordance with NFPA 70 and fill them with listed sealing compound. For concealed duct raceways, install fitting in flush steel box with blank cover plate having finish similar to that of adjacent plates or surfaces. Install duct sealing fittings in accordance with NFPA 70.
 - h. Install devices to seal duct raceway interiors at accessible locations. Locate seals so no fittings or boxes are between the seal and the following changes of environments. Seal interior of duct raceways at the following points:
 - 1) Where an underground service duct raceway enters a building or structure.
 - 2) Conduit extending from interior to exterior of building.
 - 3) Where otherwise required by NFPA 70.
 - i. Do not install conduits within 2 inch of the bottom side of a metal deck roof.
 - j. Cut conduit perpendicular to the length. For conduits metric designator 53 (trade size 2) and larger, use roll cutter or a guide to make cut straight and perpendicular to the length. Ream inside of conduit to remove burrs.
 - k. Install pull wires in empty duct raceways. Provide polypropylene or monofilament plastic line with not less than 200 lb tensile strength. Leave at least 12 inch of slack at both ends of pull wire. Cap underground duct raceways designated as spare above grade alongside duct raceways in use.
 - l. Install duct raceways square to the enclosure and terminate at enclosures without hubs with locknuts on both sides of enclosure wall. Install locknuts hand tight, plus one-quarter turn more.
 - 1) Termination fittings with shoulders do not require two locknuts.
 - m. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to metric designator 35 (trade size 1-1/4) and insulated throat metal bushings on metric designator 41 (trade size 1-1/2) and larger conduits terminated with locknuts. Install insulated throat metal grounding bushings on service conduits.
2. Types ERM and IMC:
 - a. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound that maintains electrical conductivity to threads of duct raceway and fittings before making up joints. Follow compound manufacturer's published instructions.
3. Type ERM-S-PVC:
 - a. Follow manufacturer's installation instructions for clamping, cutting, threading, bending, and assembly.
 - b. Provide PVC-coated sealing locknut for exposed male threads transitioning into female NPT threads that do not have sealing sleeves, including transitions from PVC couplings/female adapters to Type ERM-S-PVC elbows in direct-burial applications.

- PVC-coated sealing locknuts must not be used in place of conduit hub. PVC-coated sealing locknut must cover exposed threads on Type ERM-C-S-PVC duct raceway.
- c. Coat field-cut threads on PVC-coated duct raceway with manufacturer-approved corrosion-preventing conductive compound prior to assembly.
- 4. Types FMC, LFMC:
 - a. Provide a maximum of 72 inch of flexible conduit for recessed and semirecessed luminaires, equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
- 5. Type PVC:
 - a. Do not install Type PVC conduit where ambient temperature exceeds 122 deg F. Conductor ratings must be limited to 75 deg C except where installed in a trench outside buildings with concrete encasement, where 90 deg C conductors are permitted.
 - b. Comply with manufacturer's published instructions for solvent welding and fittings.
 - c. Join joints with solvent cement in accordance with manufacturer's published instructions and allowed to cure before handling. Joints to be bent, pushed, or pulled must set for minimum 24 h after joining.
- 6. Duct Raceways Embedded in Slabs:
 - a. .
 - b. Do not embed conduit in concrete slabs. Route raceways below slabs.
 - c. Change from PVC to ERM-C or IM-C before rising above floor.
- 7. Stub-ups to Above Recessed Ceilings:
 - a. Provide EMT, IM-C, or ERM-C for duct raceways.
 - b. Provide a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.
- 8. Duct Raceway Terminations at Locations Subject to Moisture or Vibration:
 - a. Provide insulating bushings to protect conductors, including conductors smaller than 4 AWG. Install insulated throat metal grounding bushings on service conduits.
- 9. Duct Fittings: Install fittings in accordance with NEMA FB 2.10 guidelines.
 - a. ERM-C-S-PVC: Provide only fittings listed for use with this type of conduit. Patch and seal joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Provide sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
 - b. EMT: Provide setscrew or compression, steel fittings. Comply with NEMA FB 2.10.
 - c. Flexible Conduit: Provide only fittings listed for use with flexible conduit type. Comply with NEMA FB 2.20.
- 10. Duct Raceways Penetrating Rooms or Walls with Acoustical Requirements: Seal duct raceway openings on both sides of rooms or walls with acoustically rated putty.
- 11. Identification: Provide labels for conduit assemblies, duct raceways, and associated electrical equipment.
- D. Interfaces with Other Work:
 - 1. Firestop penetrations of fire-rated floor and wall assemblies.
 - 2. Provide conduit hangers and supports.

3.3 FIELD QUALITY CONTROL OF CONDUITS FOR ELECTRICAL SYSTEMS

- A. Tests and Inspections:
 - 1. Perform manufacturer's recommended tests and inspections.
 - 2. Pull solid aluminum or wood test mandrel through duct to prove joint integrity and adequate bend radii, and test for out-of-round duct. Provide minimum 12 inch long mandrel equal to duct size minus 1/4 inch. If obstructions are indicated, remove obstructions and retest.
 - 3. Conduit Placement:
 - a. Verify that center-line location and offsets are in accordance with the Drawings.
 - b. Verify that hangers and supports for conduits are attached to structure.
 - c. Verify that nuts on bolts or hanger rods are secure.
 - d. Verify that space between raceways and cored holes are filled with non-shrinking grout or other approved material indicated on the Drawings and the Specifications.

- e. Verify that expansion devices are installed at locations indicated on the Drawings and the Specifications.
 - f. Verify that ends are cut square to provide flush-butting surfaces when spliced and inside edges are free of burrs that could impede installation of cables.
 - g. Verify minimum separation of utilities, or that approved mechanical protection has been provided to surrounding conduit(s) where minimum separation cannot be achieved.
 - B. Nonconforming Work:
 - 1. Conduit will be considered defective if it does not pass tests and inspections.
 - 2. Remove and replace defective units and retest.
 - C. Field Quality-Control Reports: Collect, assemble, and submit test and inspection reports.
- 3.4 CLEANING**
- A. Verify that bentonite or other drilling fluids are contained and removed, and site is restored to its original or improved condition.
- 3.5 PROTECTION**
- A. Protect coatings, finishes, and cabinets from damage and deterioration.
 - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
 - 2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 260533.13

SECTION 260533.16 - BOXES AND COVERS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Metallic outlet boxes, device boxes, rings, and covers.
 - 2. Junction boxes and pull boxes.
 - 3. Cover plates for device boxes.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional coordination, scheduling, sequencing, submittal, and installation requirements applicable to the Work for electrical, communications, and electronic safety and security systems on the Project, including wiring methods.
 - 2. Section 260526 "Grounding and Bonding for Electrical Systems" specifies grounding and bonding referenced by this Section.
 - 3. Section 260553 "Identification for Electrical Systems" specifies electrical equipment labels and warning signs installed by this Section.

1.2 DEFINITIONS

- A. Enclosure: The case or housing of an apparatus, or the fence or wall(s) surrounding an installation, to prevent personnel from accidentally contacting energized parts or to protect the equipment from physical damage. Types of enclosures and enclosure covers include the following:
 - 1. Cabinet: An enclosure that is designed for either surface mounting or flush mounting and is provided with a frame, mat, or trim in which a swinging door or doors are or can be hung.
 - 2. Concrete Box: A box intended for use in poured concrete.
 - 3. Conduit Body: A means for providing access to the interior of a conduit or tubing system through one or more removable covers at a junction or terminal point. In the United States, conduit bodies are listed in accordance with outlet box requirements.
 - 4. Conduit Box: A box having threaded openings or knockouts for conduit, EMT, or fittings.
 - 5. Cover Plate: A cover designed for protecting wiring devices installed in flush-mounted device boxes while permitting their safe operation; also called a faceplate or wallplate.
 - 6. Device Box: A box with provisions for mounting a wiring device directly to the box.
 - 7. Extension Ring: A ring intended to extend the sides of an outlet box or device box to increase the box depth, volume, or both.
 - 8. Floor Box: A box mounted in the floor intended for use with a floor box cover and other components to complete the floor box enclosure.
 - 9. Floor-Mounted Enclosure: A floor box and floor box cover assembly with means to mount in the floor that is sealed against the entrance of scrub water at the floor level.
 - 10. Junction Box: A box with a blank cover that joins different runs of raceway or cable and provides space for connection and branching of the enclosed conductors.
 - 11. Outlet Box: A box that provides access to a wiring system having pryout openings, knockouts, threaded entries, or hubs in either the sides or the back, or both, for the entrance of conduit, conduit or cable fittings, or cables, with provisions for mounting an outlet box cover, but without provisions for mounting a wiring device directly to the box.
 - 12. Pull Box: A box with a blank cover that joins different runs of raceway and provides access for pulling or replacing the enclosed cables or conductors.
 - 13. Ring: A sleeve, which is not necessarily round, used for positioning a recessed wiring device flush with the plaster, concrete, drywall, or other wall surface.
 - 14. Ring Cover: A box cover, with raised center portion to accommodate a specific wall or ceiling thickness, for mounting wiring devices or luminaires flush with the surface.
- B. Receptacle: A fixed connecting device arranged for insertion of a power cord plug. Also called a power jack.
- C. Receptacle Outlet: One or more receptacles mounted in a box with a suitable protective cover.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For each type of product requiring samples for source quality control.
- C. Shop Drawings: Prepare and submit the following:
 - 1. Shop Drawings for Floor Boxes: Show that floor boxes are located to avoid interferences and are structurally allowable.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Products or components listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
- B. .

2.2 METALLIC OUTLET BOXES, DEVICE BOXES, RINGS, AND COVERS

- A. UL QCIT - Metallic Outlet Boxes and Covers:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Arlington Industries, Inc.
 - d. Hubbell Premise Wiring; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - e. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - f. Killark; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - g. MonoSystems, Inc
 - h. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - i. Pass & Seymour; Legrand North America, LLC
 - j. Patriot Aluminum Products, LLC
 - k. Plasti-Bond; Robroy Industries
 - l. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - m. Spring City Electrical Manufacturing Company
 - n. Topaz Lighting & Electric
 - o. Wiremold; Legrand North America, LLC
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN QCIT; including UL 514A.
 - 3. Standard Features:
 - a. Box having pryout openings, knockouts, threaded entries, or hubs in either the sides or the back, or both, for entrance of conduit, conduit or cable fittings, or cables, with provisions for mounting outlet box cover, but without provisions for mounting wiring device directly to box.
 - b. Material: Sheet steel or cast metal.
 - c. Sheet Metal Depth: Minimum 2 inch.
 - d. Cast-Metal Depth: Minimum 2.4 inch.
 - 4. Other Available Features Required by the Project:
 - a. Luminaire Outlet Boxes and Covers: Nonadjustable, listed and labeled for attachment of luminaire weighing up to 50 lb.
- B. UL QCIT - Metallic Conduit Bodies:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- a. ABB Electrification Installations Products
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Crouse-Hinds; brand of Eaton, Electrical Sector
 - d. Killark; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - e. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - f. Pass & Seymour; Legrand North America, LLC
 - g. Patriot Aluminum Products, LLC
 - h. Plasti-Bond; Robroy Industries
 - i. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - j. Topaz Lighting & Electric
- 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN QCIT; including UL 514A.
 - 3. Standard Features: Means for providing access to interior of conduit or tubing system through one or more removable covers at junction or terminal point. In the United States, conduit bodies are listed in accordance with outlet box requirements.
- C. UL QCIT - Metallic Device Boxes:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Arlington Industries, Inc.
 - d. Crouse-Hinds; brand of Eaton, Electrical Sector
 - e. Hubbell Premise Wiring; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - f. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - g. Killark; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - h. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - i. Patriot Aluminum Products, LLC
 - j. Plasti-Bond; Robroy Industries
 - k. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - l. Topaz Lighting & Electric
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN QCIT; including UL 514A.
 - 3. Standard Features:
 - a. Box with provisions for mounting wiring device directly to box.
 - b. Material: Sheet steel.
 - c. Sheet Metal Depth: minimum 2 inch.
 - d. Cast-Metal Depth: minimum 2.4 inch.
- D. UL QCIT - Metallic Extension Rings:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Cooper B-line; brand of Eaton, Electrical Sector
 - d. Crouse-Hinds; brand of Eaton, Electrical Sector
 - e. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - f. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - g. Pass & Seymour; Legrand North America, LLC
 - h. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - i. Topaz Lighting & Electric

2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN QCIT; including UL 514A.
 3. Standard Features: Ring intended to extend sides of outlet box or device box to increase box depth, volume, or both.
- E. UL QCIT - Metallic Floor Boxes and Floor Box Covers:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. AFC Cable Systems; Atkore International
 - c. Arlington Industries, Inc.
 - d. Eaton, Wiring Devices; Arrow Hart
 - e. FSR Inc.
 - f. Hubbell Premise Wiring; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - g. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - h. Leviton Manufacturing Co., Inc.
 - i. Pass & Seymour; Legrand North America, LLC
 - j. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - k. Wiremold; Legrand North America, LLC
 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN QCIT; including UL 514A.
 3. Standard Features: Box mounted in floor with floor box cover and other components to complete floor box enclosure.
- F. UL QCIT - Metallic Concrete Boxes and Covers:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABB Electrification Installations Products
 - b. Crouse-Hinds; brand of Eaton, Electrical Sector
 - c. Hubbell Premise Wiring; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - d. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - e. Topaz Lighting & Electric
 - f. Wiremold; Legrand North America, LLC
 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN QCIT; including UL 514A.
 3. Standard Features: Box intended for use in poured concrete.

2.3 JUNCTION BOXES AND PULL BOXES

- A. UL BGUZ - Indoor Sheet Metal Junction and Pull Boxes:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Adalet; division of Scott Fetzer Co.
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Cooper B-line; brand of Eaton, Electrical Sector
 - d. FSR Inc.
 - e. Hoffman; brand of nVent Electrical plc
 - f. Hubbell Industrial Controls; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - g. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - h. Milbank Manufacturing Company
 - i. N J Sullivan Company

- j. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - k. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - l. Spring City Electrical Manufacturing Company
 - m. Square D; Schneider Electric USA
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN BGUZ; including UL 50 and UL 50E.
 - 3. Standard Features:
 - a. Box with a blank cover that serves the purpose of joining different runs of raceway or cable.
- B. UL BGUZ - Indoor Cast-Metal Junction and Pull Boxes:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Adalet; division of Scott Fetzer Co.
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Crouse-Hinds; brand of Eaton, Electrical Sector
 - d. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN BGUZ; including UL 50 and UL 50E.
 - 3. Standard Features:
 - a. Box with a blank cover that serves the purpose of joining different runs of raceway or cable.
- C. UL BGUZ - Outdoor Sheet Metal Junction and Pull Boxes:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Adalet; division of Scott Fetzer Co.
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Cooper B-line; brand of Eaton, Electrical Sector
 - d. FSR Inc.
 - e. Hoffman; brand of nVent Electrical plc
 - f. Hubbell Industrial Controls; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - g. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - h. Milbank Manufacturing Company
 - i. N J Sullivan Company
 - j. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
 - k. Raco Taymac Bell; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - l. Spring City Electrical Manufacturing Company
 - m. Square D; Schneider Electric USA
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN BGUZ; including UL 50 and UL 50E.
 - 3. Standard Features:
 - a. Box with a blank cover that serves the purpose of joining different runs of raceway or cable.
- D. UL BGUZ - Outdoor Cast-Metal Junction and Pull Boxes:
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Adalet; division of Scott Fetzer Co.
 - b. Appleton; Emerson Electric Co., Automation Solutions
 - c. Crouse-Hinds; brand of Eaton, Electrical Sector

- d. O-Z/Gedney; brand of Emerson Electric Co., Automation Solutions, Appleton Group
- 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. UL CCN BGUZ; including UL 50 and UL 50E.
- 3. Standard Features:
 - a. Box with a blank cover that serves the purpose of joining different runs of raceway or cable.

PART 3 - EXECUTION

3.1 SELECTION OF BOXES AND COVERS FOR ELECTRICAL SYSTEMS

- A. Unless more stringent requirements are specified in Contract Documents or manufacturers' published instructions, comply with NFPA 70 for selection of boxes and enclosures. Consult Architect for resolution of conflicting requirements.
- B. Degree of Protection:
 - 1. Outdoors:
 - a. Type 3R unless otherwise indicated.
 - b. Locations Exposed to Hosedown: Type 4X.
 - 2. Indoors:
 - a. Type 1 unless otherwise indicated.
 - b. Locations Exposed to Hosedown: Type 4.
- C. Exposed Boxes Installed Less Than 2.5 m (8 ft) Above Floor:
 - 1. Provide exposed cover. Flat covers with angled mounting slots or knockouts are prohibited.

3.2 INSTALLATION OF BOXES AND COVERS FOR ELECTRICAL SYSTEMS

- A. Comply with manufacturer's published instructions.
- B. Reference Standards for Installation: Unless more stringent installation requirements are specified in Contract Documents or manufacturers' published instructions, comply with the following:
 - 1. Electrical Construction: ICC IBC, ICC IFB, NFPA 1, NFPA 70, and NECA NEIS 1.
 - 2. Electrical Safety: NFPA 70E.
 - 3. Commissioning of Active and Passive Fire Protection Features: NFPA 3 and NFPA 4.
 - 4. Grounding and Bonding: NECA NEIS 331 and Article 250 of NFPA 70.
 - 5. Life Safety and Means of Egress Work: NFPA 101.
 - 6. Emergency and Standby Power Work: NFPA 110, NFPA 111, and NECA NEIS 416.
 - 7. Work in Confined Spaces: NFPA 350.
 - 8. Work in Basements and Other Developed Subterranean Spaces: NFPA 520.
 - 9. Outlet, Device, Pull, and Junction Boxes: Article 314 of NFPA 70.
 - 10. Consult Architect for resolution of conflicting requirements.
- C. Special Installation Techniques:
 - 1. Provide boxes in wiring and raceway systems wherever required for pulling of wires, making connections, and mounting of devices or fixtures.
 - 2. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements. Install boxes with height measured to top of box unless otherwise indicated.
 - 3. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block, and install box flush with surface of wall. Prepare block surfaces to provide a flat surface for a raintight connection between box and cover plate or supported equipment and box, whether installed indoors or outdoors.
 - 4. Horizontally separate boxes mounted on opposite sides of walls so they are not in the same vertical channel.
 - 5. Locate boxes so that cover or plate will not span different building finishes.
 - 6. Support boxes in recessed ceilings independent of ceiling tiles and ceiling grid.

7. Support boxes of three gangs or more from more than one side by spanning two framing members or mounting on brackets specifically designed for purpose.
 8. Fasten junction and pull boxes to, or support from, building structure. Do not support boxes by conduits.
 9. Set metal floor boxes level and flush with finished floor surface.
 10. Set nonmetallic floor boxes level. Trim after installation to fit flush with finished floor surface.
 11. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure to ensure a continuous ground path.
 12. Boxes and Enclosures in Areas or Walls with Acoustical Requirements:
 - a. Seal openings and knockouts in back and sides of boxes and enclosures with acoustically rated putty.
 - b. Provide gaskets for cover plates and covers.
- D. Interfaces with Other Work:
1. Identification: Provide labels for boxes and associated electrical equipment.
 - a. Identify field-installed conductors, interconnecting wiring, and components.
 - b. Label each enclosure with engraved metal or laminated-plastic nameplate.
 - c. Provide warning signs and arc-flash hazard warning labels for electrical equipment.

3.3 CLEANING

- A. Remove construction dust and debris from boxes before installing cover plates, covers, and hoods.

3.4 PROTECTION

- A. After installation, protect boxes from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

END OF SECTION 260533.16

This page intentionally left blank.

SECTION 260544 - SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Round sleeves.
 - 2. Sleeve-seal systems.
 - 3. Sleeve-seal fittings.
 - 4. Grout.
 - 5. Pourable sealants.
 - 6. Foam sealants.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 ROUND SLEEVES

- A. Steel Wall Sleeves:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Advance Products & Systems, LLC
 - b. CCI Piping Systems
 - c. Flexicraft Industries
 - d. GPT; a division of EnPRO Industries
 - e. Specified Technologies Inc.
 - 2. General Characteristics: ASTM A53/A53M, Type E, Grade B, Schedule 40, zinc coated, plain ends and integral waterstop.
- B. Cast-Iron Wall Sleeves:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Cast Iron Pipe Company
 - b. Flexicraft Industries
 - c. McWane Ductile; a part of the McWane family of companies
 - 2. General Characteristics: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop.

2.2 SLEEVE-SEAL SYSTEMS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Advance Products & Systems, LLC
 - 2. American Polywater Corporation
 - 3. BWM Company
 - 4. CALPICO, Inc.
 - 5. Flexicraft Industries
 - 6. GPT; a division of EnPRO Industries
 - 7. Metraflex Company (The)
 - 8. Proco Products, Inc
 - 9. Roxtec Inc.

- B. General Characteristics: Modular sealing device, designed for field assembly, to fill annular space between sleeve and raceway or cable or between raceway and cable.
- C. Options:
 - 1. Sealing Elements: EPDM rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
 - 2. Pressure Plates: Stainless steel.
 - 3. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements.

2.3 SLEEVE-SEAL FITTINGS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Holdrite; a division of Reliance Worldwide Corporation
- B. General Characteristics: Manufactured plastic, sleeve-type, waterstop assembly made for embedding in concrete slab or wall. Unit must have plastic or rubber waterstop collar with center opening to match piping OD.

2.4 GROUT

- A. General Characteristics: Nonshrink; recommended for interior and exterior sealing openings in non-fire-rated walls or floors.
 - 1. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
 - 2. Design Mix: 5000 psi, 28-day compressive strength.
 - 3. Packaging: Premixed and factory packaged.

2.5 POURABLE SEALANTS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Carlisle Syntec Systems
 - 2. GAF
 - 3. Johns Manville; a Berkshire Hathaway company
 - 4. Specified Technologies Inc.
- B. Performance Criteria:
 - 1. General Characteristics: Single-component, neutral-curing elastomeric sealants of grade indicated below.
 - a. Grade: Pourable (self-leveling) formulation for openings in floors and other horizontal surfaces that are not fire rated.

2.6 FOAM SEALANTS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Innovative Chemical Products (Building Solutions Group)
 - 2. The Dow Chemical Company
- B. Performance Criteria:
 - 1. General Characteristics: Multicomponent, liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam. Foam expansion must not damage cables or crack penetrated structure.

PART 3 - EXECUTION

3.1 INSTALLATION OF SLEEVES FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS

- A. Sleeves for Conduits Penetrating Above-Grade, Non-Fire-Rated, Concrete and Masonry-Unit Floors and Walls:

1. Interior Penetrations of Non-Fire-Rated Walls and Floors:
 - a. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall or floor so no voids remain. Tool exposed surfaces smooth; protect material while curing.
 - b. Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint. Comply with requirements in Section 07900 "Joint Sealers."
 2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
 3. Size pipe sleeves to provide 1/4 inch annular clear space between sleeve and raceway or cable, unless sleeve-seal system is to be installed.
 4. Install sleeves for wall penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of walls. Cut sleeves to length for mounting flush with both surfaces of walls. Deburr after cutting.
- B. Sleeves for Conduits Penetrating Non-Fire-Rated Wall Assemblies:
1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
 2. Seal space outside of sleeves with approved joint compound for wall assemblies.
- C. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel pipe sleeves and mechanical sleeve-seal systems. Size sleeves to allow for 1 inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.
- D. Underground, Exterior-Wall and Floor Penetrations:
1. Install steel pipe sleeves. Size sleeves to allow for 1 inch annular clear space between raceway or cable and sleeve for installing sleeve-seal system. Grout sleeve into wall or floor opening.
- 3.2 INSTALLATION OF SLEEVE-SEAL SYSTEMS**
- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at raceway entries into building.
- B. Install type and number of sealing elements recommended by manufacturer for raceway or cable material and size. Position raceway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between raceway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

END OF SECTION 260544

This page intentionally left blank.

SECTION 260553 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Labels.
 - 2. Extruded insulating tubing.
 - 3. Bands.
 - 4. Tapes and stencils.
 - 5. Tags.
 - 6. Signs.
 - 7. Cable ties.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional requirements applicable to coordinating, scheduling, and sequencing of the Work specified in this Section.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For each type of label and sign to illustrate composition, size, colors, lettering style, mounting provisions, and graphic features of identification products.
- C. Identification Schedule: For each piece of electrical equipment and electrical system components to be index of nomenclature for electrical equipment and system components used in identification signs and labels. Use same designations indicated on Drawings.

PART 2 - PRODUCTS

2.1 LABELS

- A. Performance Criteria:
 - 1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
 - 2. Listing Criteria: UL CCN PGDQ2 for components; including UL 969.
- B. UL PGDQ2 - Vinyl Wraparound Labels: Preprinted, flexible labels laminated with clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing label ends.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Champion America
 - c. emedco
 - d. Grafoplast Wire Markers
 - e. HellermannTyton
 - f. LEM Products Inc.
 - g. Marking Services Inc.
 - h. Panduit Corp
 - i. Seton Identification Products; a Brady Corporation company
- C. UL PGDQ2 - Self-Adhesive Wraparound Labels: Preprinted, 3 mil thick, flexible label with acrylic pressure-sensitive adhesive.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. A'n D Cable Products
 - b. Brady Corporation
 - c. Brother International Corporation

- d. emedco
 - e. Grafoplast Wire Markers
 - f. Ideal Industries, Inc.
 - g. LEM Products Inc.
 - h. Marking Services Inc.
 - i. Panduit Corp
 - j. Seton Identification Products; a Brady Corporation company
 - 2. Self-Lamination: Clear; UV-, weather-, and chemical-resistant; self-laminating, with protective shield over legend. Size labels such that clear shield overlaps entire printed legend.
 - 3. Marker for Labels:
 - a. Machine-printed, permanent, waterproof, black ink recommended by printer manufacturer.
- D. UL PGDQ2 - Self-Adhesive Labels: Vinyl, thermal, transfer-printed, 3 mil thick, multicolor, weather- and UV-resistant, pressure-sensitive adhesive labels, configured for intended use and location.
- 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. A'n D Cable Products
 - b. Brady Corporation
 - c. Brother International Corporation
 - d. emedco
 - e. Grafoplast Wire Markers
 - f. HellermannTyton
 - g. Ideal Industries, Inc.
 - h. LEM Products Inc.
 - i. Marking Services Inc.
 - j. Panduit Corp
 - k. Seton Identification Products; a Brady Corporation company
 - 2. Minimum Nominal Size:
 - a. 1-1/2 by 6 inch for raceway and conductors.
 - b. 3-1/2 by 5 inch for equipment.
 - c. As required by authorities having jurisdiction.

2.2 EXTRUDED INSULATING TUBING

- A. Performance Criteria:
 - 1. Regulatory Requirements: Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
 - 2. Listing Criteria: UL CCN YDPU2 for components; including UL 224.
- B. UL YDPU2 - Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tubes with machine-printed identification labels, sized to suit diameter and shrunk to fit firmly. Full shrink recovery occurs at maximum of 200 deg F.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Panduit Corp

2.3 BANDS

- A. Snap-Around Labels: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeves, with diameters sized to suit diameters and that stay in place by gripping action.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. HellermannTyton
 - c. Marking Services Inc.
 - d. Panduit Corp
 - e. Seton Identification Products; a Brady Corporation company

- B. Snap-Around, Color-Coding Bands: Slit, pretensioned, flexible, solid-colored acrylic sleeves, 2 inch long, with diameters sized to suit diameters and that stay in place by gripping action.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. HellermannTyton
 - c. Marking Services Inc.
 - d. Panduit Corp

2.4 TAPES AND STENCILS

- A. Marker Tapes: Vinyl or vinyl-cloth, self-adhesive wraparound type, with circuit identification legend machine printed by thermal transfer or equivalent process.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. Champion America
 - d. HellermannTyton
 - e. Ideal Industries, Inc.
 - f. Marking Services Inc.
 - g. Panduit Corp
- B. Self-Adhesive Vinyl Tape: Colored, heavy duty, waterproof, fade resistant; not less than 3 mil thick by 1 to 2 inch wide; compounded for outdoor use.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. emedco
 - d. Marking Services Inc.
- C. Tape and Stencil: 4 inch wide black stripes on 10 inch centers placed diagonally over orange background and are 12 inch wide. Stop stripes at legends.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. HellermannTyton
 - b. LEM Products Inc.
 - c. Marking Services Inc.
 - d. Pipemarker.com; Brimar Industries, Inc.
 - e. Seton Identification Products; a Brady Corporation company
- D. Floor Marking Tape: 2 inch wide, 5 mil pressure-sensitive vinyl tape, with yellow and black stripes and clear vinyl overlay.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. Seton Identification Products; a Brady Corporation company
- E. Underground-Line Warning Tape:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Ideal Industries, Inc.
 - c. LEM Products Inc.
 - d. Marking Services Inc.
 - e. Pipemarker.com; Brimar Industries, Inc.
 - f. Reef Industries, Inc.

- g. Seton Identification Products; a Brady Corporation company
- 2. Tape:
 - a. Recommended by manufacturer for method of installation and suitable to identify and locate underground electrical utility lines.
 - b. Printing on tape must be permanent and may not be damaged by burial operations.
 - c. Tape material and ink must be chemically inert and not be subject to degradation when exposed to acids, alkalis, and other destructive substances commonly found in soils.
- 3. Color and Printing:
 - a. Comply with APWA Uniform Color Code using NEMA Z535.1 safety colors.
 - b. Inscriptions for Red Tapes: "CAUTION BURIED ELECTRIC LINE BELOW".
- 4. Nonconducting Line-Warning Tape :
 - a. Pigmented polyolefin, bright colored, continuous-printed on one side with inscription of utility, compounded for direct-burial service.
 - b. Width: 3 inch.
 - c. Thickness: 4 mil.
 - d. Weight: 18.5 lb/1000 sq. ft.
 - e. Tensile in accordance with ASTM D882: 30 lbf and 2500 psi.
- 5. Reinforced Nonconducting Line-Warning Tape :
 - a. Multilayer laminate, consisting of high-density polyethylene scrim coated with pigmented polyolefin; bright colored, continuous-printed on one side with inscription of utility, compounded for direct-burial service.
 - b. Width: 3 inch.
 - c. Thickness: 12 mil.
 - d. Weight: 36.1 lb/1000 sq. ft.
 - e. Tensile in accordance with ASTM D882: 400 lbf and 11,500 psi.
- 6. Detectable Line-Warning Tape :
 - a. Detectable three-layer laminate, consisting of printed pigmented polyolefin film, solid aluminum-foil core, and clear protective film that allows inspection of continuity of conductive core; bright colored, continuous-printed on one side with inscription of utility, compounded for direct-burial service.
 - b. Width: 3 inch.
 - c. Overall Thickness: 5 mil.
 - d. Foil Core Thickness: 0.35 mil.
 - e. Weight: 28 lb/1000 sq. ft.
 - f. Tensile in accordance with ASTM D882: 70 lbf and 4600 psi.
- 7. Reinforced Detectable Line-Warning Tape :
 - a. Reinforced, detectable three-layer laminate, consisting of printed pigmented woven scrim, solid aluminum-foil core, and clear protective film that allows inspection of continuity of conductive core; bright-colored, continuous-printed on one side with inscription of utility, compounded for direct-burial service.
 - b. Width: 3 inch.
 - c. Overall Thickness: 8 mil.
 - d. Foil Core Thickness: 0.35 mil.
 - e. Weight: 34 lb/1000 sq. ft.
 - f. Tensile in accordance with ASTM D882: 300 lbf and 12,500 psi.

2.5 TAGS

- A. Metal Tags: Brass or aluminum, 2 by 2 by 0.05 inch, with stamped legend, punched for use with self-locking cable tie fastener.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. emedco
 - d. Marking Services Inc.
 - e. Seton Identification Products; a Brady Corporation company

- B. Nonmetallic Preprinted Tags: Polyethylene tags, 0.015 inch thick, color-coded for phase and voltage level, with factory printed permanent designations; punched for use with self-locking cable tie fastener.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. emedco
 - d. Grafoplast Wire Markers
 - e. LEM Products Inc.
 - f. Marking Services Inc.
 - g. Panduit Corp
 - h. Seton Identification Products; a Brady Corporation company

2.6 SIGNS

- A. Baked-Enamel Signs:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. Champion America
 - d. emedco
 - e. Marking Services Inc.
 - 2. Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for application.
 - 3. 1/4 inch grommets in corners for mounting.
 - 4. Nominal Size: 7 by 10 inch.
- B. Metal-Backed Butyrate Signs:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Champion America
 - c. emedco
 - d. Marking Services Inc.
 - 2. Weather-resistant, nonfading, preprinted, cellulose-acetate butyrate signs, with 0.0396 inch galvanized-steel backing, punched and drilled for fasteners, and with colors, legend, and size required for application.
 - 3. 1/4 inch grommets in corners for mounting.
 - 4. Nominal Size: 10 by 14 inch.
- C. Laminated Acrylic or Melamine Plastic Signs:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Brady Corporation
 - b. Carlton Industries, LP
 - c. emedco
 - d. Marking Services Inc.
 - e. Seton Identification Products; a Brady Corporation company
 - 2. Engraved legend.
 - 3. Thickness:
 - a. For signs up to 20 sq. inch, minimum 1/16 inch thick.
 - b. For signs larger than 20 sq. inch, 1/8 inch thick.
 - c. Engraved legend with black letters on white face.
 - d. Punched or drilled for mechanical fasteners with 1/4 inch grommets in corners for mounting.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Self-Adhesive Identification Products: Before applying electrical identification products, clean substrates of substances that could impair bond, using materials and methods recommended by manufacturer of identification product.

3.2 SELECTION OF COLORS AND IDENTIFICATION MARKINGS

- A. Comply with 29 CFR 1910.144 for color identification of hazards, and the following:
 - 1. Fire-protection and fire-alarm equipment, including raceways, must be finished, painted, or suitably marked safety red.
 - 2. Ceiling-mounted hangers, supports, cable trays, and raceways must be finished, painted, or suitably marked safety yellow where less than 7.7 ft above finished floor.
- B. Color-Coding for Phase- and Voltage-Level Identification, 1000 V or Less: Use colors listed below for ungrounded feeder and branch-circuit conductors.
 - 1. Color must be factory applied or field applied for sizes larger than 6 AWG when permitted by authorities having jurisdiction.
 - 2. Colors for 208Y/120 V Circuits:
 - a. Phase A: Black.
 - b. Phase B: Red.
 - c. Phase C: Blue.
 - 3. Colors for 480Y/277 V Circuits:
 - a. Phase A: Brown.
 - b. Phase B: Orange.
 - c. Phase C: Yellow.
 - 4. Color for Neutral (Grounded Conductor): White.
 - 5. Color for Equipment Ground: Bare copper or Green.
- C. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, pull points, and locations of high visibility. Identify by system and circuit designation.
- D. Locations of Underground Lines: Underground-line warning tape for power and lighting.
- E. Accessible Raceways and Metal-Clad Cables, 1000 V or Less, for Service, Feeder, and Branch Circuits, More Than 30 A and 120 V to Ground: Identify with self-adhesive raceway labels.
 - 1. Locate identification at changes in direction, at penetrations of walls and floors, at 50 ft maximum intervals in straight runs, and at 25 ft maximum intervals in congested areas.
 - 2. Identify system voltage with black letters on orange field.
- F. Cover Plates: Label inside of individual cover plates with self-adhesive labels. Place label at top of cover plate. Label cover plate with the following information, in the order listed:
 - 1. Panelboard designation.
 - 2. Colon or dash.
 - 3. Branch circuit number.
- G. Workspace Indication: Apply floor marking tape to finished surfaces. Show working clearances in direction of access to live parts. Workspace must comply with NFPA 70 and 29 CFR 1926.403 unless otherwise indicated. Do not install at flush-mounted panelboards and similar equipment in finished spaces.
- H. Equipment Identification Labels:
 - 1. Black letters on white field.
 - 2. Indoor Equipment: Self-adhesive label.
 - 3. Outdoor Equipment: Laminated acrylic or melamine sign.
 - 4. Equipment to Be Labeled:
 - a. Panelboards: Typewritten directory of circuits in location provided by panelboard manufacturer. Panelboard identification must be in form of engraved, laminated acrylic or melamine label.

- b. Enclosures and electrical cabinets.
- c. Access doors and panels for concealed electrical items.
- d. Enclosed switches.
- e. Enclosed circuit breakers.
- f. Power-transfer equipment.

3.3 SELECTION OF SIGNS AND HAZARD MARKINGS

- A. Comply with 29 CFR 1910.145 for danger, caution, warning, and safety instruction signs.
- B. Signs, labels, and tags required for personnel safety must comply with the following standards:
 - 1. Safety Colors: NEMA Z535.1.
 - 2. Facility Safety Signs: NEMA Z535.2.
 - 3. Safety Symbols: NEMA Z535.3.
 - 4. Product Safety Signs and Labels: NEMA Z535.4.
 - 5. Safety Tags and Barricade Tapes for Temporary Hazards: NEMA Z535.5.
- C. Electrical Hazard Warnings:
 - 1. Multiple Power Sources Warning Legend: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT HAS MULTIPLE POWER SOURCES."
 - 2. OSHA Workspace Clearance Warning Legend: "WARNING - OSHA REGULATION - AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR FOR 3 FEET MINIMUM."
- D. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Self-adhesive labels.
 - 1. Apply to exterior of door, cover, or other access.

3.4 INSTALLATION

- A. Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment. Install access doors or panels to provide view of identifying devices.
- B. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Retain paint system applicable for surface material and location (exterior or interior).
- C. Fasteners for Labels and Signs: Self-tapping, stainless steel screws or stainless steel machine screws with nuts and flat and lock washers.
- D. Verify and coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and operation and maintenance manual. Use consistent designations throughout Project.
- E. Install identifying devices before installing acoustical ceilings and similar concealment.
- F. Verify identity of item before installing identification products.
- G. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and operation and maintenance manual.
- H. Apply identification devices to surfaces that require finish after completing finish work.
- I. Install signs with approved legend to facilitate proper identification, operation, and maintenance of electrical systems and connected items.
- J. Elevated Components: Increase sizes of labels, signs, and letters to those appropriate for viewing from floor.
- K. Vinyl Wraparound Labels:
 - 1. Secure tight to surface of raceway or cable at location with high visibility and accessibility.
 - 2. Attach labels that are not self-adhesive type with clear vinyl tape, with adhesive appropriate to location and substrate.
- L. Snap-Around Labels: Secure tight to surface at location with high visibility and accessibility.

- M. Self-Adhesive Wraparound Labels: Secure tight to surface at location with high visibility and accessibility.
- N. Snap-Around Color-Coding Bands: Secure tight to surface at location with high visibility and accessibility.
- O. Heat-Shrink, Preprinted Tubes: Secure tight to surface at location with high visibility and accessibility.
- P. Marker Tapes: Secure tight to surface at location with high visibility and accessibility.
- Q. Self-Adhesive Vinyl Tape: Secure tight to surface at location with high visibility and accessibility.
 - 1. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for minimum distance of 6 inch where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding.
- R. Tape and Stencil: Comply with requirements in painting Sections for surface preparation and paint application.
- S. Floor Marking Tape: Apply stripes to finished surfaces following manufacturer's instructions.
- T. Underground Line Warning Tape:
 - 1. During backfilling of trenches, install continuous underground-line warning tape not less than 12 inch directly above cables or raceways buried 18 inch or more below grade. Use multiple tapes where width of multiple lines installed in common trench or concrete envelope exceeds 16 inch overall.
 - 2. Install underground-line warning tape for direct-buried cables and cables in raceways.
- U. Baked-Enamel Signs: Attach signs that are not self-adhesive type with mechanical fasteners appropriate to location and substrate.
- V. Metal-Backed Butyrate Signs: Attach signs that are not self-adhesive type with mechanical fasteners appropriate to location and substrate.
- W. Laminated Acrylic or Melamine Plastic Signs: Attach signs that are not self-adhesive type with mechanical fasteners appropriate to location and substrate.

END OF SECTION 260553

SECTION 260923 - LIGHTING CONTROL DEVICES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Time switches.
 - 2. Outdoor photoelectric switches.
 - 3. Occupancy sensors.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional coordination, scheduling, sequencing, submittal, and installation requirements applicable to the Work for electrical, communications, and electronic safety and security systems on the Project, including wiring methods.
 - 2. Section 260526 "Grounding and Bonding for Electrical Systems" specifies grounding and bonding of lighting control devices referenced by this Section.
 - 3. Section 260529 "Hangers and Supports for Electrical Systems" specifies hangers and supports referenced by this Section.
 - 4. Section 260553 "Identification for Electrical Systems" specifies electrical equipment labels and warning signs referenced by this Section.
 - 5. Section 262726 "Wiring Devices" for wall-box dimmers and manual light switches.

1.2 DEFINITIONS

- A. DPDT: Double pole double throw.
- B. DPST: Double pole single throw.
- C. N.C.: Normally closed.
- D. N.O.: Normally open.
- E. PIR: Passive infrared.
- F. SPDT: Single pole double throw.
- G. SPST: Single pole single throw.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Product Listing: Include copy of unexpired approval letter, on letterhead of qualified electrical testing agency, certifying product's compliance with specified listing criteria.
 - a. If listed manufacturer differs from selling manufacturer, indicate relationship between entities on submittal. Clearly indicate which entity warrants product performance and fitness for purpose.
 - b. Listing criteria identified in approval letter must match specified listing criteria. UL label indicating approval of equipment's enclosure is not considered approval of equipment for intended application.
 - c. Product identification in approval letter must match product branding and model numbers in submittal. Approval letters for discontinued or superseded products are unacceptable for submitted product.
 - 2. Include manufacturer's sample extended warranty language.
- B. Shop Drawings: Prepare and submit the following:
 - 1. Show installation details for the following:
 - a. Occupancy sensors.
 - 2. Interconnection diagrams showing field-installed wiring.
 - 3. Diagrams for power, signal, and control wiring.

- C. Field quality-control reports.

1.4 INFORMATIONAL SUBMITTALS

- A. Manufacturer's published instructions.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements:
 - 1. Products or components listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.

2.2 TIME SWITCHES

- A. UL WGZR - Electronic Time Switch:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Eaton
 - b. Intermatic, Inc
 - c. Leviton Manufacturing Co., Inc.
 - d. nLight; Acuity Brands Lighting, Inc.
 - e. NSi Industries LLC
 - f. Schneider Electric USA, Inc.
 - g. TE Connectivity Ltd.
 - h. Touché Lighting Control
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Clock-Operated Switches: UL CCN WGZR, including UL 917.
 - 4. Standard Features:
 - a. Contact Configuration: As indicated on drawings.
 - b. Contact Rating: 20 A driver load, 120/240 V(ac).
 - c. Automatic daylight savings time changeover.
 - d. Battery Backup: Not less than seven days' reserve, to maintain schedules and time clock.

2.3 OUTDOOR PHOTOELECTRIC SWITCHES

- A. UL WJFX - Solid-State Outdoor Photoelectric Switch, Flexible Mounting:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Eaton
 - b. Intermatic, Inc
 - c. Leviton Manufacturing Co., Inc.
 - d. nLight; Acuity Brands Lighting, Inc.
 - e. NSi Industries LLC
 - f. TE Connectivity Ltd.
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Standard Features:
 - a. Solid state, with SPST dry contacts rated for 1800 VA inductive, to operate connected relay, contactor coils, or microprocessor input; and compatible with drivers and LED lamps.
 - b. Listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.

- c. Light-Level Monitoring Range: 1.5 to 10 fc, with an adjustment for turn-on and turn-off levels within that range, and a directional lens in front of the photocell to prevent fixed light sources from causing turn-off.
- d. Time Delay: Fifteen-second minimum, to prevent false operation.
- e. Surge Protection: Metal-oxide varistor.
- f. Mounting: Twist lock complies with ANSI C136.10, with base-and-stem mounting or stem-and-swivel mounting accessories as required to direct sensor to the north sky exposure from same source and manufacturer as switch.
- g. Failure Mode: Luminaire stays ON.

2.4 OCCUPANCY SENSORS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. HLI Solutions; brand of GE Current, a Daintree Company
 - 2. Lithonia Lighting; Acuity Brands Lighting, Inc.
 - 3. Watt Stopper.
 - 4. Sensor Switch
 - 5. Leviton
 - 6. SensorWorx; brand of BLP Technologies, Inc.
- B. Source Limitations: Obtain products from single manufacturer.
- C. Dual-Technology, Passive-Infrared (PIR) and Passive-Acoustic Occupancy Sensor:
 - 1. Standard Features:
 - a. Ceiling-mounted, solid-state indoor occupancy sensors.
 - b. Integrated and separate power pack and secondary packs as indicated on drawings.
 - c. Hardwired connection to switch.
 - d. Sensitivity Adjustment: Separate for each sensing technology.
 - e. Detector Sensitivity: Detect occurrences of 6 inch minimum movement of any portion of a human body that presents a target of not less than 36 sq. inch, and detect a person of average size and weight moving not less than 12 inch in either a horizontal or a vertical manner at an approximate speed of 12 inch/s.
 - 2. Operation:
 - a. Occupancy Sensor: Unless otherwise indicated, turn lights on when coverage area is occupied, and turn them off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
- D. Wall-Switch Occupancy Sensor:
 - 1. Standard Features:
 - a. Automatic-wall-switch occupancy sensor with manual on-off switch, suitable for mounting in single gang switchbox using hardwired connection.
 - 1) Occupancy Sensor Operation: Unless otherwise indicated, turn lights on when coverage area is occupied, and turn lights off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
 - 2) Operating Ambient Conditions: Dry interior conditions, 32 to 120 deg F.
 - 3) Switch Rating: Not less than 800 VA LED load at 120 V.
 - b. Sensing Technology: Dual technology - PIR and ultrasonic.
 - c. Switch Type:
 - d. Capable of controlling load in three-way application.
 - e. Voltage: Match circuit voltage.
 - f. Time Delay:
 - 1) Concealed, field-adjustable, "off" time-delay selector at up to 30 minutes.
 - g. Adaptive Technology: Self-adjusting circuitry detects and memorizes usage patterns of the space and helps eliminate false "off" switching.
 - h. Color: Gray.
 - i. Faceplate: Stainless steel.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine lighting control devices before installation. Reject lighting control devices that are wet, moisture damaged, or mold damaged.
- B. Examine walls and ceilings for suitable conditions where lighting control devices will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 SELECTION OF CONDUCTORS AND CABLES

- A. Power Wiring to Supply Side of Remote-Control Power Sources: Not smaller than 12 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- B. Classes 2 and 3 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than 18 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- C. Class 1 Control Cable: Multiconductor cable with stranded-copper conductors not smaller than 18 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

3.3 INSTALLATION OF LIGHTING CONTROL DEVICES

- A. Comply with manufacturer's published instructions.
- B. Reference Standards for Installation: Unless more stringent installation requirements are specified in the Contract Documents or manufacturer's published instructions, comply with the following:
 - 1. Electrical Construction: ICC IBC, ICC IFB, NFPA 1, NFPA 70, and NECA NEIS 1.
 - 2. Electrical Maintenance: NFPA 70B.
 - 3. Electrical Safety: NFPA 70E.
 - 4. Grounding and Bonding: NECA NEIS 331 and Article 250 of NFPA 70.
 - 5. Consult Architect for resolution of conflicting requirements.
- C. Special Installation Techniques:
 - 1. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression systems, and partition assemblies.
 - 2. Install and aim sensors in locations to achieve not less than 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's instructions.
 - 3. Installation of Wiring:
 - a. Wiring within Enclosures: Separate power-limited and nonpower-limited conductors in accordance with conductor manufacturer's published instructions.
 - b. Size conductors in accordance with lighting control device manufacturer's published instructions unless otherwise indicated.
 - c. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, device, and outlet boxes; terminal cabinets; and equipment enclosures.
- D. Interfaces with Other Work:
 - 1. Identification: Provide labels for lighting control devices and associated electrical equipment.
 - a. Identify field-installed conductors, interconnecting wiring, and components.
 - b. Label each enclosure with engraved metal or laminated-plastic nameplate.
 - c. Identify controlled circuits in lighting contactors.
 - d. Identify circuits or luminaires controlled by photoelectric and occupancy sensors at each sensor.
 - e. Label time switches and contactors with a unique designation.

3.4 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Operational Test: After installing time switches and sensors, and after electrical circuitry has been energized, start units to confirm proper unit operation.

2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

B. Nonconforming Work:

1. Lighting control devices will be considered defective if they do not pass tests and inspections.
2. Remove and replace defective units and retest.

3.5 ADJUSTING

A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting lighting control devices to suit actual occupied conditions. Provide up to two visits to the Project site during other-than-normal occupancy hours for this purpose. Some of the Work may be required during hours of darkness.

1. For occupancy and motion sensors, verify operation at outer limits of detector range. Set time delay to suit Owner's operations.

END OF SECTION 260923

This page intentionally left blank.

SECTION 262416 - PANELBOARDS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Panelboards.
 - 2. Disconnecting and overcurrent protective devices.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional abbreviations, definitions, submittals, qualifications, testing agencies, and other requirements applicable to the Work for electrical, communications, and electronic safety and security systems on Project, including wiring methods.
 - 2. Section 260529 "Hangers and Supports for Electrical Systems" specifies concrete bases and supports for panelboards installed by this Section.
 - 3. Section 260553 "Identification for Electrical Systems" specifies electrical equipment labels and warning signs installed by this Section.

1.2 DEFINITIONS

- A. MCCB: Molded-case circuit breaker.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product submit the following:
 - 1. Product Listing: Include copy of unexpired approval letter, on letterhead of qualified electrical testing agency, certifying product's compliance with specified listing criteria.
- B. Shop Drawings: For each panelboard and related equipment:
 - 1. Include dimensioned plans, elevations, sections, and details.
 - 2. Show tabulations of installed devices with nameplates, conductor termination sizes, equipment features, and ratings.
 - 3. Detail enclosure types including mounting and anchorage, environmental protection, knockouts, corner treatments, covers and doors, gaskets, hinges, and locks.
 - 4. Detail bus configuration, current, and voltage ratings.
 - 5. Short-circuit current rating of panelboards and overcurrent protective devices.
 - 6. Include evidence of listing, by qualified electrical testing laboratory recognized by authorities having jurisdiction, for series rating of installed devices.
 - 7. Include evidence of listing, by qualified electrical testing laboratory recognized by authorities having jurisdiction, for SPD as installed in panelboard.
 - 8. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices and auxiliary components.
 - 9. Include wiring diagrams for power, signal, and control wiring.
- C. Field quality-control reports.

1.4 INFORMATIONAL SUBMITTALS

- A. Panelboard Schedules: For installation in panelboards. Submit final versions after load balancing.
- B. Manufacturer's published instructions.
- C. Field Reports:
 - 1. Manufacturer's field reports for field quality-control support.
 - 2. Field reports for voltage monitoring and adjusting.

1.5 CLOSEOUT SUBMITTALS

- A. Warranty documentation.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Special tools.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Remove loose packing and flammable materials from inside panelboards
- B. Handle and prepare panelboards for installation in accordance with NECA 407.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Products or components listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.
- B. Product Selection for Restricted Space: Drawings indicate maximum dimensions for panelboards including clearances between panelboards and adjacent surfaces and other items. Comply with indicated maximum dimensions.
- C. Comply with NEMA PB 1.
- D. Enclosures: Flush and Surface-mounted, dead-front cabinets.
 - 1. Rated for environmental conditions at installed location.
 - a. Indoor Dry and Clean Locations: UL 50E, Type 1.
 - 2. Height: 7 ft maximum.
 - 3. Front: Secured to box with concealed trim clamps. For surface-mounted fronts, match box dimensions; for flush-mounted fronts, overlap box. Trims must cover live parts and may have no exposed hardware.
 - 4. Hinged Front Cover: Entire front trim hinged to box and with standard door within hinged trim cover. Trims must cover live parts and may have no exposed hardware.
 - 5. Skirt for Surface-Mounted Panelboards: Same gage and finish as panelboard front with flanges for attachment to panelboard, wall, and ceiling or floor.
 - 6. Gutter Extension and Barrier: Same gage and finish as panelboard enclosure; integral with enclosure body. Arrange to isolate individual panel sections.
 - 7. Finishes:
 - a. Panels and Trim: Steel, factory finished immediately after cleaning and pretreating with manufacturer's standard two-coat, baked-on finish consisting of prime coat and thermosetting topcoat.
 - b. Back Boxes: Galvanized steel.
- E. Phase, Neutral, and Ground Buses:
 - 1. Material: Tin-plated aluminum or Hard-drawn copper, 98 percent conductivity.
 - a. Plating must run entire length of bus.
 - b. Bus must be fully rated for entire length.
 - 2. Interiors must be factory assembled into unit. Replacing switching and protective devices may not disturb adjacent units or require removing main bus connectors.
 - 3. Equipment Ground Bus: Adequate for feeder and branch-circuit equipment grounding conductors; bonded to box.
- F. Conductor Connectors: Suitable for use with conductor material and sizes.
 - 1. Material: Tin-plated aluminum or Hard-drawn copper, 98 percent conductivity.
 - 2. Terminations must allow use of 75 deg C rated conductors without derating.
 - 3. Size: Lugs suitable for indicated conductor sizes, with additional gutter space, if required, for larger conductors.
 - 4. Main and Neutral Lugs: Mechanical type, with lug on neutral bar for each pole in panelboard.
 - 5. Ground Lugs and Bus-Configured Terminators: Mechanical type, with lug on bar for each pole in panelboard.

- G. Quality-Control Label: Panelboards or load centers must be labeled, by qualified electrical testing laboratory recognized by authorities having jurisdiction, for use as service equipment with one or more main service disconnecting and overcurrent protective devices. Panelboards or load centers must have meter enclosures, wiring, connections, and other provisions for utility metering. Coordinate with utility company for exact requirements.
- H. Future Devices: Panelboards or load centers must have mounting brackets, bus connections, filler plates, and necessary appurtenances required for future installation of devices.
- I. Panelboard Short-Circuit Current Rating:
 - 1. Rated for series-connected system with integral or remote upstream overcurrent protective devices and labeled by qualified electrical testing laboratory recognized by authorities having jurisdiction. Include label or manual with size and type of allowable upstream and branch devices listed and labeled, by qualified electrical testing laboratory recognized by authorities having jurisdiction, for series-connected short-circuit rating.
 - a. Panelboards rated 240 V or less must have short-circuit ratings as shown on Drawings, but not less than 10 000 A(rms) symmetrical.
 - b. Panelboards rated above 240 V and less than 600 V must have short-circuit ratings as shown on Drawings, but not less than 14 000 A(rms) symmetrical.

2.2 PANELBOARDS

- A. UL QEUY - Distribution Panelboard:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Eaton
 - b. Siemens Industry, Inc., Energy Management Division
 - c. Square D; Schneider Electric USA
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Distribution Type Panelboards: UL CCN QEUY; including UL 67 and NEMA PB 1.
 - 4. Standard Features:
 - a. Doors: Secured with vault-type latch with tumbler lock; keyed alike.
 - 1) For doors more than 36 inch high, provide two latches, keyed alike.
 - b. Mains: as indicated on drawings.
 - 1) Location: Convertible between top and bottom.
 - 2) Main Breaker: Main lug interiors up to 400 A must be field convertible to main breaker.
 - c. Branch Overcurrent Protective: Plug-in circuit breakers where individual positive-locking device requires mechanical release for removal.
 - 5. Other Available Features Required by Project:
 - a. Full-Sized Neutral: Equipped with full-capacity bonding strap for service entrance applications. Mount electrically isolated from enclosure.
- B. UL QEUY - Lighting and Appliance Branch-Circuit Panelboard:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Eaton
 - b. Siemens Industry, Inc., Energy Management Division
 - c. Square D; Schneider Electric USA
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Lighting and Appliance Branch-Circuit Type Panelboards: UL CCN QEUY; including UL 67 and NEMA PB 1.
 - 4. Standard Features:

- a. Mains: Circuit breaker or lugs only.
 - 1) Location: Convertible between top and bottom.
 - 2) Main Breaker: Main lug interiors up to 400 A must be field convertible to main breaker.
- b. Branch Overcurrent Protective Devices: Plug-in circuit breakers, replaceable without disturbing adjacent units.
- 5. Other Available Features Required by Project:
 - a. Full-Sized Neutral: Equipped with full-capacity bonding strap for service entrance applications. Mount electrically isolated from enclosure.
 - b. Doors: Door-in-door construction with concealed hinges; secured with flush latch with tumbler lock; keyed alike. Outer door must permit full access to panel interior. Inner door must permit access to breaker operating handles and labeling, but current carrying terminals and bus must remain concealed.

2.3 DISCONNECTING AND OVERCURRENT PROTECTIVE DEVICES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Eaton
 - 2. Siemens Industry, Inc., Energy Management Division
 - 3. Square D; Schneider Electric USA
- B. MCCB: Comply with UL 489, with series-connected rating interrupting capacity to meet available fault currents.
 - 1. Thermal-Magnetic Circuit Breakers:
 - a. Inverse time-current element for low-level overloads.
 - b. Instantaneous magnetic trip element for short circuits.
 - c. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.
 - 2. Adjustable Instantaneous-Trip Circuit Breakers: Magnetic trip element with front-mounted, field-adjustable trip setting.
 - 3. Electronic Trip Circuit Breakers:
 - a. RMS sensing.
 - b. Field-replaceable rating plug or electronic trip.
 - c. Digital display of settings, trip targets, and indicated metering displays.
 - d. Multi-button keypad to access programmable functions and monitored data.
 - e. Ten-event, trip-history log. Each trip event must be recorded with type, phase, and magnitude of fault that caused trip.
 - f. Integral test jack for connection to portable test set or laptop computer.
 - g. Field-Adjustable Settings:
 - 1) Instantaneous trip.
 - 2) Long- and short-time pickup levels.
 - 3) Long- and short-time adjustments.
 - 4) Ground-fault pickup level, time delay, and I squared T response.
 - 4. Current-Limiting Circuit Breakers: Frame sizes 400 A and smaller; let-through ratings less than NEMA FU 1, RK-5.
 - 5. GFCI Circuit Breakers: Single- and double-pole configurations with Class A ground-fault protection (6 mA trip).
 - 6. GFPE Circuit Breakers: Class B ground-fault protection (30 mA trip).
 - 7. MCCB Features and Accessories:
 - a. Standard frame sizes, trip ratings, and number of poles.
 - b. Breaker handle indicates tripped status.
 - c. UL listed for reverse connection without restrictive line or load ratings.
 - d. Lugs: Mechanical style, suitable for number, size, trip ratings, and conductor materials.
 - e. Application Listing: Appropriate for application; Type SWD for switching fluorescent lighting loads; Type HID for feeding fluorescent and HID lighting circuits.
 - f. Ground-Fault Protection: Integrally mounted relay and trip unit with adjustable pickup and time-delay settings, push-to-test feature, and ground-fault indicator.
 - g. Handle Clamp: Loose attachment, for holding circuit-breaker handle in on position.
 - h. Multipole units enclosed in single housing with single handle.

- C. Fused Switch: NEMA KS 1, Type HD; clips to accommodate specified fuses; lockable handle.
 - 1. Provide fuses and spare fuse cabinet.
 - 2. Fused Switch Features and Accessories:
 - a. Standard ampere ratings and number of poles.
 - b. Mechanical cover interlock with manual interlock override, to prevent opening of cover when switch is in on position. Interlock must prevent switch from being turned on with cover open. Operating handle must have lock-off means with provisions for three padlocks.
 - c. Auxiliary Contacts: Two normally open and normally closed contact(s) that operate with switch handle operation.

2.4 MAINTENANCE MATERIAL ITEMS

- A. Spare Parts: Furnish to Owner spare parts, for repairing panelboards and related equipment, that are packaged with protective covering for storage on-site and identified with labels describing contents. Include the following:
 - 1. Keys: Two spares for each type of panelboard cabinet lock.
 - 2. Fuses for Fused Switches: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify actual conditions with field measurements prior to ordering panelboards to verify that equipment fits in allocated space in, and comply with, minimum required clearances specified in NFPA 70.
- B. Receive, inspect, handle, and store panelboards in accordance with.
- C. Examine panelboards before installation. Reject panelboards that are damaged, rusted, or have been subjected to water saturation.
- D. Examine elements and surfaces to receive panelboards for compliance with installation tolerances and other conditions affecting performance of the Work.
- E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Comply with manufacturer's published instructions.
- B. Reference Standards:
 - 1. Panelboards: Unless more stringent requirements are specified in Contract Documents or manufacturers' published instructions, comply with NECA 407.
 - 2. Consult Architect for resolution of conflicting requirements.
- C. Special Techniques:
 - 1. Equipment Mounting:
 - a. Install floor-mounted panelboards on cast-in-place concrete equipment base(s).
 - b. Attach panelboard to vertical finished or structural surface behind panelboard.
 - c. Mount surface-mounted panelboards to steel slotted supports 1-1/4 inch in depth. Orient steel slotted supports vertically.
 - 2. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from panelboards.
 - 3. Provide mounting and anchoring devices.
 - 4. Mount top of trim 7.0 ft above finished floor unless otherwise indicated.
 - 5. Mount panelboard cabinet plumb and rigid without distortion of box.
 - 6. Mount recessed panelboards with fronts uniformly flush with wall finish and mating with back box.
 - 7. Install overcurrent protective devices and controllers not already factory installed.
 - a. Set field-adjustable, circuit-breaker trip ranges.

- b. Tighten bolted connections and circuit breaker connections using calibrated torque wrench or torque screwdriver in accordance with manufacturer's published instructions.
- 8. Make grounding connections and bond neutral for services and separately derived systems to ground. Make connections to grounding electrodes, separate grounds for isolated ground bars, and connections to separate ground bars.
- 9. Install filler plates in unused spaces.
- 10. Stub four 1 inch empty conduits from panelboard into accessible ceiling space or space designated to be ceiling space in future.
- 11. Arrange conductors in gutters into groups and bundle and wrap with wire ties after completing load balancing.
- 12. Mount spare fuse cabinet in accessible location.
- D. Interfaces with Other Work:
 - 1. Coordinate layout and installation of panelboards and components with other construction that penetrates walls or is supported by them, including electrical and other types of equipment, raceways, piping, encumbrances to workspace clearance requirements, and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

3.3 IDENTIFICATION

- A. Identify field-installed conductors, interconnecting wiring, and components.
- B. Install warning signs.
- C. Panelboard Nameplates: Label each panelboard with nameplate.
- D. Device Nameplates: Label each branch circuit device in power panelboards with nameplate.
- E. Panelboard Label: Manufacturer's name and trademark, voltage, amperage, number of phases, and number of poles must be located on interior of panelboard door.
- F. Breaker Labels: Faceplate must list current rating, UL and IEC certification standards, and AIC rating.
- G. Circuit Directory:
 - 1. Provide directory card inside panelboard door, mounted in transparent card holder.
 - a. Circuit directory must identify specific purpose with detail sufficient to distinguish it from other circuits.
 - 2. Provide computer-generated circuit directory mounted inside panelboard door with transparent plastic protective cover.
 - a. Circuit directory must identify specific purpose with detail sufficient to distinguish it from other circuits.
 - 3. Create directory to indicate installed circuit loads after balancing panelboard loads; incorporate Owner's final room designations. Obtain approval before installing. Handwritten directories are not acceptable. Install directory inside panelboard door.

3.4 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Perform each visual and mechanical inspection and electrical test for low-voltage air circuit breakers stated in NETA ATS, Paragraph 7.6 Circuit Breakers and Paragraph 7.19.1 Surge Arrestors, Low-Voltage. Do not perform optional tests. Certify compliance with test parameters.
 - 2. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
- B. Nonconforming Work:
 - 1. Panelboards will be considered defective if they do not pass tests and inspections.
 - 2. Remove and replace defective units and retest.
- C. Field Quality-Control Reports: Collect, assemble, and submit test and inspection reports.

1. Include certified report that identifies panelboards included and that describes scanning results, with comparisons of two scans. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.
- D. Manufacturer Services: Engage factory-authorized service representative to support field tests and inspections.

3.5 ADJUSTING

- A. Adjust moving parts and operable components to function smoothly, and lubricate as recommended by manufacturer.
- B. Set field-adjustable circuit-breaker trip ranges.
- C. Load Balancing: After Substantial Completion, but not more than 60 days after Final Acceptance, measure load balancing and make circuit changes. Prior to making circuit changes to achieve load balancing, inform Architect of effect on phase color coding.
 1. Measure loads during period of normal facility operations.
 2. Perform circuit changes to achieve load balancing outside normal facility operation schedule or at times directed by Architect. Avoid disrupting services such as fax machines and on-line data processing, computing, transmitting, and receiving equipment.
 3. After changing circuits to achieve load balancing, recheck loads during normal facility operations. Record load readings before and after changing circuits to achieve load balancing.
 4. Tolerance: Maximum difference between phase loads, within panelboard, may not exceed 20 percent.

END OF SECTION 262416

This page intentionally left blank.

SECTION 262726 - WIRING DEVICES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. General-use switches, dimmer switches, and fan-speed controller switches.
 - 2. General-grade duplex straight-blade receptacles.
 - 3. Receptacles with arc-fault and ground-fault protective devices.
 - 4. Special-purpose power outlet assemblies.
 - 5. Connectors, cords, and plugs.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional coordination, scheduling, sequencing, submittal, and installation requirements applicable to the Work for electrical, communications, and electronic safety and security systems on the Project, including wiring methods.
 - 2. Section 260526 "Grounding and Bonding for Electrical Systems" specifies grounding and bonding referenced by this Section.
 - 3. Section 260553 "Identification for Electrical Systems" specifies electrical equipment labels and warning signs referenced by this Section.

1.2 DEFINITIONS

- A. GFCI: Ground-Fault Circuit Interrupter.
- B. UL 1472 Type I Dimmer: Dimmer in which air-gap switch is used to energize preset lighting levels.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Product Listing: Include copy of unexpired approval letter, on letterhead of qualified electrical testing agency, certifying product's compliance with specified listing criteria.
 - a. If listed manufacturer differs from selling manufacturer, indicate relationship between entities on submittal. Clearly indicate which entity warrants product performance and fitness for purpose.
 - b. Listing criteria identified in approval letter must match specified listing criteria. UL label indicating approval of equipment's enclosure is not considered approval of equipment for intended application.
 - c. Product identification in approval letter must match product branding and model numbers in submittal. Approval letters for discontinued or superseded products are not acceptable for submitted product.

1.4 MAINTENANCE MATERIAL SUBMITTALS

- A. Special tools.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Products or components listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.

2.2 GENERAL-USE SWITCHES AND DIMMER SWITCHES

- A. Toggle Switch:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Eaton, Wiring Devices; Arrow Hart

- b. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - c. Leviton Manufacturing Co., Inc.
 - d. Pass & Seymour; Legrand North America, LLC
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: UL CCN WMUZ and UL 20.
 - 4. Standard Features:
 - a. Device Color: Gray.
 - b. Provide toggle type for general duty, toggle type where keyed operation is required.
 - c. Configuration:
 - 1) General-duty, 120-277 V, 20 A, single pole, and three way.
 - a) Provide with forked key lock where indicated.
 - 5. Accessories:
 - a. Cover Plate: stainless steel.
 - b. Securing Screws for Cover Plate: Metal with head color matching wallplate finish.
- B. Dimmer Switches:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Eaton, Wiring Devices; Arrow Hart
 - b. GE Lighting; a Savant Company
 - c. Current HLI
 - d. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - e. Leviton Manufacturing Co., Inc.
 - f. Lutron Electronics Co., Inc
 - g. Pass & Seymour; Legrand North America, LLC
 - h. Sensorworx
 - 2. Source Limitations: Obtain products from single manufacturer.
 - 3. Listing Criteria: UL CCN EOYX and UL 1472.
 - 4. Standard Features:
 - a. UL 1472 Type I dimmer.
 - b. Device Color: Gray.
 - c. Switch Style: Push button.
 - d. Dimming Control Style: Slide.
 - 5. Accessories:
 - a. Cover Plate: stainless steel.
 - b. Securing Screws for Cover Plate: Metal with head color matching wallplate finish.

2.3 GENERAL-GRADE SINGLE STRAIGHT-BLADE RECEPTACLES

- A. Single Straight-Blade Receptacle:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Eaton, Wiring Devices; Arrow Hart
 - b. Leviton Manufacturing Co., Inc.
 - c. Pass & Seymour; Legrand North America, LLC
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Receptacles for Plugs and Attachment Plugs: UL CCN RTRT and UL 498.
 - 3. Standard Features:
 - a. Device Color: Gray .
 - 4. Accessories:
 - a. Cover Plate: stainless steel.
 - b. Securing Screws for Cover Plate: Metal with head color matching wallplate finish.

2.4 GENERAL-GRADE DUPLEX STRAIGHT-BLADE RECEPTACLES

- A. Duplex Straight-Blade Receptacle:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Eaton, Wiring Devices; Arrow Hart
 - b. Leviton Manufacturing Co., Inc.
 - c. Pass & Seymour; Legrand North America, LLC
 - d. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Receptacles for Plugs and Attachment Plugs: UL CCN RTRT and UL 498.
 - 3. Standard Features:
 - a. Device Color: Gray.
 - b. Configuration:
 - 1) General-duty, smooth face, NEMA 5-20R.
 - 4. Accessories:
 - a. Cover Plate: Stainless steel.
 - b. Securing Screws for Cover Plate: Metal with head color matching wallplate finish.

2.5 RECEPTACLES WITH GROUND-FAULT PROTECTIVE DEVICES

- A. General-Grade, Tamper-Resistant Duplex Straight-Blade Receptacle with GFCI Device:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Eaton, Wiring Devices; Arrow Hart
 - b. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - c. Leviton Manufacturing Co., Inc.
 - d. Pass & Seymour; Legrand North America, LLC
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Receptacle GFCIs: UL CCN KCXS, UL 498, and UL 943.
 - 3. Standard Features:
 - a. Device Color: Gray.
 - b. Configuration: Heavy-duty, NEMA 5-20R.
 - 4. Accessories:
 - a. Cover Plate: **stainless steel**.
 - b. Securing Screws for Cover Plate: Metal with head color matching wallplate finish.
- B. General-Grade, Weather-Resistant, Tamper-Resistant, Duplex Straight-Blade Receptacle with GFCI Device:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Eaton, Wiring Devices; Arrow Hart
 - b. Hubbell Wiring Device-Kellems; brand of Hubbell Electrical Solutions; Hubbell Incorporated
 - c. Leviton Manufacturing Co., Inc.
 - d. Pass & Seymour; Legrand North America, LLC
 - 2. Listing Criteria: Investigated, labeled, and marked by qualified electrical testing laboratory in accordance with guide information and standards specified for the following UL product categories:
 - a. Receptacle GFCIs: UL CCN KCXS, UL 498, and UL 943.
 - 3. Standard Features:
 - a. Device Color: Gray.
 - b. Configuration: Heavy-duty, NEMA 5-20R.

4. Accessories:
 - a. In-use cover:
 - 1) Type: Extra-duty, weather-while-in-use (bubble type) cover with gasketed perimeter and hinged cover.
 - 2) Configuration: Compatible with duplex, Decora (rectangular), and GFCI receptacles as indicated on drawings.
 - 3) Material: UV-resistant, impact-resistant polycarbonate or die-cast aluminum with clear or opaque hinged cover.
 - 4) Listings: UL 514D/514C listed, evaluated to UL 50E for enclosures in wet locations.
 - 5) Compliance: NEC 406.9(B)(1) requirements for receptacles in wet locations (extra-duty type).

PART 3 - EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS

- A. Coordinate locations of outlet boxes provided under Section 260533.16 as required for installation of wiring devices provided under this section.
 1. Mounting Heights: Unless otherwise indicated, as follows:
 - a. Wall Switches: 48 inches above finished floor.
 - b. Wall Dimmers: 48 inches above finished floor.
 - c. Receptacles: 18 inches above finished floor or 6 inches above counter.
 2. Orient outlet boxes for vertical installation of wiring devices unless otherwise indicated.
 3. Where multiple receptacles or wall switches are installed at the same location and at the same mounting height, gang devices together under a common wall plate.
 4. Locate wall switches on strike side of door with edge of wall plate 3 inches from edge of door frame. Where locations are indicated otherwise, notify Architect to obtain direction prior to proceeding with work.
- B. Connect wiring devices by wrapping conductor clockwise 3/4 turn around screw terminal and tightening to proper torque specified by the manufacturer. Where present, do not use push-in pressure terminals that do not rely on screw-actuated binding.
- C. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
- D. Install wiring devices plumb and level with mounting yoke held rigidly in place.
- E. Install wall plates to fit completely flush to wall with no gaps and rough opening completely covered without strain on wall plate. Repair or reinstall improperly installed outlet boxes or improperly sized rough openings. Do not use oversized coverplates in lieu of meeting this requirement.
- F. Install blank wall plates on junction boxes and on outlet boxes with no wiring device installed or where designated for future use.
- G. Identify each wiring device per Section 260553.

3.2 INSTALLATION OF SWITCHES

- A. Comply with manufacturer's published instructions.
- B. Reference Standards for Installation: Unless more stringent installation requirements are specified in the Contract Documents or manufacturer's published instructions, comply with the following:
 1. Electrical Construction: ICC IBC, ICC IFB, NFPA 1, NFPA 70, and NECA NEIS 1.
 2. Electrical Safety: NFPA 70E.
 3. Life Safety and Means of Egress Work: NFPA 101.
 4. Wiring Devices: NECA NEIS 130.
 5. Mounting Heights: NECA NEIS 1.
 6. Install with OFF position down.
 7. Consult Architect for resolution of conflicting requirements.

- C. Interfaces with Other Work:
 - 1. Identification:
 - a. Identify cover or cover plate for device with panelboard identification and circuit number.

3.3 INSTALLATION OF STRAIGHT-BLADE RECEPTACLES

- A. Comply with manufacturer's published instructions.
- B. Reference Standards for Installation: Unless more stringent installation requirements are specified in the Contract Documents or manufacturer's published instructions, comply with the following:
 - 1. Electrical Construction: ICC IBC, ICC IFB, NFPA 1, NFPA 70, and NECA NEIS 1.
 - 2. Electrical Safety: NFPA 70E.
 - 3. Grounding and Bonding: NECA NEIS 331 and Article 250 of NFPA 70.
 - 4. Installing and Maintaining Wiring Devices: NECA NEIS 130.
 - 5. Mounting Heights: Unless otherwise indicated in the Contract Documents, comply with mounting heights recommended in NECA NEIS 1.
 - 6. Receptacle Orientation: Unless otherwise indicated in the Contract Documents, orient receptacle to match configuration diagram in NEMA WD 6. Where installed horizontally, locate grounding terminal on left.
 - 7. Where split-wired receptacles are indicated, remove tabs connection top and bottom receptacles.
 - 8. Where GFCI receptacles are indicated, utilize GFCI receptacles at each location. Do not use feed-through wiring to protect downstream devices.
 - 9. Consult Architect for resolution of conflicting requirements.

3.4 FIELD QUALITY CONTROL

- A. Inspect each wiring device for damage and defects.
- B. Operate each wall switch to verify proper operation.
- C. Test each receptacle for proper operation and polarity.
- D. Test each GFCI device for proper tripping according to manufacturer's directions.
- E. Correct deficiencies and replace damaged or defective devices.

3.5 ADJUSTING

- A. Adjust devices and wall plates to be flush and level.
- B. Adjust coverplate screws to be uniformly perpendicular to the axis of the device.
- C. Adjust presets for wall dimmers according to manufacturer's instructions as directed by Architect.

3.6 PROTECTION

- A. Devices:
 - 1. Schedule and sequence installation to minimize risk of contamination of wires and cables, devices, device boxes, outlet boxes, covers, and cover plates by plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other materials.
 - 2. After installation, protect wires and cables, devices, device boxes, outlet boxes, covers, and cover plates from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

END OF SECTION 262726

This page intentionally left blank.

SECTION 264313 - SURGE PROTECTIVE DEVICES FOR LOW-VOLTAGE ELECTRICAL POWER CIRCUITS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Type 2 surge protective devices (SPDs).
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" for additional abbreviations, definitions, submittals, qualifications, testing agencies, and other Project requirements applicable to Work specified in this Section.
 - 2. Section 262416 "Panelboards" for integral SPDs installed by panelboard manufacturer.

1.2 DEFINITIONS

- A. In: Nominal discharge current.
- B. Maximum Continuous Operating Voltage (MCOV): The maximum designated RMS value of the power frequency voltage that may be continuously applied to the mode of protection of an SPD.
- C. Metal-Oxide Varistor (MOV): An electronic component with a significant bidirectional, nonlinear current-voltage characteristic.
- D. Mode(s), Modes of Protection, or Protection Modes: Electrical paths where the SPD offers defense against transient overvoltages. Examples include: line to neutral (L-N), line to ground (L-G), line to line (L-L), and neutral to ground (N-G).
- E. SCCR: Short-circuit current rating.
- F. Type 2 SPDs: Permanently connected SPDs intended for installation on the load side of the service disconnect overcurrent device, including SPDs located at the branch panel.
- G. Voltage Protection Rating (VPR): A rating selected from UL 1449 list of preferred values assigned to each mode of protection.

1.3 ACTION SUBMITTALS

- A. Product Data:
 - 1. For each type of product.
 - a. Include electrical characteristics, specialties, and accessories for SPDs.
 - b. Certification of compliance with UL 1449 by qualified electrical testing laboratory recognized by authorities having jurisdiction including the following information:
 - 1) Tested values for VPRs.
 - 2) In ratings.
 - 3) MCOV, type designations.
 - 4) OCPD requirements.
 - 5) Manufacturer's model number.
 - 6) System voltage.
 - 7) Modes of protection.
- B. Field quality-control reports.

PART 2 - PRODUCTS

2.1 TYPE 2 SURGE PROTECTIVE DEVICES (SPDs)

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Eaton
 - 2. Schneider Electric USA, Inc.
 - 3. Siemens Industry, Inc., Energy Management Division

- B. Source Limitations: Obtain devices from the same manufacturer as Panelboards.
- C. General Characteristics:
 - 1. Reference Standards: UL 1449, Type 2; UL 1283.
 - 2. MCOV: Not less than 125 percent of nominal system voltage for 208Y/120 V and 120/240 V power systems.
 - 3. Peak Surge Current Rating: Minimum single-pulse surge current withstand rating per phase must not be less values indicated below. Peak surge current rating must be arithmetic sum of the ratings of individual MOVs in a given mode.
 - a. For distribution panelboards: 160 kA per phase
 - b. For branch panelboards: 120 kA per phase
 - 4. Protection modes and UL 1449 VPR for grounded wye circuits with 208Y/120 V, three-phase, four-wire circuits must not exceed the following:
 - a. Line to Neutral: 700 V for 208Y/120 V.
 - b. Line to Ground: 700 V for 208Y/120 V.
 - c. Neutral to Ground: 700 V for 208Y/120 V.
 - d. Line to Line: 1200 V for 208Y/120 V.
 - 5. Protection modes and UL 1449 VPR for 240/120 V, single-phase, three-wire circuits must not exceed the following:
 - a. Line to Neutral: 700 V.
 - b. Line to Ground: 700 V.
 - c. Neutral to Ground: 700 V.
 - d. Line to Line: 1200 V.
 - 6. SCCR: Equal or exceed 200 kA.
 - 7. In Rating: 20 kA.
- D. Options:
 - 1. Include LED indicator lights for power and protection status.
 - 2. Include internal thermal protection that disconnects the SPD before damaging internal suppressor components.
 - 3. Include NEMA ICS 5, dry Form C contacts rated at 2 A and 24 V(ac) for remote monitoring of protection status.
 - 4. Include surge counter.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. SPDs shall be factory installed within panelboards.

3.2 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 - 1. Compare equipment nameplate data for compliance with Drawings and the Specifications.
 - 2. Inspect anchorage, alignment, grounding, and clearances.
 - 3. Verify that electrical wiring installation complies with manufacturer's installation requirements.
- B. Nonconforming Work:
 - 1. SPDs that do not pass tests and inspections will be considered defective.
 - 2. Remove and replace defective units and retest.
- C. Prepare test and inspection reports.
- D. Manufacturer Services:
 - 1. Engage factory-authorized service representative to support field tests and inspections.

3.3 STARTUP SERVICE

- A. Complete startup checks in accordance with manufacturer's instructions.

- B. Do not perform insulation-resistance tests of the distribution wiring equipment with SPDs installed. Disconnect SPDs before conducting insulation-resistance tests; reconnect them immediately after the testing is over.
- C. Energize SPDs after power system has been energized, stabilized, and tested.

END OF SECTION 264313

This page intentionally left blank.

SECTION 265000 - LIGHTING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Luminaires.
 - 2. Luminaire fittings.
- B. Related Requirements:
 - 1. Section 260010 "Supplemental Requirements for Electrical" specifies additional requirements applicable to coordinating, scheduling, and sequencing of the Work specified in this Section.
 - 2. Section 260519 "Low-Voltage Electrical Power Conductors and Cables" specifies wiring connections installed by this Section.
 - 3. Section 260529 "Hangers and Supports for Electrical Systems" specifies channel and angle supports installed by this Section.
 - 4. Section 260553 "Identification for Electrical Systems" specifies electrical equipment labels and warning signs installed by this Section.

1.2 DEFINITIONS

- A. BUG Rating: Backlight, uplight, and glare rating for light pollution from exterior luminaires.
- B. Correlated Color Temperature (CCT): The absolute temperature (in kelvins) of a blackbody whose chromaticity (color quality) most nearly resembles that of the light source.
- C. Color Rendering Index (CRI): The measure of the degree of color shift objects undergo when illuminated by the light source as compared with the color of those same objects when illuminated by a reference light source. The lower the CRI of a light source, the more difficult it is to identify colors and stripes on electronic components and wiring.
- D. IDA: International Dark-Sky Association.
- E. IES: Illuminating Engineering Society.
- F. LPD: Lighting power density.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Luminaires: Include the following additional information:
 - a. Product Listing: Include copy of unexpired approval letter, on letterhead of qualified electrical testing agency, certifying product's compliance with specified listing criteria.
 - 1) If listed manufacturer differs from selling manufacturer, indicate relationship between entities on submittal. Clearly indicate which entity warrants product performance and fitness for purpose.
 - 2) Listing criteria identified in approval letter must match specified listing criteria. Approval of only equipment's enclosure is not considered approval of equipment for intended application.
 - 3) Product identification in approval letter must match product branding and model numbers in submittal. Approval letters for similar products are not acceptable.
 - b. Product Certificates: Include product certificates stating compliance with standards listed below, signed by manufacturer or fabricator.
 - 1) Manufacturers' Certified Data: Photometric data certified by manufacturer's laboratory with current accreditation under National Voluntary Laboratory Accreditation Program (NVLAP) for Energy Efficient Lighting Products.
 - 2) Testing Agency Certified Data: For luminaires indicated on Lighting Fixture Schedule on the Drawings, photometric data certified by qualified independent testing laboratory. Photometric data for remaining luminaires must be certified by manufacturer.

- c. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
- d. Include operating characteristics, electrical characteristics, and furnished accessories.
- e. Include schedule of submitted lighting products. Arrange schedule and accompanying product data in order by luminaire and lamp designations indicated on the Drawings.
- f. Include battery and charger data for emergency lighting units.
- g. Include life, output (lumens, CCT, and CRI), and energy-efficiency data.
- h. Include photometric data and adjustment factors obtained from qualified laboratory tests.
- i. Include manufacturer's sample warranty language.
- 2. Luminaire Fittings: Include the following additional information:
 - a. Product Listing: Include copy of unexpired approval letter, on letterhead of qualified electrical testing agency, certifying product's compliance with specified listing criteria.
 - 1) If listed manufacturer differs from selling manufacturer, indicate relationship between entities on submittal. Clearly indicate which entity warrants product performance and fitness for purpose.
 - 2) Listing criteria identified in approval letter must match specified listing criteria. Approval of only equipment's enclosure is not considered approval of equipment for intended application.
 - 3) Product identification in approval letter must match product branding and model numbers in submittal. Approval letters for similar products are not acceptable.
 - b. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - c. Include operating characteristics, electrical characteristics, and furnished accessories.
 - d. Include schedule of submitted lighting products. Arrange schedule and accompanying product data in order by luminaire and lamp designations indicated on the Drawings.
 - e. Include manufacturer's sample warranty language.

1.4 INFORMATIONAL SUBMITTALS

- A. Manufacturers' published instructions.

1.5 CLOSEOUT SUBMITTALS

- A. Warranty documentation.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Protect exposed surface finishes on lighting equipment by applying strippable, temporary protective covering before shipping.

1.7 WARRANTY FOR LUMINAIRES

- A. Special Installer Extended Warranty: Installer warrants that fabricated and installed luminaires perform in accordance with specified requirements and agrees to repair or replace products that fail to perform as specified within extended-warranty period. Warranty must convey to Owner upon acceptance of the Work.
 - 1. Extended-Warranty Period: Two years from date of Substantial Completion; full coverage for labor, materials, and equipment.

1.8 WARRANTY FOR BATTERIES

- A. Special Manufacturer Extended Warranty for Batteries: Manufacturer warrants that batteries perform in accordance with specified requirements and agrees to provide repair or replacement of batteries that fail to perform as specified within extended-warranty period.
 - 1. Initial Extended-Warranty Period for Li-ion Batteries: Five years from date of Substantial Completion; full coverage for materials only, freight prepaid.
 - 2. Initial Extended-Warranty Period for Ni-Cd Batteries: Five years from date of Substantial Completion; full coverage for materials only, freight prepaid.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Products or components listed and labeled in accordance with NFPA 70, by qualified electrical testing laboratory recognized by authorities having jurisdiction, and marked for intended location and application.

2.2 LUMINAIRES

- A. Light Fixture Schedule contains basis of design. Provide fixtures as scheduled or submit substitute equivalent fixtures from alternate manufacturers for review a minimum of ten days prior to bid date.
 - 1. Source Limitations: Obtain products for similar luminaire types from single manufacturer.
 - 2. Listing Criteria:
 - a. LED Luminaires: UL CCN IFAM; including UL 1598.
 - b. Outdoor Canopy Luminaires: UL CCN IFAW; including UL 1598.
 - c. Marked in accordance with UL CCN HYXT, including UL 1598, for compatible power supply, installation location, and environmental conditions.
- B. UL FTBR or FTBV - Emergency Lighting and Power Equipment:
 - 1. Source Limitations: Obtain products from single manufacturer.
 - 2. Listing Criteria:
 - a. Emergency Lighting and Power: UL CCN FTBR or UL CCN FTBV; including UL 924, NFPA 101, and ICC IBC.
 - b. Marked in accordance with UL CCN HYXT, including UL 1598, for compatible power supply, installation location, and environmental conditions.
 - 3. Standard Features:
 - a. Charger: Fully automatic, solid-state, constant-current type with sealed power transfer relay.
 - b. Status and Test Indication: Visible and accessible without opening luminaire or entering ceiling space.
 - 1) Indicator Light: LED indicates normal power on. Normal glow indicates trickle charge; bright glow indicates charging at end of discharge cycle.
 - 2) Test Push-Button: Push-to-test button in unit housing simulates loss of normal power and demonstrates unit operability.
 - c. Nominal Operating Voltage: 120 V(ac).
 - d. Mounting: Ceiling or Wall with universal junction box adaptor.
 - e. Enclosure: UV stable thermoplastic housing .
 - f. Light Source: Two LED head(s).
 - 4. Other Available Features Required by the Project:
 - a. Mounting Height: As indicated on drawings.
- C. UL FWBO - Exit Fixture:
 - 1. Source Limitations: Obtain products from single manufacturer.
 - 2. Listing Criteria:
 - a. Exit Fixtures: UL CCN FWBO; including UL 924, NFPA 101, and ICC IBC.
 - b. Marked in accordance with UL CCN HYXT, including UL 1598, for compatible power supply, installation location, and environmental conditions.
 - 3. Standard Features:
 - a. Nominal Operating Voltage: 120 V(ac).
 - b. Light Source: LED; 50,000 hours minimum rated life.
 - c. Internal emergency power unit.
 - d. Master/Remote Sign Configurations:
 - 1) Master Unit: Comply with requirements above for self-powered exit signs, and provide additional capacity in LED power supply for power connection to remote unit.
 - 2) Remote Unit: Comply with requirements above for self-powered exit signs, except omit power supply, battery, and test features. Arrange to receive full power

requirements from master unit. Connect for testing concurrently with master unit as a unified system.

4. Other Available Features Required by the Project:
 - a. Mounting Height: As indicated on drawings.

2.3 LUMINAIRE FITTINGS

- A. Luminaire Support Accessories:
 1. Standard Features:
 - a. Sized and rated for luminaire weight.
 - b. Capable of maintaining luminaire position after cleaning and relamping.
 - c. Capable of supporting luminaire without causing deflection of ceiling or wall.
 - d. Capable of supporting horizontal force equal to 100 percent of luminaire weight and vertical force equal to 400 percent of luminaire weight.
 2. Other Available Features Required by the Project:
 - a. Wires: ASTM A641/A641M, Class 3, soft temper, zinc-coated steel, 12 gage wire supports adjustable to 10 ft in length.
 - b. Aircraft Cables: 5/32 inch diameter aircraft cable supports adjustable to 10 ft in length.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roughing-in for luminaire to verify actual locations of luminaire and electrical connections before luminaire installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF LIGHTING

- A. Comply with manufacturer's published instructions.
- B. Reference Standards for Installation: Unless more stringent installation requirements are specified in Contract Documents or manufacturers' published instructions, comply with the following:
 1. Electrical Construction: ICC IBC, ICC IFB, NFPA 1, NFPA 70, and NECA NEIS 1.
 2. Grounding and Bonding: NECA NEIS 331 and Article 250 of NFPA 70.
 3. Work in Confined Spaces: NFPA 350.
 4. Installation of Indoor Lighting Systems: NECA NEIS 500.
 5. Installation of Exterior Lighting Systems: NECA NEIS 501.
 6. Installation of Luminaires, Lampholders, and Lamps: Article 410 of NFPA 70.
 7. Installation of Emergency Lighting and Exit Signs: ICC IBC, NFPA 101, and Parts IV and V in Article 700 of NFPA 70.
 8. Consult Architect for resolution of conflicting requirements.
- C. Special Installation Techniques:
 1. Install luminaires level, plumb, and square with finished floor or grade unless otherwise indicated.
 2. Install luminaires at height and aiming angle as indicated on the Drawings.
 3. Coordinate layout and installation of luminaires with other construction.
 4. Adjust luminaires that require field adjustment or aiming. Include adjustment of photoelectric device to prevent false operation of relay by artificial light sources, favoring a north orientation.
 5. Exterior Corrosion Prevention:
 - a. Do not use aluminum in contact with earth or concrete. When in direct contact with dissimilar metals, protect aluminum with insulating fittings or treatment.
 - b. When embedding steel conduits in concrete, wrap conduit with 10 mil thick, pipe-wrapping plastic tape applied with a 50 percent overlap.
 6. Flush-Mounted Luminaire Support:
 - a. Secured to outlet box.

- b. Attached to ceiling structural members at four points equally spaced around circumference of luminaire.
 - c. Trim ring flush with finished surface.
- 7. Wall-Mounted Luminaire Support: Attached to structural members in walls.
 - a. Do not attach luminaires directly to gypsum board.
- 8. Suspended Luminaire Support:
 - a. Ceiling Mount:
 - 1) Two aircraft cables.
 - b. Continuous Rows of Luminaires: Provide tubing or stem for wiring at one point and wire support for suspension for each unit length of luminaire chassis, including one at each end.
- 9. Ceiling-Grid-Mounted Luminaire Support:
 - a. Install ceiling support system rods or wires, independent of the ceiling suspension devices, for each luminaire. Locate not more than 6 inch from luminaire corners.
 - b. Support Clips: Fasten to luminaires and to ceiling grid members at or near each luminaire corner with clips that are UL listed for application.
 - c. Luminaires of Sizes Smaller than Ceiling Grid: Install as indicated on reflected ceiling plans or center in acoustical panel, and support luminaires independently with no fewer than two 3/4 inch metal channels spanning and secured to ceiling tees.
- 10. Remote Mounting of Ballasts or Drivers: Do not exceed distance between ballast or driver and luminaire recommended by ballast or driver manufacturer.
- 11. Emergency Power Units: Secure with approved fasteners in four or more locations, spaced near corners of unit.
- 12. Install wiring connections for luminaires.
- 13. Identification: Provide labels for luminaires and associated electrical equipment.
 - a. Identify field-installed conductors, interconnecting wiring, and components.
 - b. Provide warning signs.
 - c. Label each enclosure with engraved metal or laminated-plastic nameplate.

3.3 FIELD QUALITY CONTROL OF LIGHTING

- A. Tests and Inspections:
 - 1. Perform manufacturer's recommended tests and inspections.
 - 2. Operational Test: After installing luminaires, switches, and accessories, and after electrical circuitry has been energized, test units to confirm proper operation.
 - 3. Test for Emergency Lighting: Interrupt power supply to demonstrate proper operation. Verify transfer from normal power to battery power and retransfer to normal.
 - 4. Verify operation of photoelectric controls.
- B. Nonconforming Work:
 - 1. Luminaire will be considered defective if it does not pass tests and inspections.
 - 2. Remove and replace defective units and retest.

3.4 PROTECTION

- A. After installation, protect lighting equipment from construction activities. Remove and replace items that are contaminated, defaced, damaged, or otherwise caused to be unfit for use prior to acceptance by Owner.

END OF SECTION 265000

This page intentionally left blank.